



HUGH
THE ARBORIST

Arboricultural Impact Assessment Report

<u>Client Name:</u>	Faz and Angela Jalali
<u>Site Address:</u>	6 Wedgewood Crescent Beacon Hill NSW
<u>Authors Details:</u>	Hugh Millington
<u>Email:</u>	hugh@hughtheArborist.com.au
<u>Phone:</u>	0426 836 701
<u>Date Prepared:</u>	23 rd October 2024

Table of Contents

1.	INTRODUCTION.....	3
2.	SCOPE OF THE REPORT	4
3.	LIMITATIONS	4
4.	METHODOLOGY.....	5
5.	SITE LOCATION AND BRIEF DESCRIPTION OF THE PROPOSAL	6
6.	OBSERVATIONS AND GENERAL INFORMATION IN RELATION TO PROTECTING TREES ON DEVELOPMENT SITES	8
7.	ASSESSMENT OF CONSTRUCTION IMPACTS	10
8.	CONCLUSIONS.....	13
9.	RECOMMENDATIONS.....	14
10.	ARBORICULTURAL WORK METHOD STATEMENT (AMS) AND TREE PROTECTION REQUIREMENTS.....	15
12.	BIBLIOGRAPHY/REFERENCES.....	24
13.	LIST OF APPENDICES.....	25

COPYRIGHT

©Hugh The Arborist 2024

The use of any or all sections of this report in any documentation relating to the site is permissible so long as the copyright is noted at the completion of all sections.

Any other use of this report, or any part thereof for any other purpose or in documentation for any other site is strictly prohibited. No part of this report may be reproduced, transmitted, stored in a retrieval system or updated in any form or by any means (electronic, photocopying, recording or otherwise) without written permission of Hugh Millington.

1. INTRODUCTION

- 1.1 Hugh The Arborist Pty Ltd have been instructed by the clients Faz and Angela Jalali to assess trees located on and adjoining the site that may be impacted by a proposed development in accordance with AS4970 Protection of Trees on Development Sites (2009).
- 1.2 All tree data was collected during one site inspection on 16th October 2024. The weather was clear with average visibility.

Table 1: Documents Reviewed For The Assessment

Title	Author	Date created	Plan/Doc. Ref.
Survey Plan	CMS Pty Ltd	12/10/2023	22869detail
Architectural Plans	Action Plans	16/8/2024	Revision A Refer to schedule below

NO.	DRAWING NAME
DA00	COVER
DA01	NOTATION
DA02	SAFETY NOTES
DA03	SITE ANALYSIS
DA04	SITE / ROOF / SEDIMENT EROSION / WASTE MANAGEMENT / STORMWATER CONCEPT PLAN
DA05	EXISTING LOWER GROUND FLOOR PLAN
DA06	EXISTING GROUND FLOOR PLAN
DA07	PROPOSED LOWER GROUND FLOOR PLAN
DA08	PROPOSED FIRST FLOOR PLAN
DA09	ELEVATIONS 01
DA10	ELEVATIONS 02
DA11	ELEVATIONS 03
DA12	SECTIONS 01
DA13	SECTIONS 02
DA14	POOL PLAN
DA15	AREA CALCULATIONS
DA16	WINTER SOLSTICE 9 AM
DA17	WINTER SOLSTICE 12 PM
DA18	WINTER SOLSTICE 3 PM
DA19	SAMPLE BOARD
DA20	BASIX COMMITMENTS

2. SCOPE OF THE REPORT

2.1 This report has been undertaken to meet the following objectives.

- 2.1.1 Conduct a visual assessment from ground level of trees located on and adjoining the site as identified on the plans provided.
- 2.1.2 For the purpose of this report, a tree is taken to have a height equal to or greater than 5 metres.
- 2.1.3 Determine the trees estimated contribution years and remaining, useful life expectancy and award the trees a retention value.
- 2.1.4 Provide an assessment of the impact the proposed development is likely to have on condition of the subject trees in accordance with AS4970 Protection of trees on development sites (2009).
- 2.1.5 Provide pragmatic recommendations for the management of trees and mitigation of construction impacts on protected trees.

3. LIMITATIONS

- 3.1 The findings of this report are based on the observations and site conditions at the time of inspection.
- 3.2 Where access was limited due to trespass issues, measurements have been estimated.
- 3.3 All of the observations were carried out from ground level. The accuracy of the assessment of the subject trees structural condition and health is limited to the visibility of the tree at the time of inspection.
- 3.4 The tree inspections were visual from ground level only. No soil or tissue testing was carried out as part of the tree inspection. None of the surrounding surfaces adjacent to trees were lifted or removed during the tree inspections.
- 3.5 Root decay can sometimes be present with no visual indication above ground. It is also impossible to know the extent of any root damage caused by mechanical damage such as underground root cutting during the installation of services without undertaking detailed root investigation. Any form of tree failure due to these activities is beyond the scope of this assessment.
- 3.6 The report reflects the subject tree(s) as found on the day of inspection. Any changes to the growing environment of the subject tree, or tree management works beyond those recommended in this report may alter the findings of the report. There is no warranty, expressed or implied, that problems or deficiencies relating to the subject tree, or subject site may not arise in the future.

- 3.7 Tree identification is based on accessible visual characteristics at the time of inspection. As key identifying features are not always available the accuracy of identification is not guaranteed. Where tree species is unknown, it is indicated with a spp.
- 3.8 All diagrams, plans and photographs included in this report are visual aids only, and are not to scale unless otherwise indicated.
- 3.9 Hugh The Arborist neither guarantees, nor is responsible for, the accuracy of information provided by others that is contained within this report.
- 3.10 While an assessment of the subject trees estimated useful life expectancy is included in this report, no specific tree risk assessment has been undertaken for any of trees at the site.
- 3.11 The ultimate safety of any tree cannot be categorically guaranteed. Even trees apparently free of defects can collapse or partially collapse in extreme weather conditions. Trees are dynamic, biological entities subject to changes in their environment, the presence of pathogens and the effects of ageing. These factors reinforce the need for regular inspections. It is generally accepted that hazards can only be identified from distinct defects or from other failure-prone characteristics of a tree or its locality.
- 3.12 Alteration of this report invalidates the entire report.

4. METHODOLOGY

- 4.1 The following information was collected during the assessment of the subject tree(s).
 - 4.1.1 Tree common name
 - 4.1.2 Tree botanical name
 - 4.1.3 Tree age class
 - 4.1.4 DBH (Trunk/Stem diameter at breast height/1.4m above ground level) - millimetres.
 - 4.1.5 Estimated height - metres
 - 4.1.6 Estimated crown spread (Radius of crown) - metres
 - 4.1.7 Health
 - 4.1.8 Structural condition
 - 4.1.9 Amenity value
 - 4.1.10 Estimated remaining contribution years (SULE)¹

¹ Barrell Tree Consultancy, *SULE: Its use and status into the New Millennium*, TreeAZ/03/2001, <http://www.treeaz.com/>.

4.1.11 Retention value (Tree AZ)²

4.1.12 Notes/comments

- 4.2 An assessment of the trees condition was made using the visual tree assessment (VTA) model (Mattheck & Breloer, 1994).³
- 4.3 Tree diameter was measured using a DBH tape or in some cases estimated. All other measurements were estimations unless otherwise stated. The other tools I used during the assessment were a digital camera, Japanese made 170mm blade digging knife and a Leica DistoD410 digital laser tape.
- 4.4 All DBH measurements, tree protection zones, and structural root zones were calculated in accordance with methods set out in AS4970 Protection of trees on development sites (2009). See appendices for more information.
- 4.5 Details of how the observations in this report have been assessed are listed in the appendices.

5. SITE LOCATION AND BRIEF DESCRIPTION OF THE PROPOSAL

- 5.1 The site is located in the in the Northern Beaches Council suburb of Beacon Hill. All trees at the site are managed under the following policy and legislation.

5.1.1 Warringah Local Environmental Plan (LEP) 2011

5.1.2 Warringah Development Control Plan (DCP) 2011

5.1.3 Northern Beaches Tree Management Controls

5.1.4 State Environmental Planning Policy (Biodiversity and Conservation) 2021

- 5.2 The subject site falls from front to rear which includes a significant drop off to the rear boundary. The site is subject to other level changes provided by natural rock outcrops and contains numerous trees of varying maturity and value.
- 5.3 The proposed works consist of alterations and additions to the existing dwelling and a swimming pool.
- 5.4 The site is not located within a Heritage Conservation area or subject to biodiversity listings according to the NSW Planning Portal Spatial Viewer accessed 23/10/2024.⁴

² Barrell Tree Consultancy, *Tree AZ version 10.10-ANZ*, <http://www.treeaz.com/>.

³ Mattheck, C. & Breloer, H., *The body language of trees - A handbook for failure analysis*, The Stationary Office, London, England (1994).

⁴ <https://www.planningportal.nsw.gov.au/spatialviewerhistoric/#/find-a-property/address>

Tile 1: Site Location ⁵



⁵ <https://maps.six.nsw.gov.au/>

6. OBSERVATIONS AND GENERAL INFORMATION IN RELATION TO PROTECTING TREES ON DEVELOPMENT SITES

6.1 **Tree information:** Details of each individual tree assessed, including the observations taken during the site inspection, can be found in the tree inspection schedule in appendix 2, where the indicative tree protection zone (TPZ) and Structural Root Zone (SRZ) has been calculated for each of the subject trees. The TPZ and SRZ should be measured in radius from the centre of the trunk. Each of the subject trees have been awarded a retention value based on the observations using the Tree AZ method. Tree AZ is used to identify higher value trees worthy of being a constraint to development and lower value trees that should generally not be a constraint to the development. The Tree AZ categories sheet (Barrell Tree Consultancy) has been included in appendix 3 to assist with understanding the retention values. The retention value that has been allocated to the subject trees in this report is not definitive and should only be used as a guideline.

6.2 **Site plans:** The following plans have been prepared.

- Appendix 1 – Existing Site Plan
- Appendix 1A – Proposed Ground Floor Plan and Tree Protection Plan
- Appendix 1B – Proposed Lower Ground Floor Plan and Tree Protection Plan

Tree location, Trunk, Canopy spread, TPZ and SRZ information has been overlaid across both plans.

6.3 **Tree protection zone (TPZ):** The TPZ is the principle means of protecting trees on development sites and is an area required to maintain the viability of trees during development. It is commonly observed that tree roots will extend significantly further than the indicative TPZ, however the TPZ is an area identified in AS4970-2009 to be the area where root loss or disturbance will generally impact the viability of the tree. The TPZ is identified as a restricted area to prevent damage to trees either above or below ground during a development. Where trees are intended to be retained proposed developments must provide an adequate TPZ around trees. The TPZ is set aside for the tree's root zone, trunk and crown and it is essential for the stability and longevity of the tree. The TPZ also incorporates the SRZ (see below for more information about the SRZ). The TPZ is calculated by multiplying the DBH by twelve, with the exception of palms, other monocots, cycads and tree ferns, the TPZ of which have been calculated at one metre outside the crown projection.

- 6.4 **Structural Root Zone (SRZ):** This is the area around the base of a tree required for the trees stability in the ground. An area larger than the SRZ always needs to be maintained to preserve a viable tree. The SRZ is calculated using the following formula; $(DAB \times 50)^{0.42} \times 0.64$. There are several factors that can vary the SRZ which include height, crown area, soil type and soil moisture. It can also be influenced by other factors such as natural or built structures. Generally, work within the SRZ should be avoided. Soil level changes should also generally be avoided inside the SRZ of trees to be retained. Palms, other monocots, cycads and tree ferns do not have an SRZ.
- 6.5 **Minor encroachment into TPZ:** Sometimes encroachment into the TPZ is unavoidable. Encroachment includes but is not limited to activities such as excavation, compacted fill and machine trenching. Minor encroachment of up to 10% of the overall TPZ area is normally considered acceptable, providing there is space adjacent to the TPZ for the tree to compensate and the tree is displaying adequate vigour/health to tolerate changes to its growing environment.
- 6.6 **Major encroachment into TPZ:** Where encroachment of more than 10% of the overall TPZ area is proposed the project Arborist must investigate and demonstrate that the tree will remain in a viable condition. In some cases, tree sensitive construction methods such as pier and beam footings, suspended slabs, or cantilevered sections, can be utilised to allow additional encroachment into the TPZ by bridging over roots and minimising root disturbance. Major encroachment is only possible if it can be undertaken without severing significant size roots, or if it can be demonstrated that significant roots will not be impacted. Root investigations may be required to identify roots that will be impacted during major TPZ encroachment.

7. ASSESSEMENT OF CONSTRUCTION IMPACTS

7.1 **Table 2:** In the table below the impact of proposed development impact to all trees included in the report has been assessed.

Tree ID	Species	Retention value	TPZ radius (m)	SRZ radius (m)	TPZ encroachment	Discussion/ Conclusion	Recommendation
1	<i>Eucalyptus pilularis</i>	A1	9.1	9.6	Major	Existing structures within the TPZ include the driveway stairs, front of the dwelling and the front porch (deck). The existing driveway stairs are proposed to be retained as is the majority of the existing deck attached to the front of the dwelling. The existing low stone retaining wall in front of the deck is proposed to be demolished and the existing deck extended out to occupy the area of garden bed between the deck and the wall; the levels provided on the plans show a negligible difference in existing and proposed levels. Excavation is proposed for the extended paved area alongside the existing driveway stairs which will require a new low retaining wall as the front setback increases in grade. The levels provided on the survey plan show the tree is up to 2.5 metres higher on the slope than the lowest stair and the proposed finished level of the paved area/retaining wall. The other alterations proposed are contained within the existing footprint of the dwelling indicating they will not affect the tree. The associated encroachment for the paved area and retaining wall is up to 12% within the TPZ area and within the fringe of the SRZ area which is a major encroachment. In terms of associated impacts, 12% is only just above the threshold of minor encroachment and is unlikely to affect the condition of the tree. The slight encroachment of less than 0.5m ² in the SRZ which also considers potential for over excavation is unlikely to require disturbing any tree roots that are significant to the stability of the tree given the tree is situated significantly higher than the proposed works and the excavation is on the very fringe of the SRZ. The tree is considered to be viable for retention under the proposal providing the initial excavations for the front paved area are carried out manually under the guidance of the project Arborist.	Retain and protect



Tree ID	Species	Retention value	TPZ radius (m)	SRZ radius (m)	TPZ encroachment	Discussion/ Conclusion	Recommendation
2	<i>Yucca alofolia</i>	Z1	2.0	NA	None	No encroachment proposed.	Retain and protect
3	<i>Washingtonia robusta</i>	Z1	2.0	NA	None	No encroachment proposed.	Retain and protect
4	<i>Yucca alofolia</i>	Z1	2.0	NA	None	No encroachment proposed.	Retain and protect
5	<i>Cyathea australis</i>	A1	2.0	NA	Major	Tree has not been identified on the survey plan. The tree is located within the footprint of the deck and is not retainable under the proposal.	Remove
6	<i>Corymbia gummiifera</i>	A1	1.9	2.1	Major	Tree has not been identified on the survey plan. The tree is located within the footprint of the deck and is not retainable under the proposal.	Remove
7	<i>Ficus benjamina</i>	Z3	1.5	2.0	Minor	Tree has not been identified in the survey plan. The proposed works will encroach by less than 5% in the TPZ and not within the SRZ indicating the tree will not be affected by the works. The species is low value and exempt from protection in the LGA. The tree is suggested to be removed to allow for construction space that may reduce impacts on the higher value T1.	Remove
8	<i>Callistemon viminalis</i>	Z10	2.0	3.6	Major	The tree will be subject to major encroachment in the TPZ and the SRZ from the proposed pool. The tree is decayed at the base and may have been subject to a partial failure therefore is recommended for removal irrespective of the proposal.	Remove
9	<i>Melaleuca bracteata</i>	A1	2.4	2.6	None	No encroachment proposed.	Retain and protect
10	<i>Melaleuca bracteata</i>	A1	2.4	2.6	None	No encroachment proposed.	Retain and protect
11	<i>Cyathea australis</i>	Z1	2.0	NA	None	Cluster of Tree Ferns have not been identified on the survey plan and are located lower down on a rock shelf indicating they will not be subject to encroachment.	Retain and protect



HUGH
THE ARBORIST

Tree ID	Species	Retention value	TPZ radius (m)	SRZ radius (m)	TPZ encroachment	Discussion/ Conclusion	Recommendation
12	<i>Glochidion ferdinandi</i>	A1	3.8	4.6	None	Tree located on adjoining land. No encroachment proposed.	Retain and protect
13	<i>Pittosporum undulatum</i>	Z10	1.5	2.2	None	Tree located on adjoining land. No encroachment proposed.	Retain and protect
14	<i>Pittosporum undulatum</i>	Z3	1.4	2.2	Major	Up to 20% encroachment into the TPZ and the SRZ from the proposed entertaining area, which is a major encroachment that may affect the viability of the tree. The tree is below the height threshold for protection in the LGA and is proposed to be removed.	Remove
15	<i>Ligustrum lucidum</i>	Z3	1.2	1.3	Major	The species is a listed environmental weed and is recommended for removal irrespective of the proposal.	Remove
16	<i>Ligustrum lucidum</i>	Z3	1.2	1.3	Major	The species is a listed environmental weed and is recommended for removal irrespective of the proposal.	Remove

8. CONCLUSIONS

8.1 **Table 3:** Summary of the impact to trees during the development.

Impact	Reason	Category A	Category Z	Total
		A	Z	
Trees to be removed	Building/landscape construction, new surfacing and/or proximity, or trees in poor condition.	5,6,	7,8, 14,15,16	7
Retained trees subject to TPZ encroachment or no encroachment	Removal of existing surfacing/structures and/or installation of new surfacing/structures will not significantly impact the tree	1,9,10,12,	2,3,4,11,13	9
Trees requiring tree sensitive construction to mitigate development impacts or root investigations	Proposed impacts will result in the severance of roots leading to the decline or destabilization of trees assessed	-	-	0

9. RECOMMENDATIONS

- 9.1 This report assesses the impact of a proposed development at the site on sixteen trees located on and adjoining the subject site in accordance with AS4970 Protection of Trees on Development Sites (2009).
- 9.2 Seven trees are proposed to be removed, several of which have not been identified on the survey plan. Of the trees to be removed, five are low value category Z trees and two are category A trees. While the category A trees generally contain few defects, they are considered to be relatively easy to replace within the short term.
- 9.3 The remaining nine trees consisting of four category A trees and five category Z trees can be retained under the proposed development will no significant development impacts.
- 9.4 It is recommended that the project Arborist oversee all works within the front setback to ensure the assessed impact on tree 1 is maintained at an acceptable level particularly during excavations.
- 9.5 This report does not provide consent to prune or remove trees. All works may be subject to approval from the relevant Consent Authority.
- 9.6 All works within the TPZ and SRZ of retained trees are to be overseen by an AQF5 Consulting Arborist to assist with minimising development impact.
- 9.7 No service plan has been assessed as part of this report. All services plans should be subject to review by a consulting Arborist. Where possible underground services should be located outside the TPZ of trees to be retained. All underground services located inside the TPZ of any tree to be retained must be installed via tree sensitive techniques specified below.
- 9.8 **Underground Services:** AS4970 Protection of trees on development sites (2009) recommends that all underground services located inside the TPZ of any tree to be retained should be installed via tree sensitive techniques. This should include either directional drilling methods or manual excavations to minimise the impact to trees identified for retention.

If directional drilling is proposed, section 4.5.5 of AS4970-2009 says that 'The directional drilling bore should be at least 600 mm deep. The project Arborist should assess the likely impacts of boring and bore pits on retained trees'.⁶ If manual excavations are proposed, all excavations for the services should be carried out manually under the supervision of the project Arborist (minimum qualification AQF 5). Manual excavation may include the use of pneumatic and hydraulic tools, high-pressure air or a combination of high-pressure water and a vacuum device. All roots greater than 40mm in diameter should be retained in the

⁶ Council Of Standards Australia, AS 4970 Protection of trees on development sites (2009) page 18.

service trench. The service pipe should then be threaded below the retained roots where practical. Roots greater than 40mm within the alignment of the service pipe should only be severed/pruned under the approval of the project Arborist. All root pruning should be in accordance with AS4373 Pruning of amenity trees (2007). Open trenching in the SRZ of trees can be impractical without impacting significant roots, as often dense root growth is present in the SRZ. Open trenching should therefore be avoided in the SRZ. It is recommended that any section of pipe that is located in the SRZ of trees to be retained is installed via sub-surface boring/directional drilling methods only. The feasibility of sub-surface boring/directional drilling will need to be investigated by a sub-surface boring/directional drilling specialist. The project Arborist should provide advice and supervise excavations for bore pits, which must be carried out manually if located within the TPZ. The top of the pipe must be at least 600mm below the existing soil grade. The location of bore pits should be flexible in the TPZ to avoid significant roots, the project Arborist should assess and advise in writing the impact of any significant root severance to the condition of the tree.

10. ARBORICULTURAL WORK METHOD STATEMENT (AMS) AND TREE PROTECTION REQUIREMENTS

- 10.1 **Use of this report:** All contractors must be made aware of the tree protection requirements prior to commencing works at the site and be provided with a copy of this report.
- 10.2 **Project Arborist:** Prior to any works commencing at the site a project Arborist should be appointed. The project Arborist should be qualified to a minimum AQF level 5 and/or equivalent qualifications and experience and should assist with any development issues relating to trees that may arise. If at any time it is not feasible to carryout works in accordance with this, an alternative must be agreed in writing with the project Arborist.
- 10.3 **Tree work:** All tree work must be carried out by a qualified and experienced Arborist with a minimum of AQF level 3 in arboriculture, in accordance with NSW Work Cover Code of Practice for the Amenity Tree Industry (1998) and AS4373 Pruning of amenity trees (2007).
- 10.4 **Initial site meeting/on-going regular inspections:** The project Arborist is to hold a pre-construction site meeting with principal contractor to discuss methods and importance of tree protection measures and resolve any issues in relation to tree protection that may arise. In accordance with AS4970-2009, the project Arborist should carryout regular site inspections to ensure works are carried out in accordance with this document throughout the development process. I recommend regular site inspections on a frequency based on the longevity of the project; this is to be agreed in the initial meeting.

10.5 **Table 4:** Site Specific Tree Protection Recommendations

Tree Number	Protection specification
1	- Fencing to isolate the Structural Root Zone area. - Additional protection will be required for the TPZ area but is recommended to be determined in consultation with the project Arborist when the Construction management Plan is prepared due to the significant limitations on space at the front of the site.
2,3,4	- Trees are sufficiently isolated on the far side of the retained driveway.
5,6,7,8	- Remove.
9,10	- Fencing at edge of proposed pool to the edge of the stone wall containing the trees.
11,12,13	- Trees are sufficiently isolated from the works on adjoining land or existing level changes.
14,15,16	- Remove.


10.6 Tree protection Specifications: It is the responsibility of the principal contractor to install tree protection prior to works commencing at the site (prior to demolition works) and to ensure that the tree protection remains in adequate condition for the duration of the development. The tree protection must not be moved without prior agreement of the project Arborist. The project Arborist must inspect that the tree protection has been installed in accordance with this document and AS4970-2009 prior to works commencing.

10.7 Protective fencing: Where it is not feasible to install fencing at the specified location due to factors such as restricting access to areas of the site or for constructing new structures, an alternative location and protection specification must be agreed with the project Arborist. Where the installation of fencing is unfeasible due to restrictions on space, trunk and branch protection will be required (see below). The protective fencing must be constructed of 1.8 metre 'cyclone chainmesh fence'. The fencing must only be removed for the landscaping phase and must be authorised by the project Arborist. Any modifications to the fencing locations must be approved by the project Arborist.

10.8 TPZ signage: Tree protection signage is to be attached to the protective fencing, displayed in a prominent position and the sign repeated at 10 metres intervals or closer where the fence changes direction. Each sign shall contain in a clearly legible form, the following information:

- Tree protection zone/No access.
- This fence has been installed to prevent damage to the tree/s and their growing environment both above and below ground. Do not move fencing or enter TPZ without the agreement of the project Arborist.

- The name, address, and telephone number of the developer/builder and project Arborist
- 10.9 **Trunk and Branch Protection:** The trunk must be protected by wrapped hessian or similar material to limit damage. Timber planks (50mm x 100mm or similar) should then be placed around tree trunk. The timber planks should be spaced at 100mm intervals and must be fixed against the trunk with tie wire or strapping and connections finished or covered to protect pedestrians from injury. The hessian and timber planks must not be fixed to the tree in any instance. The trunk and branch protection shall be installed prior to any work commencing on site and shall be maintained in good condition for the entire development period.
- 10.10 **Mulch:** Any areas of the TPZ located inside the subject site (only trees to be retained directly adjacent to site works must be mulched to a depth of 75mm with good quality composted wood chip/leaf mulch.
- 10.11 **Ground Protection:** Ground protection is required to protect the underlying soil structure and root system in areas where it is not practical to restrict access to whole TPZ, while allowing space for construction. Ground protection must consist of good quality composted wood chip/leaf mulch to a depth of between 150-300mm, laid on top of geo textile fabric. If vehicles are to be using the area, additional protection will be required such as rumble boards or track mats to spread the weight of the vehicle and avoid load points. Ground protection is to be specified by the project Arborist as required.

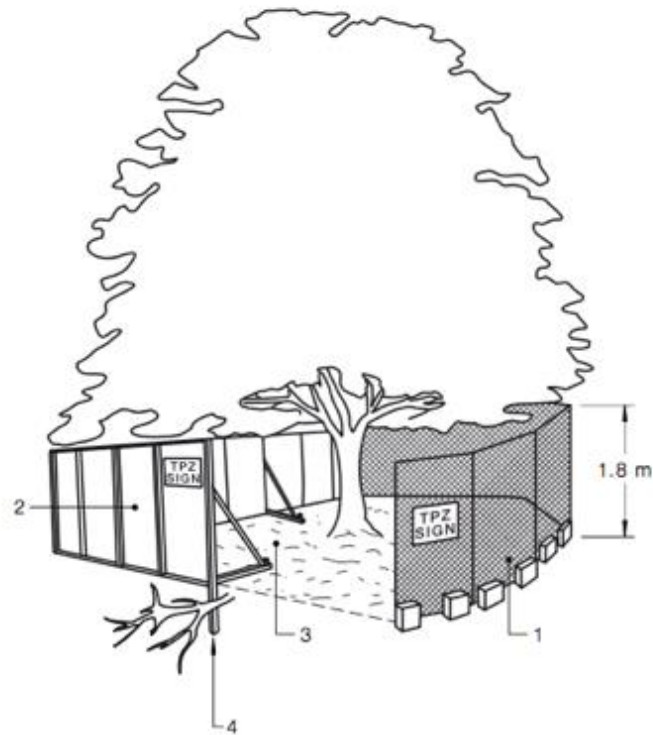


LEGEND:

- 1 Chain wire mesh panels with shade cloth (if required) attached, held in place with concrete feet.
- 2 Alternative plywood or wooden paling fence panels. This fencing material also prevents building materials or soil entering the TPZ.
- 3 Mulch installation across surface of TPZ (at the discretion of the project arborist). No excavation, construction activity, grade changes, surface treatment or storage of materials of any kind is permitted within the TPZ.
- 4 Bracing is permissible within the TPZ. Installation of supports should avoid damaging roots.

An image from AS4970-2009,⁷ with example tree protection.

⁷ Council of Standards Australia, *AS4970 Protection of trees on development sites* (2009), page 16.

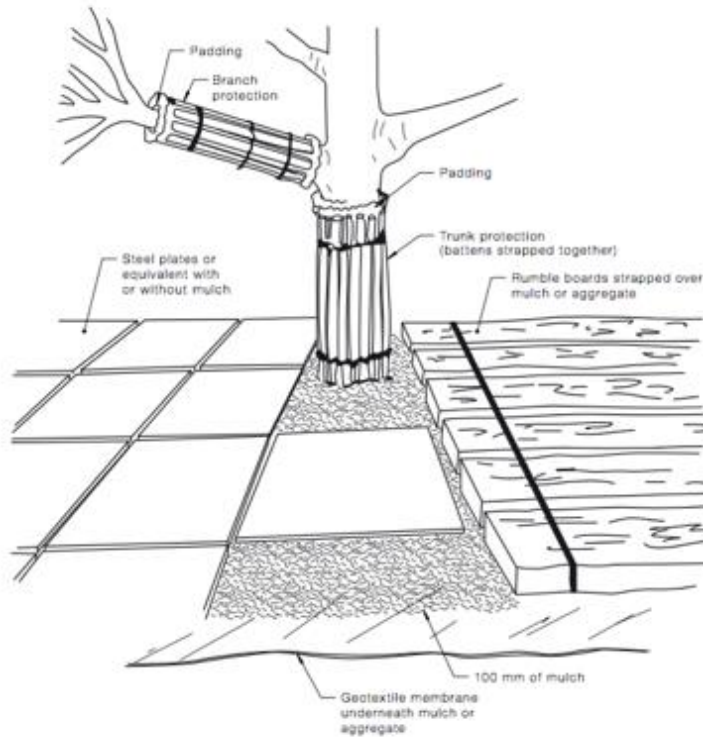

NOTES:

- 1 For trunk and branch protection use boards and padding that will prevent damage to bark. Boards are to be strapped to trees, not nailed or screwed.
- 2 Rumble boards should be of a suitable thickness to prevent soil compaction and root damage.

An image from AS4970-2009,⁸ with example tree protection.

⁸ Council of Standards Australia, *AS4970 Protection of trees on development sites* (2009), page 17.

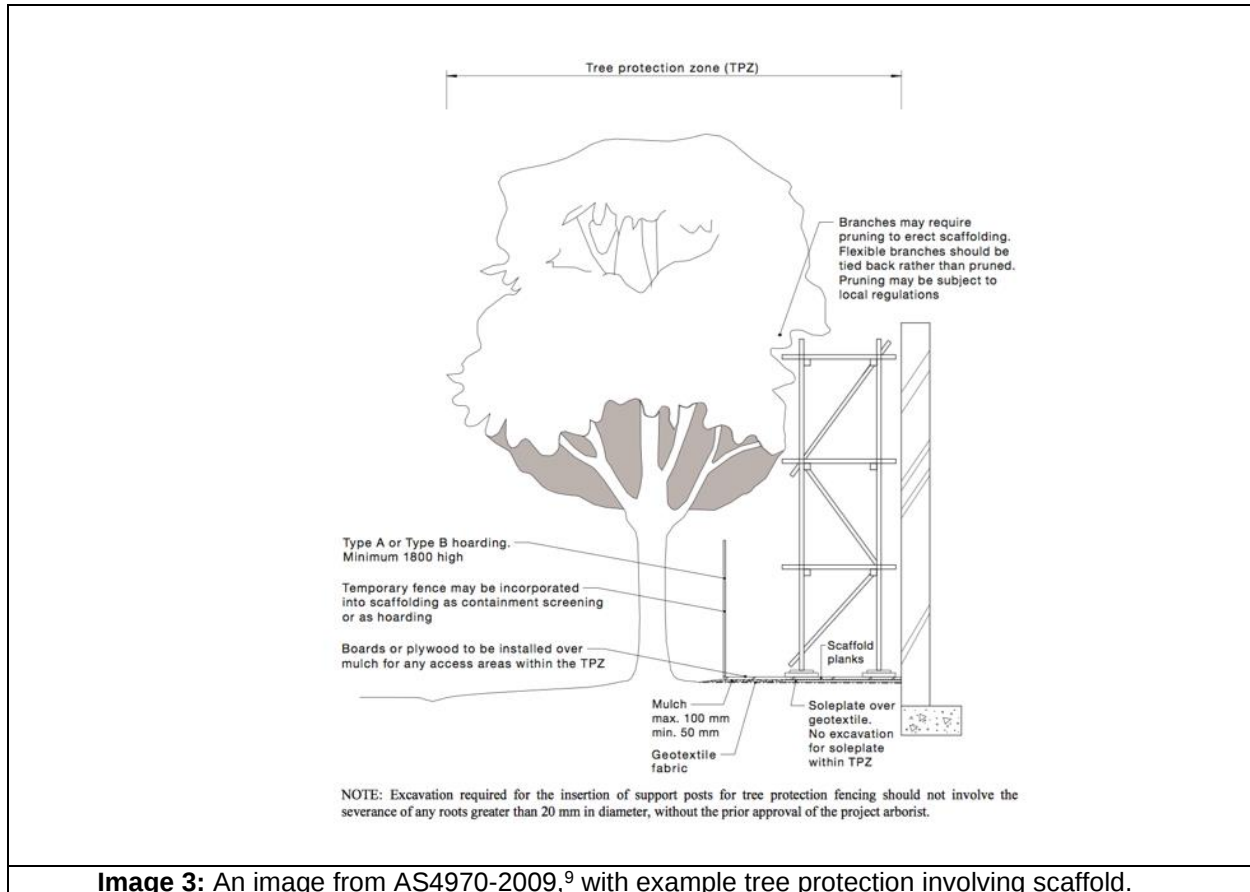


Image 3: An image from AS4970-2009,⁹ with example tree protection involving scaffold.

10.12 Root investigations: Where major TPZ encroachments require demonstrating the viability of trees the following method for root investigations is to be used. Non-destructive excavations are to be carried out along the outer edge of proposed or existing structures within the TPZ (excavation methods include the use of pneumatic and hydraulic tools, high-pressure air or a combination of high-pressure water and a vacuum device). Excavations generally consist of a trench to a depth dictated by the location of significant roots, bedrock, unfavourable conditions for root growth, or the required depth for footings up to 1 metre. The investigation is to be carried out by AQF5 consulting Arborist who is to record all roots greater than 40 millimetres in diameter and produce a report discussing the significance of the findings. No roots 40 millimetres in diameter are to be frayed or damaged during excavation and the trench is to be backfilled as soon as possible to reduce the risk of roots drying out. In the event roots must be left exposed, they are to be wrapped in hessian sack and regularly irrigated for the duration of exposure.

⁹ Council of Standards Australia, *AS4970 Protection of trees on development sites* (2009), page 19.

10.13 Restricted activities inside TPZ: The following activities must be avoided inside the TPZ of all trees to be retained unless approved by the project Arborist. If at any **time** these activities cannot be avoided an alternative must be agreed in writing with the project Arborist to minimise the impact to the tree.

- A) Machine excavation.
- B) Ripping or cultivation of soil.
- C) Storage of spoil, soil or any such materials
- D) Preparation of chemicals, including preparation of cement products.
- E) Refueling.
- F) Dumping of waste.
- G) Wash down and cleaning of equipment.
- H) Placement of fill.
- I) Lighting of fires.
- J) Soil level changes.
- K) Any physical damage to the crown, trunk, or root system.
- L) Parking of vehicles.

10.14 Excavations and root pruning: The project Arborist must supervise and certify that all excavations and root pruning are in accordance with AS4373-2007 and AS4970-2009. For continuous strip footings, first manual excavation is required along the edge of the structures closest to the subject trees. Manual excavation should be a depth of 1 metre (or to unfavourable root growth conditions such as bed rock or heavy clay, if agreed by project Arborist). Next roots must be pruned back in accordance with AS4373-2007. After all root pruning is completed, machine excavation is permitted within the footprint of the structure. For tree sensitive footings, such as pier and beam, all excavations inside the TPZ must be manual. Manual excavation may include the use of pneumatic and hydraulic tools, high-pressure air or a combination of high-pressure water and a vacuum device. No pruning of roots greater 40mm in diameter is to be carried out without approval of the project arborist. All pruning of roots greater than 10mm in diameter must be carried out by a qualified Arborist/Horticulturalist with a minimum AQF level 3. Root pruning is to be a clean cut with a sharp tool in accordance with AS4373 Pruning of amenity trees (2007).¹⁰ The tree root is to be pruned back to a branch root if possible. Make a clean cut and leave as small a wound as possible.

10.15 Landscaping: All landscaping works within the TPZ of trees to be retained are to be undertaken in consultation with a consulting Arborist to minimize the impact to trees. General guidance is provided below to minimise the impact of new landscaping to trees to be retained.

¹⁰ Council of Standards Australia, AS 4373 Pruning of amenity trees (2007) page 18

- 10.16 **New retaining walls** should be avoided. Where new retaining walls are proposed inside the TPZ of trees to be retained, they should be constructed from tree sensitive material, such as timber sleepers, that require minimal footings/excavations. If brick retaining walls are proposed inside the TPZ, consider pier and beam type footings to bridge significant roots that are critical to the trees condition. Retaining walls must be located outside the SRZ and sleepers/beams located above existing soil grades.
- 10.17 **New footpaths** and hard surfaces should be minimised, as they can limit the availability of water, nutrients, and air to the tree's root system. Where they are proposed, they should be constructed on or above existing soil grades to minimise root disturbance and consider using a permeable surface. Footpath should be located outside the SRZ.
- 10.18 **The location of new plantings** inside the TPZ of trees to be retained should be flexible to avoid unnecessary damage to tree roots greater than 30mm in diameter.
- 10.19 **Sediment and Contamination:** All contamination run off from the development such as but not limited to concrete, sediment and toxic wastes must be prevented from entering the TPZ at all times.
- 10.20 **Tree Wounding/Injury:** Any wounding or injury that occurs to a tree during the construction process will require the project Arborist to be contacted for an assessment of the injury and provide mitigation/remediation advice. It is generally accepted that trees may take many years to decline and eventually die from root damage. All repair work is to be carried out by the project Arborist, at the contractor's expense.
- 10.21 **Completion of Development Works:** After all construction works are complete the project Arborist should assess that the subject trees have been retained in the same condition and vigour. If changes to condition are identified the project Arborist should provide recommendations for remediation.

11. HOLD POINTS

11.1 Hold Points: Below is a sequence of hold points requiring project Arborist certification throughout the development process. The hold points must be checked and certified. All certifications must be provided in written format upon completion of the development. The final certification must include details of any instructions for remediation undertaken during the development.

Hold Point	Stage	Responsibility	Certification	Complete Y/N and date
Project Arborist to hold pre construction site meeting with principal contractor to discuss methods and importance of tree protection measures and resolve any issues in relation to feasibility of tree protection requirements that may arise.	Prior to work commencing.	Principle contractor	Project Arborist	
Project Arborist To supervise all pruning works to retained trees.	Prior to works commencing	Principal Contractor	Project Arborist	
Project Arborist to assess and certify that tree protection has been installed in accordance with section 11 and AS4970-2009 prior to works commencing at site.	Prior to development work commencing.	Principle contractor	Project Arborist	
In accordance with AS4970-2009 the project arborist should carry out regular site inspections to ensure works are carried out in accordance with the recommendations. I recommend site inspections on a bi-monthly frequency.	Ongoing throughout the development	Principle contractor	Project Arborist	
Project Arborist to oversee all excavations and demolition inside the TPZ of any tree to be retained.	Construction	Principle contractor	Project Arborist	
Project Arborist to certify that all pruning of roots greater than 40mm in diameter has been carried out in accordance with AS4373-2007. All root pruning must be carried out by a qualified Arborist/Horticulturalist with a minimum AQF level 3.	Construction	Principle contractor	Project Arborist	
Project Arborist to certify that all underground services including storm water inside TPZ of any tree to be retained have been installed in accordance with AS4970-2009.	Construction	Principle contractor	Project Arborist	
All landscaping works/boundary walls within the TPZ of trees to be retained are to be undertaken in consultation with the project Arborist to minimize the impact to trees.	Landscape	Principle contractor	Project Arborist	

Hold Point	Stage	Responsibility	Certification	Complete Y/N and date
After all construction works are complete the project Arborist should assess that the subject trees have been retained in the same condition and vigor and authorize the removal of protective fencing. If changes to condition are identified the project Arborist should provide recommendations for remediation.	Upon completion of construction	Principle contractor	Project Arborist	
Any wounding or injury that occurs to a tree during the demolition/construction process will require the project arborist to be contacted for an assessment of the injury and provide mitigation/remediation advice. All remediation work is to be carried out by the project arborist, at the contractor's expense.	Ongoing throughout the development	Principle contractor	Project Arborist	

12. BIBLIOGRAPHY/REFERENCES

- Council of Standards Australia, *AS4970 Protection of trees on development sites* (2009).
- Council of Standards Australia, *AS4373 Pruning of amenity trees* (2007).
- Mattheck, C. & Breloer, H., *The body language of trees - A handbook for failure analysis*, The Stationary Office, London, England (1994).
- Barrell, J. (2001), '*SULE: Its use and status in the new millennium*' in *Management of Mature Trees proceedings of the 4th NAAA Workshop*, Sydney, 2001. Barrell
- Barrell Tree Consultancy, *Tree AZ version 10.10-ANZ*, <http://www.treeaz.com/>.
- *Warringah Local Environmental Plan 2011*
- *Warringah Development Control Plan 2011*
- <https://eservices.northernbeaches.nsw.gov.au/ePlanning/live/pages/plan/book.aspx?exhibit=PDCP>.
- *Northern Beaches Council - Removing and Pruning Trees on Private Land*, <https://www.northernbeaches.nsw.gov.au/planning-development/tree-management/private-land>

13. LIST OF APPENDICES

The following are included in the appendices.

- Appendix 1 – Existing Site Plan
- Appendix 1A – Proposed Ground Floor Plan and Tree Protection Plan
- Appendix 1B – Proposed Lower Ground Floor Plan and Tree Protection Plan
- Appendix 2 - Tree inspection schedule
- Appendix 3 – Health
- Appendix 4 – Amenity Value
- Appendix 5 – Age Class
- Appendix 6 – Structural Condition
- Appendix 7 – SULE Categories
- Appendix 8 – Retention Values
- Appendix 9 – Trees AZ
- Appendix 10 – TPZ Encroachment


Hugh Millington



Diploma of Arboriculture (AQF5)
NC Forestry and Arboriculture III (UK)
RFS Tech. Cert. II (UK)
QTRA Registered User
ISA Tree Risk Assessment Qualification

0426836701

hugh@hughtheArborist.com.au

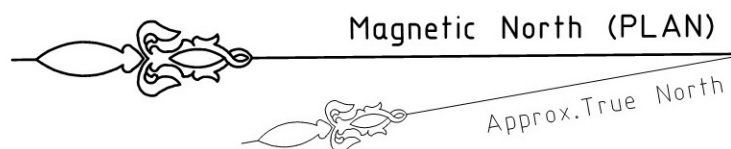

SEWER MAIN PLOTTED FROM SYDNEY WATER DIAGRAM APPROXIMATE POSITION ONLY

WEDGEWOOD

(BITUMEN FORMATION)

CRESENT




Hugh The Arborist Pty Ltd


hugh@hughthearborist.com.au
www.hughthearborist.com.au



6 Wedgewood Crescent Beacon Hill NSW

SCALE : 1 : 100	@ A1	DATE : 23/10/2024	
MAP FILENAME :Appendix 1 - Existing Site Plan			

Prepared by Hugh Millington

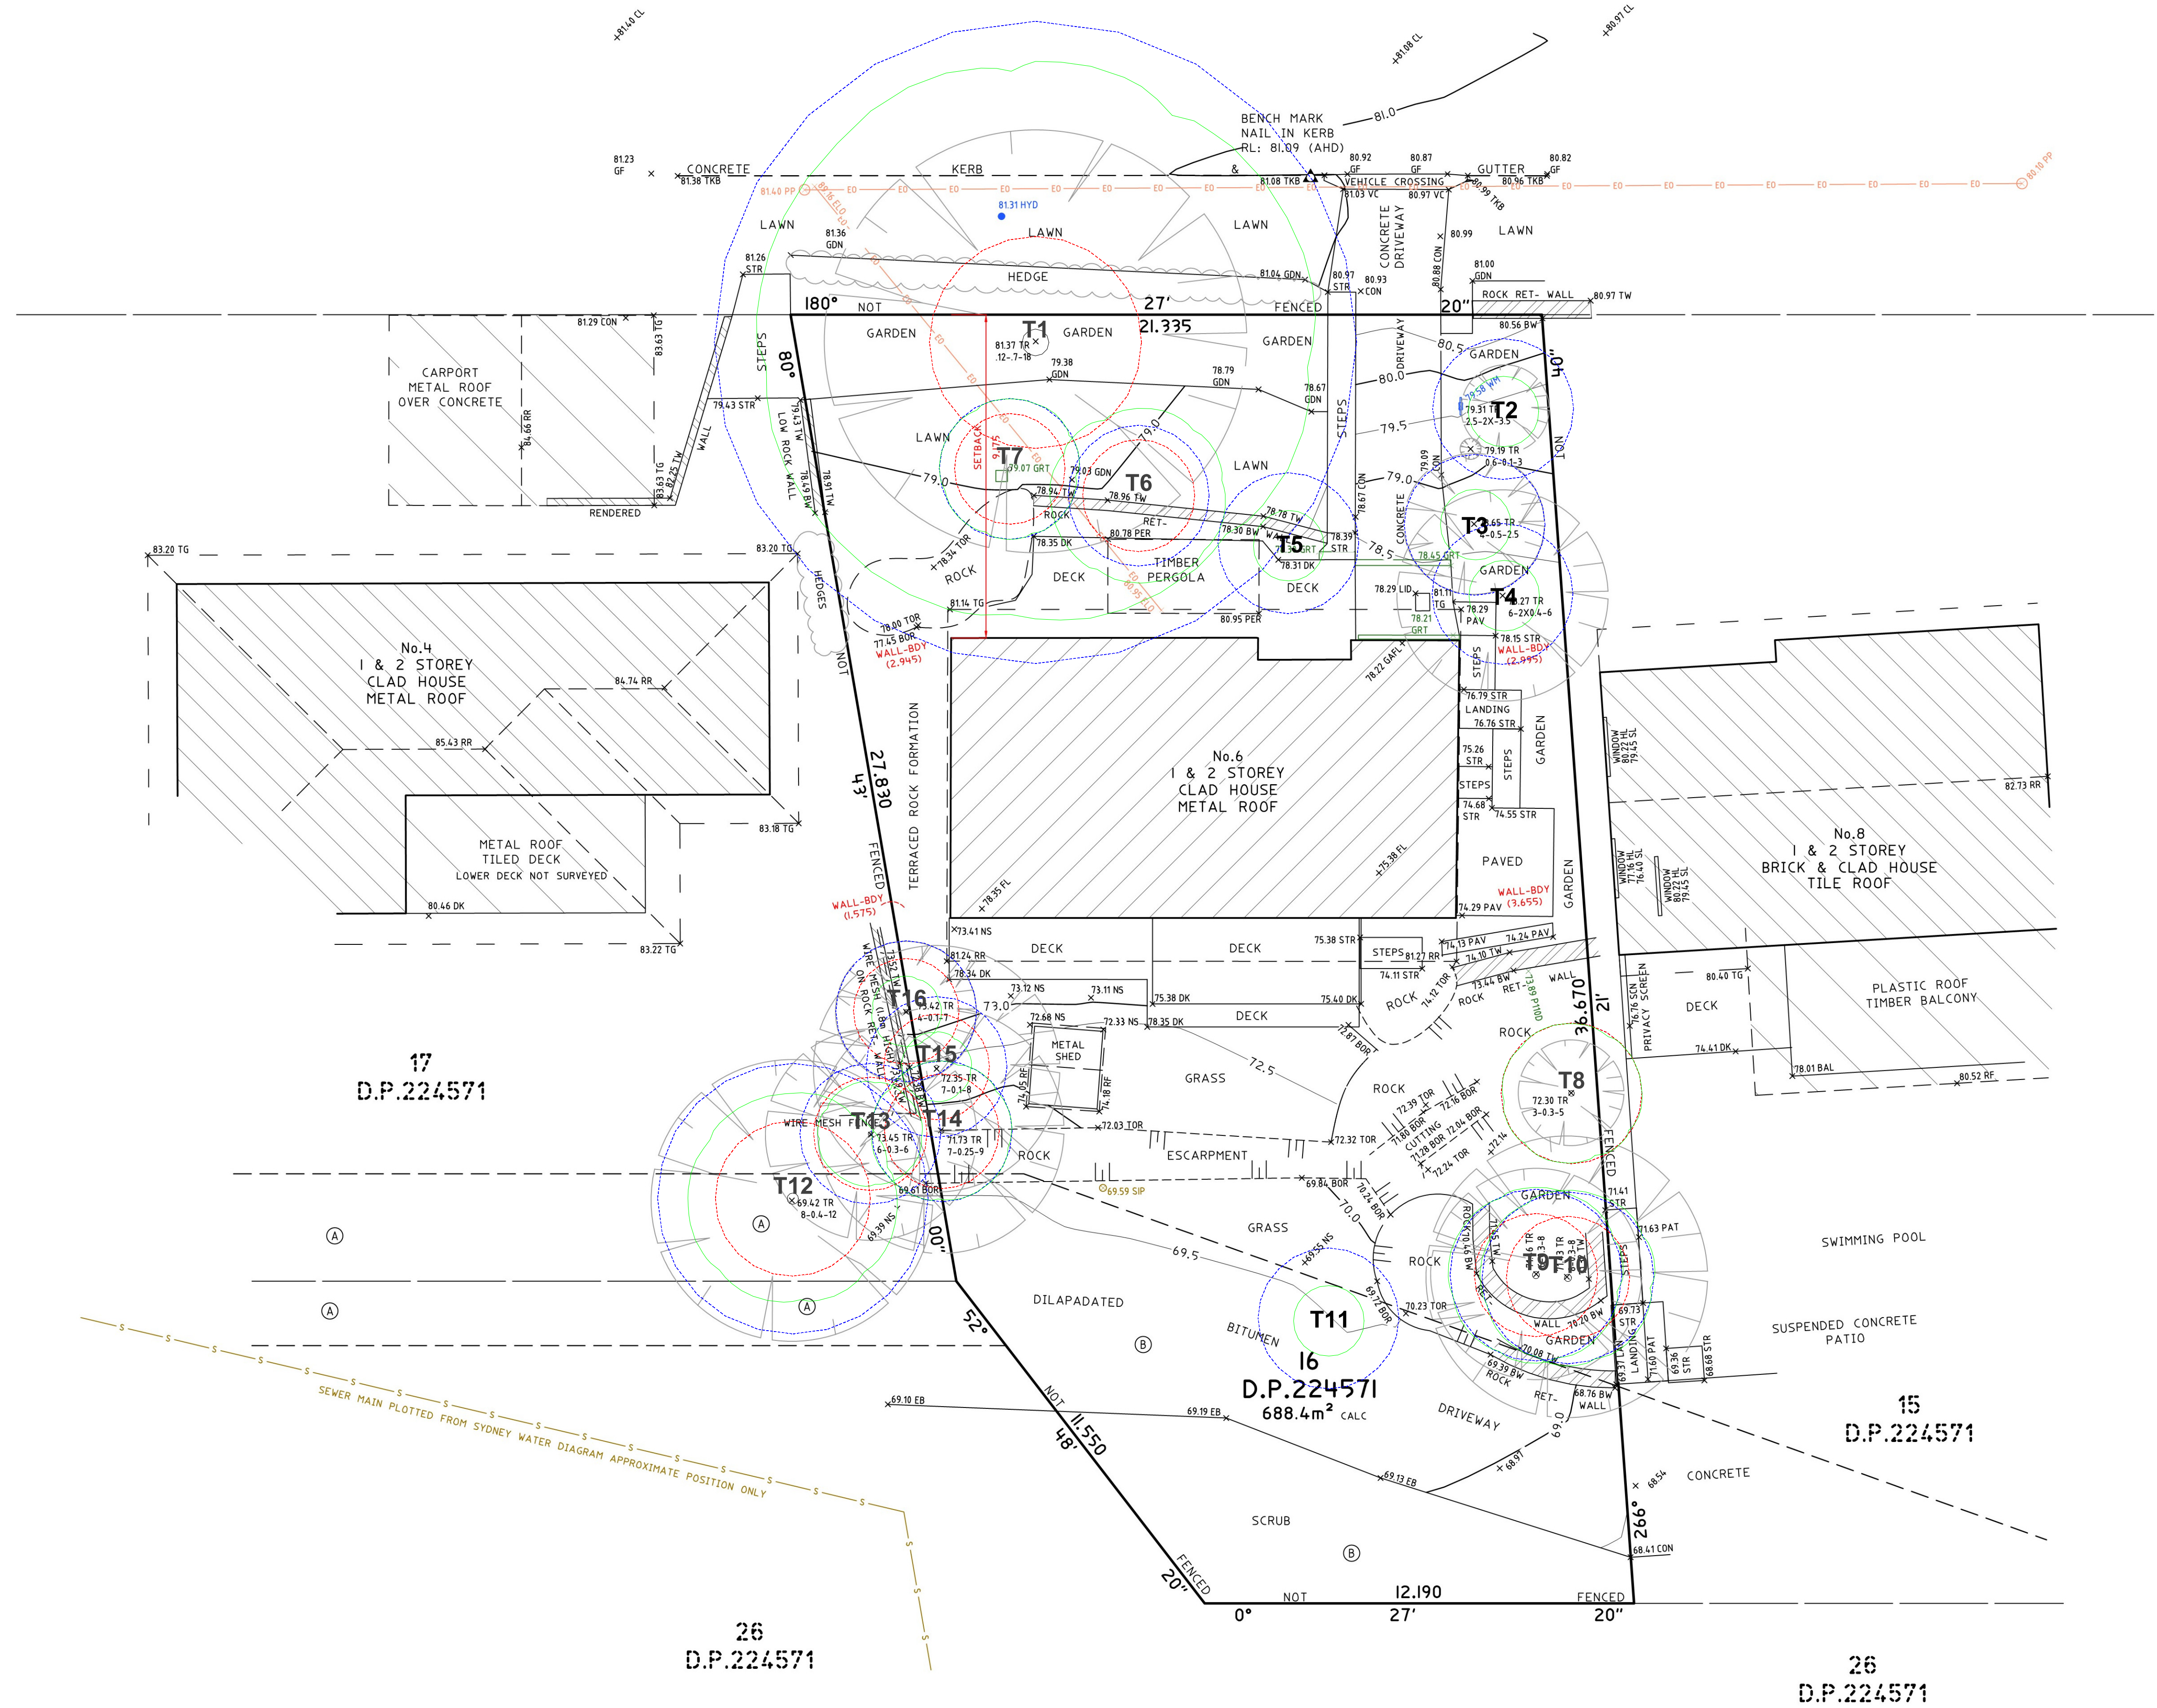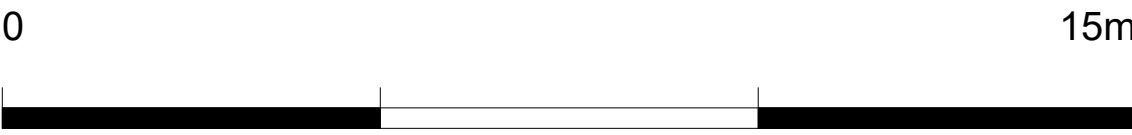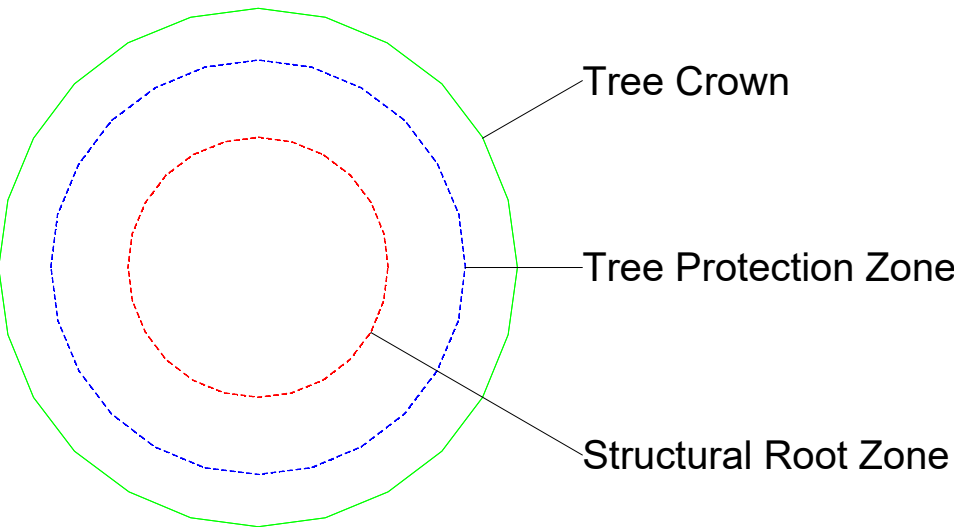

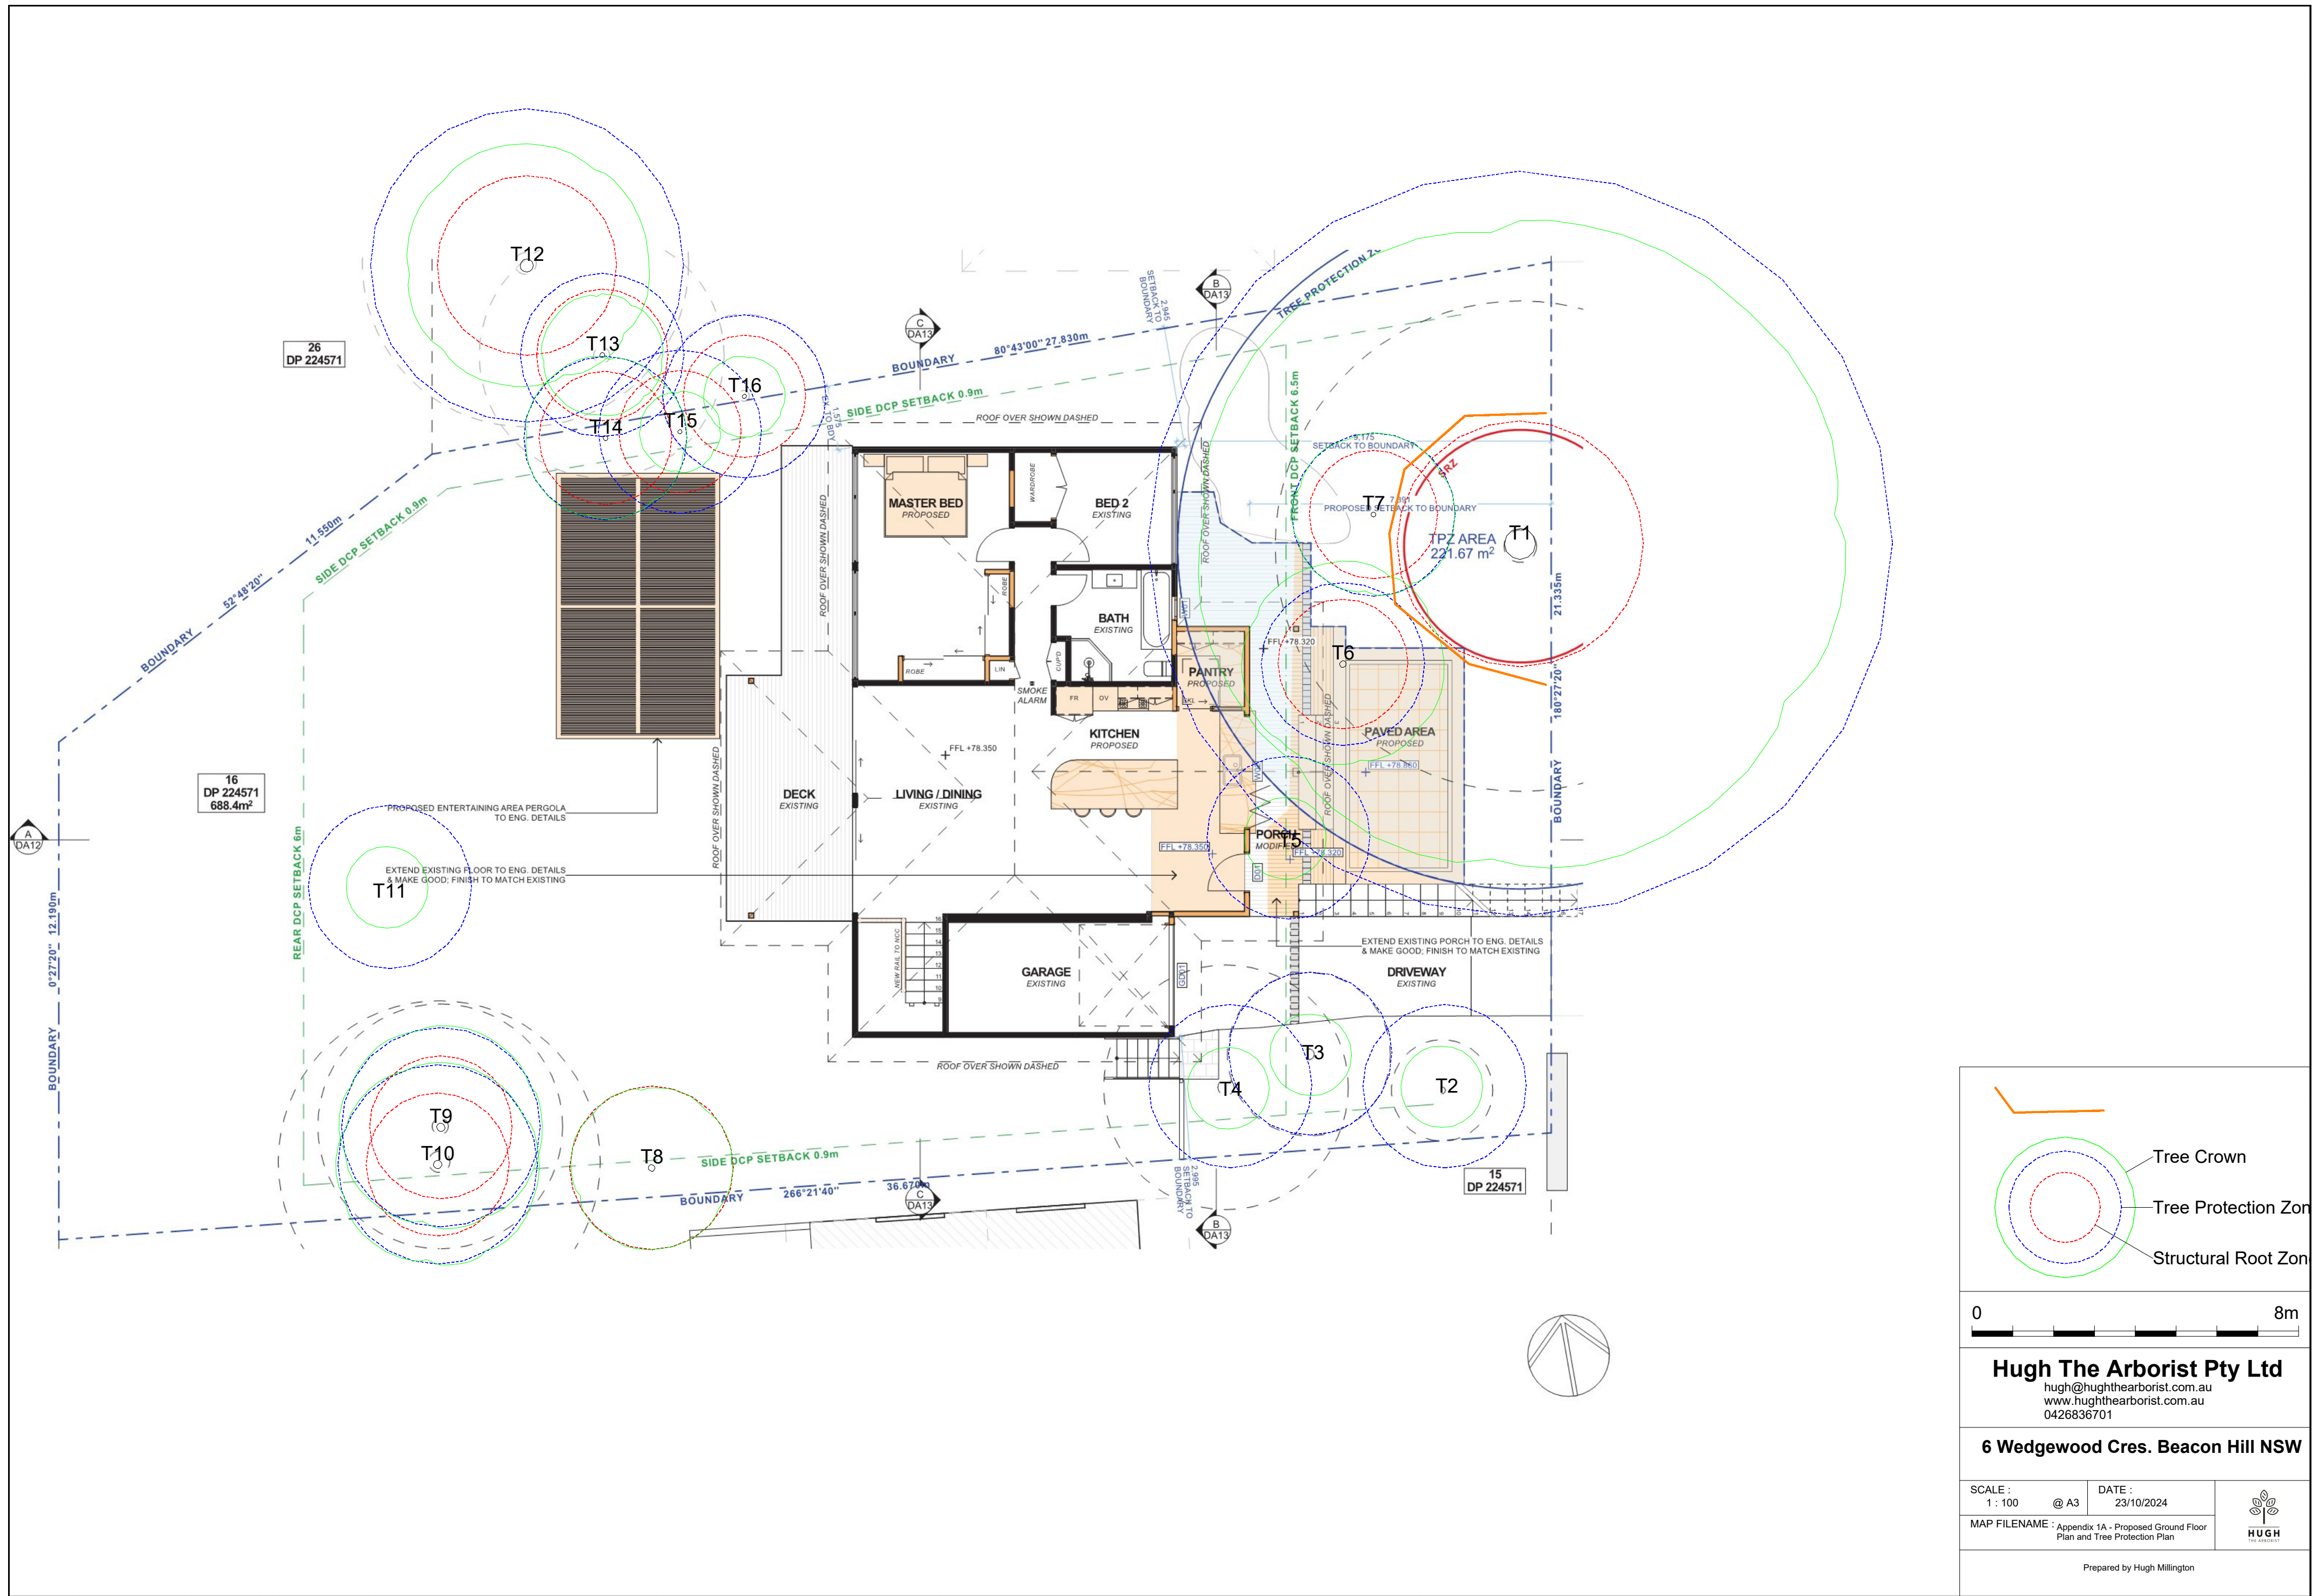

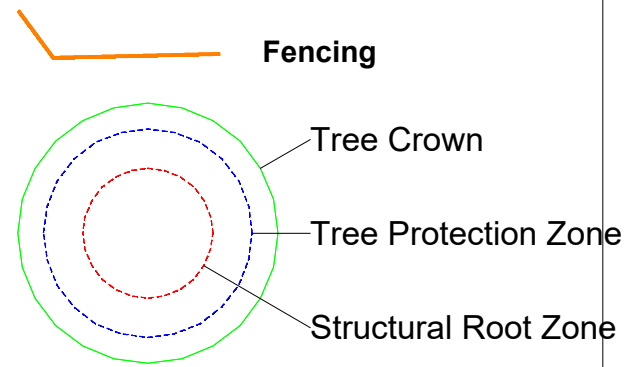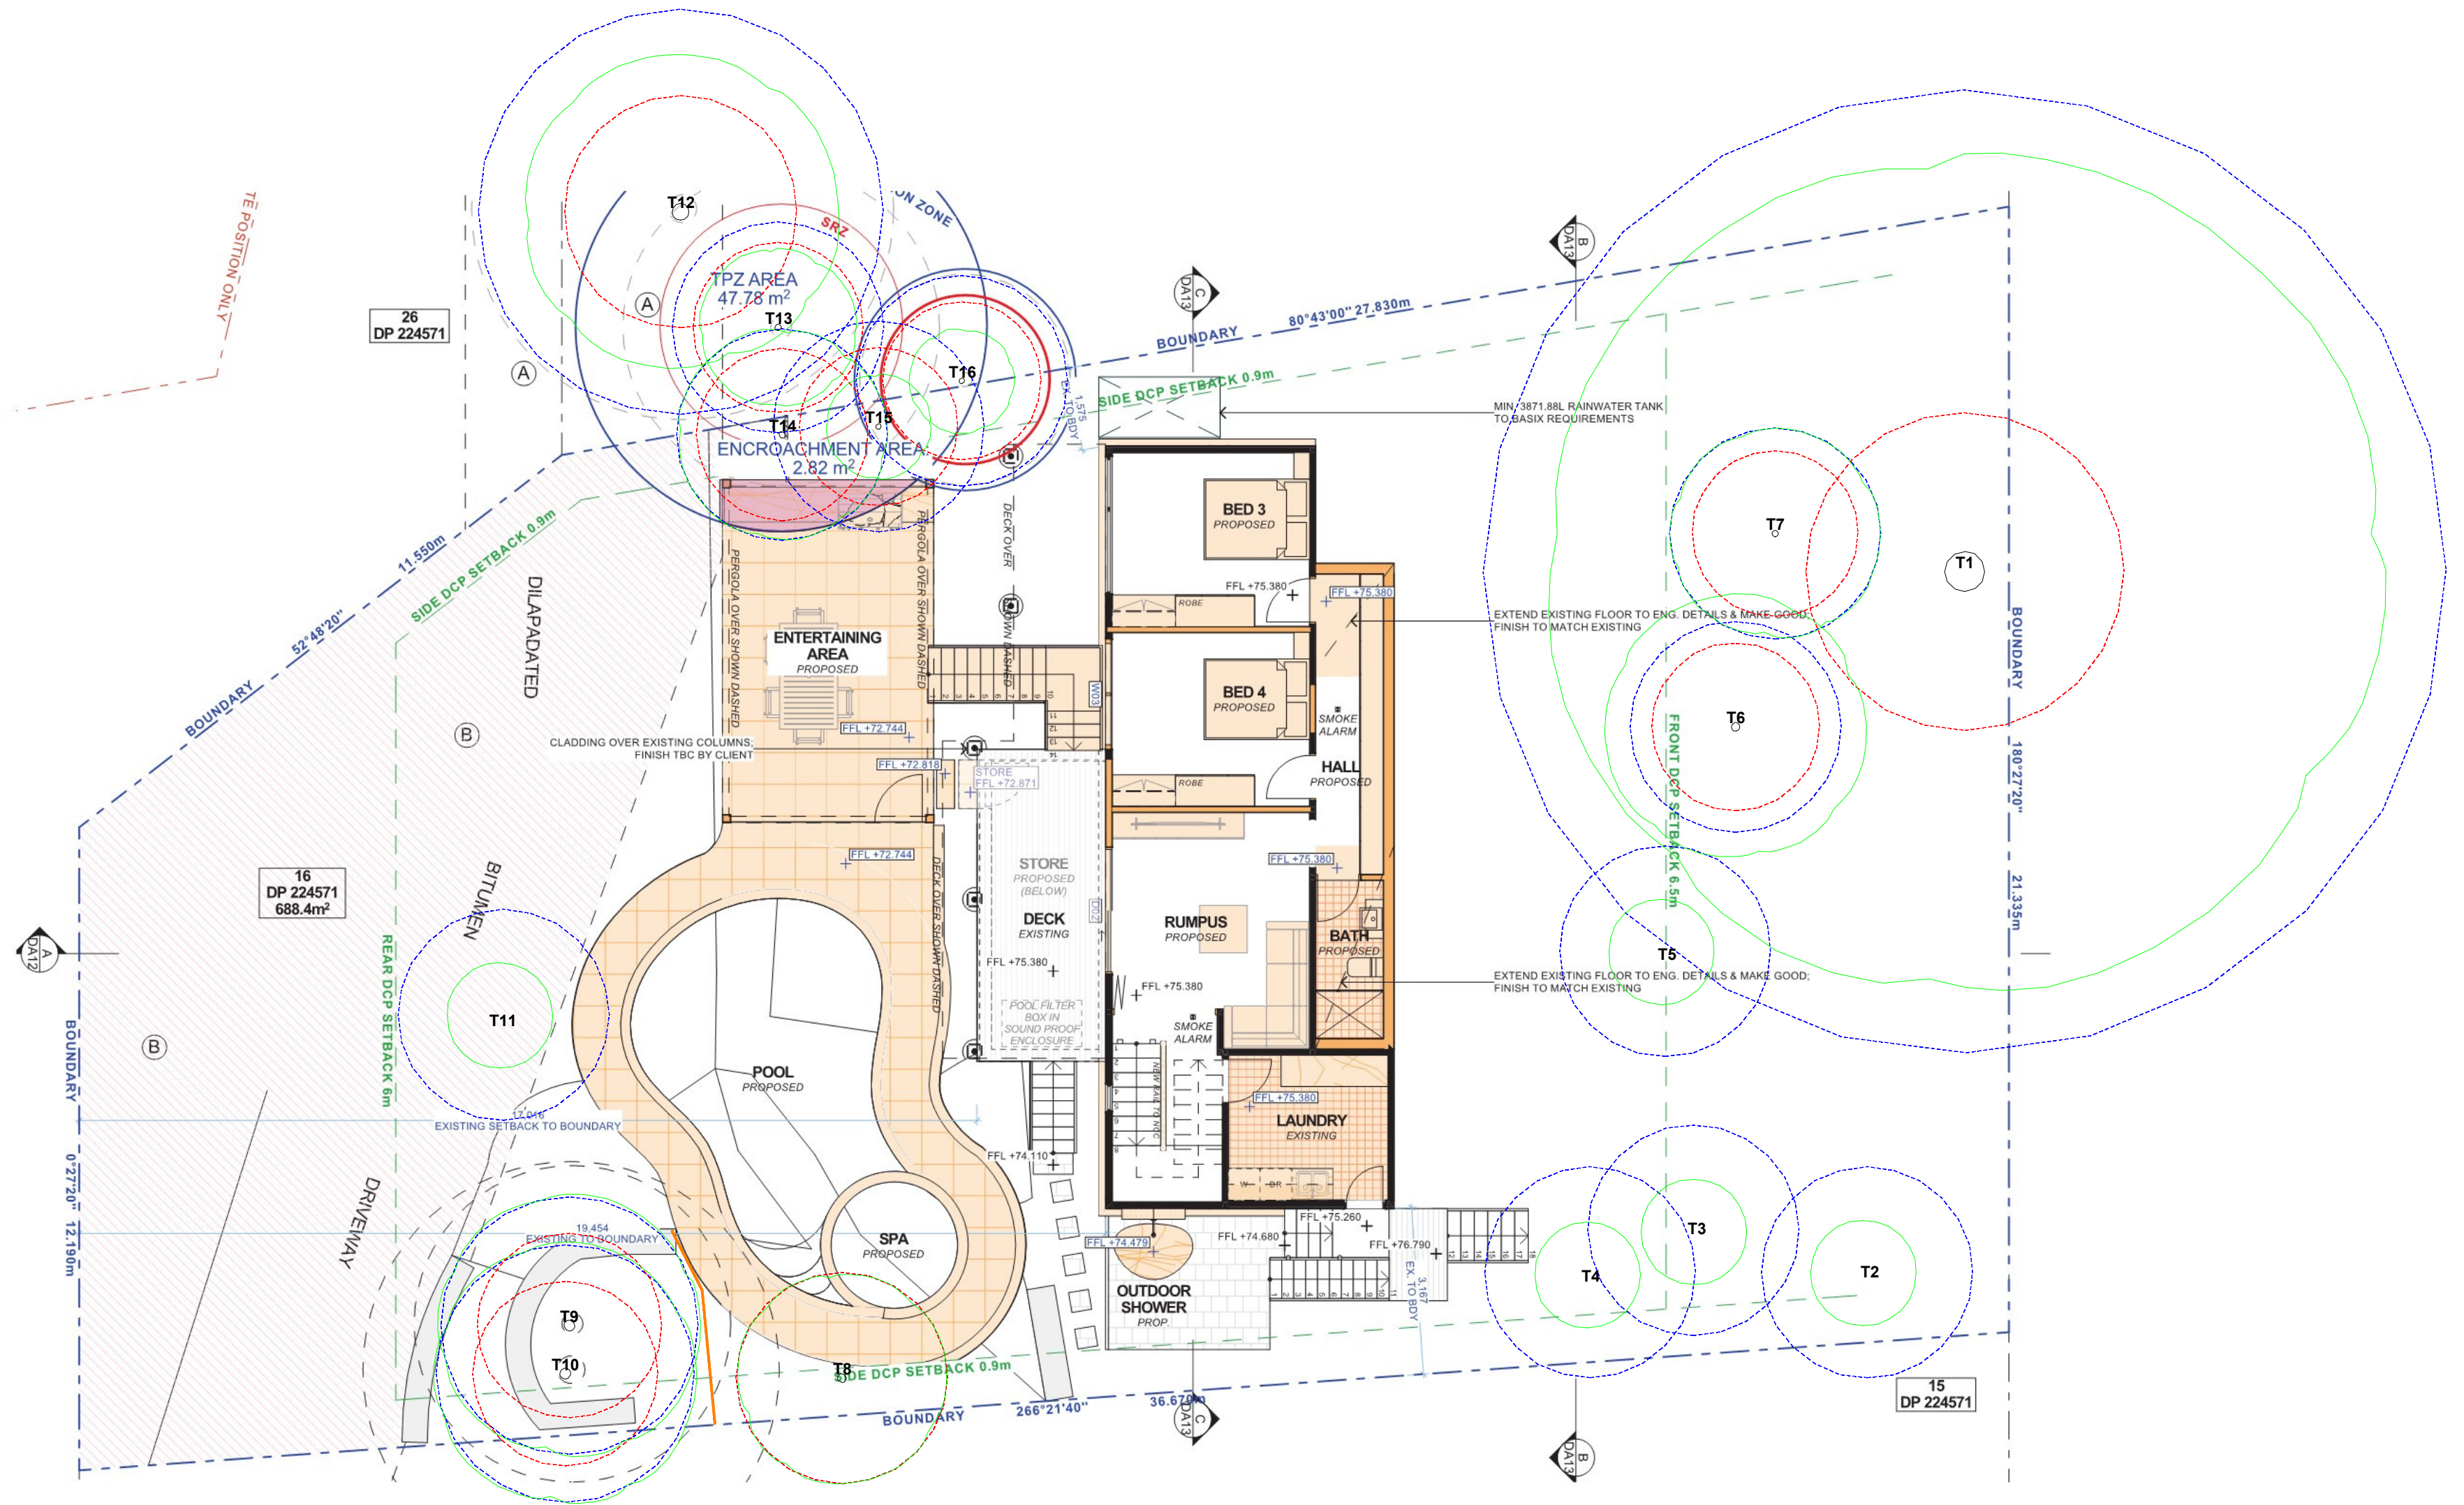

0 8m

Hugh The Arborist Pty Ltd

hugh@hughthearborist.com.au
www.hughthearborist.com.au
0426836701

6 Wedgewood Cres. Beacon Hill NSW

SCALE :
1 : 100 @ A3

DATE :
23/10/2024

MAP FILENAME : Appendix 1B - Proposed Lower Ground Floor
Plan and Tree Protection Plan



Prepared by Hugh Millington

Appendix 2 - Tree Inspection Schedule

Tree ID	Common Name	Botanical Name	Age Class	Height (m)	Canopy Spread Radius (m)	Stem 1 (mm)	Stem 2 (mm)	Stem 3	Stem 4	Stem 5	Stem 6	DBH (mm)	DAB (mm)	Health	Structure	Landscape Value	SULE	Trees AZ Value	TPZ Radius (m)	SRZ Radius (m)	Notes
1	Blackbutt	<i>Eucalyptus pilularis</i>	Semi-mature	15	8	760						760	800	Good	Good	High	1. Long	A1	9.1	9.6	
2	Bayonet Yucca	<i>Yucca alofolia</i>	Mature	4	1	80						80	NA	Good	Good	Low	1. Long	Z1	2.0	NA	
3	Mexican Fan Palm	<i>Washingtonia robusta</i>	Young	3	1	300	0	0	0			300	NA	Good	Good	Low	1. Long	Z1	2.0	NA	
4	Bayonet Yucca	<i>Yucca alofolia</i>	Mature	5	1	80	0	0	0			80	NA	Good	Good	Low	1. Long	Z1	2.0	NA	
5	Rough Tree Fern	<i>Cyathea australis</i>	Mature	5	1	201	0	0	0			201	NA	Good	Good	Medium	1. Long	A1	2.0	NA	Not on survey
6	Red Bloodwood	<i>Corymbia gummifera</i>	Semi-mature	6	2.5	160	0	0	0			160	175	Good	Good	Medium	1. Long	A1	1.9	2.1	Not on survey
7	Weeping Fig	<i>Ficus benjamina</i>	Semi-mature	5	2	80	80	50	0			124	170	Good	Good	Low	1. Long	Z3	1.5	2.0	Not on survey
8	Weeping Bottlebrush	<i>Callistemon viminalis</i>	Semi-mature	6	2	108	100	70	0			163	300	Fair	Poor	Low	4. Remove	Z10	2.0	3.6	Partial failure at base
9	Black tea Tree	<i>Melaleuca bracteata</i>	Semi-mature	7	2.5	120	115	80	85			203	220	Good	Good	High	1. Long	A1	2.4	2.6	Tree in rock
10	Black tea Tree	<i>Melaleuca bracteata</i>	Semi-mature	7	2.5	120	115	80	85			203	220	Good	Good	High	1. Long	A1	2.4	2.6	Tree in rock
11	Rough Tree Fern	<i>Cyathea australis</i>	Semi-mature	4	1	80	0	0	0			80	NA	Good	Good	Low	1. Long	Z1	2.0	NA	Group of 4 rough not on survey
12	Cheese Tree	<i>Glochidion ferdinandi</i>	Semi-mature	8	3	320	0	0	0			320	380	Good	Good	High	1. Long	A1	3.8	4.6	Neighbors tree below rock
13	Sweet Pittosporum	<i>Pittosporum undulatum</i>	Semi-mature	6	1.5	90	85	0	0			124	180	Fair	Poor	Low	4. Remove	Z10	1.5	2.2	Decay at base
14	Sweet Pittosporum	<i>Pittosporum undulatum</i>	Semi-mature	6	2	80	90	0	0			120	185	Good	Good	Low	1. Long	Z3	1.4	2.2	
15	Broad Leaved Privet	<i>Ligustrum lucidum</i>	Semi-mature	7	1	100	0	0	0			100	110	Good	Good	Very Low	1. Long	Z3	1.2	1.3	
16	Broad Leaved Privet	<i>Ligustrum lucidum</i>	Semi-mature	7	1	100	0	0	0			100	110	Good	Good	Very Low	1. Long	Z3	1.2	1.3	

Explanatory Notes

Tree Species - Botanical name followed by common name in brackets. Where species is unknown it is indicated with an 'spp'.

Age Class - Over mature (OM), Mature (M), Early mature (EM), Semi mature (SM), Young (Y), Dead (D).

Diameter at Breast Height (DBH) - Measured with a DBH tape or estimated at approximately 1.4m above ground level. Where DBH has been estimated it is indicated with an 'est'.

Diameter Above root Buttresses (DAB): Measured with a DBH tape or estimated above root buttresses (DAB) for calculating the SRZ.

Height - Height from ground level to top of crown. All heights are estimated unless otherwise indicated.

Spread - Radius of crown at widest section. All tree spreads are estimated unless otherwise indicated.

Tree Protection Zone (TPZ) - DBH x 12. Measured in radius from the centre of the trunk. Rounded to nearest 0.1m. For monocots, the TPZ is set at 1 metre outside the crown projection.

Structural Root Zone (SRZ) - $(DAB \times 50)^{0.42} \times 0.64$. Measured in radius from the centre of the trunk. Rounded up to nearest 0.1m.

Health - Good/Fair/Poor/Dead

Structure - Good/Fair/Poor

Safe Useful Life Expectancy (SULE) - 1. Long (40+years), 2. Medium (15 - 40 years), 3. Short (5 - 15 years), 4. Remove (under 5 years), 5. Small/young.

Amenity Value - Very High/High/Medium/Low/Very Low.

(x) Indicates the measurement taken for the diameter at tree base above the buttress roots.

(E) Indicates estimated measurements.

[illegible]

Appendix 3 – Assessment of Health

<u>Category</u>	<u>Example condition</u>	<u>Summary</u>
Good	• Crown has good foliage density for species. • Tree shows no or minimal signs of pathogens that are unlikely to have an effect on the health of the tree. • Tree is displaying good vigour and reactive growth development.	• The tree is in above average health and condition and no remedial works are required.
Fair	• The tree may be starting to dieback or have over 25% deadwood. • Tree may have slightly reduced crown density or thinning. • There may be some discolouration of foliage. • Average reactive growth development. • There may be early signs of pathogens which may further deteriorate the health of the tree. • There may be epicormic growth indicating increased levels of stress within the tree.	• The tree is in below average health and condition and may require remedial works to improve the trees health.
Poor	• The may be in decline, have extensive dieback or have over 30% deadwood. • The canopy may be sparse or the leaves may be unusually small for species. • Pathogens or pests are having a significant detrimental effect on the tree health.	• The tree is displaying low levels of health and removal or remedial works may be required.
Dead	• The tree is dead or almost dead.	• The tree should generally be removed.

Appendix 4 Landscape Value

RATING	HERITAGE VALUE	ECOLOGICAL VALUE	AMENITY VALUE
1. SIGNIFICANT	The subject tree is listed as a Heritage Item under the Local Environment Plan (LEP) with a local, state or national level of significance or is listed on Council's Significant Tree Register	The subject tree is scheduled as a Threatened Species as defined under the Threatened Species Conservation Act 1995 (NSW) or the Environmental Protection and Biodiversity Conservation Act 1999	The subject tree has a very large live crown size exceeding 300m ² with normal to dense foliage cover, is located in a visually prominent position in the landscape, exhibits very good form and habit typical of the species
	The subject tree forms part of the curtilage of a Heritage Item (building /structure /artefact as defined under the LEP) and has a known or documented association with that item	The tree is a locally indigenous species, representative of the original vegetation of the area and is known as an important food, shelter or nesting tree for endangered or threatened fauna species	The subject tree makes a significant contribution to the amenity and visual character of the area by creating a sense of place or creating a sense of identity
	The subject tree is a Commemorative Planting having been planted by an important historical person (s) or to Commemorate an important historical event	The subject tree is a Remnant Tree, being a tree in existence prior to development of the area	The tree is visually prominent in view from surrounding areas, being a landmark or visible from a considerable distance
2. VERY HIGH	The tree has a strong historical association with a heritage item (building/structure/artefact/garden etc) within or adjacent the property and/or exemplifies a particular era or style of landscape design associated with the original development of the site.	The tree is a locally-indigenous species, representative of the original vegetation of the area and is a dominant or associated canopy species of an Endangered Ecological Community (EEC) formerly occurring in the area occupied by the site.	The subject tree has a very large live crown size exceeding 200m ² ; a crown density exceeding 70% (normal-dense), is a very good representative of the species in terms of its form and branching habit or is aesthetically distinctive and makes a positive contribution to the visual character and the amenity of the area
3. HIGH	The tree has a suspected historical association with a heritage item or landscape supported by anecdotal or visual evidence	The tree is a locally-indigenous species and representative of the original vegetation of the area and the tree is located within a defined Vegetation Link / Wildlife Corridor or has known wildlife habitat value	The subject tree has a large live crown size exceeding 100m ² ; The tree is a good representative of the species in terms of its form and branching habit with minor deviations from normal (e.g. crown distortion/suppression) with a crown density of at least 70% normal); The subject tree is visible from the street and surrounding properties and makes a positive contribution to the visual character and the amenity of the area
4. MODERATE	The tree has no known or suspected historical association, but does not detract or diminish the value of the item and is sympathetic to the original era of planting.	The subject tree is a non-local native or exotic species that is protected under the provisions of this DCP.	The subject tree has a medium live crown size exceeding 40m ² ; The tree is a fair representative of the species, exhibiting moderate deviations from typical form (distortion/suppression etc) with a crowndensity of more than 50% (thinning to normal); and The tree is visible from surrounding properties, but is not visually prominent – view may be partially obscured by other vegetation or built forms. The tree makes a fair contribution to the visual character and amenity of the area.
5. LOW	The subject tree detracts from heritage values or diminishes the value of a heritage item	The subject tree is scheduled as exempt (not protected) under the provisions of this DCP due to its species, nuisance or position relative to buildings or other structures.	The subject tree has a small live crown size of less than 40m ² and can be replaced within the short term (5-10 years) with new tree planting
6. VERY LOW	The subject tree is causing significant damage to a heritage Item.	The subject tree is listed as an Environment Weed Species in the Local Government Area, being invasive, or is a known nuisance species.	The subject tree is not visible from surrounding properties (visibility obscured) and makes a negligible contribution or has a negative impact on the amenity and visual character of the area. The tree is a poor representative of the species, showing significant deviations from the typical form and branching habit with a crown density of less than 50% (sparse).
7. INSIGNIFICANT	The tree is completely dead and has no visible habitat value	The tree is a declared Noxious Weed under the Noxious Weeds Act (NSW) 1993 within the relevant Local Government Area.	The tree is completely dead and represents a potential hazard.

Appendix 5 - Age class

Determining the exact age of a tree is difficult without carrying out potentially invasive testing. The age class of the subject tree has been estimated using the definitions below.

<u>Category</u>	<u>Description</u>
Young/Newly planted	• Young or recently planted tree.
Semi Mature	• Up to 20% of the usual life expectancy for the species.
Early mature/Mature	• Between 20% - 80% of the usual life expectancy for the species.
Over mature	• Over 80% of the usual life expectancy for the species.
Dead	• Tree is dead or almost dead.

Appendix 4 - Structural condition

<u>Category</u>	<u>Example condition</u>	<u>Summary</u>
Good	• Branch unions appear to be strong with no sign of defects. • There are no significant cavities. • The tree is unlikely to fail in usual conditions. • The tree has a balanced crown shape and form.	• The tree is considered structurally good with well developed form.
Fair	• The tree may have minor structural defects within the structure of the crown that could potentially develop into more significant defects. • The tree may have a cavity that is currently unlikely to fail but may deteriorate in the future. • The tree is an unbalanced shape or leans significantly. • The tree may have minor damage to its roots. • The root plate may have moved in the past but the tree has now compensated for this. • Branches may be rubbing or crossing.	• The identified defects are unlikely cause major failure. • Some branch failure may occur in usual conditions. • Remedial works can be undertaken to alleviate potential defects.
Poor	• The tree has significant structural defects. • Branch unions may be poor or weak. • The tree may have a cavity or cavities with excessive levels of decay that could cause catastrophic failure. • The tree may have root damage or is displaying signs of recent movement. • The tree crown may have poor weight distribution which could cause failure.	• The identified defects are likely to cause either partial or whole failure of the tree.

Appendix 7 - Safe Useful Life Expectancy (SULE), (Barrel, 2001)

A tree's safe useful life expectancy is determined by assessing a number of different factors including the health and vitality, estimated age in relation to expected life expectancy for the species, structural defects, and remedial works that could allow retention in the existing situation.

Category	Description
1. Long	Useful life expectancy over 40 years
2. Medium	Useful life expectancy 15 to 40 years
3. Short	Useful life expectancy 5 to 15 years
4. Remove	Useful life expectancy under 5 years
5. Small/Young	Trees that could be transplanted or replaced with similar specimen.
6. Unstable	Tree has become hazardous or structurally unstable.

TreeAZ Categories (Version 10.04-ANZ)

CAUTION: TreeAZ assessments must be carried out by a competent person qualified and experienced in arboriculture. The following category descriptions are designed to be a brief field reference and are not intended to be self-explanatory. They must be read in conjunction with the most current explanations published at www.TreeAZ.com.

Category Z: Unimportant trees not worthy of being a material constraint

Local policy exemptions: Trees that are unsuitable for legal protection for local policy reasons including size, proximity and species

Z1	Young or insignificant small trees, i.e. below the local size threshold for legal protection, etc
Z2	Too close to a building, i.e. exempt from legal protection because of proximity, etc
Z3	Species that cannot be protected for other reasons, i.e. scheduled noxious weeds, out of character in a setting of acknowledged importance, etc

High risk of death or failure: Trees that are likely to be removed within 10 years because of acute health issues or severe structural failure

Z4	Dead, dying, diseased or declining
Z5	Severe damage and/or structural defects where a high risk of failure <u>cannot</u> be satisfactorily reduced by reasonable remedial care, i.e. cavities, decay, included bark, wounds, excessive imbalance, overgrown and vulnerable to adverse weather conditions, etc
Z6	Instability, i.e. poor anchorage, increased exposure, etc

Excessive nuisance: Trees that are likely to be removed within 10 years because of unacceptable impact on people

Z7	Excessive, severe and intolerable inconvenience to the extent that a locally recognized court or tribunal would be likely to authorize removal, i.e. dominance, debris, interference, etc
Z8	Excessive, severe and intolerable damage to property to the extent that a locally recognized court or tribunal would be likely to authorize removal, i.e. severe structural damage to surfacing and buildings, etc

Good management: Trees that are likely to be removed within 10 years through responsible management of the tree population

Z9	Severe damage and/or structural defects where a high risk of failure can be <u>temporarily</u> reduced by reasonable remedial care, i.e. cavities, decay, included bark, wounds, excessive imbalance, vulnerable to adverse weather conditions, etc
Z10	Poor condition or location with a low potential for recovery or improvement, i.e. dominated by adjacent trees or buildings, poor architectural framework, etc
Z11	Removal would benefit better adjacent trees, i.e. relieve physical interference, suppression, etc
Z12	Unacceptably expensive to retain, i.e. severe defects requiring excessive levels of maintenance, etc

NOTE: Z trees with a high risk of death/failure (Z4, Z5 & Z6) or causing severe inconvenience (Z7 & Z8) at the time of assessment and need an urgent risk assessment can be designated as ZZ. ZZ trees are likely to be unsuitable for retention and at the bottom of the categorization hierarchy. In contrast, although Z trees are not worthy of influencing new designs, urgent removal is not essential and they could be retained in the short term, if appropriate.


Category A: Important trees suitable for retention for more than 10 years and worthy of being a material constraint

A1	No significant defects and could be retained with minimal remedial care
A2	Minor defects that could be addressed by remedial care and/or work to adjacent trees
A3	Special significance for historical, cultural, commemorative or rarity reasons that would warrant extraordinary efforts to retain for more than 10 years
A4	Trees that may be worthy of legal protection for ecological reasons (Advisory requiring specialist assessment)

NOTE: Category A1 trees that are already large and exceptional, or have the potential to become so with minimal maintenance, can be designated as AA at the discretion of the assessor. Although all A and AA trees are sufficiently important to be material constraints, AA trees are at the top of the categorization hierarchy and should be given the most weight in any selection process.

Appendix 10 – Examples of TPZ Encroachment

Encroachment into the Tree Protection Zone is sometimes unavoidable. The following diagram shows examples of acceptable levels of encroachment and how they may be compensated for by providing additional space contiguous to the TPZ area.

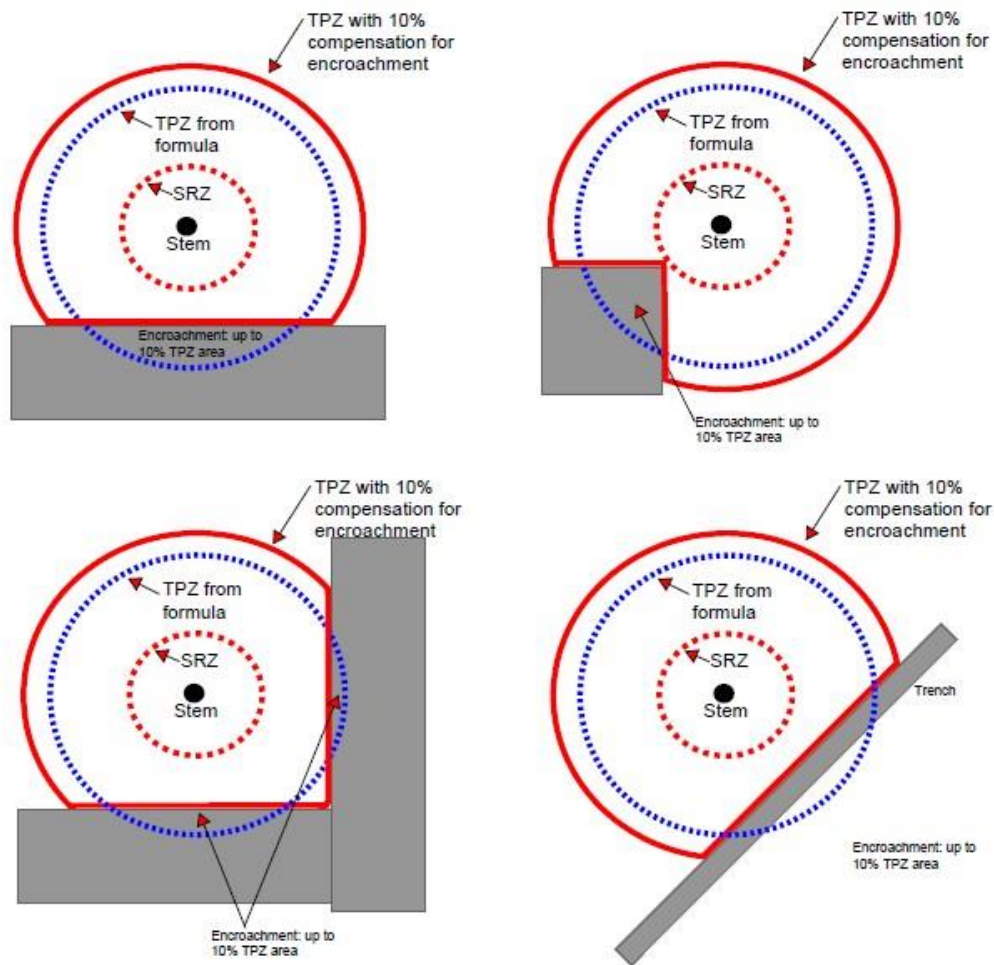

Note: Less than 10% TPZ area and outside SRZ. Any loss of TPZ compensated for elsewhere.