




private residence


44 wandeen rd, clareville


alterations and additions development application architectural perspectives

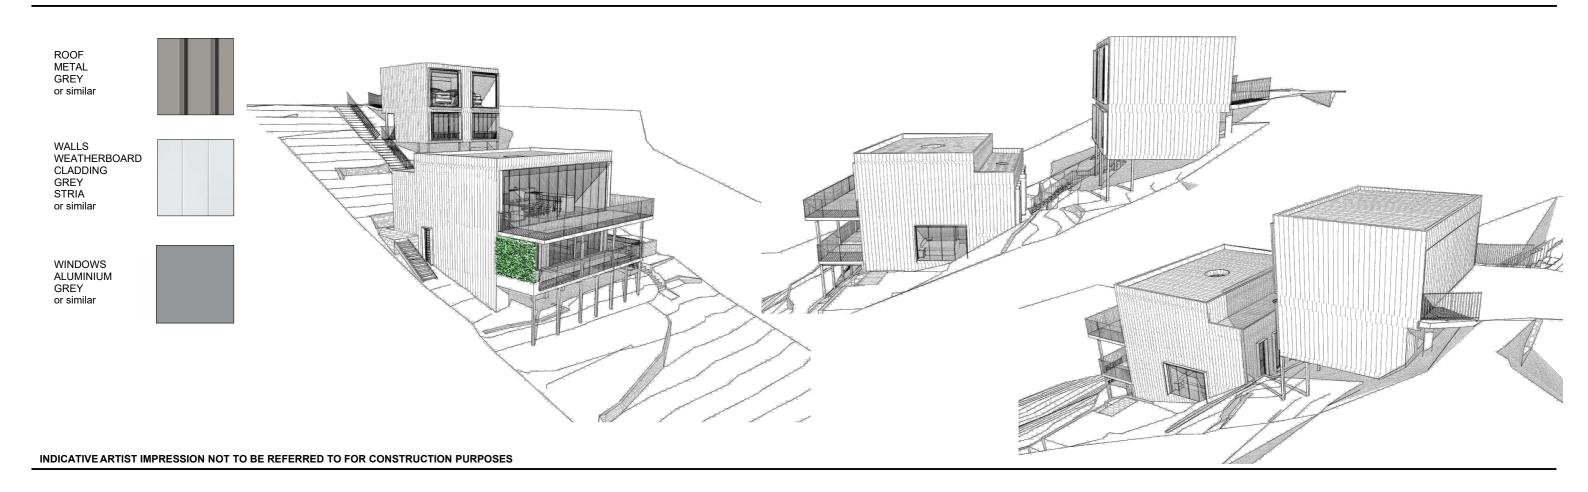


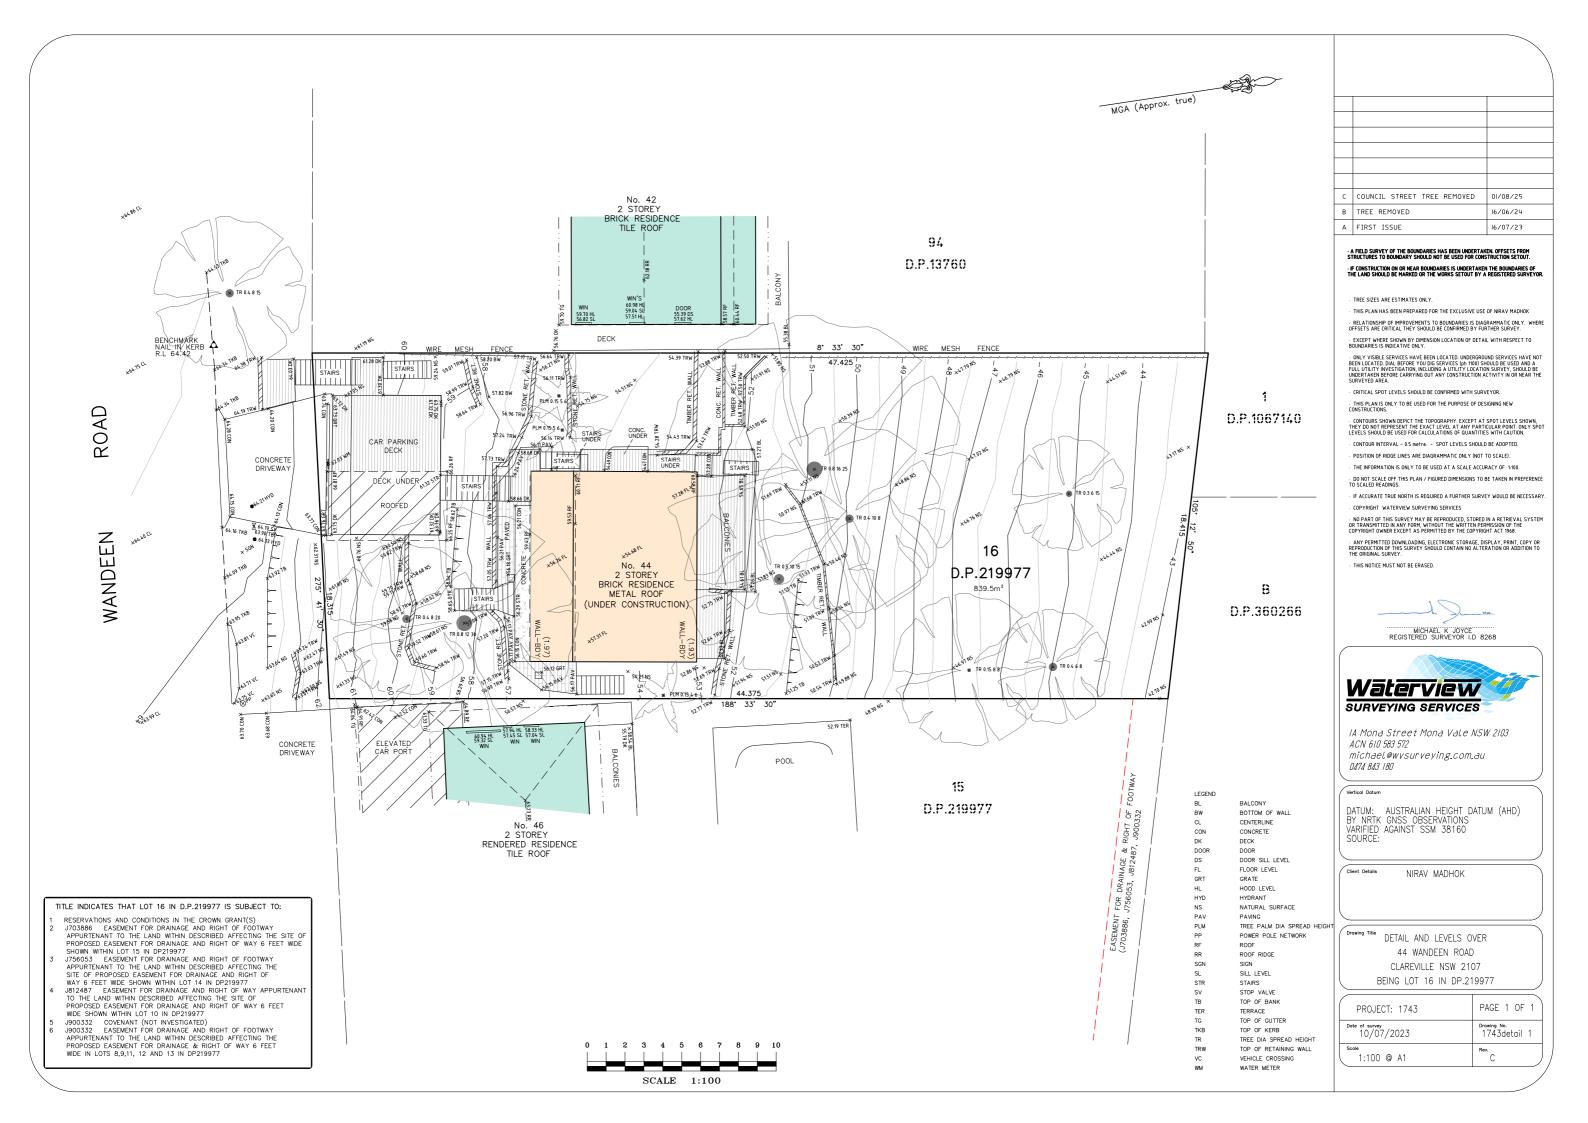


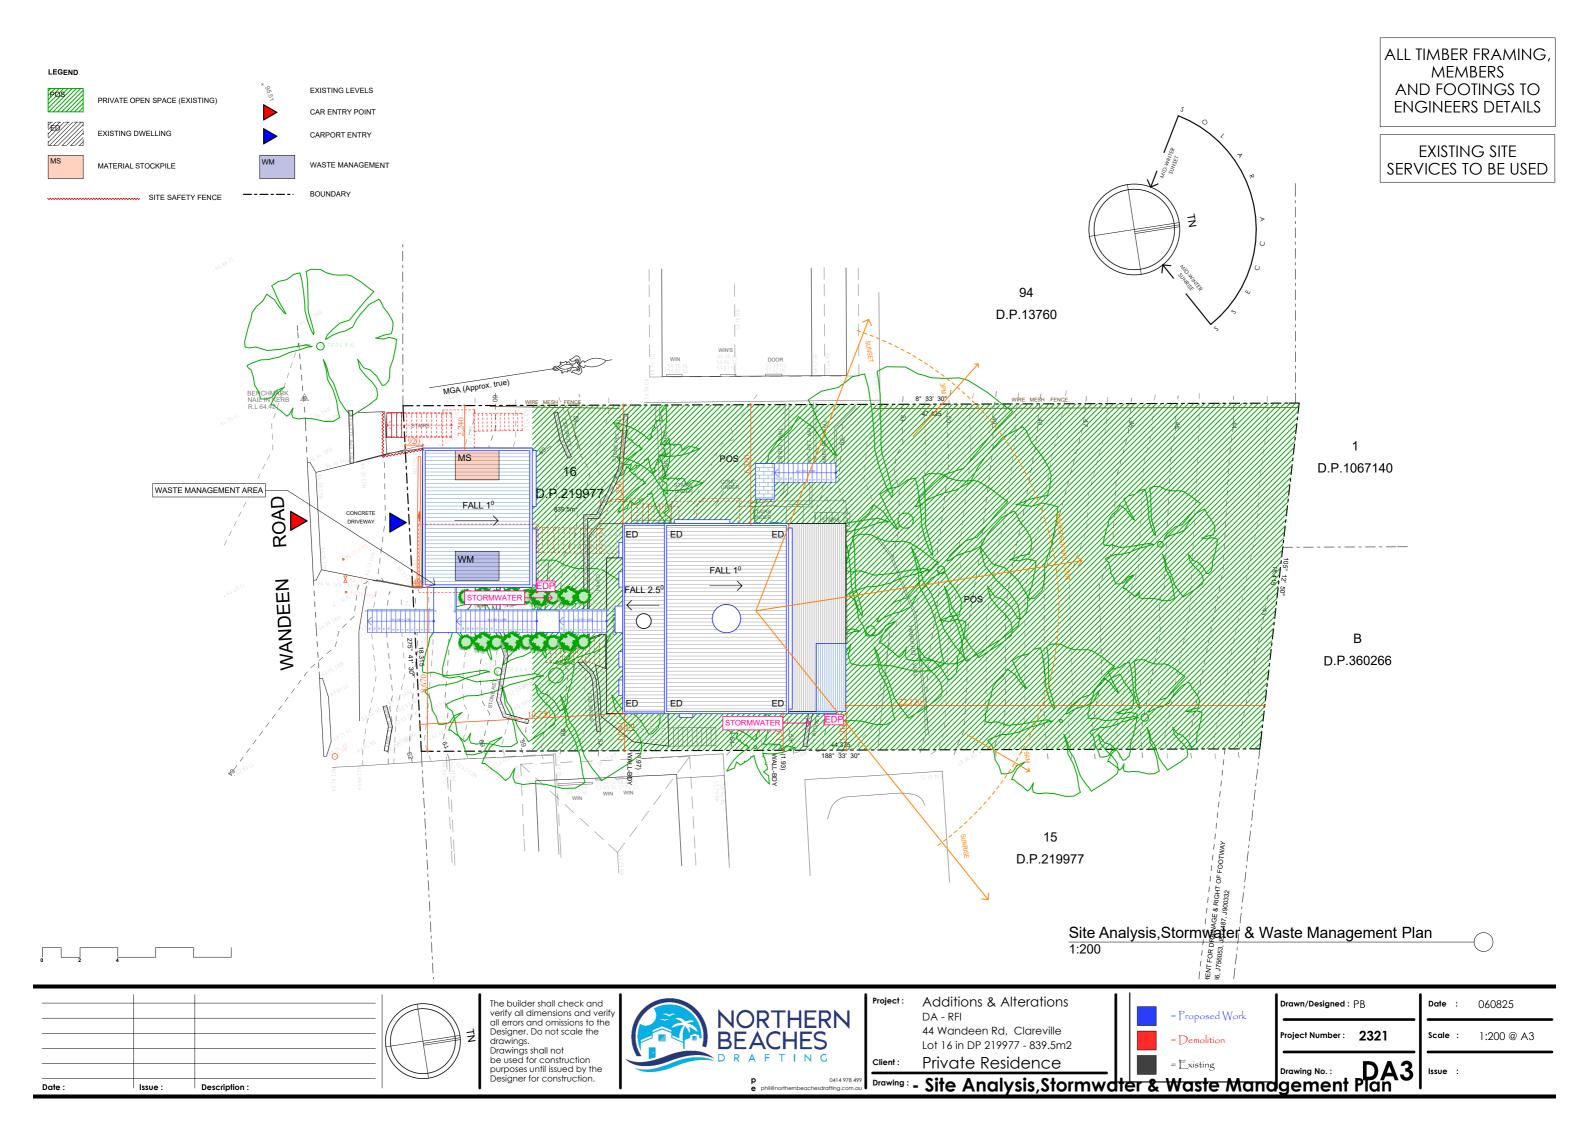


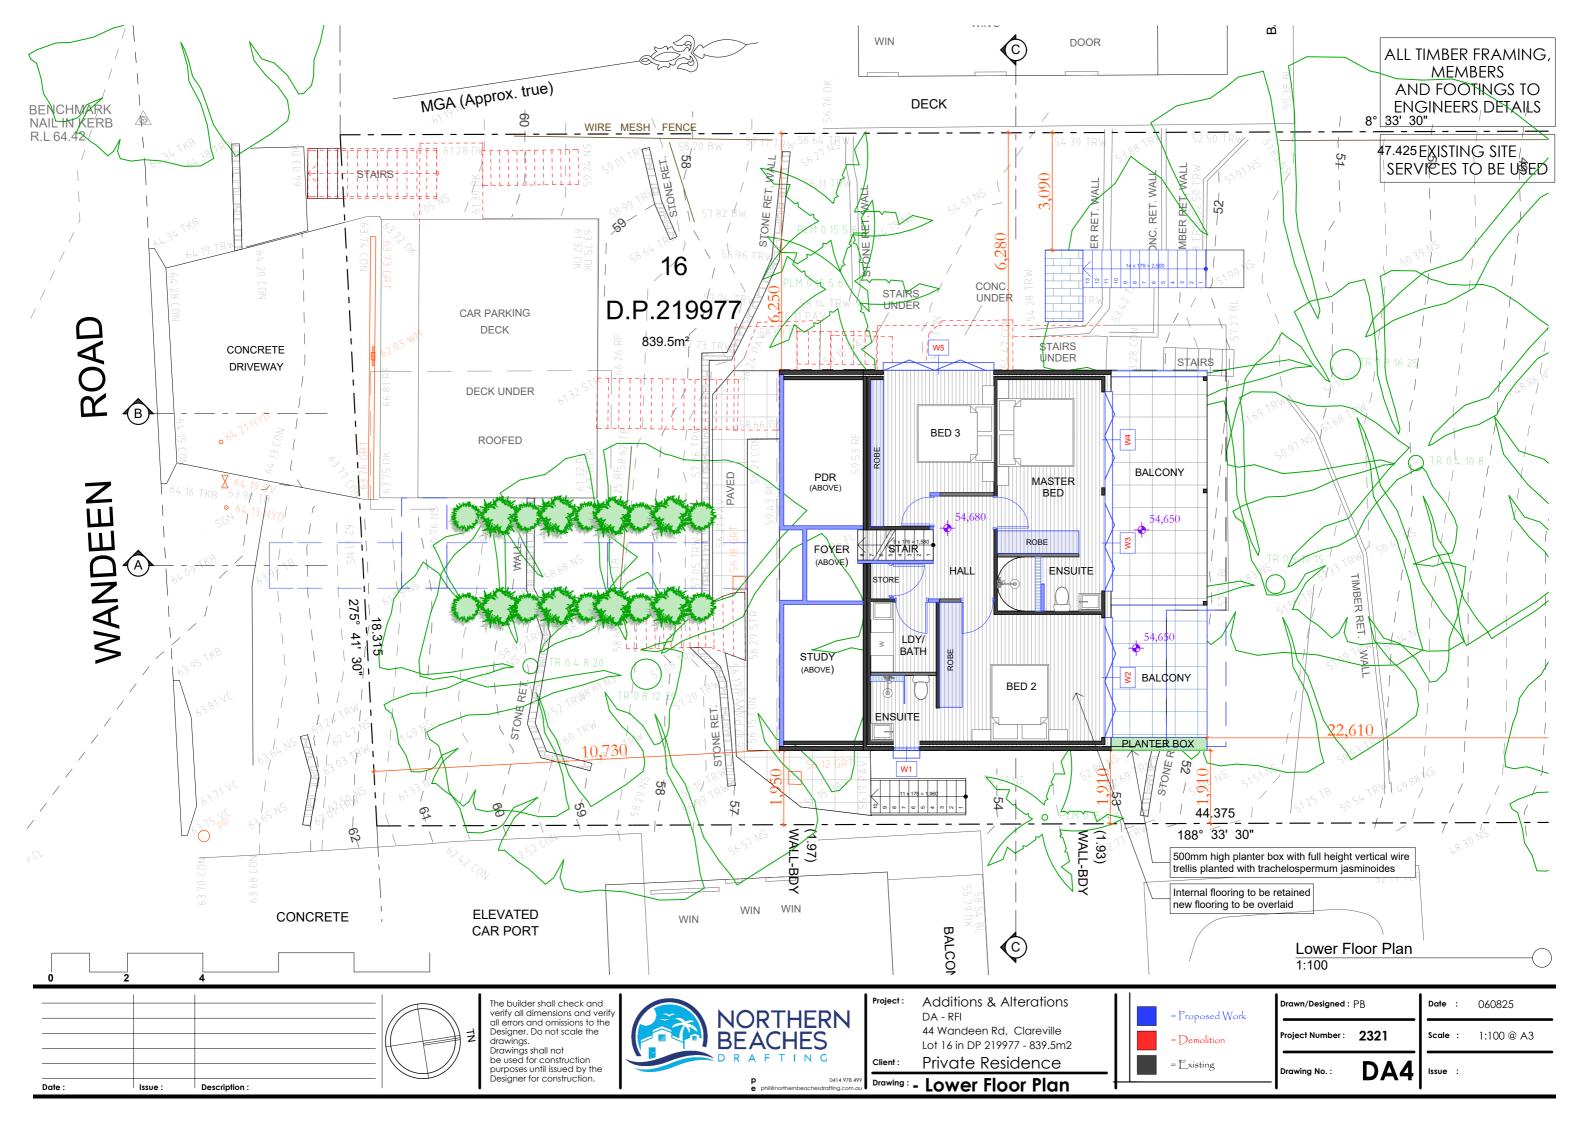


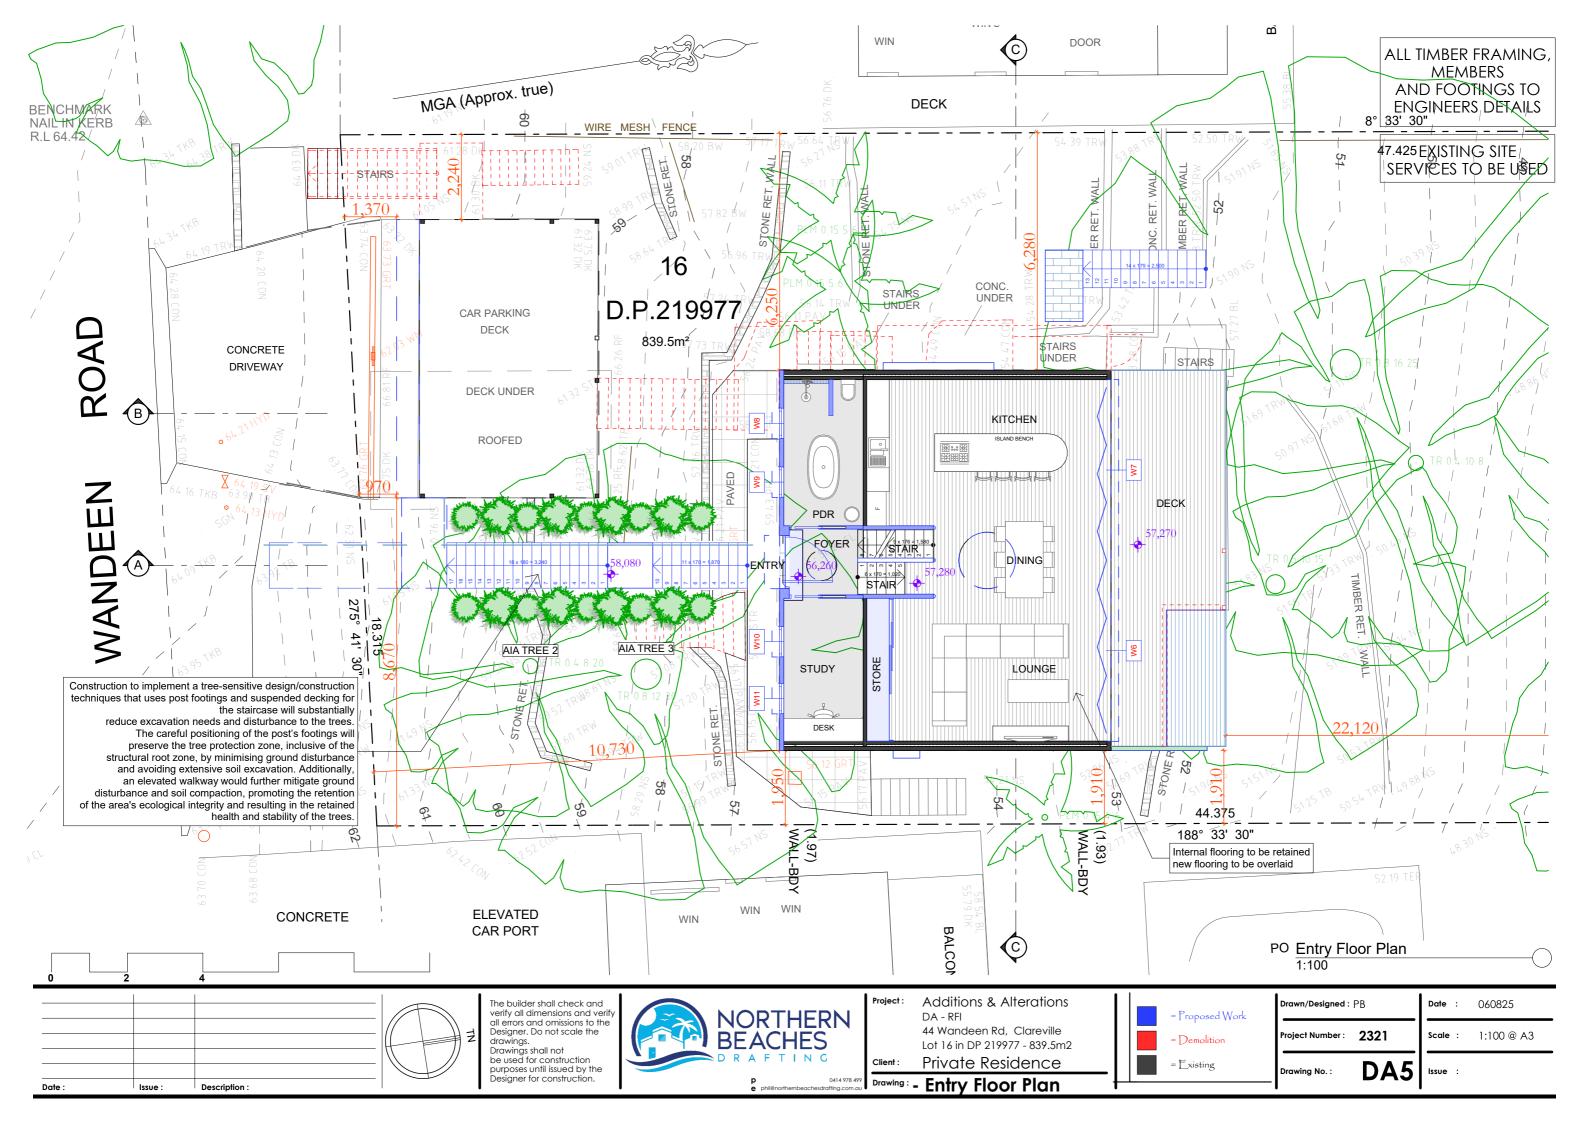


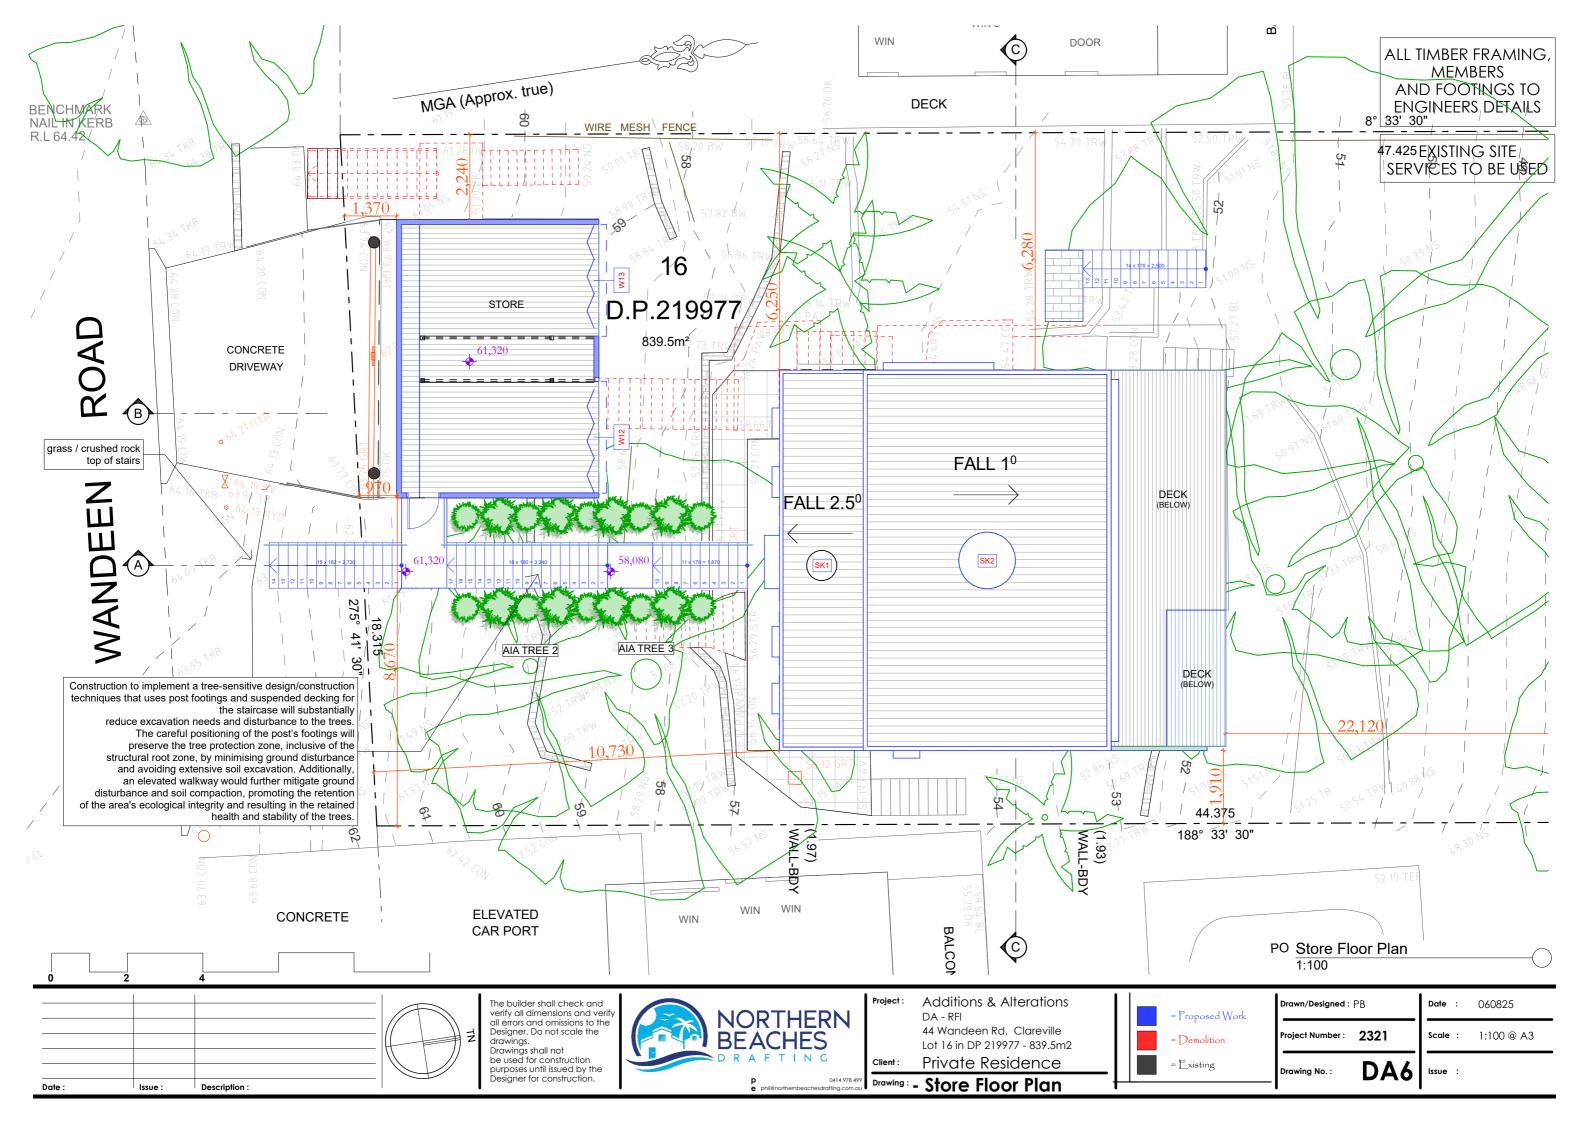

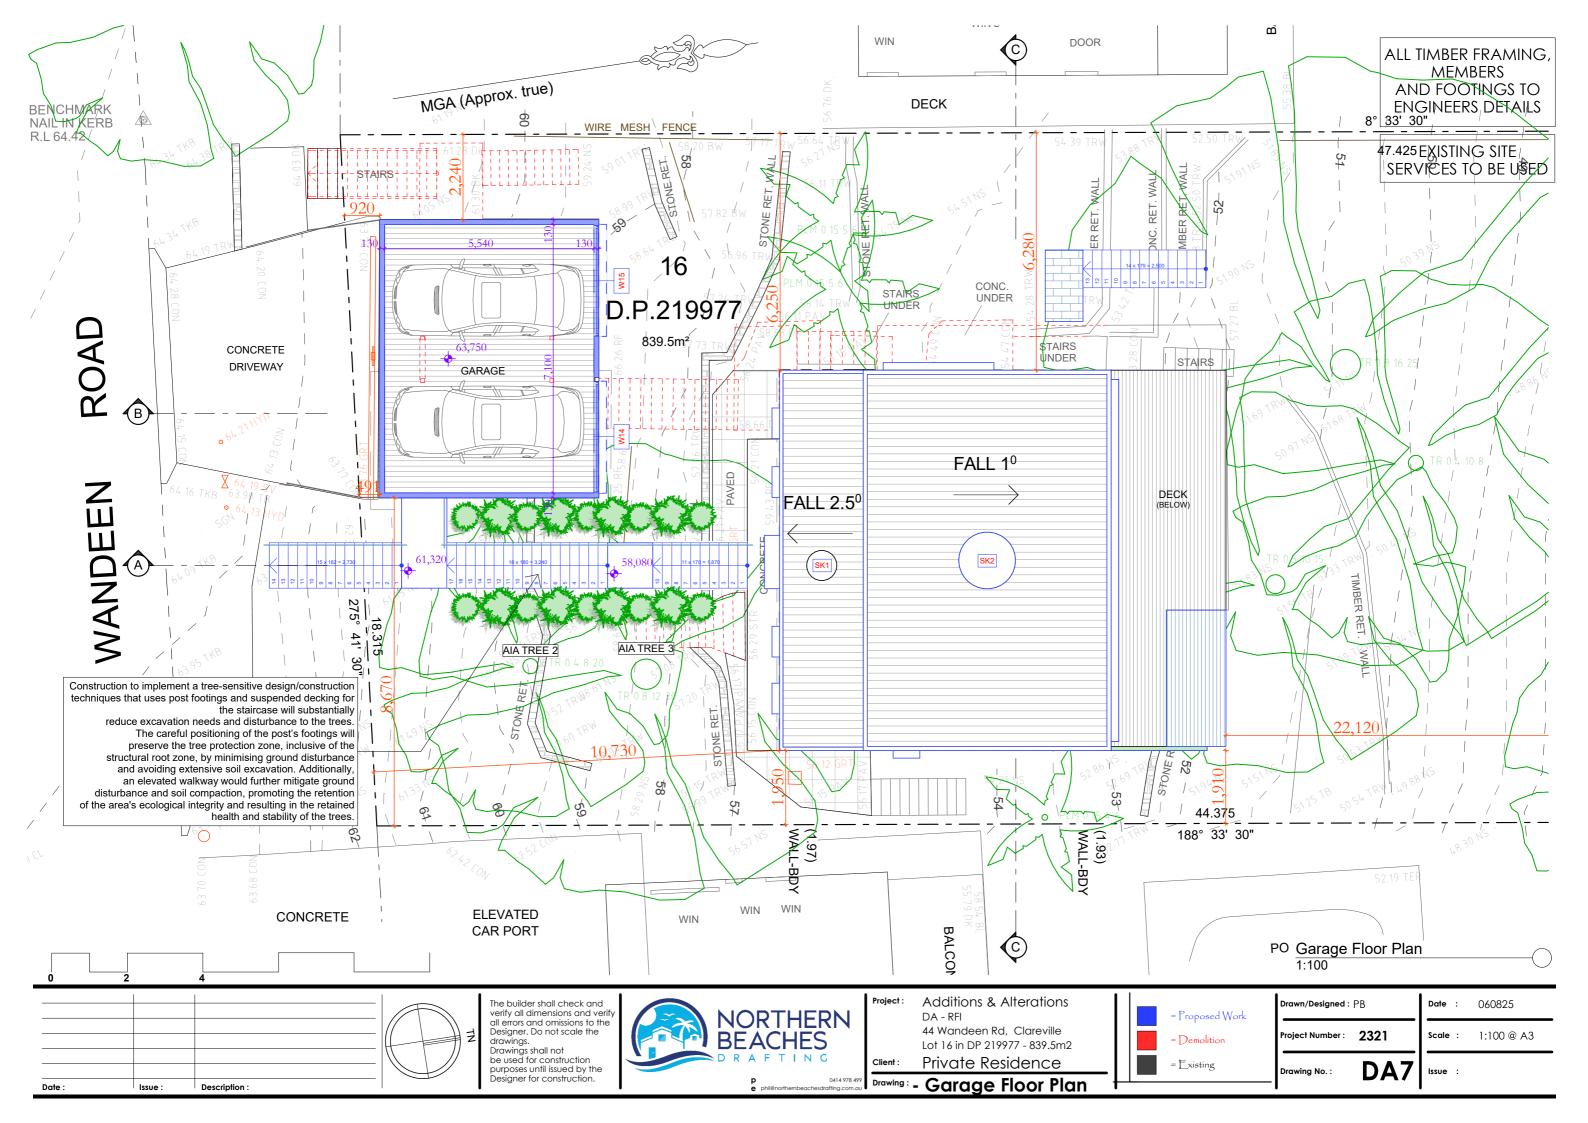


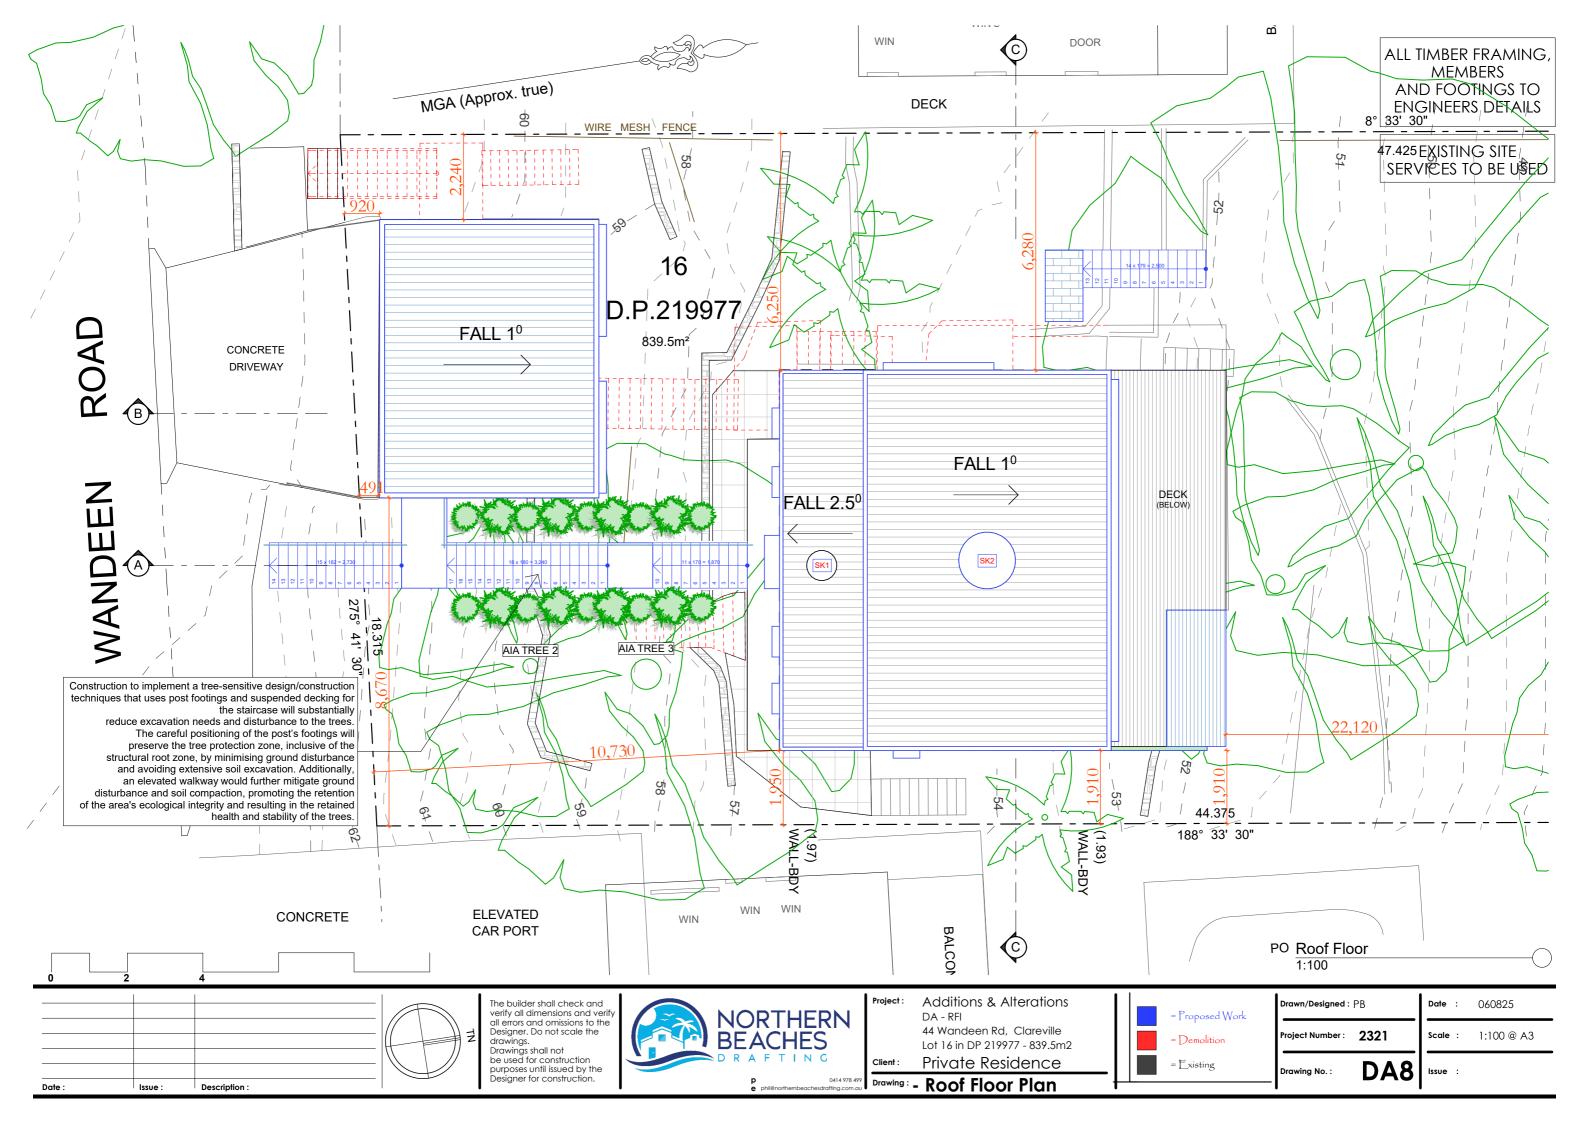

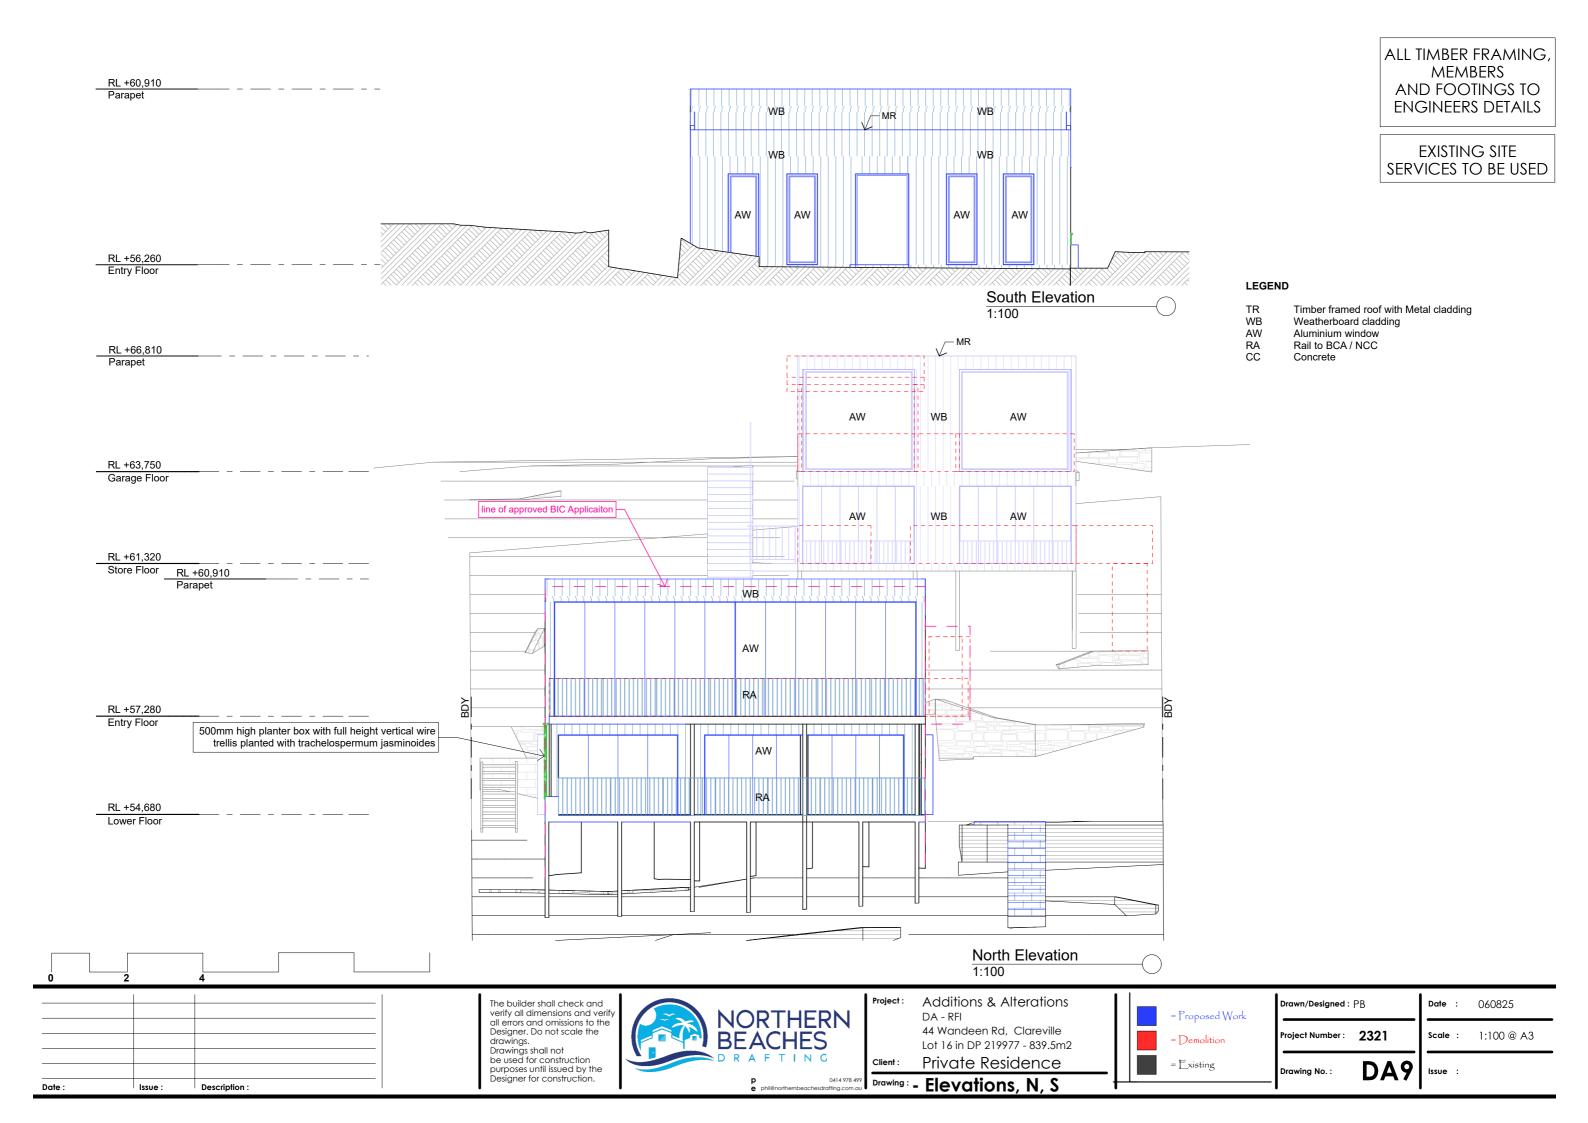

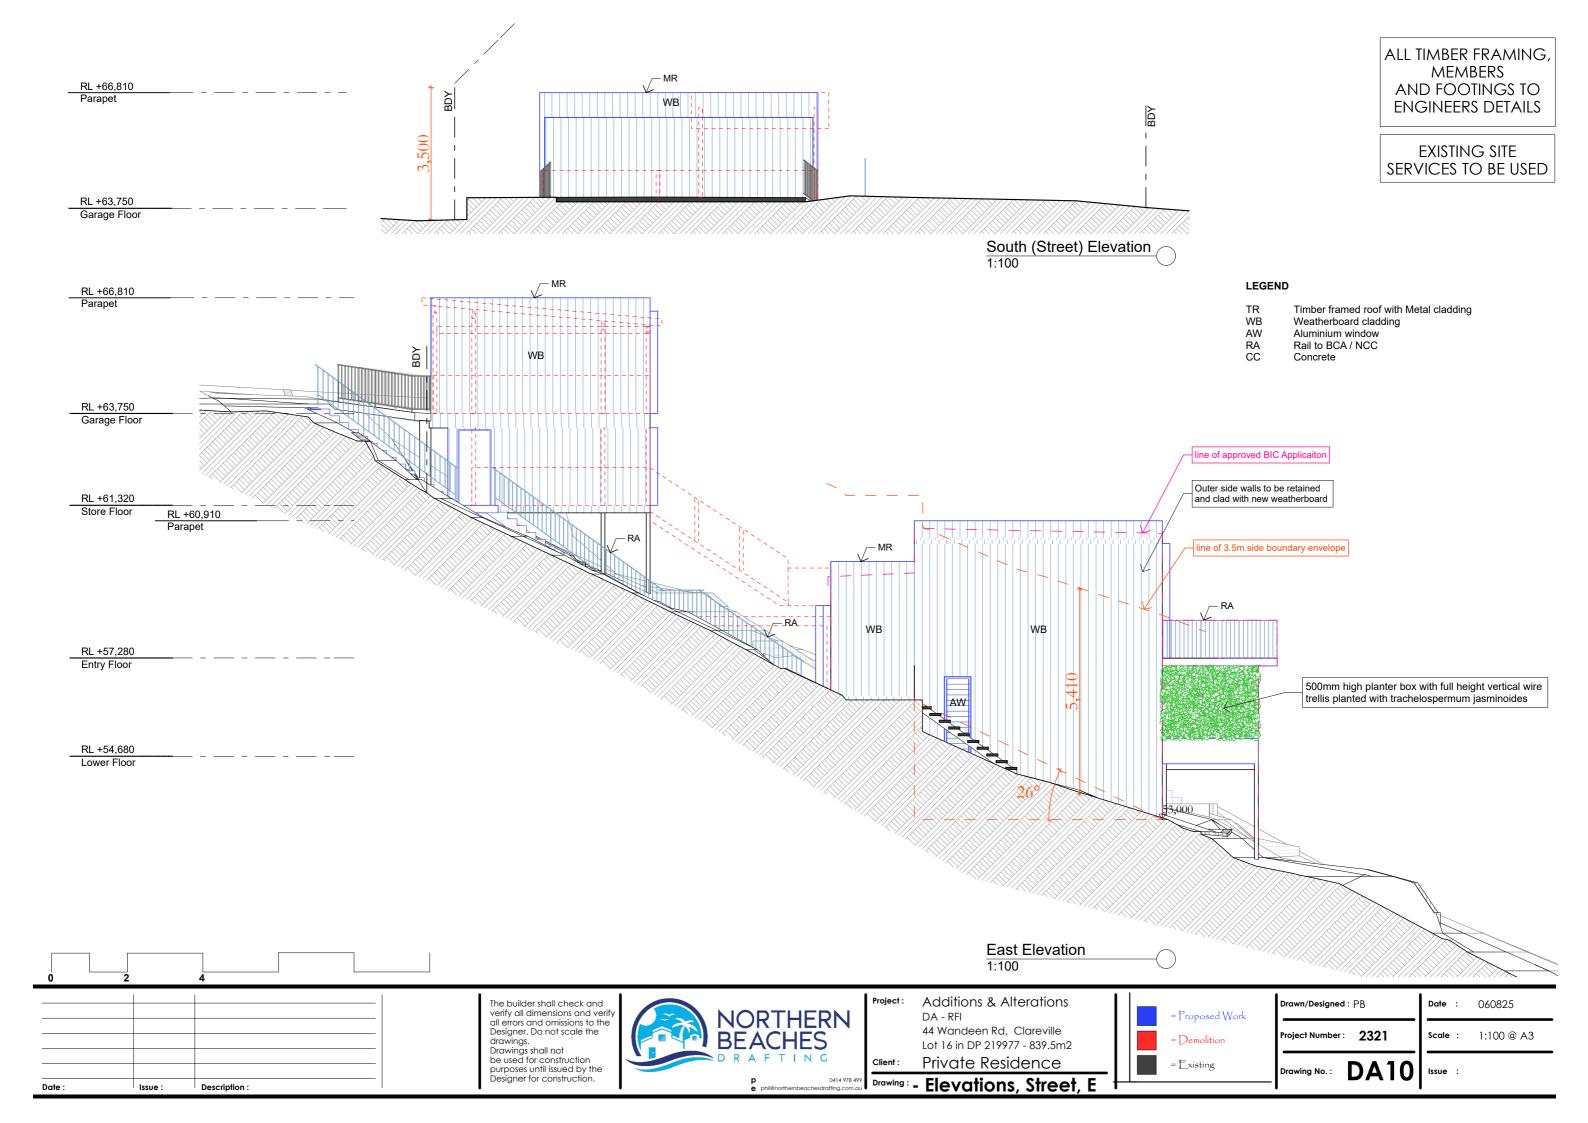

ALL TIMBER FRAMING, **MEMBERS** AND FOOTINGS TO **ENGINEERS DETAILS** EXISTING SITE SERVICES TO BE USED ВДУ Date : 060825 Scale: 1:100 @ A3 Drawing No.: DA11 Issue :

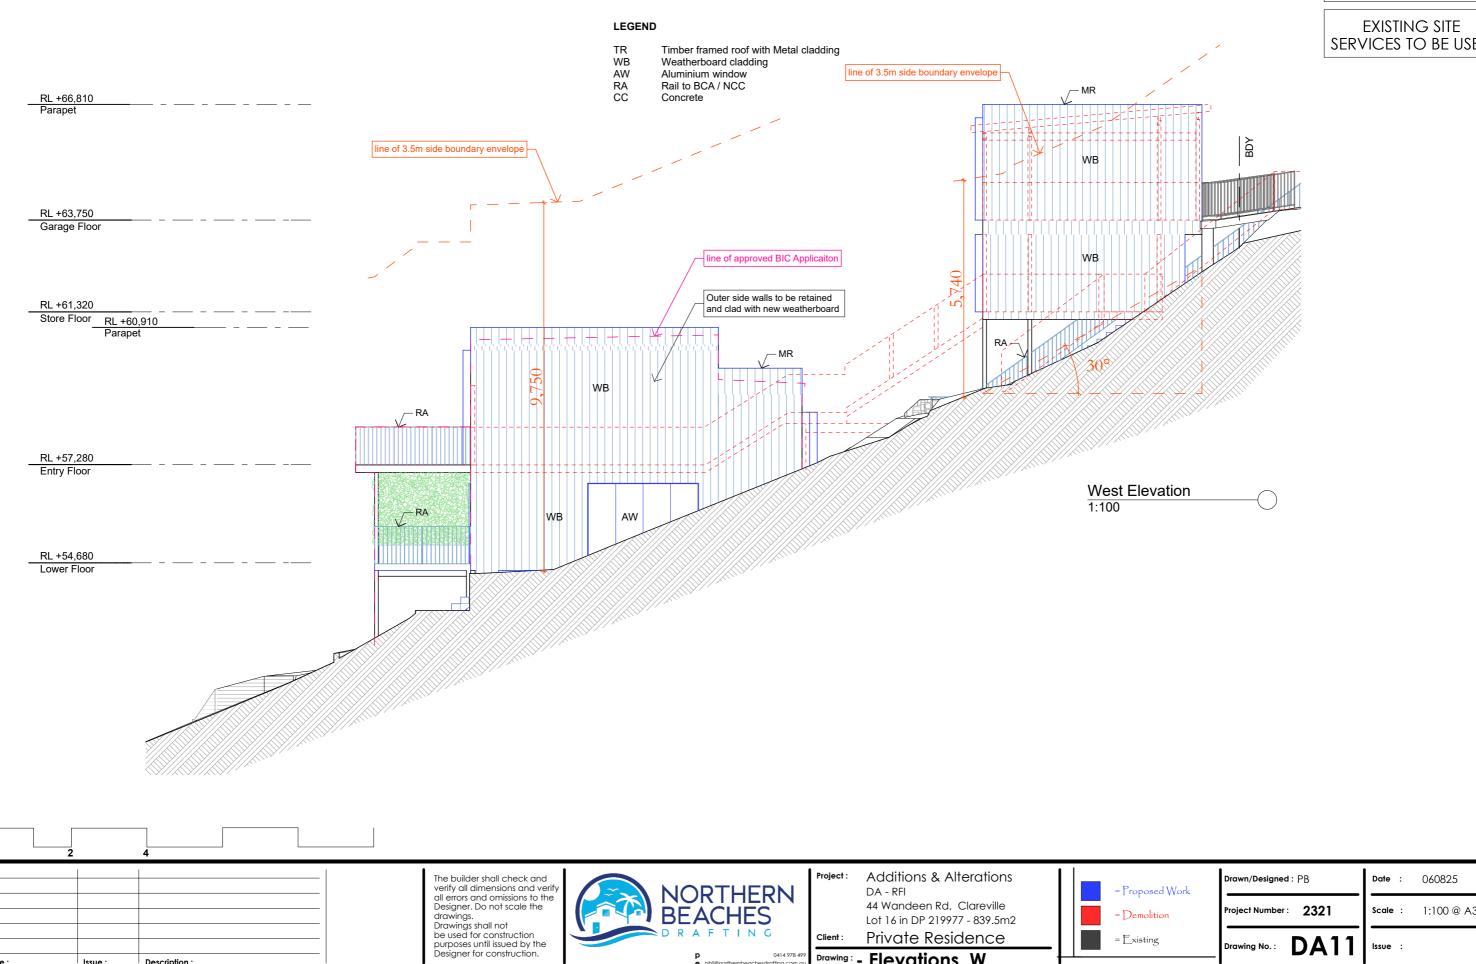


Description :

Issue :

Date:


Drawing: - Elevations, W

EXISTING SITE SERVICES TO BE USED

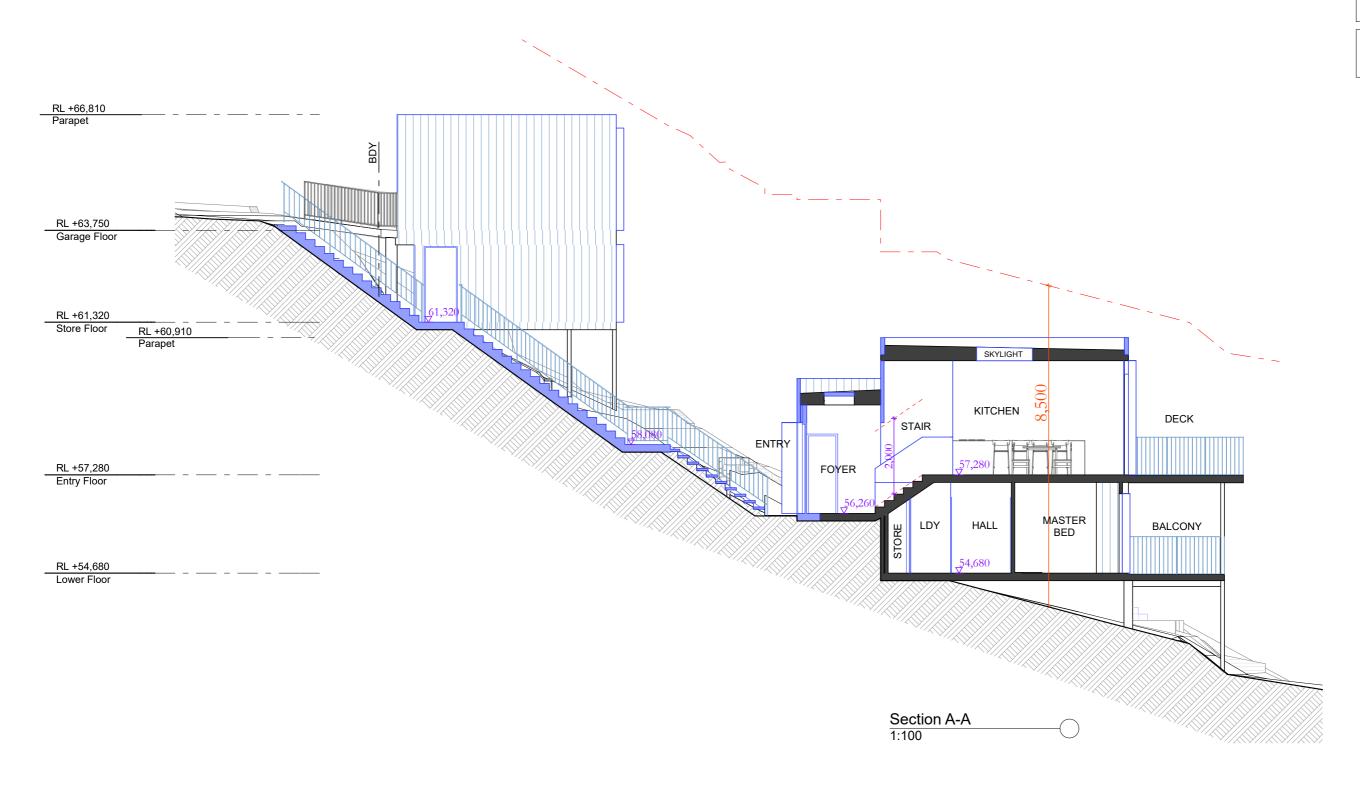




EXISTING SITE SERVICES TO BE USED

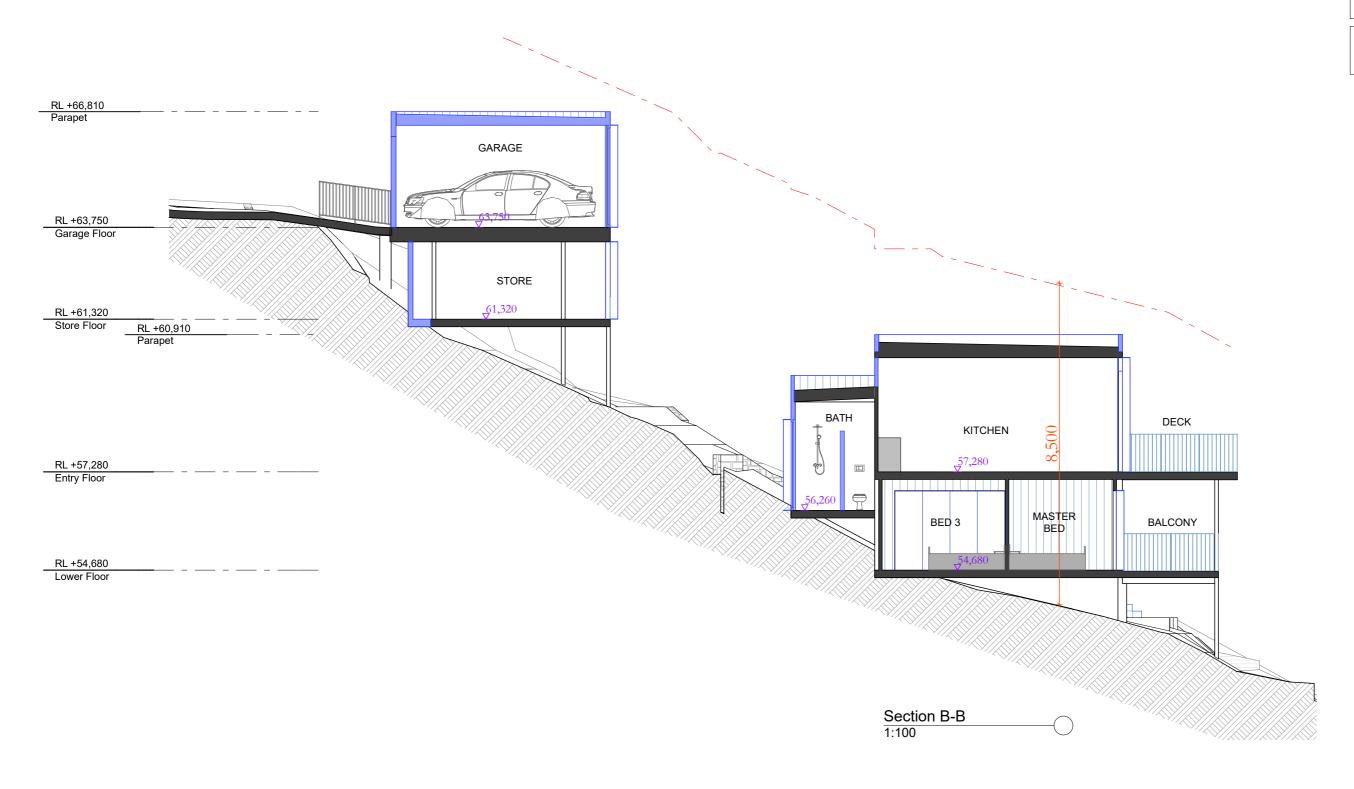






EXISTING SITE SERVICES TO BE USED

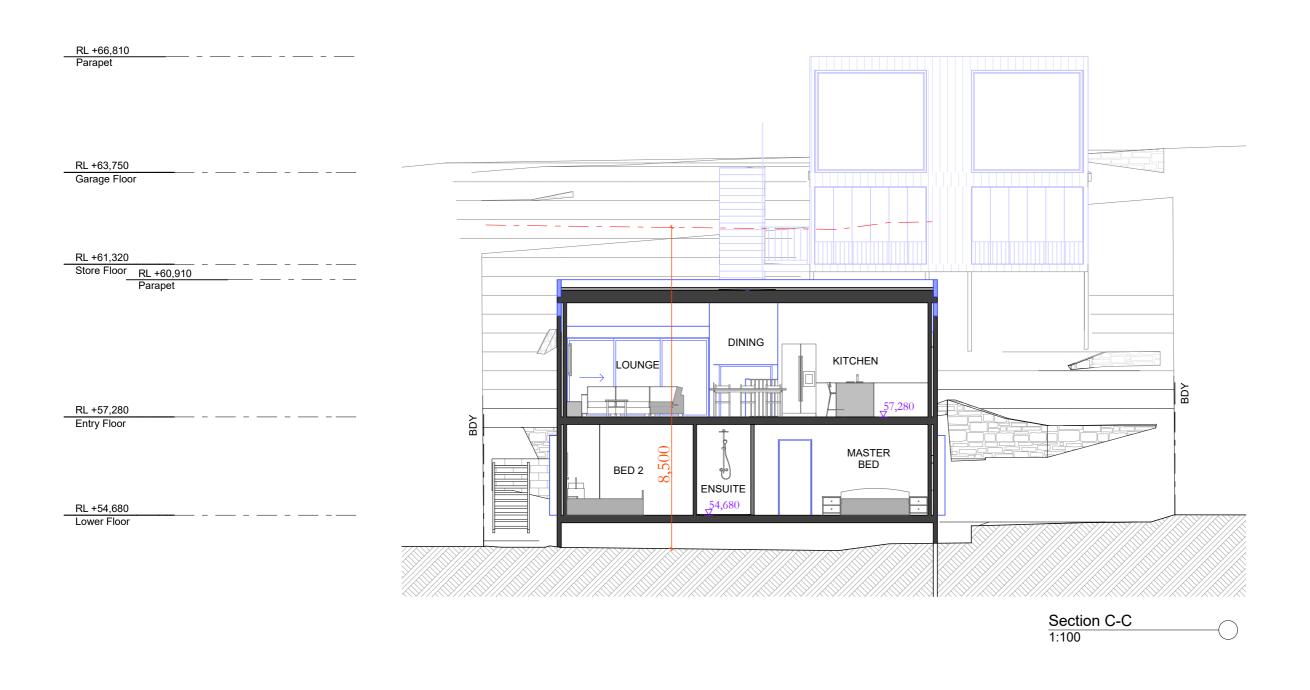





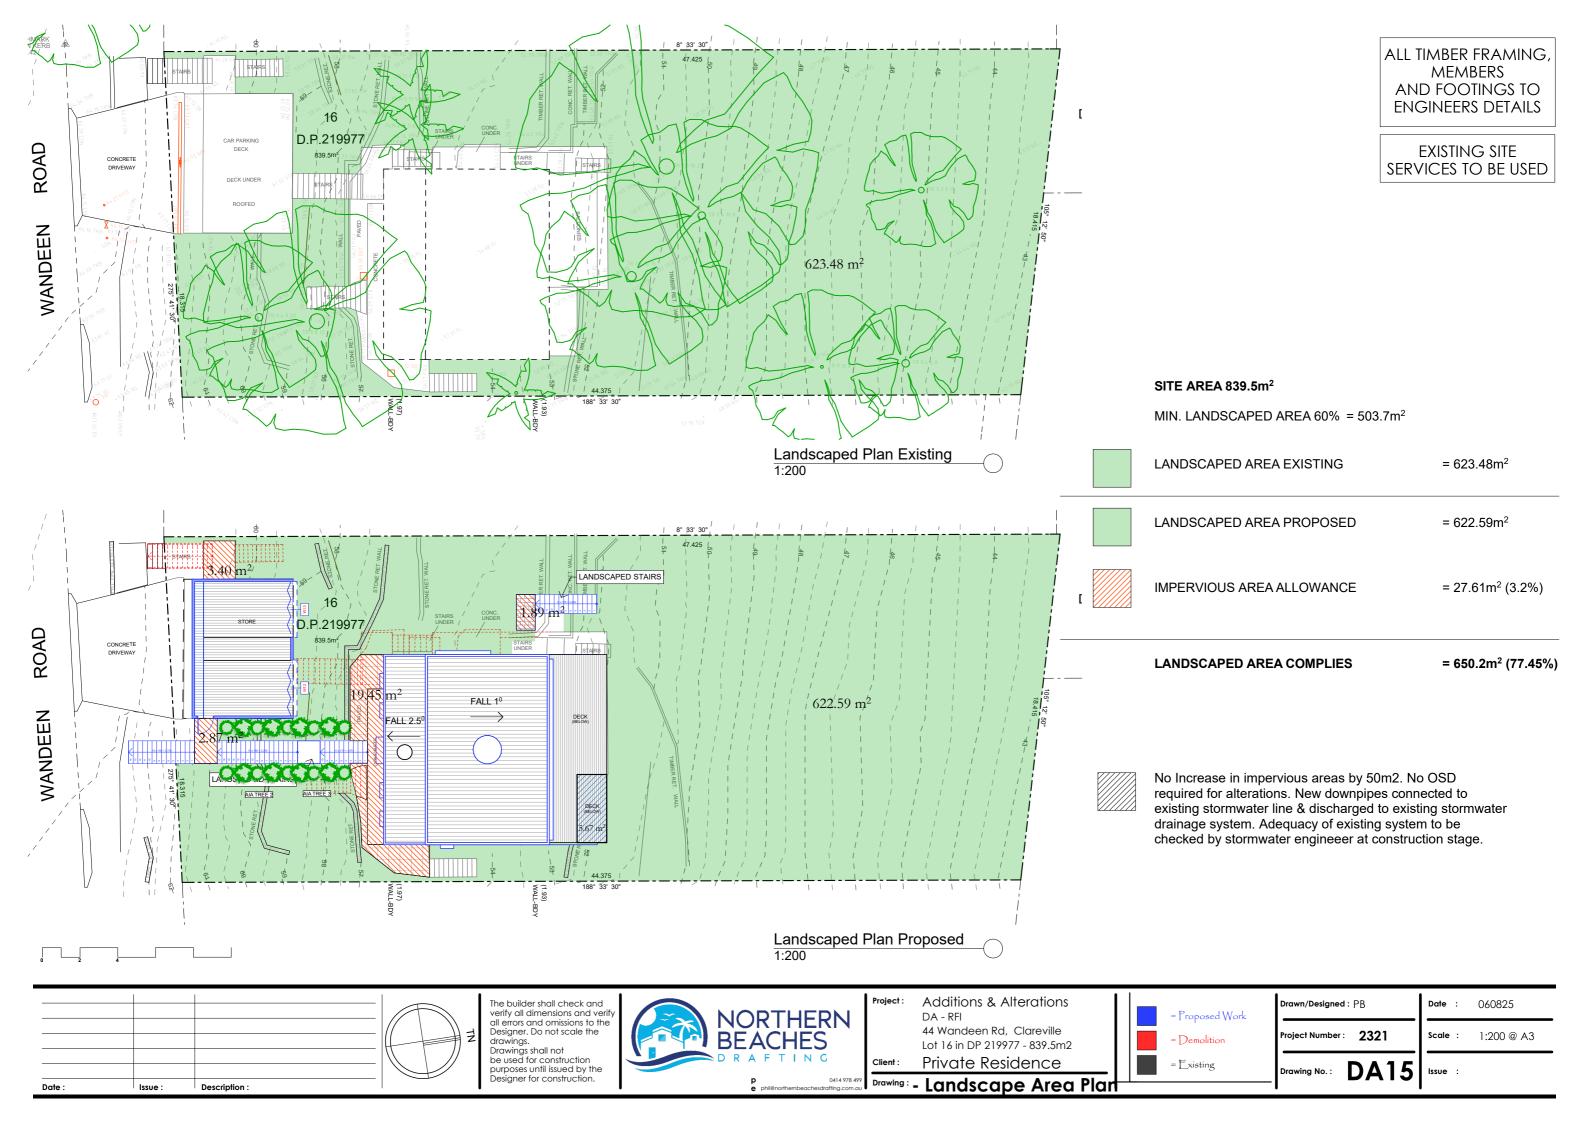

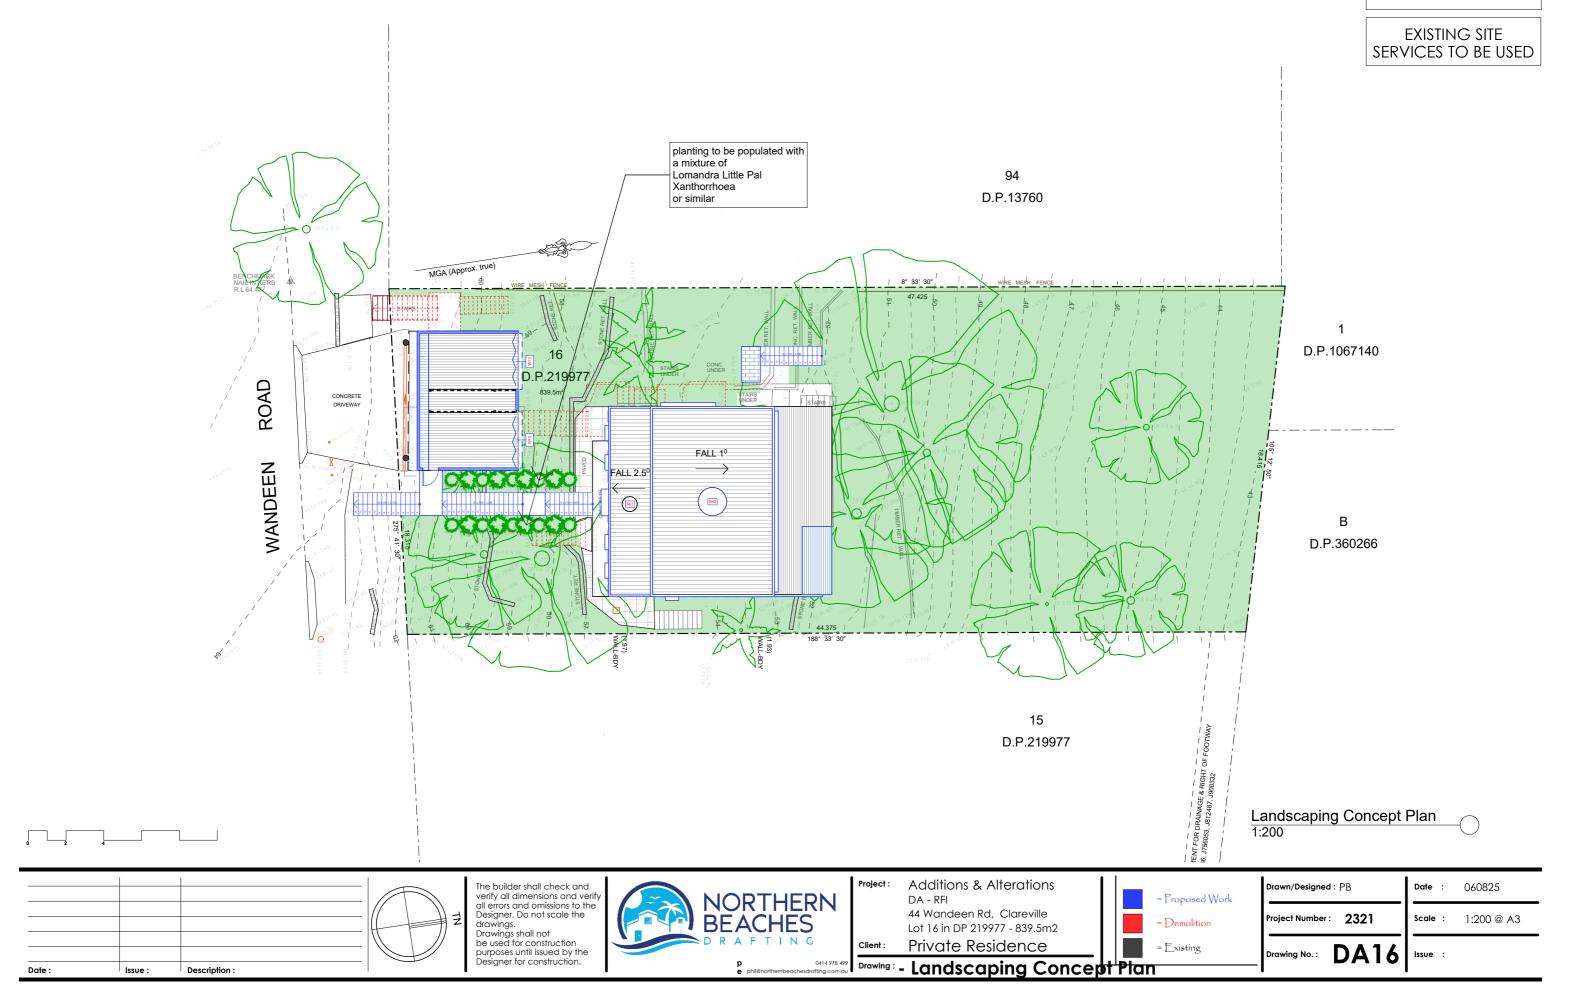


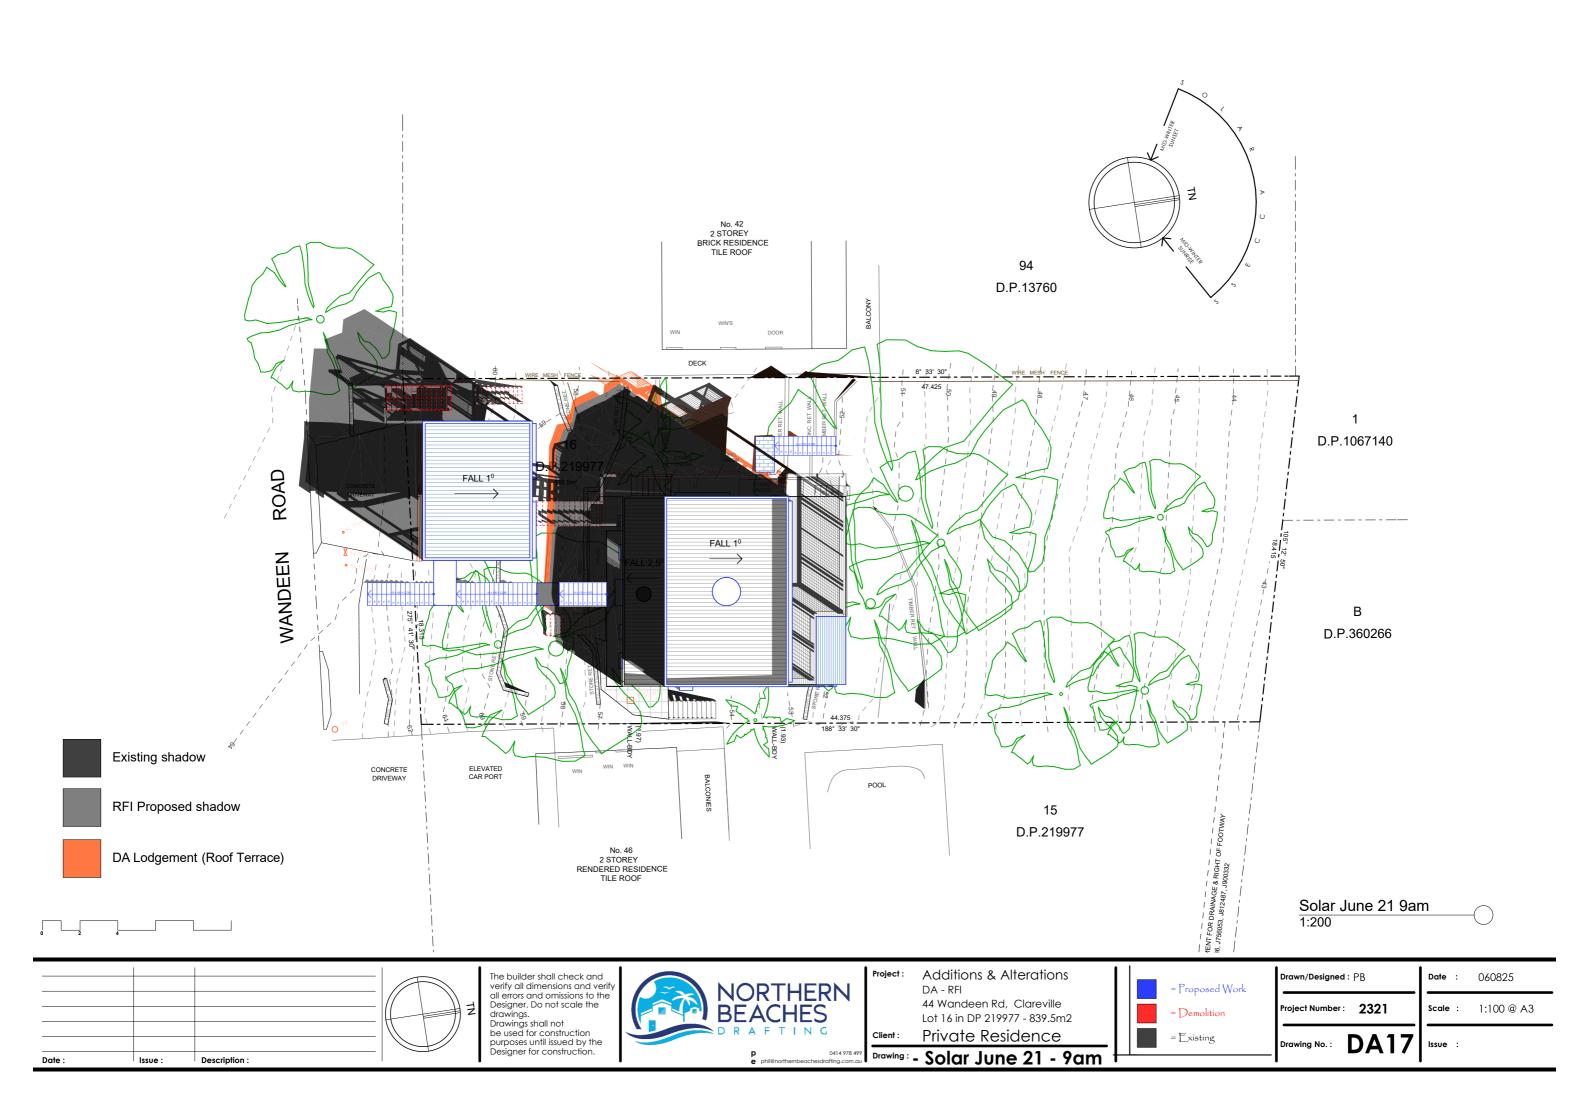

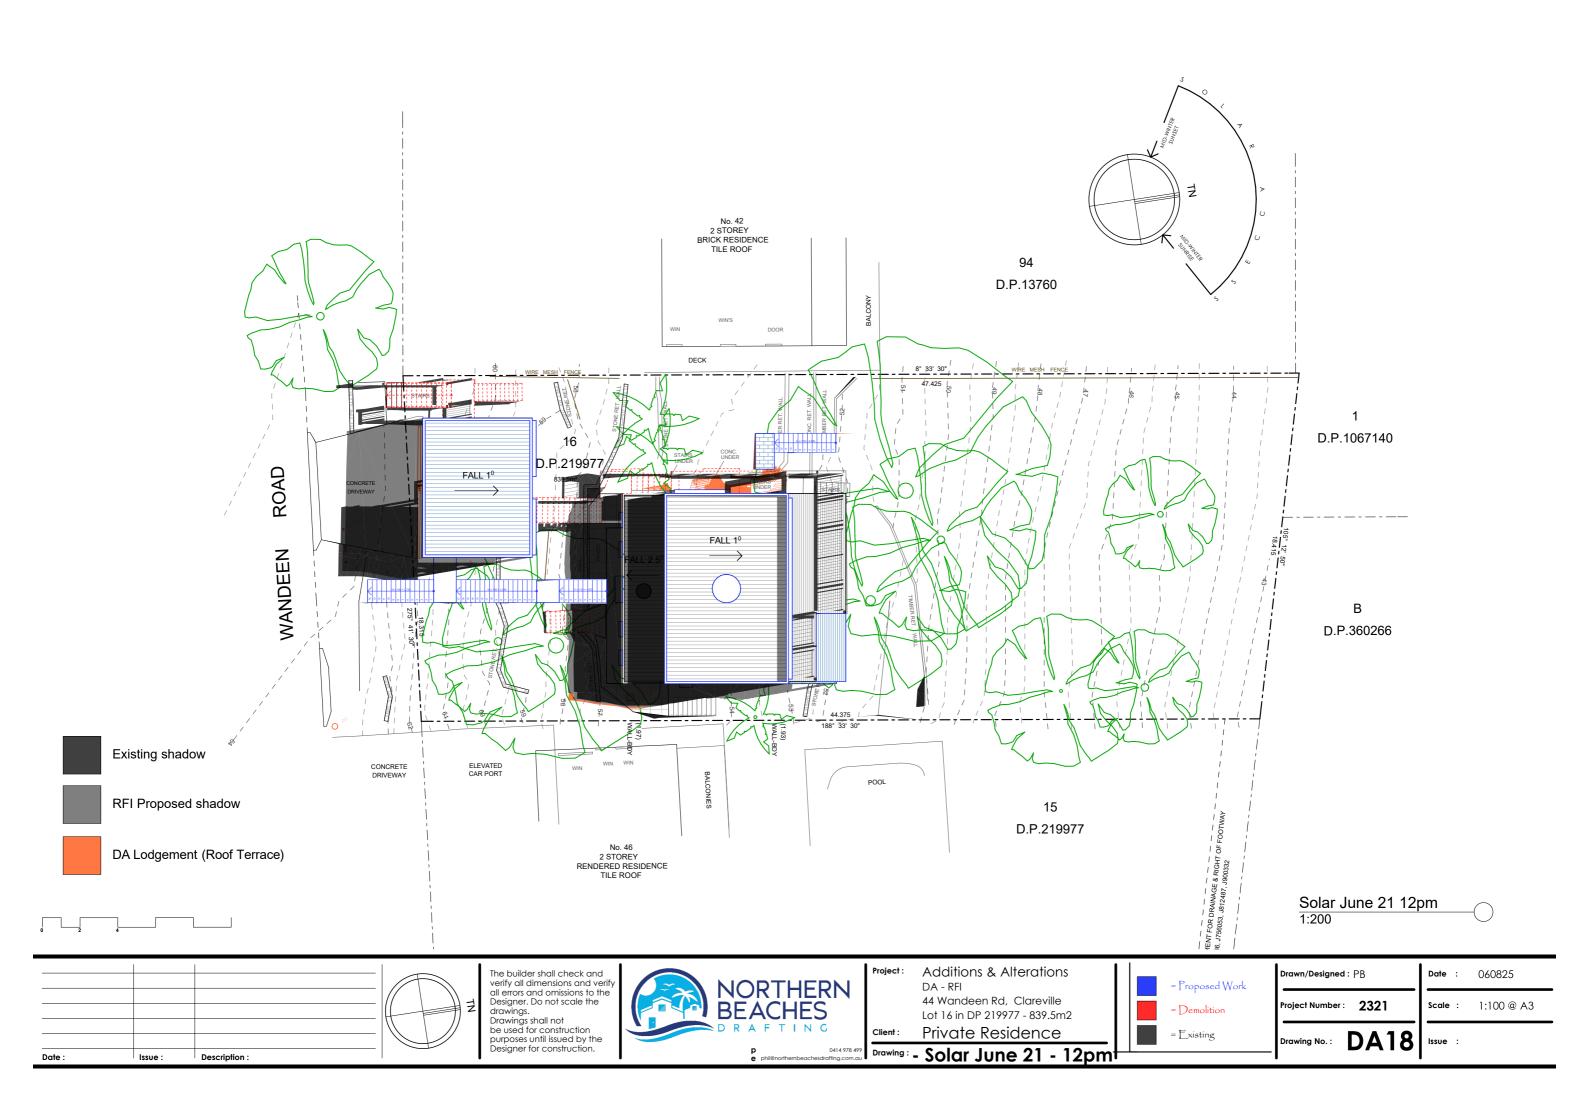

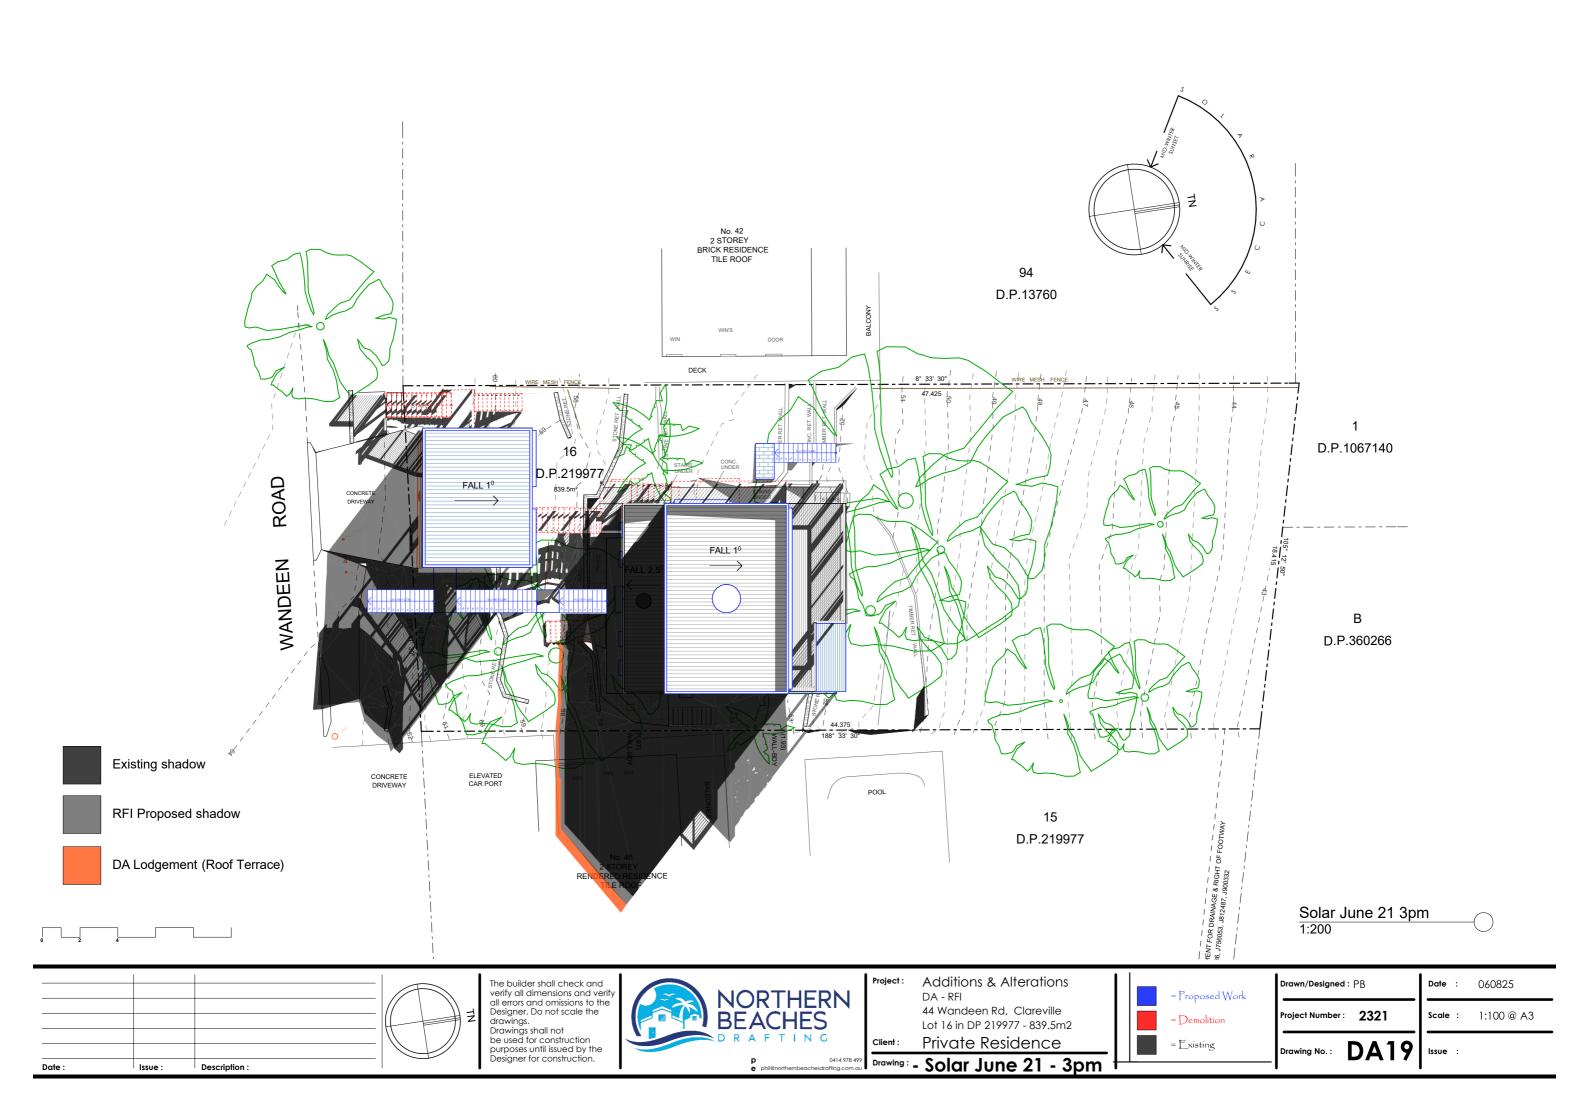

EXISTING SITE SERVICES TO BE USED

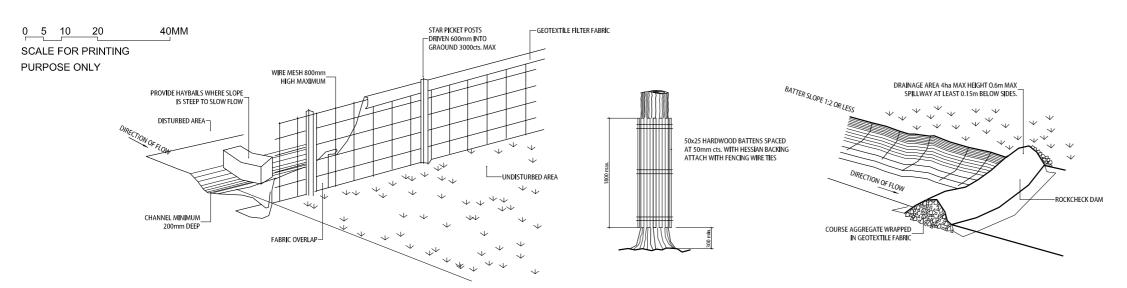

Vehicle Movements

TO LIMIT DISTURBANCE TO THE SITE AND TRACKING OF MATERIAL ONTO THE STREET ALL VEHICLES AND PLANT EQUIPMENT ARE TO USE A SINGLE ENTRY/EXIT POINT UNLESS COUMCIL HAS APPROVED ALTERNATIVE ARRANGEMENTS.

ACCESS POINTS AND APRKING AREAS ARE TO BE STABILISED WITH COMPACTED SUB-GRADE AS SOON AS POSSIBLE AFTER THEIR FORMATION.

WHERE SPILLAGE DOES OCCUR IT IS TO BE CONTAINED IMMEDIATELY AND CAREFULLY REMOVED. THE AREA AFFECTED IS TO BE RESTORED TO A STANDARD EQUAL TO OR BETTER THAN ITS PREVIOUS CONDITION.

ALL VEHICLES ARE TO BE WASHED PRIOR TO EXISTING THE SITE.
THIS SERVES THE PURPOSE OF REMOVING SITE MATERIAL ON THE VEHICLE
AND PREVENTS IT FROM BEING DEPOSITED ON THE ROAD NETWORK
ADJACENT TO THE SITE AND THUS, THE STORMATER SYSTEM. ALL POLLUTED
WATER MUST BE RETAINED ON SITE FOR TREATMENT BEFORE IT IS DISCHARGED

NO VEHICLE ASSOCIATED WITH THE WORK IS TO BE PARKED ON A FOOTPATH OR PUBLIC RESERVE.

ALL VEHILCES VISITING THE SITE DURING DEMOLITION, EXCAVATION AND/OR CONSTRUCTION WORKS, ARE TO COMPLY WITH THE PARKING REQUIREMENTS IN TAHT AREA.

Sediment Traps

TYPICAL SEDIMENT FENCE

WHERE A SEDIMENT FENCE IS NOT USED APPROPRIATE SEDIMENT TRAPS SHOULD BE LOCATED AT ALL POINTS WHERE STORMWATER LEAVES THE CONTSTRUCTION STIE OR LEAVES THE GUTTER AND ENTERS THE DRAIMAGE SYSTEM. A COMMON TECHNIQUE IS THE GRAVEL SAUSAGE.

Diversion Channels

A DIVERSION CHANNEL IS AN EXCAVATED EARTH DITCH OR PATH. THESE STRUCTURES AREE USED TO INTERCEPT AND DIRECT RUN-OFF TO A DESIRED LOCATION WHERE POSSIBLE.

ALL STORMWATER RUN-OFF FLOWING ONTO DISTURBED AREAS, INCLUDING STOCKPILES, MUST BE INTERCEPTED, DIVERTED AND/OR SAFELY DISPOSED OF. THIS CAN BE ACHIVED BY CONSTRUCTING A TEMPORARY EARTH BANK AROUND THE UPSLOPE EXTENT OF THE CONSTRUCTION SITE WHERE THE DIVERSION DOES NOT AFFECT THE NEIGHBOURING PROPERTIES.

TYPICAL TREE PROTECTION

Erosion & Sediment Controls

APPROPRIATE EROSION AND SEDIMENT CONTROLS MUST BE IMPLEMENTED ON ALL SITES THAT INVOLVE SOIL DISTURBANCE. THE MEASURES MUST BE IN PLACE PRIOR TO THE COMMENCEMENT OF WORK.

THOSE CONTROLS ARE TO BE MONITORED AND MAINTAINED IN ORDER TO SERVE THEIR INTENDED FUNCTION FOR THE DURATION OF THW WORKS OR UNITS JUST THEM AS THE SITE S FLULY STRAILISED. FRAY CONTROLS ARE DAMAGED OR BECOME INEFFECTIVE DURING THE COURSE OF THE WORKS THEY ARE TO BE BERNISTATE OR BEPLACED BAMEDIATELY, SUFFICIENT ACCESS TO THESE CONTROLS MUST BE PROVIDED IN CASE OF THE NEED TO REPORTE

TYPICAL DIVERSION CHANNEL

Dust Control ALL TRUCKS/UTES MUST COVER THEIR LOADS AT ALL TIMES.

APPROPRIATE METHODS ARE TO BE EMPLOYED TO PREVENT BLOWING DUST CREATING AN UNACCEPTABLE HAZARD OR NUISANCE ON THE SITE OR DOWN WIND. PRODUCTION OF DUST CAN BE MINIMISED BY LINITING AREA OF EARTHWORKS, WATERING AND PROGRESSIVE VEGETATION.

WHERE DUST IS CREATED AS A RESULT WORKS AND/OR SOIL EXPOSURE, THE BARE SOIL AREAS MUST BE WATERED, DURING AND/OR AT THE END OF EACH DAY TO LAY THE DUST.

EARTH MOVONG ACTIVITIES SHOULD BE AVOIDED WHERE WINDS ARE SUFFICIENTLY STRONG ENOUGH TO RAISE VISIBLE DUST.

Designated Site Manager/Builder

PERIOR TO COMMENCEMENT OF WORK A SITE MANAGER OR BUILDER MUST BE NOMINATED. THE SITE MANAGER OR BUILDER WILL BE RESPONSIBLE AND LABEL FOR ALL WORKS CARRED OUT ON THE SITE THIS ASSUMES THE RESONSIBLUTY FOR THE ACTIONS OF ALL SUBCONTRACTED PARTIES AS WILL AS ADVISING THEM OF COUNCIL'S REQUIREMENTS WHEN CARRYING OUT WORKS.

Topsoil Management

PRIOR TO THE STRIPPING OF TOPSOIL, THE VEGETATIVE COVER MUST BE REDUECED BY EITHER SLASHING OR MOWING.

ALL TOPSOIL IS TO BE RETAINED AND PROTECTED FOR REUSE ON SITE.

SOIL STOCKPILES MUST NOT BE LOCATED ON NATURE STRIPS, FOOTPATHS, ROADWAYS, KERBS, ACCESSWAYS, WITHIN DRAINAGE LINES/FLOWS/PATHS OR AROUND OR AGAINST TREE SHRIBS. SEDIMENT CORTROL MEASURES MUST BE INCORPORATED WITH ANY RESULTING STOCKPILE. THE STOCKPILE CAN BE PROTECTED FROM BROSION BY COVERING IT WITH AN INPERVIOUS MATERIAL, IN CONJUNCTION WITH THE INSTALLATION OF A SEDIMENT FENCE AROUND IT.

IF STOCKPILES ARE TO REMAIN FOR MORE THAN ONE MONTH THEY ARE TO BE GRASSED IMMEDIATELY AND STABILISED WITHIN FOURTEEN DAYS. SURPLUS TOPSOIL MUST BE REASONABLY REMOVED FROM SITE.

Builidng Material Stockpiling

OF BUILDING MATERIALS, DEMOLITION WASTE, WASTE CONTAINERS, ETC.
AS WILL BE REQUIRED.

Sediment Fences

A SEDIMENT FENCE SHOULD BE LOCATED ALONG THE DOWNSLOPE BOUNDARY/SJOP THE SITE, ON THE CONSTRUCTION SIDE OF THE TURF FILTER STIP OF NATIVE VEGETATION , AND AROUND ALL STOCKPILES OF MATERIAL ON THE SITE.

Description : Date: Issue :

The builder shall check and verify all dimensions and verify all errors and omissions to the Designer. Do not scale the drawings. Drawings shall not be used for construction



Additions & Alterations DA - RFI 44 Wandeen Rd, Clareville Lot 16 in DP 219977 - 839.5m2

Private Residence

= Proposed Work = Demolition = Existing

Drawn/Designed : PB

Project Number: 2321

Date :

Scale :

060825

DA20

purposes until issued by the Designer for construction.

0414 978 49 Drawing: - Sediment & Erosion Clontrol Plan page 1/9 BASIX Certificate number:A1762456_03

BASIX™Certificate

Building Sustainability Index www.planningportal.nsw.gov.au/development-and-assessment/basix

Alterations and Additions

Certificate number: A1762456_03

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.planningportal.nsw.gov.au/definitions

Secretary

Date of issue: Monday, 07 April 2025
To be valid, this certificate must be lodged within 3 months of the date of issue.



Project name	44 Wandeen Rd_03			
Street address	44 WANDEEN Road CLAREVILLE 2107			
Local Government Area	Northern Beaches Council			
Plan type and number	Deposited Plan DP219977			
Lot number	16			
Section number	-			
Project type				
Dwelling type	Dwelling house (detached)			
Type of alteration and addition	The estimated development cost for my renovation work is \$50,000 or more, and does not include a pool (and/or spa).			
N/A	N/A			
Certificate Prepared by (please complete before submitting to Council or PCA)				
Name / Company Name: Bodill Ventures Pty Ltd				

Fixtures and systems	Show on DA Plans	Show on CC/CDC Plans & specs	Certifier Check
Lighting			
The applicant must ensure a minimum of 40% of new or altered light fixtures are fitted with fluorescent, compact fluorescent, or light-emitting-diode (LED) lamps.		~	~
Fixtures			
The applicant must ensure new or altered showerheads have a flow rate no greater than 9 litres per minute or a 3 star water rating.		~	~
The applicant must ensure new or altered toilets have a flow rate no greater than 4 litres per average flush or a minimum 3 star water rating.		~	~
The applicant must ensure new or altered taps have a flow rate no greater than 9 litres per minute or minimum 3 star water rating.		~	

Construction	Show on DA Plans	Show on CC/CDC Plans & specs	Certifier Check		
Insulation requirements					
The applicant must construct the new or alte listed in the table below, except that a) addi insulation specified is not required for parts	~	~	•		
Construction	Additional insulation required (R-value)	Other specifications			
concrete slab on ground floor.	nil	N/A			
suspended floor with enclosed subfloor: framed (R0.7).	R0.60 (down) (or R1.30 including construction)	N/A			
external wall: framed (weatherboard, fibro, metal clad)	R1.30 (or R1.70 including construction)				
external wall: brick veneer	R1.16 (or R1.70 including construction)				
flat ceiling, flat roof: framed	ceiling: R2.08 (up), roof: foil backed blanket (55 mm)	medium (solar absorptance 0.475 - 0.70)			

Glazing requirements	Show on DA Plans	Show on CC/CDC Plans & specs	Certifier Check
Windows and glazed doors			
The applicant must install the windows, glazed doors and shading devices, in accordance with the specifications listed in the table below. Relevant overshadowing specifications must be satisfied for each window and glazed door.	~	~	~
The following requirements must also be satisfied in relation to each window and glazed door:		~	~
Each window or glazed door with improved frames, or pyrolytic low-e glass, or clear/air gap/clear glazing, or toned/air gap/clear glazing must have a U-value and a Solar Heat Gain Coefficient (SHGC) no greater than that listed in the table below. Total system U-values and SHGCs must be calculated in accordance with National Fenestration Rating Council (NFRC) conditions. The description is provided for information only. Alternative systems with complying U-value and SHGC may be substituted.		~	~
For projections described in millimetres, the leading edge of each eave, pergola, verandah, balcony or awning must be no more than 500 mm above the head of the window or glazed door and no more than 2400 mm above the sill.	~	~	~
For projections described as a ratio, the ratio of the projection from the wall to the height above the window or glazed door sill must be at least that shown in the table below.	~	~	~
Pergolas with polycarbonate roof or similar translucent material must have a shading coefficient of less than 0.35.		~	~
Pergolas with fixed battens must have battens parallel to the window or glazed door above which they are situated, unless the pergola also shades a perpendicular window. The spacing between battens must not be more than 50 mm.		~	~
Overshadowing buildings or vegetation must be of the height and distance from the centre and the base of the window and glazed door, as specified in the 'overshadowing' column in the table below.		_	_

azing requir	ements						DA Plans	Plans & specs	Check
Vindows and gla	zed doors glazing	g requirements							
Window/door number	Orientation	Area of glass including frame (m2)	Overshadowing height (m)	Overshadowing distance (m)	Shading device	Frame and glass type			
W1	E	1.47	6.65	2.27	none	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W2	N	6.6	0	0	eave/ verandah/ pergola/balcony >=900 mm	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W3	N	5.32	0	0	eave/ verandah/ pergola/balcony >=900 mm	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W4	N	5.32	0	0	eave/ verandah/ pergola/balcony >=900 mm	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W5	W	6.13	7.83	7.77	projection/ height above sill ratio >=0.23	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			

Date :	Issue :	Description :

The builder shall check and re builder shall check and verify all dimensions and verify all errors and omissions to the Designer. Do not scale the drawings.

Drawings shall not be used for construction purposes until issued by the Designer for construction.



Additions & Alterations DA - RFI 44 Wandeen Rd, Clareville Lot 16 in DP 219977 - 839.5m2

Private Residence

Drawing: - BASIX

= Proposed Work	Dra
= Demolition	Proj
= Existing	Dra

awn/Designed: PB oject Number: 2321 Date : 060825 Scale :

awing No.: DA21

lazing requirements								Show on CC/CDC Plans & specs	Certifier Check
Window/door number	Orientation	Area of glass including frame (m2)	Overshadowing height (m)	Overshadowing distance (m)	Shading device	Frame and glass type			
W6	N	14.44	9.56	4.1	projection/ height above sill ratio >=0.23	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W7	N	14.44	18.84	5.8	projection/ height above sill ratio >=0.23	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W8	S	1.9	0	0	none	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W9	S	1.9	0	0	none	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			
W10	S	1.9	0	0	none	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			

Glazing requi	Glazing requirements						Show on DA Plans	Show on CC/CDC Plans & specs	Certifier Check
Windows and gla	Windows and glazed doors glazing requirements								
Window/door number	Orientation	Area of glass including frame (m2)	Overshadowing height (m)	Overshadowing distance (m)	Shading device	Frame and glass type			
W11	S	1.9	0	0	none	improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)			

Date :	Issue :	Description :
	1	1

The builder shall check and re builder shall check and verify all dimensions and verify all errors and omissions to the Designer. Do not scale the drawings.

Drawings shall not be used for construction purposes until issued by the Designer for construction.



IORTHERN	Project:
EACHES	
RAFTING	Client :

p 0414 978 499 Prawing: - BASIX

Glazing requirements

Glazed roofs glazing requirements

Glazed roof number

may be issued.

The applicant must install the glazed roofs described in the table below, in accordance with the specifications listed in the table.

Shading device

Commitments identified with a vin the "Show on DA plans" column must be shown on the plans accompanying the development application for the proposed development (if a development application is to be lodged for the proposed development). Commitments identified with a win the "Show on CC/CDC plans & specs" column must be shown in the plans and specifications accompanying the application for a construction

Commitments identified with a 🕶 in the "Certifier check" column must be certified by a certifying authority as having been fulfilled, before a final occupation certificate for the development

no shading

improved aluminium, single clear, (U-value: 6.44, SHGC: 0.75)

The following requirements must also be satisfied in relation to each glazed roof:

0.5

In these commitments, "applicant" means the person carrying out the development.

Area of glazing (m2)

Glazed roofs

Project :	Additions & Alterations DA - RFI
	44 Wandeen Rd, Clareville
	Lot 16 in DP 219977 - 839.5m2
Cliant.	Drivata Davidanaa

= Proposed Work = Demolition = Existing

Drawn/Designed: PB

Date : 060825 Scale :

Show on Show on CC/CDC Certifier DA Plans Plans & specs Check

•

V

V

Drawing No.: DA22

Project Number: 2321 Private Residence