

# **Landscape Referral Response**

Application Number:	DA2025/0151
Date:	24/07/2025
Proposed Development:	Use of a tenancy in approved mixed use and seniors housing development as a centre-based child care facility including internal fit-out and landscaping
Responsible Officer:	Thomas Burns
Land to be developed (Address):	Lot 11 DP 1258355 , 5 Skyline Place FRENCHS FOREST NSW 2086

#### Reasons for referral

This application seeks consent for the following:

- Construction / development works within 5 metres of a tree or
- New residential works with three or more dwellings. (RFB's, townhouses, seniors living, questhouses, etc). or
- Mixed use developments containing three or more residential dwellings.
- New Dwellings or

#### Officer comments

## Amended Plans Comment 24/07/2025

Review of the more detailed plans provided indicate that the use of the land as part of the child care centre operational requirements reduces the ability for tall tree planting.


The Landscape Plans provided indicate that only mid-sized trees can be provided to the perimeter of the area as opposed to tall canopy trees indicated on the original consent.


Use of the land as a childcare centre with the required outdoor play spaces restricts planting to the perimeter. Given that restriction, species proposed are appropriate for the available space.

Conditions have been provided if the proposal is to be approved.

DA2025/0151 Page 1 of 11



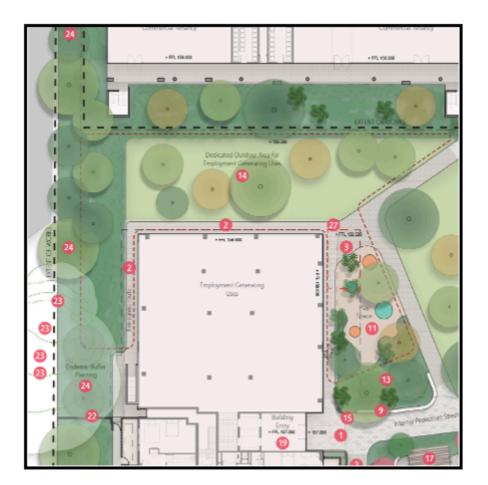




Approved Landscape Plans

DA-2025/0151 I

DA2025/0151 Page 2 of 11



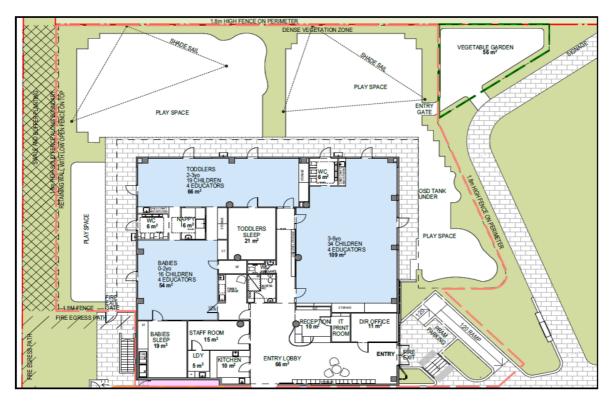

DA-2025/0151 Floor Plan


DA2025/0151 Page 3 of 11





DA2025/0151 Page 4 of 11



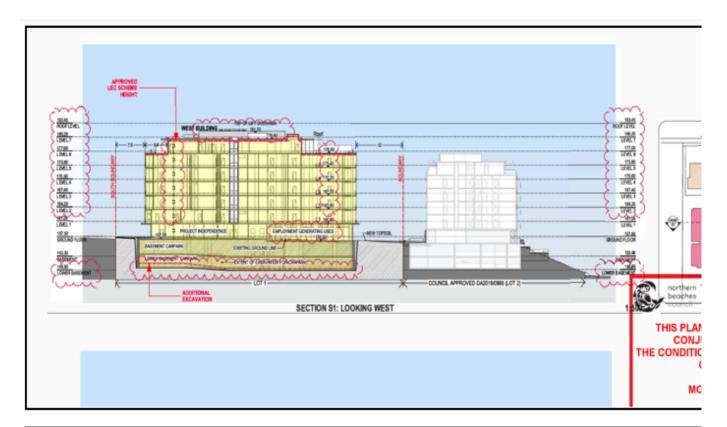



# **Original Comment**

DA2025/0151 Page 5 of 11



The application seeks consent for: Use of a tenancy in approved mixed use and seniors housing development as a centre-based child care facility including internal fit-out and landscaping.

At this stage there appears to be insufficient information to assess the application. No landscape plans were sighted.


The proposal seems to indicate that soft landscape open space areas are being included in the play areas for the childcare centre.

Based on the minimal information provided, this would remove a number of replacement trees and lead to an apparent reduction in the provision of buildings in a landscape setting that is part of the current approval.

Landscape Plans are required to enable assessment of these changes.


DA2025/0151 Page 6 of 11



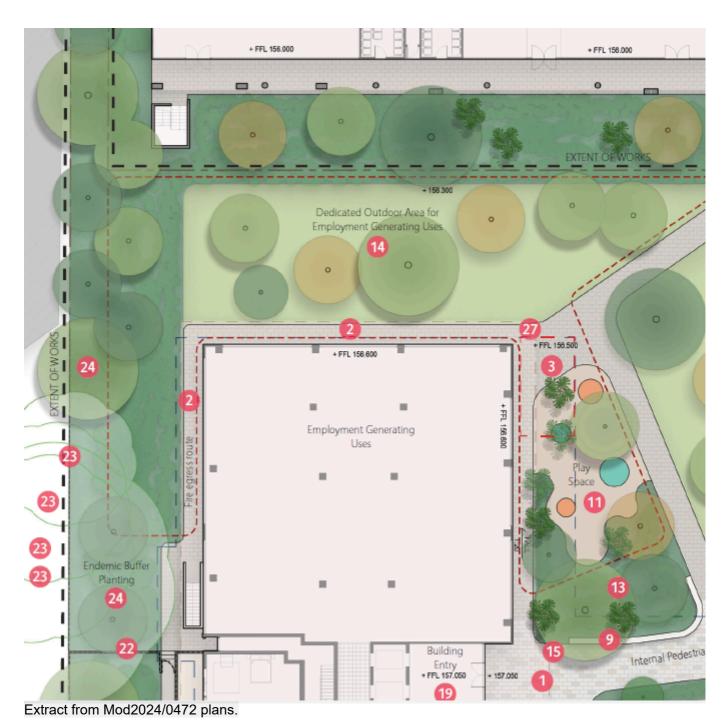

DA2025/0151 Page 7 of 11



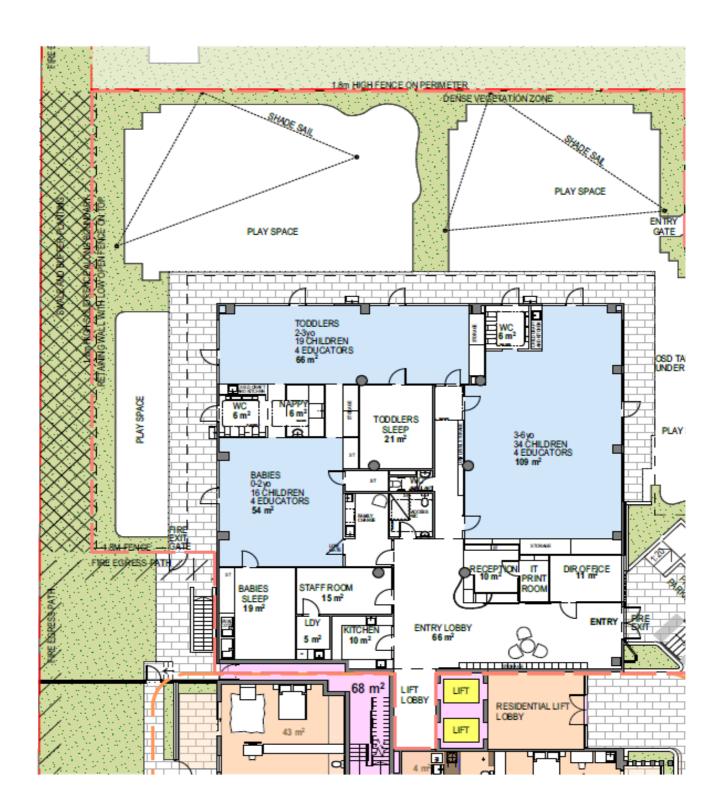

**GROUND FLOOR PLAN** 

DA2025/0151 Ground Floor Plan

The proposal is therefore supported.

DA2025/0151 Page 8 of 11



Note: Should you have any concerns with the referral comments above, please discuss these with the Responsible Officer.

## **Recommended Landscape Conditions:**

## CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

## **Tree and Vegetation Protection**

- a) Existing trees and vegetation shall be retained and protected, including:
  - i) all trees within the site not approved for removal, including trees and vegetation nominated for retention on the approved Plans,
  - ii) all trees and vegetation located on adjoining properties,
  - iii) all trees and vegetation within the road reserve.
- b) Tree protection shall be undertaken as follows:
  - i) tree protection shall be in accordance with AS4970-2025 Protection of trees on development sites, and any recommendations of an approved Arboricultural Impact Assessment,
  - ii) existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture,
  - iii) removal of existing tree roots at or >25mm (Ø) diameter is not permitted without consultation with an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture.
  - iv) no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained.
  - v) structures are to bridge tree roots at or >25mm (Ø) diameter unless directed by an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture on site.
  - vi) excavation for stormwater lines and all other utility services is not permitted within the tree protection zone, without consultation with an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture including advice on root protection measures,
  - vii) should either or all of v) or vi) occur during site establishment and construction works, an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture shall provide recommendations for tree protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist/Project Arborist to the Principal Certifier,
  - viii) any temporary access to, or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of AS4970-2009 Protection of trees on development sites,
  - the activities listed in section 4.2 of AS4970-2009 Protection of trees on development sites, shall not occur within the tree protection zone of any tree on the lot or any tree on an adjoining site,
  - x) tree pruning from within the site to enable approved works shall not exceed 10% of any tree canopy, and shall be in accordance with AS4373-2007 Pruning of amenity trees,

DA2025/0151 Page 9 of 11



xi) the tree protection measures specified in this clause must: i) be in place before work commences on the site, and ii) be maintained in good condition during the construction period, and iii) remain in place for the duration of the construction works.

The Principal Certifier must ensure that:

c) The arboricultural works listed in a) and b) are undertaken and certified by an Arborist/Project Arborist as complaint to AS4970-2025 Protection of trees on development sites, and any recommendations of an approved Arboricultural Impact Assessment.

Reason: Tree and vegetation protection.

#### **Condition of Trees**

During the construction period the applicant is responsible for ensuring all existing trees required to be retained are maintained in a healthy and vigorous condition. This is to be done by ensuring that all identified tree protection measures are adhered to or by seeking arboricultural advice from an Arborist with minimum AQF Level 5 in arboriculture during the works.

In this regard all protected trees shall not exhibit:

- i) a general decline in health and vigour,
- ii) damaged, crushed or dying roots due to poor pruning techniques,
- iii) more than 10% loss or dieback of roots, branches and foliage,
- iv) mechanical damage or bruising of bark and timber of roots, trunk and branches,
- v) yellowing of foliage or a thinning of the canopy untypical of its species,
- vi) an increase in the amount of deadwood not associated with normal growth,
- vii) an increase in kino or gum exudation,
- viii) inappropriate increases in epicormic growth that may indicate that the plants are in a stressed condition.
- ix) branch drop, torn branches and stripped bark not associated with natural climatic conditions.

Any mitigating measures and recommendations required by the Arborist are to be implemented.

The owner of the adjoining allotment of land is not liable for the cost of work carried out for the purpose of this clause.

Reason: Protection of trees.

# CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

#### **Landscape Completion**

Landscape works are to be implemented in accordance with Landscape Plans Issue C dated 11.07.25 prepared by Paddock Studios, and inclusive of the following conditions:

- a) landscape works are to be contained within the legal property boundaries,
- b) all tree planting shall be a minimum pre-ordered planting size of 75 litres or as otherwise scheduled if greater in size; meet the requirements of Natspec Specifying Trees; planted into a prepared planting hole 1m x 1m x 600mm depth, backfilled with a sandy loam mix or approved similar, mulched to 75mm depth minimum and maintained, and watered until established;

DA2025/0151 Page 10 of 11



c) tree, shrub and groundcover planting shall be installed as indicated on the Landscape Plans Issue C dated 11.07.25 prepared by Paddock Studios,

Prior to the issue of an Occupation Certificate, details (from a qualified landscape architect, landscape designer or horticulturalist) shall be submitted to the Principal Certifier, certifying that the landscape works have been completed in accordance with any conditions of consent.

Reason: Environmental amenity.

# ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

### **Landscape Maintenance**

If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components. Trees, shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilised as required at the time of planting. If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan(s) and any conditions of consent.

A maintenance activity schedule for on-going maintenance of planters on slab shall be incorporated to monitor and replenish soil levels as a result of soil shrinkage over time.

The approved landscape area shall in perpetuity remain as planting under the development consent.

Reason: To maintain local environmental amenity.

DA2025/0151 Page 11 of 11