for: WES JONES

Architect: WATERSHED ARCHITECTS

Prepared By:



A.C.N. 076 121 616 A.B.N. 24 076 121 616

Sydney: Ph: (02) 9984 7000

Suite 207, 30 Fisher Road Dee Why N.S.W. 2099

Gold Coast: Ph: (07) 5631 4744

Suite 1, 30B Griffith Street, Coolangatta QLD 4225

E: nb@nbconsulting.com.au W: www.nbconsulting.com.au

The copyright of these drawings remains with Northern Beaches Consulting Engineers Pty Ltd. Trading as NB Consulting Engineers

DRAWING SCHEDULE:

DOI A STORMWATER DRAINAGE GENERAL NOTES

DO2 A SITE STORMWATER DRAINAGE PLAN

DO3 A LEVEL I AND SITE STORMWATER DRAINAGE PLAN

DO4 A LEVEL 2 STORMWATER DRAINAGE PLAN

DO5 A LEVEL 3 STORMWATER DRAINAGE PLAN

DOG A ROOF STORMWATER DRAINAGE PLAN

DIO A STORMWATER DRAINAGE DETAILS SHEET 1

D21 A OSD CATCHMENT PLAN

ISSUED FOR D.A.
SUBMISSION ONLY
NOT FOR
CONSTRUCTION

IF IN DOUBT ASK

2410116 REV. A -2024-12-05

3. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE BY THE BUILDER BEFORE COMMENCING WITH

STORMWATER NOTES:

AL ALL WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE CURRENT NATIONAL CONSTRUCTION CODE (NCC), AUSTRALIAN STANDARDS (LATEST VERSION), THE REQUIREMENTS OF THE LOCAL COUNCIL AND ANY APPLICABLE AUTHORITIES.

A3. THE LOCATION OF ALL DRAINAGE ELEMENTS ARE SHOWN INDICATIVELY BASED ON AVAILABLE SURVEY OR OTHER INFORMATION, ALL DRAINAGE ELEMENTS ARE TO BE INSTALLED WITH CONSIDERATION TO SITE CONSTRAINTS AND THE INTENT OF THE DRAINAGE CONCEPT.

AS ANY MATERIAL VARIATIONS TO THE DRAINAGE CONCERT OF DETAILED STORMHATER SI EMENTS MIST BE APPROVED BY NORTHERN BEACHES CONSULTING ENGINEERS PTY LTD PRIOR TO COMMENCEMENT. A5, ANY EXCAVATION OR TRENCHING FOR SERVICES ADJACENT TO A STRUCTURE OR PROPERTY BOUNDARY MUST NOT ENCROACH ON THE 'ZONE OF INFLUENCE', REFER TO THE NCC FOR FURTHER

AS ALL LEVELS SHOWN ON THIS PLAN MIST BE COORDINATED WITH ALL DELEVANT INFORMATION INCLUDING THE ARCHITECTURAL, CIVIL # STRUCTURAL ENGINEERING PLANS. WHERE A LEVEL IS SHOWN WITHIN A RAMPED AREA (EG A PIT GRATE), THE LEVEL IS APPROXIMATE AND MAY NEED TO BE

ADJUSTED TO ACCOMODATE THE SLOPE.

A7, ANY DESIGN CLASHES, INCLUDING WITH SERVICES, STRUCTURE CONFIGURATION OR FINISHED LEVELS MUST BE COMMUNICATED WITH THE PROJECT STORMWATER ENGINEER NOMINATED ON THIS PLAN PRIOR

GENERAL CONSTRUCTION NOTES:

BI, CONTRACTORS TO LOCATE ALL EXISTING SERVICES PRIOR TO EXCAVATION AND NOTIFY ENGINEER OF ANY POTENTIAL CLASHES WITH THE PROPOSED STORMWATER DRAINAGE SYSTEM.

B2. ANY ELEMENTS OF THE EXISTING STORMWATER SYSTEM WHICH ARE PROPOSED TO BE RETAINED MUST BE INSPECTED AND APPROVED BY AN ENGINEER PRIOR TO CONSTRUCTION AS BOTH HAVING ADEQUATE CAPACITY TO CATER FOR THE RUNOFF DIRECTED TO IT AND BEING IN ADEQUATE CONDITION

B3. EXISTING STORMWATER SYSTEM ALSO TO BE INSPECTED BY A SUITABLY QUALIFIED PLUMBER PRIOR TO CONSTRUCTION AND UPGRADED AS REQUIRED IN ACCORDANCE WITH ASSESS 3.

BA. CARE SHOULD BE TAKEN WHEN UNDERTAKING WORKS IN THE VICINITY OF TREES NOT TO DISTURB
THE TREE ROOT SYSTEM, HAND DIGGING OF TRENCHES MAY BE REQUIRED SUBJECT TO THE PROJECT ARBORISTS REQUIREMENTS. REFER TO THE ARBORIST REPORT FOR EXCAVATION REQUIREMENTS

B5. SWIMMING POOL SURCHARGE OVERFLOW TO BE CONNECTED VIA GRAVITY TO THE SEWER IN ACCORDANCE WITH ASSECO. DETAILS AND CERTIFICATION BY OTHERS.

B6. EXTENT, ALIGNMENT, DEPTH AND CONDITION OF ANY COUNCIL STORMWATER PIPELINE WITHIN A DEVELOPMENT SITE MUST BE VERIFIED PRIOR TO CONSTRUCTION AND THE ENGINEER MUST BE NOTIFIED UPON VERIFICATION. ANY NEW CONNECTION TO A COUNCIL STORMMATER PIPELINE WILL BE SUBJECT TO COUNCIL APPROVAL AND MUST BE INSTALLED IN ACCORDANCE WITH THE LOCAL COUNCIL SPECIFICATIONS R7 ALL LINDEPCRAIND CONFINED SPACES MIST PROVIDE SAFE AND SUFFICIENT MAINTENANCE ACCESS POINTS IN ACCORDANCE WITH WORK HEALTH AND SAFETY BILL 2011, WORK HEALTH AND SAF REGULATIONS 2011 AND AUSTRALIAN STANDARDS AS 2865-2009 CONFINED SPACES, ADEQUATE

VENTILATION POINTS MUST BE PROVIDED WHERE GAS BUILD UP IS LIKELY.

BB, THE PROJECT ENGINEER MUST BE NOTIFIED IF ANY CHANGES ARE PROPOSED DURING CONSTRUCTION TO WHAT IS SHOWN ON THE LATEST STORMWATER MANAGEMENT PLAN PREPARED BY NBCE. THIS MUST BE CO-ORDINATED AND APPROVED BY NBCE. IF NBCE ARE NOT NOTIFIED OF ANY CHANGES DURING CONSTRUCTION. THIS MAY HINDER FINAL CERTIFICATION.

B9. NBCE MUST CONDUCT A FINAL INSPECTION OF ANY INSTALLED STORMWATER WORKS PRIOR TO ISSUE OF THE FINAL HYDRAULIC CERTIFICATION.

BIO. THE PROJECT BUILDER MUST CONTACT THE PROJECT STORMWATER ENGINEER FOR SITE INSPECTIONS INSPECT THE ITEMS DETAILED ON THE SITE INSPECTION SCHEDULE, THIS MAY AFFECT THE FINAL

CI. ALL PIPES TO BE MINIMUM 100mm & UNLESS NOTED OTHERWISE.

C2. ALL PIPES TO BE UPVC SENER GRADE TO AS 1254 UNLESS NOTED OTHERWISE.
C3. ALL PIPES TO BE LAYED AT 1.3 MINIMUM GRADE UNLESS NOTED OTHERWISE.

CA ALL CONNECTIONS INTO EXISTING PIPES MUST BE MADE IN THE DIRECTION OF FLOW

PIPE USING A FLONCON CONNECTION FITTING U.N.O.

C6. ALL PIPES SHALL BE LAID ON A 75mm SAND BED. COMPACTED TO 100% S.M.D.D. BELOW PAVEMENTS. (NO COMPACTION REQUIRED BELOW LANDSCAPING) COVER TO SURFACE FROM TOP OF PIPE TO BE 300mm MINIMUM. BACKFILL TO BE ADEQUATELY CONSOLIDATED AROUND PIPES BY METHOD OF RAMMING AND WATERING IN, TRENCHES TO BE FILLED WITH NO-FINES GRANULAR MATERIAL AS SPECIFIED.

C7. ALL EXISTING EARTHENWARE PIPES TO BE UPGRADED TO uPVC.

C8. MINIMUM PIPE COVER TO ALL IN-GROUND PIPEWORK SHALL BE CARRIED OUT IN ACCORDANCE WITH TABLE 6.2.5 - AS3500.3 (2021).

C9. ALL SUSPENDED PIPE FIXINGS ARE TO BE CARRIED OUT IN ACCORDANCE WITH AS203: CIO. ENSURE THAT ALL STORMWATER PITS AND PIPES ARE LOCATED CLEAR FROM TREE ROOT SYSTEMS. CII, ALL PIPENORK MUST BE INSTALLED WITHIN THE SITE BOUNDARY OF THE DEVELOPMENT SITE, ANY NEW OR EXISTING PIPEMORK EXTENDING THROUGH PRIVATE PROPERTY BEYOND THE BOUNDARY OF THE DEVELOPMENT SITE MUST BE CONTAINED SOLELY WITHIN A DRAINAGE EASEMENT. IF NO DRAINAGE

FASEMENT EXISTS. A NEW DRAINAGE FASEMENT MIST BE SQUALT AND REGISTERED PRIOR TO LITHINGING EASEMENT CANNOT BE OBTAINED. CI2. THE PROJECT STORMWATER ENGINEER MUST BE NOTIFIED AND INSPECT ALL IN-GROUND PIPEWORK

AND CONNECTIONS PRIOR TO BACKFILLING. IF ENGINEER DOES NOT INSPECT THE IN-GROUND PIPEMORK, THIS MAY AFFECT THE FINAL HYDRAULIC CERTIFICATION, NBCE WILL NOT APPROVE PIPE GRADES, ALL

CI3. PIPE ANCHOR BLOCKS TO BE INSTALLED FOR ALL PVC PIPEMORK WHEN THE GRADIENT EXCEEDS 1:5 IN ACCORDANCE WITH AS 3500.3.

DI, ALL DOWN PIPES TO BE 100mm # UNLESS NOTED OTHERWISE. D2. DOWN PIPE LOCATIONS ARE INDICATIVE ONLY, LOCATIONS TO BE CONFIRMED WITH ARCHITECT PRIOR

A1

DA PROVIDE CLEANING EYES AT ALL DOWNPIPES

4. GUTTER GUARDS MUST BE INSTALLED ON ALL GUTTERS UNLESS NOTED OTHERWISI D6. ALL EAVES GUTTER AND VALLEY GUTTER SYSTEMS MUST BE INSTALLED IN ACCORDANCE WITH ASSECT & REQUIREMENTS

D6. ALL BOX GUTTER SYSTEMS MUST BE INSTALLED STRICTLY IN ACCORDANCE WITH THE DETAILS SHOWN ON THE APPROVED STORMWATER MANAGEMENT PLAN. IF NO DETAILS ARE SHOWN, THE BOX GUTTER SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH ASSESSO, 3. IF ANY CHANGE TO THE BOX GUTTER SYSTEM CONFIGURATION IS PROPOSED. THE ENGINEER MUST BE NOTIFIED FOR A RE-DESIGN, IF THE INSTALLED BOX GUTTER DOES NOT STRICTLY COMPLY WITH THE DESIGN DETAILED ON THE D7, ALL GREEN ROOFS, PEBBLED ROOFS AND PLANTERS WITH A CONCRETE BASE MUST BE WATERPROOFED AND HAVE DRAINAGE CELL INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS

Consulting Engineers

STRUCTURAL • CIVIL • STORMWATER • REMEDIAL

DA IF ANY VALLEY GUTTER SHOWN ON THIS PLAN IS BELOW A 12 S-DEGREE BOOF PITCH WITH A CATCHMENT AREA ABOVE 20m2 A CUSTOM VALLEY GUTTER, OR BOX GUTTER WILL BE REQUIRED. IF THE ROOF PITCH REQUIREMENT CANNOT BE ACHIEVED. THE PROJECT ENGINEER MUST BE NOTIFIED FOR DESIGN DETAILS AND THE GUTTER SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH ASSSOO.3 PRIOR

D9. ADEQUATE FLASHING WILL BE REQUIRED TO DIVERT FLOWS AROUND SKYLIGHTS. FLASHING WORKS RELEVANT AUSTRALIAN STANDARDS AND NCC REQUIREMENTS.

DIO. ALL EAVES GUTTERS MUST BE MINIMUM 150 HALF ROUND GUTTERS (WITH A CROSS-SECTIONAL AREA OF 9200mm® OR AN APPROVED EQUIVALENT, UNO. ALL EAVES GUTTER FALLS MUST BE DIRECTED TO THE NOMINATED DOWNPIPES AS SHOWN ON THE STORMWATER MANAGEMENT PLAN. THE PROJECT STORMWATER ENGINEER MUST BE NOTIFIED IF ANY CHANGES ARE PROPOSED OR THE ABOVE CANNOT BE ACHIEVED PRIOR TO CONSTRUCTION.

DII. ALL EAVES GUTTERS AND ASSOCIATED DOWNPIPES MUST BE INSTALLED IN ACCORDANCE WITH TABLE 3.5.2. AS3500.3 (2021), UNLESS NOTHED OTHERWISE.

DI2. NOTIFY THE PROJECT ENGINEER IF THE MINIMUM HEAD PRESSURE HEIGHT (AS SHOWN ON THIS PLAN) BETWEEN THE INVERT OF THE GUTTER AND INVERT OF THE CHARGED SYSTEM OUTLET CANNOT

EI. ALL STORMWATER PITS MUST BE INSTALLED IN ACCORDANCE WITH ASSESSO.3.

E3. MINIMUM INTERNAL DIMENSIONS FOR STORMWATER AND INLET PITS TO BE IN ACCORDANCE WITH

E4. ALL PITS GREATER THAN 1200mm DEEP SHALL HAVE STEP IRONS INSTALLED. STEP IRON INSTALLATION MUST BE IN ACCORDANCE WITH THE RELEVANT ALISTBALIAN STANDARDS

BELOW THE INVERT OF THE OUTLET PIPE AND A MAXI-MESH SCREEN AS PER LOCAL COUNCIL AND THE AUSTRALIAN STANDARD REQUIREMENTS HOWEVER INLESS SPECIFICALLY REQUIRED BY COUNCILS NOT REQUIRE A SUMP.

ALL STORMWATER PITS TO BE LOCATED AT LOW POINTS TO PREVENT PONDED WATER ET, FOR STORMWATER PITS LOCATED BELOW THE WATER TABLE, CUT INTO ROCK OR IN POORLY DRAINED SOILS. THE PIT SUMP MAY BE FILLED WITH MORTAR AND SCREEDED TOWARDS THE OUTLET AT MINIMUM IS FALL, SUBJECT TO THE ENGINEERS APPROVAL.

EB. A STAINLESS STEEL OR GALVANISED MESH SCREEN (MAXI-MESH RHB080 OR APPROVED EQUIVALENT) MUST BE INSTALLED OVER OUTLETS WITHIN ALL SURFACE PITS AND ORIFICE PLATES. UNO. THE TRASH SCREEN AREA MUST BE A MINIMUM OF 50 TIMES THE ORIFICE AREA FOR ALL ORIFICES BELOW ISOMO DIAMETER. IF ABOVE ISOMO, TRASH SCREEN AREA MAY BE REDUCED TO 20 TIMES THE ORIFICE AREA, ALL TRASH SCREENS MUST REMAIN A DISTANCE OF 1.5 TIMES THE ORIFICE AREA AWAY FROM THE OUTLET STRUCTURE, OR 200mm, WHICHEVER IS GREATER

UNLESS FOUNDED ON A ROCK FOUNDATION. SURSOIL DRAINAGE.

(APPROPRIALLY SECTION 6 7 AND APPENDIX I.) AND THE NCC.

MOVEMENT COULD DAMAGE BUILDINGS OR CAUSE LOSS OF AMENITY THROUGH THE BUILD-UP OF EXCESSIVE MOISTURE OR LATERAL WATER PRESSURE THIS INCLUDES ALONG WALLS THAT IMPEDE THE FOOTINGS, BEHIND RETAINING WALLS AND ADJACENT TO BASEMENT WALLS, SUBSCIL DRAINAGE IS GENERALLY ALSO REQUIRED IN SHALLOW LANDSCAPED AREAS OVER ROCK OR POORLY DRAINED SOILS TO PREVENT OVERLY SATURATED LANDSCAPED AREAS.

F3. THE INSTALLATION OF SUBSOIL DRAINAGE MAY REQUIRE TRENCHING THROUGH ROCK. F4. ALL SUBSOIL LINES ARE TO BE 100mm uPVC SLOTTED PIPE (UNSOCKED), LAID AT (MIN.) 0.5% FALL

F5. THE SUBSOIL LINE IS TO BE SURROUNDED BY SELECT FILTER MATERIAL, GENERALLY 10-20

F6. THE TRENCH SHALL BE SIZED TO PROVIDE A MINIMUM 50mm BEDDING AND 100mm COVER ALL WRAPPED ALL-ROUND IN NON-WOVEN, GEOTEXTILE FABRIC OF STRENGTH CLASS A, WITH SUFFICIENT OVERLAP (LESSER OF TRENCH WIDTH OR 500mm)

F7. WHERE THE IN-SITU SOILS HAVE A GRAIN SIZE SMALLER THAN THE GEOTEXTILE FABRIC, COURSE WASHED-SAND SHOULD BE USED AS A FILTER TO PREVENT BLOCKAGE OF THE GEOFABRIC

LANDSCAPED AREAS ARE PROPOSED OVER THE TRENCH. THE TOP 300mm OF BACKFILL MAY BE MIXED WITH UP TO 20% ORGANIC MATTER

P9. ALL SUBSOIL LINES ARE TO DISCHARGE INTO A GRATED PIT. AT A LEVEL MINIMUM 50mm ABOVE THE PIT OUTLET UND. THE PROJECT BUILDER IS TO IMPLEMENT APPROPRIATE MEASURES TO PREVENT

FIO. THE HIGH-END OF THE SUBSOIL LINE IS TO BE TURNED UP AT 45" AND TERMINATE AT GROUND LEVEL WITH AN INSPECTION CAP TO ENABLE FUTURE FLUSH OUT AND MAINTENANCE.

mm LONG TAIL OUT SUBSOIL LINE TO BE PROVIDED ON THE UPSTREAM SIDE OF ALL LARGE PITS OR IN AREAS WITH HIGH SEEPAGE FLOWS, SUBSOIL LINE TO BE COVERED WITH GEOTEXTILE FILTER SOCK FOR THE FULL LENGTH AND END COVERED, BACKFILL MUST BE IN NO-FINES

ISSUED FOR D.A.

SUBMISSION ONLY

NOT FOR

CONSTRUCTION

CHARGED SYSTEM.

GI. ALL PIPENORK IN A CHARGED SYSTEM TO BE 100mm & upvc pressure or sener grade pipes WITH ALL JOINTS PRESSURE SEALED TO A MINIMUM OF LODOWN (JAILESS NOTED OTHERWISE) ABOVE

G2. ALL CHARGED SYSTEMS MUST HAVE A BLEED OUT LINE AT THE LOW POINT IN THE CHARGED SYSTEM WHICH MUST BE CONNECTED TO A FLUSH OUT PIT VIA GRAVITY. THE BLEED LINE MUST BE MAINTAINED AND REGULARLY FLUSHED OUT.

HI, ORIFICE PLATE MUST BE INSTALLED PRIOR TO INSTALLATION OF THE ROOF DRAINAGE SYSTEM AND CONNECTION OF THE SITE STOPMWATER SYSTEM TO THE ONLSITE DETENTION TANK

H2. THE HEIGHT DIFFERENCE (H+) BETWEEN THE ORIFICE CENTRELINE AND THE TOP WATER LEVEL OF THE ON-SITE DETENTION TANK MUST BE CONSTRUCTED IN ACCORDANCE WITH THE STORMWATER MANAGEMENT PLAN, IF H* CHANGES DUE TO SITE CONDITIONS, THE ENGINEER MUST BE NOTIFIED FOR AN ORIFICE PLATE SIZE ADJUSTMENT.

H3. ANY PIPE FITTINGS FOR BELOW GROUND ON-SITE DETENTION TANKS MUST BE INSTALLED IN

HA ACCESS HATCHES MUST BE INSTALLED AT BOTH ENDS OF THE ON-SITE DETENTION TANK IF THE DEPTH OF THE TANK IS GREATER THAN 1200mm, STEPS IRONS MUST BE INSTALLED IN ACCORDANCE WITH THE RELEVANT AUSTRALIAN STANDARDS.

HS. ABOVE GROUND ON-SITE DETENTION BASINS MUST NOT EXCEED A PONDING DEPTH OF 300000 UNLESS NOTED OTHERWISE. THE BUILDER MUST ENSURE THAT THE REQUIRED DETENTION VOLUME IS ACHIEVED DURING CONSTRUCTION. A WORK-AS-EXECUTED PLAN DETAILING THE FINISHED LEVELS AND VOLUME OF THE ON-SITE DETENTION BASIN MUST BE CARRIED OUT AT THE COMPLETION OF WORKS BY A REGISTERED SURVEYOR AND APPROVED BY THE ENGINEER PRIOR TO FINAL CERTIFICATION. H6. IF ORIFICE HEIGHT (H#) IS SUBJECT TO CHANGE, THE PROJECT ENGINEER MUST BE NOTIFIED FOR AN

H7. PONDING DEPTHS IN LANDSCAPED AREAS MUST NOT EXCEED 300mm UNDER THE DESIGN CONDITIONS FOR ALL RESIDENTIAL DEVELOPMENTS. IF THE PONDING DEPTH EXCEEDS 300mm, POOL FENCING MUST BE DESIGN AND CONSTRUCTED IN ACCORDANCE WITH THE SWIMMING POOLS ACT 1992.

US THE MAXIMUM SLOPE AND BATTERS SHOULD NOT EXCEED LIN 4. UND THE MINIMUM SLOPE IN WITHIN THE LANDSCAPED BASIN AREA.

LIS SUR-SOIL DRAINAGE MUST BE INSTALLED WITHIN LANDSCAPED BASIN AREA IN ACCORDANCE WITH GROUND CONDITIONS.

JI, WHEN LAND FALLS TOWARDS A BUILDING, INCLUDING LAND UPSLOPE OF THE PROPERTY BOUNDARY GROUND SURFACE LEVELS ADJACENT TO THE BUILDING ARE TO BE REGRADED SUCH THAT THE FIRST J2, ANY NEW DEVELOPMENT WORKS MUST NOT CREATE ANY TRAPPED SURFACE AREAS, IN SUCH CASES MISTE TRADED AREAS EVIST SWALE DRAINS OF CRATED RITS WITH RIPED CUTLETS OF ADECLATE CAPACITY MAY BE REQUIRED TO ROUTE RUNOFF AROUND THE BUILDING TO AN APPROVED DISCHARGE POINT, IF THE TRAPPED AREA IS BELOW THE NATURAL SURFACE LEVEL, A PUMP OUT SYSTEM MAY BE REQUIRED. IN EITHER CASE, THE PROJECT ENGINEER MUST BE CONTACTED FOR DESIGN DETAILS (AS REQUIRED) PRIOR TO CONSTRUCTION.

3. BUILDER TO PROVIDE A MINIMUM IOOMM WIDE x 30mm HIGH OR 50mm DIA OVERFLOW FOR EVERY 6m OF EXPOSED AREA THAT IS TRAPPED OR SURROUNDED BY HOBS/BALUSTRADES/WALLS/ETC, THE FULL OVERFICIAL DEPTA MILET BE LOCATED BELOW ANY AD INCENT INTERNAL FLOOR LEVELS OF OPENINGS TO PROTECT AGAINST WATER INGRESS DUE TO BLOCKAGE OF THE PRIMARY OUTLET(S). THE OVERFLOW MUST BE FREE DRAINING TO THE LEGAL POINT OF DISCHARGE.

EXTERNAL LEVELS AND ISOmm ABOVE ALL ADJACENT PERVIOUS EXTERNAL LEVELS, U.N.O. IMMEDIATELY ADJACENT EXTERNAL AREAS (WITHIN IM OF INTERNAL AREAS) MUST SLOPE AWAY FROM THE DWELLING AT A MINIMUM 2.5% FALL. IF ANY ASPECT IS UNACHIEVABLE, NBCE MUST BE NOTIFIED FOR ALTERNATIVE DRAINAGE DETAILING IF APPLICABLE

PROVISIONS IN CASE THE PRIMARY DISCHARGE BLOCKS, THIS MUST BE COORDINATED WITH THE PROJECT

NORTHERN BEACHES COUNCIL - REGION I ON-SITE DETENTION SYSTEM CALCULATION SHEET

ADDRESS: 4 TAMINGA STREET, BAYVIEW

ALL WORKS IN ACCORDANCE WITH COUNCIL'S WATER MANAGEMENT FOR DEVELOPMENT POLICY, SECTION 5.5 - LOW LEVEL PROPERTIES

DEVELOPMENT TYPE ALTERATIONS AND ADDITIONS

SITE DETAILS

1764,6 m² TOTAL SITE AREA (EXCLUDING DRIVEWAY)

597.1 m 2 (33.8% OF SITE) PRE DEVELOPMENT IMPERVIOUS AREA 651.4 m 2 (36.9% OF SITE) POST DEVELOPMENT IMPERVIOUS AREA

OSD REQUIREMENTS

THE DEVELOPMENT WILL RESULT IN AN INCREASE IN IMPERVIOUS AREA $> 50 \mathrm{m}^2$, THEREFORE OSD IS REQUIRED. THE MAJORITY OF THE EXISTING SITE DRAINS TOWARDS THE COUNCIL OWNED NATURAL WATERCOURSE. THEREFORE THE CONSIDERED SITE AREA IS TAKEN AS THE JAND THAT CURRENTLY DRAINS TO THE WATERCOURSE. ANY SURFACE BELOW THE EXISTING DRIVEWAY HAS BEEN EXCLUSION. FROM THE OSD CALCULATIONS AS IT IS HEAVILY VEGETATED WITH A STEEP SLOPE AND THUS IS NOT CONSIDERED PRACITICAL OR FEASIBLE TO CONTROL

OSD STORAGE REQUIREMENT

1077.44 m ² CONSIDERED SITE AREA (REFER D21 FOR OSD CATCHMENT AREA PLAN)

PRE-DEVELOPMENT SITE DISCHARGE

20% AEP 32 L/s 1% AFP

POST DEVELOPMENT SITE DISCHARGE

30 L/s (10 L/s FROM OSD) 20% AFP 56 L/s (13 L/s FROM OSD) 1% AEP

3.95 m 3 (4.0 m 3 PROVIDED) OSD VOLUME REQUIRED

RAINWATER REUSE STORAGE REQUIREMENT

NIL m NIL m PROVIDED) RAINWATER 'BASIX' REQUIRED

'BASIX' REQUIRED ROOF AREA TO RAINWATER TANKS

OUTLET CONTROL

METHOD OF DISCHARGE CONNECT TO EXISTING COUNCIL WATERWAY

NO INVESTIGATION OF UNDERGROUND SERVICES HAS BEEN MADE. ALL RELEVANT AUTHORITIES SHOULD BE NOTIFIED PRIOR TO ANY EXCAVATION ON OR NEAR THE SITE DEVELOPERS & EXCAVATORS MAY BE HELD FINANCIALLY RESPONSIBLE BY THE ASSET OWNER SHOULD THEY DAMAGE UNDERGROUND NETWORKS.

CARELESS DIGGING CAN:
- CAUSE DEATH OR SERIOUS INJURY TO WORKERS AND THE

GENERAL PUBLIC COMMUNICATIONS

- LEAD TO CRIMINAL PROSECUTION AND DAMAGES CLAIMS. CAUSE EXPENSIVE FINANCIAL LOSSES TO BUSINESS

- CUT OFF EMERGENCY SERVICES DELAY PROJECT COMPLETION TIMES WHILE THE DAMAGE



MINIMISE YOUR RISK AND CONTACT

STORMWATER INSPECT	TION SCHEDULE
INSPECTION ITEMS	STAGE OF CONSTRUCTION
IN-GROUND PIPEWORK	PRIOR TO BACKFILL
IN-GROUND INFILTRATION/DISPERSION TRENCHES	PRIOR TO BACKFILL
IN-GROUND PREFABRICATED TANKS	PRIOR TO CONCRETE POUR/BACKFILL
PIPEWORK CAST-IN SLABS	PRIOR TO CONCRETE POUR
BOX GUTTERS	POST INSTALLATION WITH SAFE ROOF ACCESS MADE AVAILABLE
ABOVE GROUND PIPEWORK + FINISHED SURFACE LEVELS	FINAL CERTIFICATION

IF IN DOUBT ASK

DOCUMENT CERTIFICATION Date : 09.12.2024 Michael Wachjo 2024-12-05 A ISSUED FOR DA SUBMISSION ONLY - NOT FOR CONSTRUCTION NP HS B.E.(Civil), MIEAust., PRE, DEP. Director NB Consulting Engineers)

IF IN DOUBT ASK

Consulting Engineers STRUCTURAL • CIVIL • STORMWATE

A.C.N. 076 121 616 A.B.N. 24 076 121 616 Sydney: Ph: (02) 9984 7000 Gold Coast: Ph: (07) 5631 4744 Suite 1, 30B Griffith Street, Coolangatta QLD 4225 E: nb@nbconsulting.com.au W: www.nbconsulting.com. WATERSHED ARCHITECTS

WES JONES

Drawing Title: STORMWATER DRAINAGE

TOJECT: ALTERATIONS AND ADDITIONS 4 TAMINGA STREET, BAYVIEW

GENERAL NOTES

DEC. 124

N.P.

2410116 D01

onsulting

Enginee



- THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION IF THE ISSUE DATE PRECEDES THE ISSUE DATE ON THE ARCHITECTURAL DRAWINGS.
- 2. DO NOT SCALE FROM THIS DRAWING.
- 3. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE BY THE BUILDER BEFORE COMMENCING WITH ASSOCIATED WORK.
- 4. FOR GENERAL NOTES REFER TO DRAWING NUMBER: DOI.



REFER CONTINUATION FOR DO3

ROCK-LINED CREEK - OUTLET PIPE TO BE DIRECTED ONTO ROCK AND SURROUNDED BY CONCRETE TO PROTECT PIPE. OUTLET TO FUTURE DETAILS DURING CONSTRUCTION. SEE INSET PHOTO FOR TYPICAL CREEK CONFIGURATION.

100mm \$\phi\$ upvc outlet pipe direct to council watercourse. Details to be coordinated during cc stage. NBCE recommends that a survey of the full site, including driveway extent, to be conducted prior to construction to determine appropriate location of pipe.

FIGURE 1.1
IMAGE DEPICTING LANDSCAPE OF
POTENTIAL OUTLET DISCHARGE AREA



ISSUED FOR D.A. SUBMISSION ONLY NOT FOR CONSTRUCTION



MINIMISE YOUR RISK AND CONTACT www.byda.com.au BEFORE YOU DIG.

IF IN DOUBT ASK

M

	SITE	STORMWATER	DRAINAGE	PLAN
--	------	------------	----------	------

SCALE = 1 : 200


۸۱							
					DOCUMENT CERTIFICATION	Consulting Engineers	_
						STRUCTURAL • CIVIL • STORMWATER • REMEDIAL	
					Date :09.12.2024	A.C.N. 076 121 616 A.B.N. 24 076 121 616	
					Michael Wachjo	Sydney: Ph: (02) 9984 7000	_
2024-12-05	Α	ISSUED FOR DA SUBMISSION ONLY - NOT FOR CONSTRUCTION	NP	HS	B.E.(Civil), MIEAust.,PRE,DEP.	Unit 11, 1 Vuko Place, Warriewood NSW 2102	
					(Director NB Consulting Engineers)	Gold Coast: Ph: (07) 5631 4744	
Date:	Issue:	Description:	Ву:	Review:	The copyright of this drawing remains with NB Consulting Engineers	Suite 1, 30B Griffith Street, Coolangatta QLD 4225 E : nb@nbconsulting.com.au W : www.nbconsulting.com.au	


NC	Consulting Engineers STRUCTURAL • CIVIL • STORMWATER • REMEDIAL
	A.C.N. 076 121 616 A.B.N. 24 076 121 616
	Sydney: Ph: (02) 9984 7000
	Unit 11, 1 Vuko Place, Warriewood NSW 2102
	Gold Coast: Ph: (07) 5631 4744
uith	Suite 1, 30B Griffith Street, Coolangatta QLD 4225

Architect:	WATERSHED ARCHITECTS
Client:	WES JONES

O ARCHITECTS	Project: ALTERATIONS AND ADDITIONS 4 TAMINGA STREET, BAYVIEW	
JONES	SITE STORMWATER DRAINAGE PLAN	

IONS /IEW	DEC. 124	Design: W.F.	_	Drawn:	
PLAN	Job No: 2410)116		ing No:	Issue:

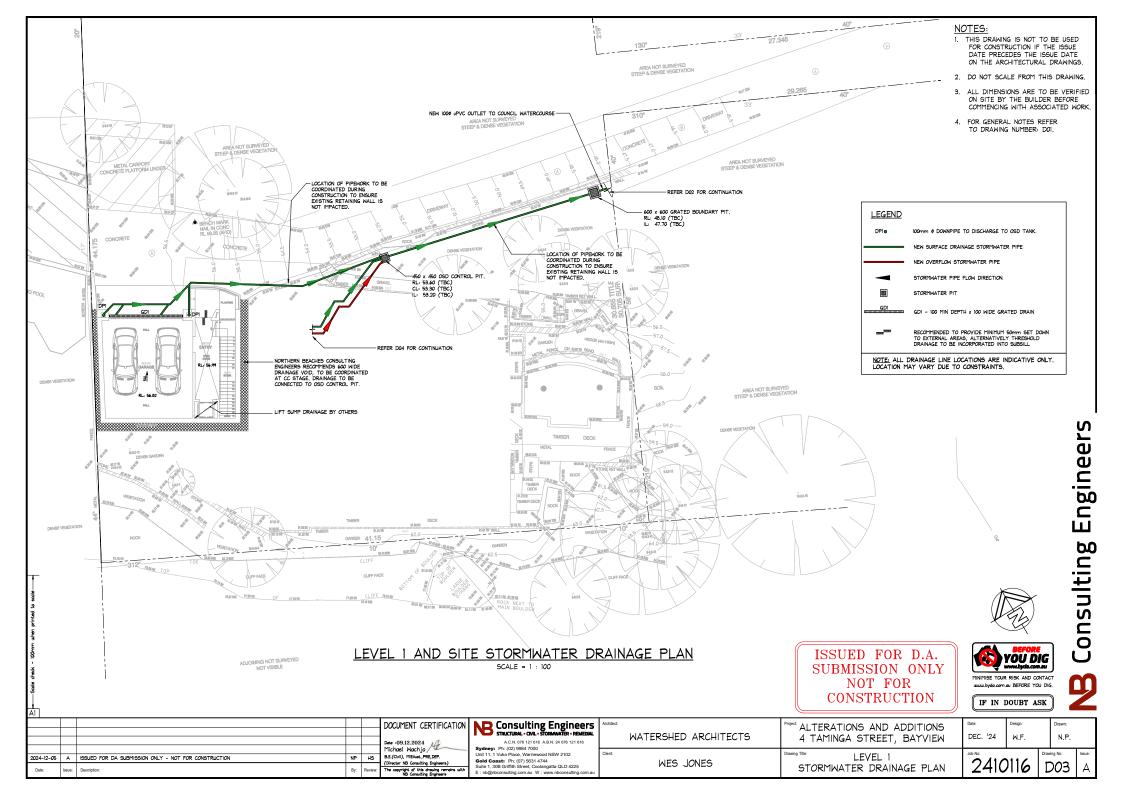


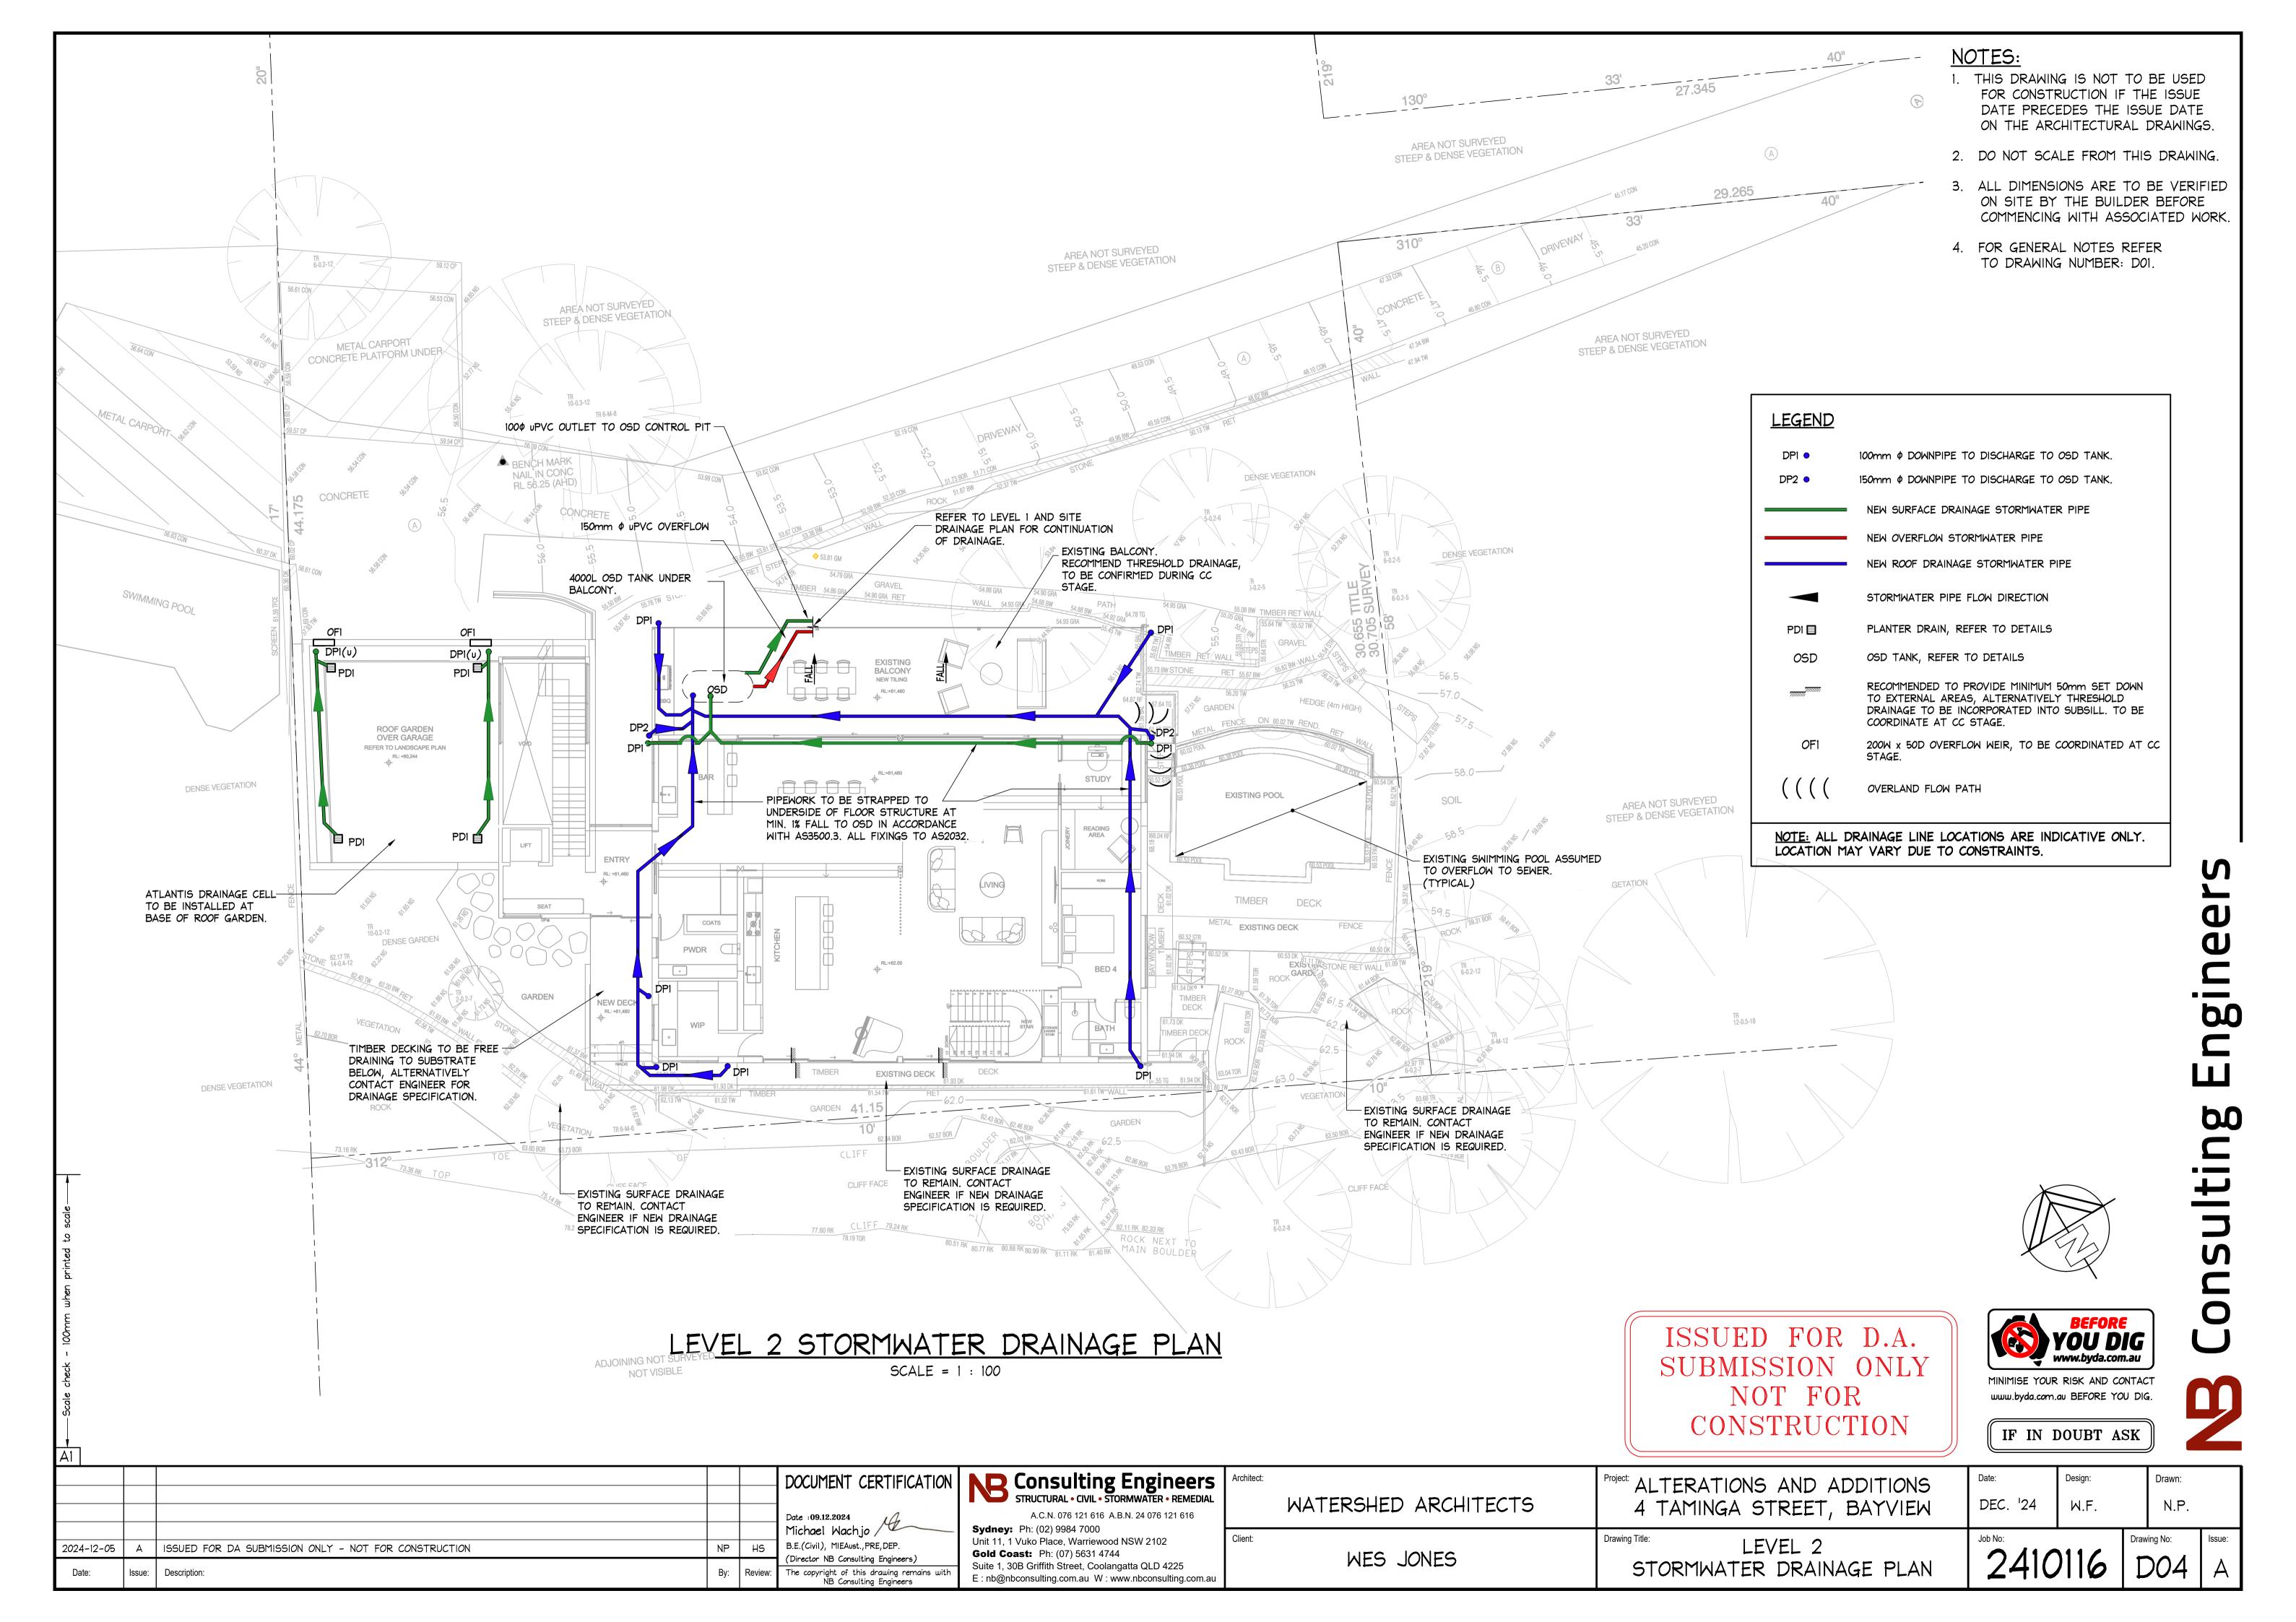


Consulting Engineers_

NOTES:

- 1. THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION IF THE ISSUE DATE DATE PRECEDES THE ISSUE DATE ON THE ARCHITECTURAL DRAWINGS.
- 2. DO NOT SCALE FROM THIS DRAWING.
- 3. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE BY THE BUILDER BEFORE COMMENCING WITH ASSOCIATED WORK.
- 4. FOR GENERAL NOTES REFER TO DRAWING NUMBER: DOI.

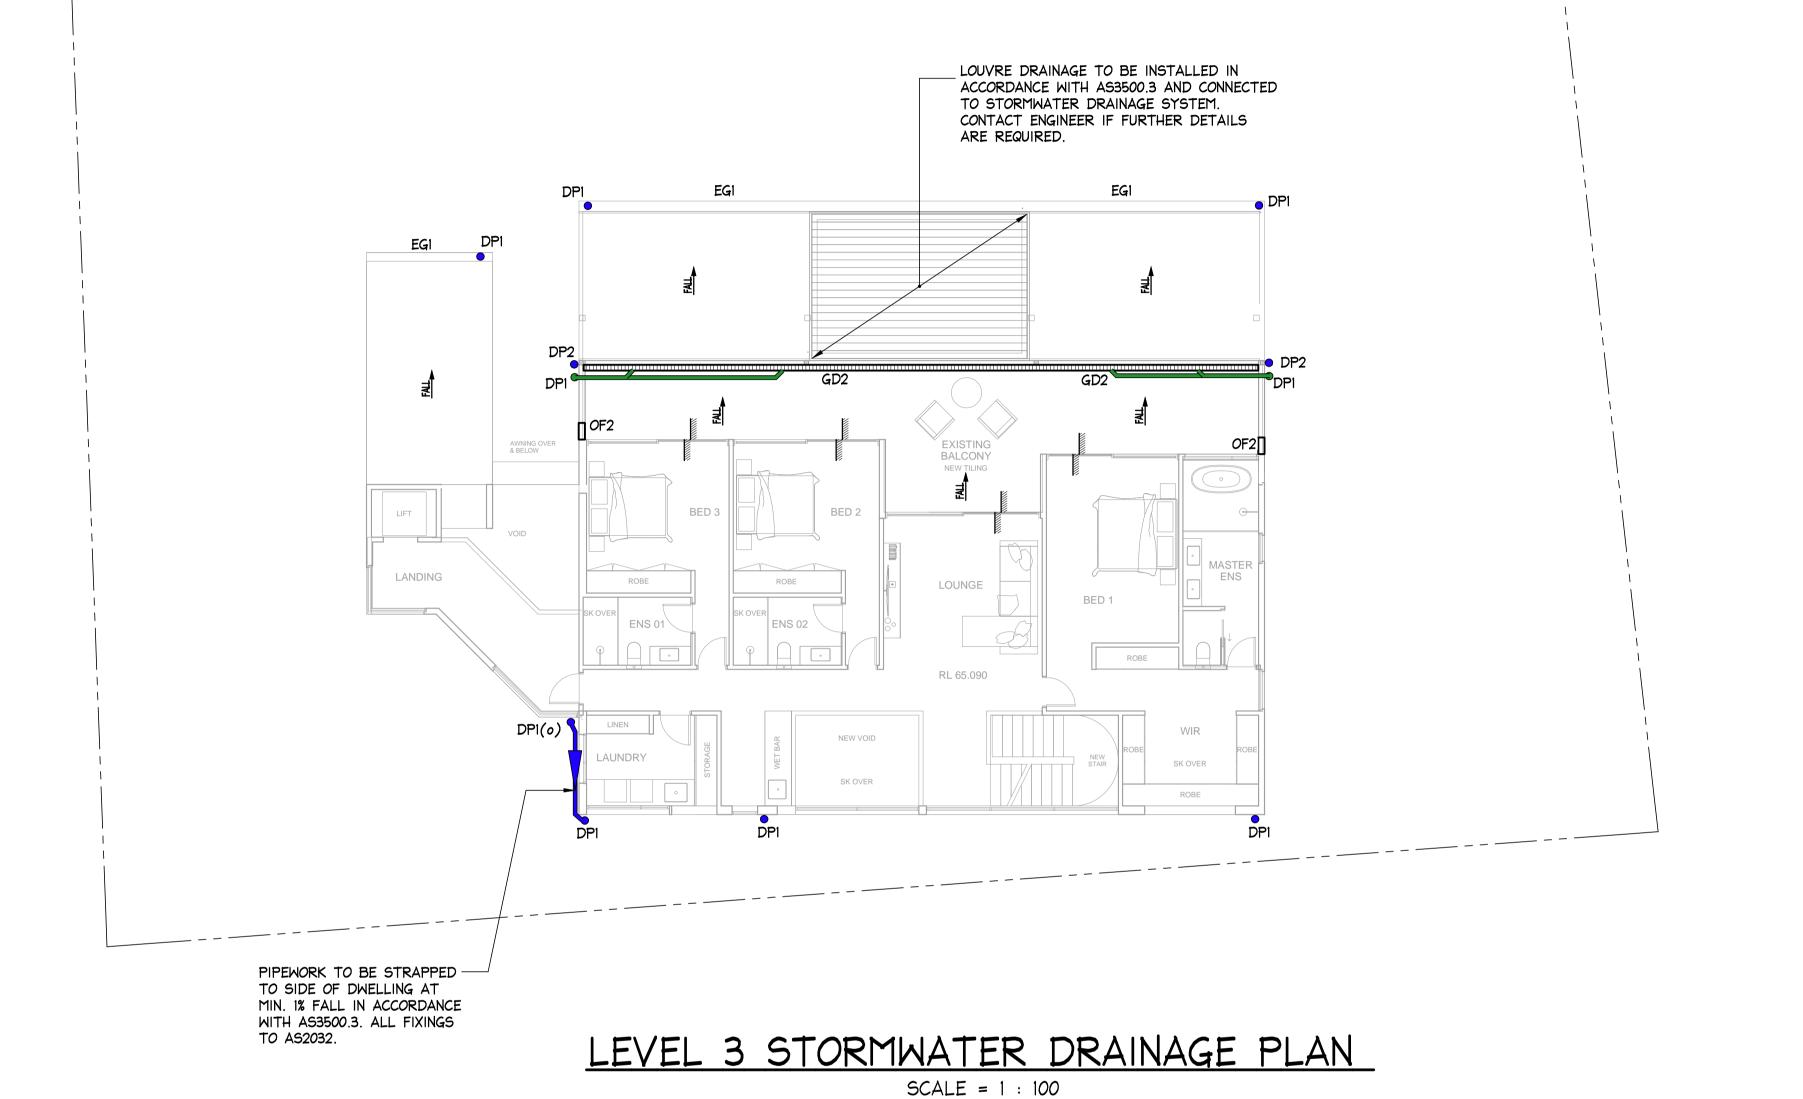

LEGEND 100mm & DOWNPIPE TO DISCHARGE TO OSD TANK. 150mm & DOWNPIPE TO DISCHARGE TO OSD TANK. 150mm \$\phi\$ HALF ROUND EAVES GUTTER. NEW SURFACE DRAINAGE STORMWATER PIPE NEW ROOF DRAINAGE STORMWATER PIPE STORMWATER PIPE FLOW DIRECTION PLANTER DRAIN, REFER TO DETAILS PDI 🗏 GD2 - STORMTECH 100mm THRESHOLD GRATED DRAIN RECOMMENDED TO PROVIDE MINIMUM 50mm SET DOWN TO EXTERNAL AREAS, ALTERNATIVELY THRESHOLD DRAINAGE TO BE INCORPORATED INTO SUBSILL. TO BE COORDINATED AT CC STAGE. 100W x 50D OVERFLOW SLOT, TO BE COORDINATED AT CC STAGE. OVERLAND FLOW PATH DOWNPIPE OVER ONLY NOTE: ALL DRAINAGE LINE LOCATIONS ARE INDICATIVE ONLY. LOCATION MAY VARY DUE TO CONSTRAINTS.



ISSUED FOR D.A. SUBMISSION ONLY NOT FOR CONSTRUCTION



MINIMISE YOUR RISK AND CONTACT www.byda.com.au BEFORE YOU DIG.


IF IN DOUBT ASK

-	m

				DOCUMENT CERTIFICATION	STRUCTURAL • CIVIL • STORMWATER • REMEDIAL	Architect: WATERSHED ARCHITECTS	Project: ALTERATIONS AND ADDITIONS	Date: DEC. 124	Design: W.F.	Drawn: N.P.	
				Date :09.12.2024	A.C.N. 076 121 616 A.B.N. 24 076 121 616	MATERIALD ARCHITECTS	4 TAMINGA STREET, BAYVIEW	DLO. 24	M.I.	18.1	
				Michael Wachjo	Sydney: Ph: (02) 9984 7000	Client:	Drawing Title:	Joh No		Drawing No:	Issue:
2024-12-05	A ISSUED FOR DA SUBMISSION ONLY - NOT FOR CONSTRUCTION	NP	HS	■ D.E.(CIVIL), I IIEAUSL, FRE, DEF.	Unit 11, 1 Vuko Place, Warriewood NSW 2102 Gold Coast: Ph: (07) 5631 4744	INIEG IONIEG	LEVEL 3	A1/		· ·	Jouo.
Date:	Issue: Description:	Ву:	Review:	The copyright of this drawing remains with NB Consulting Engineers	Suite 1, 30B Griffith Street, Coolangatta QLD 4225 E: nb@nbconsulting.com.au W: www.nbconsulting.com.au	WES JONES	STORMWATER DRAINAGE PLAN	2410	1116	D05	А

NOTES:

- 1. THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION IF THE ISSUE DATE PRECEDES THE ISSUE DATE ON THE ARCHITECTURAL DRAWINGS.
- 2. DO NOT SCALE FROM THIS DRAWING.
- 3. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE BY THE BUILDER BEFORE COMMENCING WITH ASSOCIATED WORK.
- 4. FOR GENERAL NOTES REFER TO DRAWING NUMBER: DOI.

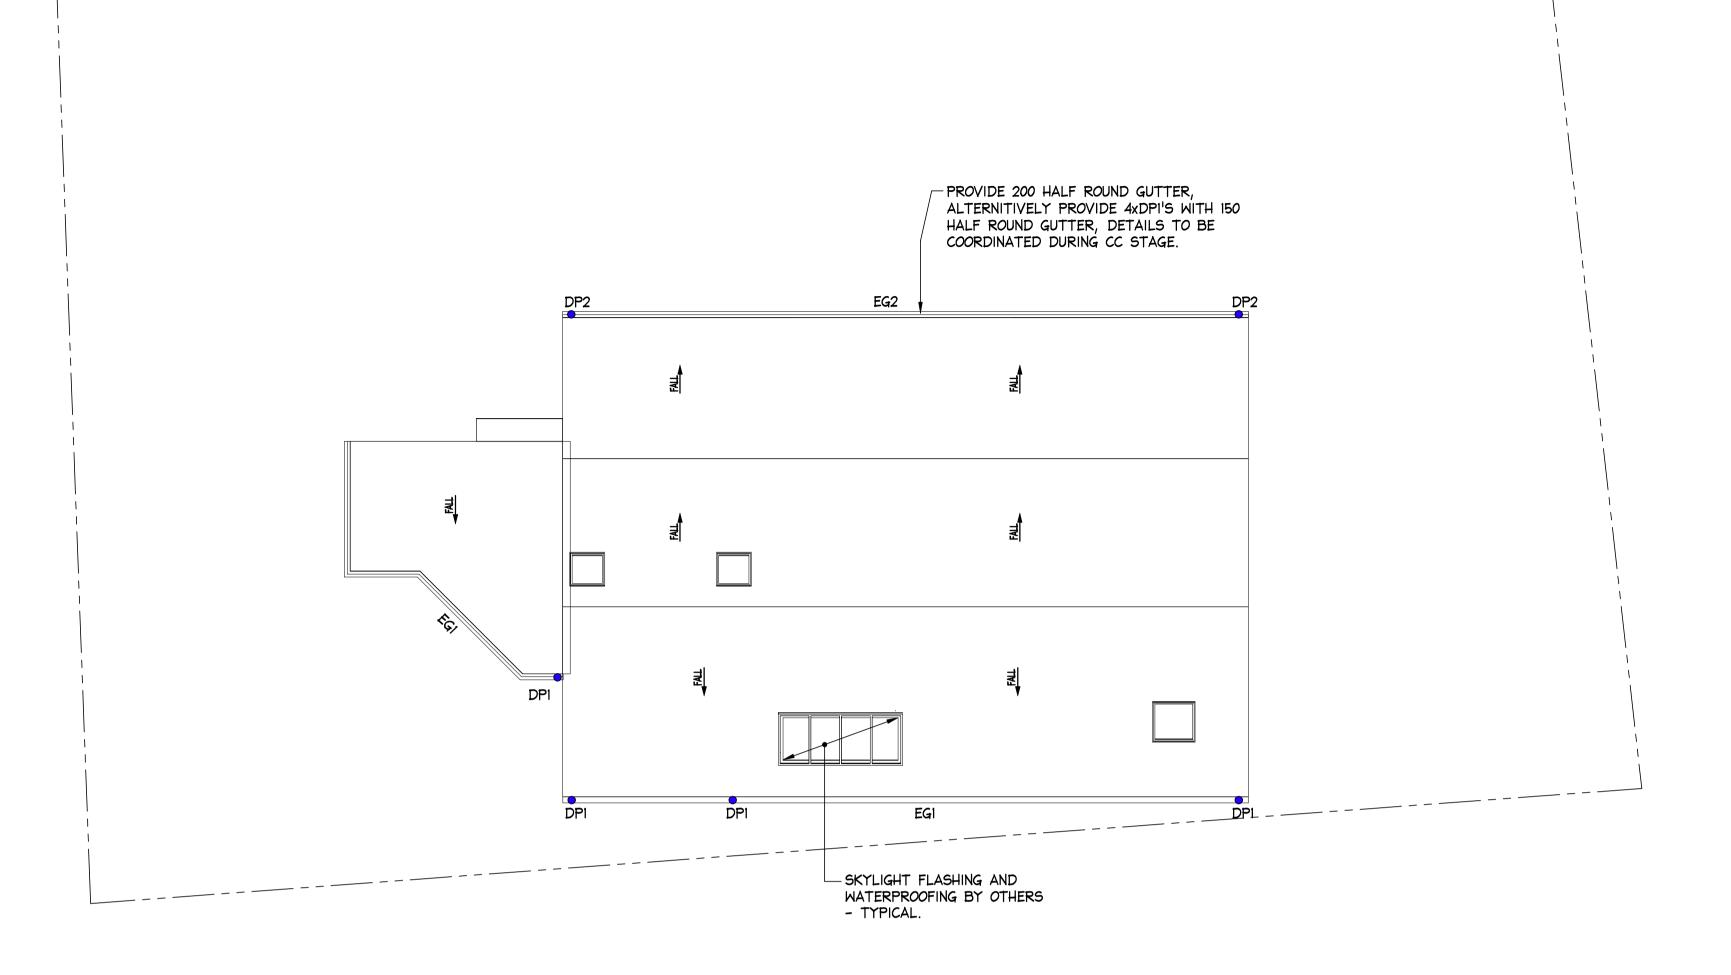

ROOF STORMWATER DRAINAGE PLAN

SCALE = 1 : 100

LEGEND

DPI •


100mm \$\phi\$ DOWNPIPE TO DISCHARGE TO OSD TANK.

150mm \$\phi\$ DOWNPIPE TO DISCHARGE TO OSD TANK.

150mm \$\phi\$ HALF ROUND EAVES GUTTER.

200mm \$\phi\$ HALF ROUND EAVES GUTTER.

NOTE: ALL DRAINAGE LINE LOCATIONS ARE INDICATIVE ONLY. LOCATION MAY VARY DUE TO CONSTRAINTS.



ISSUED FOR D.A. SUBMISSION ONLY NOT FOR CONSTRUCTION



www.byda.com.au BEFORE YOU DIG.

	IF	IN	DOUBT	ASK
`				

11						
					DOCUMENT CERTIFICATION	Consulting Engineers
					BOOCHERT CERTIFICATION	STRUCTURAL • CIVIL • STORMWATER • REMEDIAL
					Date :09.12.2024	A.C.N. 076 121 616 A.B.N. 24 076 121 616
					Michael Wachjo	Sydney : Ph: (02) 9984 7000
2024-12-05	Α	ISSUED FOR DA SUBMISSION ONLY - NOT FOR CONSTRUCTION	NP	HS	B.E.(Civil), MIEAust.,PRE,DEP.	Unit 11, 1 Vuko Place, Warriewood NSW 2102
					(Director NB Consulting Engineers)	Gold Coast: Ph: (07) 5631 4744
Date:	Issue:	Description:	Ву:	Review:	The copyright of this drawing remains with NB Consulting Engineers	Suite 1, 30B Griffith Street, Coolangatta QLD 4225 E: nb@nbconsulting.com.au W: www.nbconsulting.com.au

~	Consulting Engineers STRUCTURAL • CIVIL • STORMWATER • REMEDIAL
	A.C.N. 076 121 616 A.B.N. 24 076 121 616
_	Sydney : Ph: (02) 9984 7000
	Unit 11, 1 Vuko Place, Warriewood NSW 2102
	Gold Coast: Ph: (07) 5631 4744
_	Suite 1, 30B Griffith Street, Coolangatta QLD 4225

Architect:	WATERSHED ARCHITECTS	Project: ALTERATIONS AND ADDITIONS 4 TAMINGA STREET, BAYVIEW	Date:
Client:	WES JONES	ROOF STORMWATER DRAINAGE PLAN	Job No:

—	111	БООБТ	ASK	J
		Design:		Dra

241C)116		06	А
0:		Draw	ring No:	Issue:
C. '24	W.F.		N.P.	

NOTES:

1. THIS DRAWING IS NOT TO BE USED

FOR CONSTRUCTION IF THE ISSUE DATE PRECEDES THE ISSUE DATE

ON THE ARCHITECTURAL DRAWINGS


2. DO NOT SCALE FROM THIS DRAWING.

3. ALL DIMENSIONS ARE TO BE VERIFIED

4. FOR GENERAL NOTES REFER


TO DRAWING NUMBER: DOI.

ON SITE BY THE BUILDER BEFORE COMMENCING WITH ASSOCIATED WORK




OR PRECAST GRATED DRAIN BY MANUFACTURER ALTERNATE POLYPROPYLENE DRAIN BY MANUFACTURER

> TYPE 'GDI' GRATED DRAIN SCALE = 1 : 20




PRECAST OR CAST INSITU PIT REFER STORMWATER NOTES ALTERNATE POLYPROPYLENE PIT BY MANUFACTURER

> TYPICAL PIT DETAIL SCALE = 1 : 20

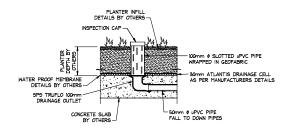

REFER TO MANUFACTURERS SPECIFICATION FOR SPS DRAINAGE OUTLETS

STANDARD PLANTER DRAIN - 'PDI' SCALE = 1 : 10

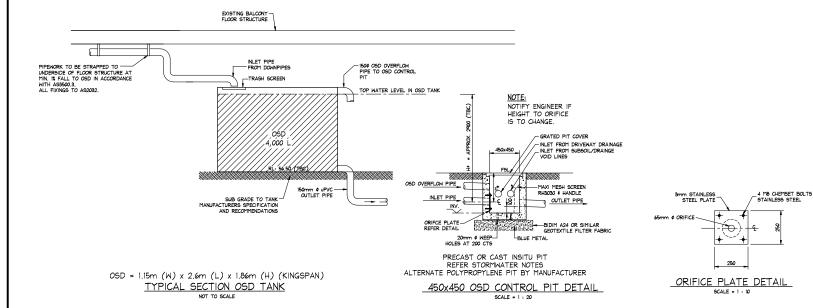

ISSUED FOR D.A. SUBMISSION ONLY NOT FOR CONSTRUCTION



www.byda.com.au BEFORE YOU DIG.

IF IN DOUBT ASK

2410116

W.F.

DEC. '24

Drawn:	
N.P.	

D10

A1									
					Date : 09.12.2024	Consulting Engineers STRUCTURAL - CVIL - STORMWATER - REMEDIAL A.C.N. 076 121 616 A.B.N. 24 076 121 616	Architect:	WATERSHED ARCHITECTS	Project ALTERATIONS AND ADDITIONS 4 TAMINGA STREET, BAYVIEW
2024- Date	12-05	ISSUED FOR DA SUBMISSION ONLY - NOT FOR CONSTRUCTION Description:	NP By:	HS Review:	Michael Wachjo B.E.(Civil), MiEAust., PRE, DEP. (Director NB Consulting Engineers) The copyright of this drawing remains with NB Consulting Engineers	Sydney: Ph: (02) 9984 7000 Unit 11, 1 Vuko Place, Warriewood NSW 2102 Gold Coast: Ph: (07) 5831 4744 Sulte 1, 30B Griffith Street, Coolangatta QLD 4225 E: nb@nbconsulting.com.au W: www.nbconsulting.com.au	Client	WES JONES	DETAILS AND SECTIONS SHEET 1

