



**Consulting.**<sup>TM</sup>  
an Elephants Foot Company

8 Forest Road, Warriewood NSW  
Residential Development

## OPERATIONAL WASTE MANAGEMENT PLAN

20/06/2024  
Report No. 6043  
Revision C

Client

---

**Kuatro Build Pty Ltd**

1 Macquarie Street, Sydney NSW 2000  
T 02 9011 6030

Architect

---

**Architectural Design Studio**

1/7 Murray Rose Avenue, Sydney Olympic Park NSW 212  
T 02 9763 1888 E [info@adsarchitects.com](mailto:info@adsarchitects.com)  
[www.adsarchitects.com](http://www.adsarchitects.com)



## REVISION REFERENCE

Revision	Date	Prepared by	Reviewed by	Description
A	4/06/2024	E. Abetian	H. Wilkes	Draft
B	13/06/2024	H Wilkes	J Parker	Amendment
C	20/06/2024	H Wilkes	J Parker	Final

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

## TABLE OF CONTENTS

1.0	ACKNOWLEDGEMENT OF COUNTRY .....	3
2.0	INTRODUCTION.....	3
2.1	SCOPE OF REPORT .....	3
2.2	REPORT CONDITIONS .....	4
3.0	LEGISLATION & GUIDANCE.....	5
4.0	DEVELOPMENT OVERVIEW.....	6
4.1	SITE LOCATION.....	6
5.0	RESIDENTIAL WASTE MANAGEMENT .....	8
5.1	RESIDENTIAL WASTE GENERATION ESTIMATES.....	8
5.2	RESIDENTIAL BIN SUMMARY .....	10
5.3	RESIDENTIAL WASTE DISPOSAL PROCEDURES.....	10
5.4	RESIDENTIAL BIN COLLECTION PROCEDURES .....	11
5.5	OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS .....	11
5.5.1	RESIDENTIAL COMMON AREAS.....	11
5.5.2	LANDSCAPED AREAS AND GARDEN ORGANICS.....	11
5.5.3	RESIDENTIAL BULKY WASTE PROCEDURES.....	12
6.0	STAKEHOLDER ROLES & RESPONSIBILITIES .....	13
7.0	SOURCE SEPERATION .....	14
8.0	EDUCATION .....	15
8.1	SIGNAGE.....	15
9.0	POLLUTION PREVENTION.....	15
10.0	BIN WASHING.....	16
11.0	BIN MOVING PATHS.....	16
12.0	WASTE ROOMS .....	17
13.0	CONSTRUCTION REQUIRMENTS.....	19
13.1	ADDITIONAL CONSIDERATIONS.....	19
14.0	USEFUL CONTACTS.....	20
APPENDIX A:	ARCHITECTURAL PLANS.....	21
APPENDIX: A.1	GROUND LEVEL – COLLECTION POINT AND BIN ROOMS .....	22
APPENDIX: A.2	BASEMENT 1 – Bin Room.....	24
APPENDIX B:	NORTHEN BEACH COUNCIL WASTE MANAGEMENT GUIDELINES –	
APPENDIX A	25	
APPENDIX C:	PRIMARY WASTE MANAGEMENT PROVISIONS.....	29
APPENDIX: C.1	TYPICAL BIN SPECIFICATIONS.....	30
APPENDIX: C.2	SIGNAGE FOR WASTE AND RECYCLING BINS.....	31
APPENDIX: C.3	EXAMPLE COLLECTION VEHICLE INFORMATION.....	33
APPENDIX D:	SECONDARY WASTE MANAGEMENT PROVISIONS.....	35

APPENDIX: D.1	EXAMPLE HANDHELD BIN MOVERS .....	36
APPENDIX: D.2	EXAMPLE SEATED BIN MOVERS .....	37
APPENDIX: D.3	EXAMPLE BIN TRAILERS .....	38
APPENDIX: D.4	EXAMPLE BIN TOWING ATTACHMENTS .....	39
APPENDIX: D.5	EXAMPLE SOURCE SEPARATION RECEPTACLES .....	40

## TABLE OF FIGURES

Figure 1: Site Location.....	6
Figure 2: Site Plan.....	7

## LIST OF TABLES

Table 1: Estimated Waste and Recycling Volumes.....	9
Table 2: Stakeholder Roles and Responsibilities .....	13
Table 3: Operational Waste Streams.....	14
Table 4: Waste Room Areas.....	17
Table 5: Waste Room Requirements.....	18

## GLOSSARY OF ABBREVIATIONS AND TERMS

<b>TERM</b>	<b>DESCRIPTION</b>
<i>Bin-Carting Route</i>	Travel path for transporting bins from their allocated storage location to the nominated collection point
<i>Bin Hoist</i>	A device used for lifting or lowering bins between different levels
<i>Bin Lifter</i>	A device used to mechanically lift bins for the purpose of emptying them into larger bins and/or compactors.
<i>Bin Mover</i>	Either a handheld device (commonly referred to as a bin tug) or a ride-on device (typically a tractor or Class C vehicle with an attached bin trailer) used to facilitate the movement of bins across long distances or up ramps
<i>Bulk Bins</i>	Containers with a capacity greater than 1100L designed to be collected by a front-loading vehicle
<i>Bulky Waste</i>	Recycling items that are too large to be deposited into bins, including furniture, whitegoods, electronics and mattresses
<i>Collection Area/Point</i>	Designated area or point where bins are loaded onto the collection vehicle for servicing
<i>Comingled Recycling</i>	Waste stream for the recycling of plastic bottles, other plastics, paper, glass and metal containers
<i>Communal Bin Room</i>	A central, shared bin room accessible to all residents or staff to dispose of their waste stream
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>EPA</i>	Environment Protect Authority
<i>General Waste</i>	All non-recyclable and non-hazardous waste that is sent to landfill
<i>HRV</i>	Heavy Rigid Vehicle
<i>Kerbside Collection</i>	A collection arrangement whereby bins are presented in a single row along the kerb and serviced by a collection vehicle on the street.
<i>L</i>	Litre
<i>LEP</i>	Local Environmental Plan
<i>Mixed Use Development</i>	A development comprising a combination of both residential and commercial units or two or more different land uses within the one development.
<i>Mobile Bins</i>	Containers with a capacity up to and including 1100L designed to be collected by a rear-loading vehicle
<i>Multi-unit Residential Development</i>	Also known as MUD's, residential flat buildings, or apartment blocks, this is a residential development with multiple units that typically share facilities and services such as bins and collections.

<i>Onsite Collection</i>	A collection arrangement whereby all bins are serviced by a collection vehicle within the property boundary, either in the building's basement or at grade and off-street.
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and that acts, or may act, as an entity
<i>Paper/ Cardboard Recycling</i>	Waste stream for the recycling of paper and cardboard only.
<i>Source Separation Receptacles</i>	Communal containers used throughout the development for the day-to-day disposal of different waste streams
<i>Waste Stream</i>	A classification used to describe waste of a particular type (eg. food waste stream)
<i>WHS</i>	Workplace Health and Safety

## 1.0 ACKNOWLEDGEMENT OF COUNTRY

Elephants Foot Consulting (EFC) acknowledges that every project we work on takes place on First Peoples land. We recognise Aboriginal and Torres Strait Islander People as Traditional Custodians of this land. We pay respect to ancestors and Elders, past and present.

## 2.0 INTRODUCTION

Elephants Foot Consulting (EFC) has been engaged to prepare the following Operational Waste Management Plan (OWMP) to satisfy the conditions of the Development Application Northern Beaches Council requires for the Residential Development located at 8 Forest Road, Warriewood NSW.

Robust waste management strategies are required for new developments to support the design and sustainable performance of the building. It is EFC's belief that a successful waste management strategy contains three key objectives:

- i. **Promote responsible source separation*** to reduce the amount of waste that goes to landfill by implementing convenient and efficient waste management systems.
- ii. **Ensure adequate waste and recycling provisions and procedures*** are established that will cater for potential changes during the operational phase of the development.
- iii. **Comply*** with all relevant council codes, policies, and guidelines.

To achieve these objectives, this OWMP identifies and details the following components:

- Waste streams expected to be generated onsite and anticipated volumes;
- Suitable bin sizes and quantities;
- Waste and recycling disposal procedures;
- Bin room size estimations and equipment recommendations; and
- Waste collection strategies, locations and frequencies.

It is vital that this OWMP is integrated into the overall management of the building and is clearly communicated to all relevant stakeholders.

### 2.1 SCOPE OF REPORT

This OWMP only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

The waste management of the **construction** and **demolition** phases of the development are not addressed in this report. A construction and demolition WMP will need to be provided separately.

## 2.2 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management chute equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Councils are subject to changing waste and recycling policies and requirements at their own discretion.
- This OWMP is only finalised once the draft watermark has been removed. If the draft watermark is present, the information in the OWMP is not confirmed.



### 3.0 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Pittwater 21 Development Control Plan
- Pittwater Local Environmental Plan 2014

The primary purpose of a Development Control Plan (DCP) is to guide the planning process according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Northern Beaches Council Waste Management Guidelines 2016
- NSW Better Practice Guide For Resource Recovery In Residential Developments 2019
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

## 4.0 DEVELOPMENT OVERVIEW

The proposed development falls under the LGA of Northern Beaches Council, and consists of:

- 4 buildings with 2 levels
  - Building A with 18 residential units
  - Building B with 18 residential units
  - Building C with 18 residential units
  - Building D with 12 residential units
- 14 Townhouses

The buildings and townhouses are connected by a basement level.

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings.

## 4.1 SITE LOCATION

The site is located at 8 Forest Road, Warriewood NSW as shown in Figure.1 (boundaries are indicative only). The site has frontages to Jubilee Avenue and Hill View Crescent, with vehicle access via Jubilee Avenue.

*Figure 1: Site Location*



Source: Google Maps 2024

Figure 2: Site Plan



Source: ADS architects, Project No. 0800, Drawing A001, Rev 12, June 2024, Preliminary Site Plan

## 5.0 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste stream generation estimates and disposal and collection procedures.

### 5.1 RESIDENTIAL WASTE GENERATION ESTIMATES

The conditions of consent B.26.9 for LEC16-151186 (DA No. N0440-15) issued by Land and Environment Court has been referenced to attain the total number of bins required for the residential units.

The bin estimates are based on generic information. Actual volumes of waste and recycling in operation may differ according to the residents' actual waste management practices.

The following table shows the estimated volume (L) of general waste and recycling generated by the development. The calculations are based on the understanding that there will be three bin rooms within the site for the residents with closest proximity.

The buildings serviced by each waste room is assumed to be as follows;

- Bin Room 1 will be for the residents of Buildings A, B & Townhouses 1-9
- Bin Room 2 will be for the residents of Buildings C & D
- Bin Room 3 will be for the residents of townhouses 10-14



Table 1: Estimated Waste and Recycling Volumes

Unit Groupings	# Units	General Waste Generation Rate (L/unit/week)	Generated General Waste (L/week)	Cardboard Recycling Generation Rate (L/unit/week)	Generated Cardboard Recycling (L/week)	Co-Mingled Recycling Generation Rate (L/unit/week)	Generated Co-Mingled Recycling (L/week)		
<i>Bin Room 1 (Basement) for Buildings A, B &amp; Townhouses 1-9</i>	45	80	3600	70	3150	70	3150		
<i>Bin Room 2 (Ground Level) for Buildings C &amp; D</i>	30	81	2430	70	2100	70	2100		
<i>Bin Room 3 (Ground Level) for townhouses 10-14</i>	4	82	328	70	280	70	280		
<b>TOTAL</b>	<b>79</b>		<b>6358</b>		<b>5530</b>		<b>5530</b>		
<b>Bins and Collections</b>	General Waste Bin Size (L)		240	Cardboard Recycling Bin Size (L)		240	Co-Mingled Recycling Bin Size (L)		240
	General Waste Collections per Week		1	Cardboard Recycling Collections per Week		1	Co-Mingled Recycling Collections per Week		1
	Number of Waste Bins Per Week	<i>Bin Room 1 (Basement) for Buildings A, B &amp; Townhouses 1-9</i>	15	Number of Paper/ Cardboard Recycling Bins Per Week	<i>Bin Room 1 (Basement) for Buildings A, B &amp; Townhouses 1-9</i>	14	Number of Co-Mingled Recycling Bins Per Week	<i>Bin Room 1 (Basement) for Buildings A, B &amp; Townhouses 1-9</i>	14
		<i>Bin Room 2 (Ground Level) for Buildings C &amp; D</i>	11		<i>Bin Room 2 (Ground Level) for Buildings C &amp; D</i>	9		<i>Bin Room 2 (Ground Level) for Buildings C &amp; D</i>	9
		<i>Bin Room 3 (Ground Level) for townhouses 10-14</i>	2		<i>Bin Room 3 (Ground Level) for townhouses 10-14</i>	2		<i>Bin Room 3 (Ground Level) for townhouses 10-14</i>	2
	Total General Waste Bins Required for Collection		<b><u>28</u></b>	Total Cardboard Recycling Bins Required for Collection		<b><u>25</u></b>	Total Co-Mingled Recycling Bins Required for Collection		<b><u>25</u></b>

## 5.2 RESIDENTIAL BIN SUMMARY

Based on waste and recycling estimations generated and the recommended bin quantities and collection frequencies are as follows:

In addition, the based on the *Northern Beaches Council Waste Management Guidelines 2016*, 2x 240L bins for vegetation waste (assumed to be future FOGO bins) have been recommended per building.

<b>General Waste:</b>	28x 240L bins collected once weekly
<b>Paper/ Cardboard Recycling:</b>	25x 240L bins collected once weekly
<b>Co-Mingled Recycling:</b>	25x 240L bins collected once weekly
<b>Vegetation (Future FOGO):</b>	10x 240L bins collected once weekly

During operation, it is the responsibility of the building manager to monitor the number of bins required for the residential component of the development. General waste, recycling and vegetation volumes may change according to residents' attitudes to waste disposal, building occupancy levels or the development's management. Any requirements for adjusting the capacity of the waste facilities may be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

## 5.3 RESIDENTIAL WASTE DISPOSAL PROCEDURES

Each unit will have a storage area capable of holding separate receptacles for general waste, comingled recycling and paper/cardboard recycling. This is typically located within kitchen areas beneath the workbench. This space should be sized to accommodate 40L receptacles (minimum) to account for 2 days' worth of waste and recycling.

Communal Bin Rooms 240L bins for general waste, comingled recycling, paper/cardboard recycling and vegetation will be provided through out the site. The residents of the buildings will share the bins within their allocated communal bin room.

The residents will be responsible for walking their general waste, recycling and vegetation waste (Future FOGO) to their designated communal bin room and placing their items into the correct bin.

General waste should be bagged when placed into the general waste bins and recycling should not be bagged and instead, be placed loosely into the recycling bins.

It is assumed that the vegetation bin will become a Food Organics and Garden Organics (FOGO) bin once Northern Beaches Council commences a FOGO collection service to multi-unit developments. It is assumed that until the FOGO collection service is introduced, there will be minimal usage of the vegetation bins, as the majority of garden organics from the development will be from the shared landscaped areas. The management of waste generated from the shared landscaped areas is discussed in section 5.5.2.

Refer to Council guidance for the types of materials accepted in the different waste and recycling streams.

## 5.4 RESIDENTIAL BIN COLLECTION PROCEDURES

Council will be engaged to collect the residential general waste, recycling and vegetation waste in accordance with Council's collection schedule. This report assumes that general waste, co-mingled recycling and paper/cardboard recycling are collected weekly and vegetation bins are collected fortnightly.

Prior to the collection day, the Building Manager will be responsible for transferring the bins from the Communal Bin Rooms for each building to the Bin Holding Area for Collections on ground level. As the bins will be moved via the internal roadways, a ride on bin tug and trailer is recommended for transporting the bins (See Appendix D.2 & D.3). The Building Manager is also responsible for ensuring that the bins are adequately arranged for an efficient collection.

On the day of collection, a Council collection vehicle will enter the site from Jubilee Avenue and park on the loading area on ground level. The collection staff will exit the vehicle and collect the bins from the Bin Holding Area for Collections and return the empty bins once serviced.

Upon completion of servicing, the collection vehicle will exit the site onto Jubilee Avenue in a forward direction.

The Building Manager is responsible for returning the bins to their operational location to resume use.

All access and clearances to the collection point must be able to accommodate a 10.5m long HRV per Council's collection vehicle.

## 5.5 OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS

The following sections outline other waste management considerations for the residential components.

### 5.5.1 RESIDENTIAL COMMON AREAS

Residential common areas will be supplied with suitably branded source separation receptacles where considered appropriate. Receptacles should be placed in convenient locations which are accessible to all residents. The building manager will monitor the capacity of these receptacles and empty the contents into the central collection bins as required.

### 5.5.2 LANDSCAPED AREAS AND GARDEN ORGANICS

Vegetation generated from common landscaped areas will be managed and removed from the site by the designated landscaping contractors as they carry out scheduled landscaping maintenance works.

Vegetation generated from foliage within each residential unit will be managed by the residents and should be disposed of into the vegetation bins.

### 5.5.3 RESIDENTIAL BULKY WASTE PROCEDURES

An area will be made available for the storage of discarded residential bulky waste items (e.g. whitegoods, furniture, etc.). This room should be located within close proximity of the collection point and must have a minimum doorway width of 1.5m to facilitate the movement of large items in and out of the room. The room must be square or rectangular and with a minimum ceiling clearance of 2.1 meters.

Northern Beaches Council also requires the bulky waste storage rooms to be provided for residential buildings at a rate of 4m<sup>3</sup> per each 10 dwellings as per *Northern Beaches Waste Management Guidelines (2016)*.

Based on this rate, the Bulky Waste Room required is as follows;

#### **Bulky Waste Room Size**

There are 80 units

→ 4m<sup>3</sup> for each 10 dwellings

→  $80/10 = 8 \times 4\text{m}^3 = 32\text{m}^3$

Considering a minimum ceiling height clearance of 2.1m

The required area would be  $32\text{m}^3/2.1\text{m} = 15.24\text{m}^2$

**bulky waste storage area: minimum 16m<sup>2</sup>**

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the Bulky Waste Room. It is the caretaker's responsibility to arrange collection dates with Council and coordinate these times with the residents.

On the evening or morning prior to the bulky waste collection, the building manager will transport the bulky waste from the bulky waste room to the ground level bin presentation area.

On the day of bulky waste collection, a Council collection vehicle will enter the site from Jubilee Avenue and park on the loading area on ground level. Collection staff will collect the bulky waste items from the ground level bin presentation area. Once bulky items have been loaded onto the vehicle, the collection vehicle will exit the site onto Jubilee Avenue in a forward direction.



## 6.0 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table outlines the primary roles and responsibilities of the respective stakeholders:

*Table 2: Stakeholder Roles and Responsibilities*

Roles	Responsibilities
<b>Strata, Body Corporate or Management</b>	<ul style="list-style-type: none"> <li>• Co-ordinate the waste strategy within the site.</li> <li>• Ensure all waste service providers submit monthly reports on all equipment movements and waste quantities/weights.</li> <li>• Organise internal waste audits/visual assessments on a regular basis.</li> <li>• Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and</li> <li>• Manage any non-compliances/complaints reported through waste audits.</li> </ul>
<b>Building Manager or Waste Caretaker</b>	<ul style="list-style-type: none"> <li>• Co-ordinate general waste, recycling and vegetation collections</li> <li>• Clean and transport bins as required.</li> <li>• Organise replacement or maintenance requirements for bins.</li> <li>• Organise, maintain and clean bin storage areas.</li> <li>• Organise bulky waste collections when required.</li> <li>• Investigate and ensure prompt clean-up of illegally dumped waste materials.</li> <li>• Prevent storm water pollution by taking necessary precautions (secure bin rooms, prevent overflowing of bins).</li> <li>• Abide by all relevant WH&amp;S legislation, regulations, and guidelines.</li> <li>• Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management.</li> <li>• Assess any manual handling risks and prepare a manual handling control plan for bin transfers.</li> <li>• Ensure site safety for residents, children, visitors, staff and contractors; and</li> <li>• Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors.</li> </ul>
<b>Residents</b>	<ul style="list-style-type: none"> <li>• Dispose of all general waste, recycling and vegetation in the allocated bins provided.</li> <li>• Ensure adequate separation of general waste, recycling and vegetation; and</li> <li>• Comply with the provisions of Council and the OWMP.</li> </ul>
<b>Waste Collection Contractor</b>	<ul style="list-style-type: none"> <li>• Provide a reliable and appropriate bin collection service.</li> <li>• Provide feedback to building managers/residents regarding contamination of recyclables; and</li> <li>• Work with building managers to customise waste systems where possible.</li> </ul>
<b>Gardening/Landscaping Contractor</b>	<ul style="list-style-type: none"> <li>• Remove all garden organics generated during gardening maintenance activities for recycling at an offsite location.</li> </ul>
<b>Developer</b>	<ul style="list-style-type: none"> <li>• Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the Strata or Body Corporate.</li> </ul>

## 7.0 SOURCE SEPERATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. The table below outlines what is typically included in various waste streams and how they can be managed. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

*Table 3: Operational Waste Streams*

Waste Stream	Description	Typical Destination	Waste Stream Management
<b>General Waste</b>	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	General waste should be bagged before placing in designated general waste bins.
<b>Paper and Cardboard Recycling</b>	Cardboard and paper products are recyclable materials that can be re-processed into new products.	Resource Recovery Centre	Cardboard should be flattened before placing in the designated cardboard bin.
<b>Commingled Recycling</b>	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons).	Materials Recovery Facility (MRF)	Commingled recycling must not be bagged, and instead should be placed loosely in the designated recycling bins.
<b>Food Waste</b>	Food waste consists of unwanted or uneaten kitchen scraps that are easily compostable/biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds).	Composting facility or Landfill	Food waste can be composted on-site, off-site, or else included in the general waste stream.
<b>Garden Organics</b>	Garden organics consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches)	Resource Recovery Centre	Landscape Maintenance Contractors will remove the garden organics from site during scheduled maintenance.  Garden organics will be collected in Council or private contractor bins and removed from site.
<b>Electronic Waste</b>	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager arranges collection for e-waste recycling as needed by residents.
<b>Bulky Waste Items</b>	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Residents liaise with building manager to store in Bulky Goods Room. Building manager arranges with Council for removal.
<b>Other</b>	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager arranges collection by appropriate recycling services when required.

## 8.0 EDUCATION

Educational material encouraging correct separation of general waste, recycling and vegetation must be provided to each residential tenant. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building caretaker provide information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal bins.

Education and communication must be provided consistently on a regular basis to encourage behaviour change and account for transient building personnel such as new residents, tenants, or cleaning staff. Information should include:

- Descriptions of items accepted in the general waste, recycling and vegetation streams (refer to Council guidance);
- How to dispose of bulky waste and any other items that are not general waste, recycling or vegetation (refer to Council guidance);
- Residents' obligations to health and safety as well as building management; and
- How to prevent cross contamination among waste streams.

### 8.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill. Signage should include:

- Clear and correctly labelled bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All signage should conform to the relevant Australian Standards.

## 9.0 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

## 10.0 BIN WASHING

The bins will be cleaned by the building manager periodically to ensure hygiene and minimise odour.

Bin washing can occur within the bin rooms, using the room clean down facilities (i.e tap connection and drain). Alternatively, a specialist bin washing contractor can be engaged to clean the bins to an agreed schedule. The specialist bin contractor would collect the bins from the bin holding area and clean the bins with their specialised vehicle.

## 11.0 BIN MOVING PATHS

The building manager is responsible for the transportation of bins from their designated operational locations to the collection area, returning them once emptied to resume operational use.

Any movement of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personal.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be A minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

As the bins are intended to be moved up the vehicle ramp and the distance of the bin moving paths exceeds 10m, a bin moving device will be required to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata will be responsible for maintaining, repairing and replacing waste management equipment.

Bins may have to be fitted with hitches to enable the simultaneous transportation of multiple bins to the collection area. Council must be informed of any hitch attachments required to be installed on bins.

## 12.0 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below and are estimates only.

Table 4: Waste Room Areas

Level	Waste Room Type	Equipment
Basement	<i>Bin Room 1 for Buildings A, B &amp; Townhouses 1-9</i>	15 x 240L MGBs (General waste) 14 x 240L MGBs (Comingled Recycling) 14 x 240L MGBs (Paper/Cardboard) 5 x 240L MGBs (Vegetation)
Ground Level	<i>Bin Room 2 for Buildings C &amp; D</i>	11 x 240L MGBs (General waste) 9 x 240L MGBs (Comingled Recycling) 9 x 240L MGBs (Paper/Cardboard) 4 x 240L MGBs (Vegetation)
Ground level	<i>Bin Room 3 for townhouses 10-14</i>	2 x 240L MGBs (General waste) 2 x 240L MGBs (Comingled Recycling) 2 x 240L MGBs (Paper/Cardboard) 1 x 240L MGBs (Vegetation)
Basement	Bulky Waste Room	>16m <sup>2</sup> for Bulky Waste storage  1x Bin moving device Bin Room 1 overflow
Ground level	Bin Holding Area for Collections ( <i>Collection Point</i> )	28 x 240L MGBs (General waste) 25 x 240L MGBs (Comingled Recycling) 25 x 240L MGBs (Paper/Cardboard) 10 x 240L MGBs (Vegetation)

The “estimated area required” in the table above have been calculated based on equipment requirements and/or bin dimensions with an additional 90% of bin GFA factored in for manoeuvrability. Other factors such as the shape of the room, position of the chutes, configuration of the equipment, access needs and position of the door may impact the size of the room required. Thus a smaller or larger room size may also be suitable for purpose, as long as the room can accommodate the required equipment with adequate access.

In addition, all doorways and passageways facilitating the movement of bins must be at least 1200mm wide.

The following table provides further waste room requirements.

*Table 5: Waste Room Requirements*

Waste Room Type	Waste Room Requirements
Communal Bin Room	<ul style="list-style-type: none"> <li>• Bins should be arranged so that all bins are accessible. Bins are not to be placed in front of one another or in such a way as to restrict access to the other bins for use.</li> <li>• Rooms must be well ventilated either naturally or mechanically in accordance with AS1668.4.2012</li> <li>• Cleaning facilities such as hose hock and drainage for odour and hygiene control must be provided.</li> <li>• It is recommended a dustpan and broom is provided in this room for residents to clean up unexpected spillages when using bins.</li> </ul>
Bin Holding Area for Collections	<ul style="list-style-type: none"> <li>• Bins must not be stacked in rows that are more than two bins deep</li> <li>• Bin Tug storage must have access to a charging point.</li> </ul>
Bulky Waste Room	<ul style="list-style-type: none"> <li>• May be a dedicated room or screened area within another waste room</li> <li>• Must be in close proximity to the collection area</li> <li>• Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc.</li> <li>• Doorway should be a minimum of 1500mm wide</li> </ul>

## 13.0 CONSTRUCTION REQUIRMENTS

Waste room construction must comply with the minimum standards as outlined in the *Pittwater 21 Development Control Plan*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better practice guide for resource recovery in residential developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

### 13.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 100mm up, this is to eliminate build-up of dirt;
- Tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
  - Mechanically - exhausting at a rate of 5L/m<sup>2</sup> floor area, with a minimum rate of 100L/s minimum. Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem; or
  - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

## 14.0 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

---

### LOCAL COUNCIL

Northern Beaches Council Customer Service	Ph: (02) 1300 434 434	E: <a href="mailto:council@northernbeaches.nsw.gov.au">council@northernbeaches.nsw.gov.au</a>
--	-----------------------	---

---

### PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services	Ph: 02 9599 9999	E: <a href="mailto:service@ccws.net.au">service@ccws.net.au</a>
Sydney Waste	Ph: 02 8661 0031	
Waste Clear	Ph: 1300 525 352	E: <a href="mailto:admin@wasteclear.com.au">admin@wasteclear.com.au</a>

---

### BIN MOVING DEVICE SUPPLIERS

Elephants Foot Equipment	Ph: 1300 435 374	E: <a href="mailto:equipment@elephantsfoot.com.au">equipment@elephantsfoot.com.au</a>
Sitecraft	Ph: 1300 363 152	E: <a href="mailto:sales@sitecraft.com.au">sales@sitecraft.com.au</a>

---

### BALER SUPPLIERS

Elephants Foot Equipment	Ph: 1300 435 374	E: <a href="mailto:equipment@elephantsfoot.com.au">equipment@elephantsfoot.com.au</a>
--------------------------	------------------	---

---

### ORGANIC DIGESTERS AND DEHYDRATORS

Elephants Foot Equipment	Ph: 1300 435 374	E: <a href="mailto:equipment@elephantsfoot.com.au">equipment@elephantsfoot.com.au</a>
Waste Master	Ph: 1800 614 272	E: <a href="mailto:hello@wastemasterpacific.com.au">hello@wastemasterpacific.com.au</a>

---

### COOKING OIL CONTAINERS AND DISPOSAL

Cookers	Ph: 1300 882 299	E: <a href="mailto:info@cookers.com.au">info@cookers.com.au</a>
Auscol	Ph: 1800 629 476	E: <a href="mailto:sales@auscol.com">sales@auscol.com</a>

---

### ODOUR CONTROL

Elephants Foot Equipment	Ph: 1300 435 374	E: <a href="mailto:equipment@elephantsfoot.com.au">equipment@elephantsfoot.com.au</a>
--------------------------	------------------	---

---

### SOURCE SPERATION BINS

Method Recycling	Ph: 0499 890 455	
------------------	------------------	--

---

### BINS AND BIN EQUIPMENT

Elephants Foot Equipment	Ph: 1300 435 374	E: <a href="mailto:equipment@elephantsfoot.com.au">equipment@elephantsfoot.com.au</a>
SULO	Ph: 1300 364 388	E: <a href="mailto:sulosales@pactgroup.com">sulosales@pactgroup.com</a>

---

### CHUTES, COMPACTORS AND EDIVERTER SYSTEMS


Elephants Foot Chute Solutions	Ph: 1300 435 374	E: <a href="mailto:chutes@elephantsfoot.com.au">chutes@elephantsfoot.com.au</a>
--------------------------------	------------------	---



## APPENDIX A: ARCHITECTURAL PLANS



APPENDIX: A.1 GROUND LEVEL – COLLECTION POINT AND BIN ROOM 3

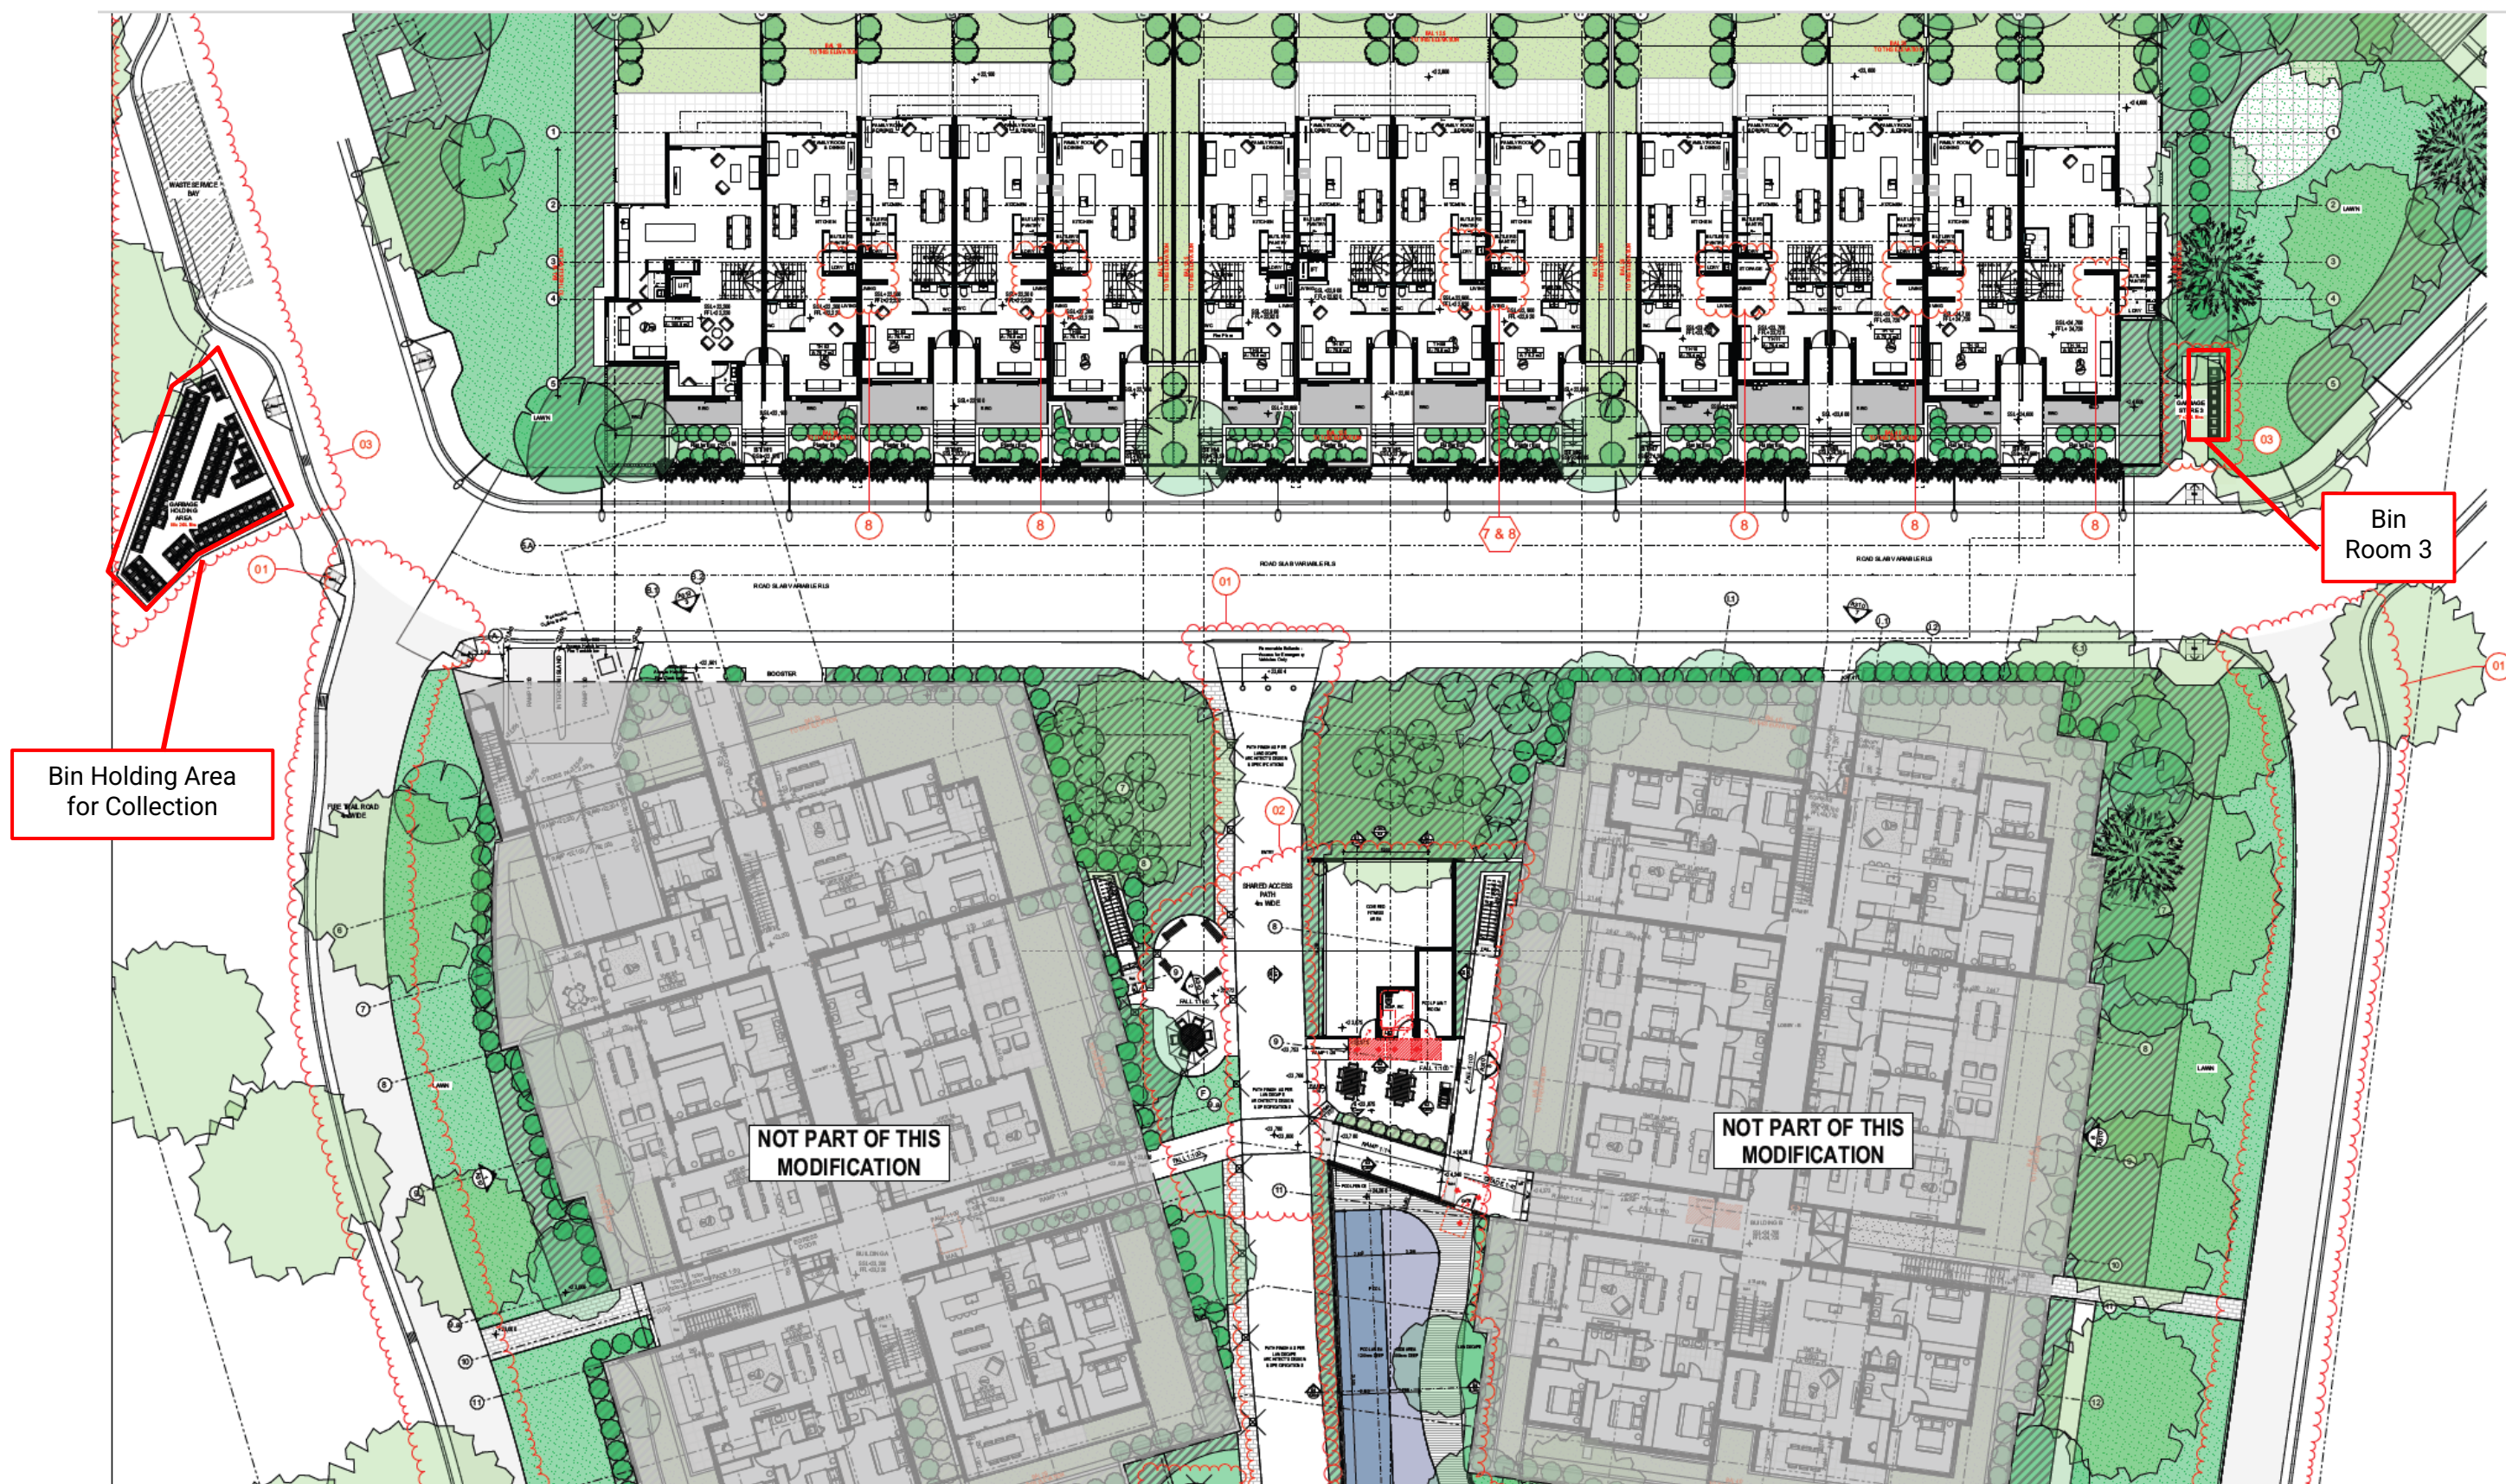




APPENDIX: A.2 GROUND LEVEL –BIN ROOM 2



Source: ADS architects, Project No. 0800, Drawing A100.1, Rev 18, June2024 – Ground Floor Plan West



APPENDIX: A.3 BASEMENT 1 – BIN ROOM 1 & BULKY WASTE ROOM

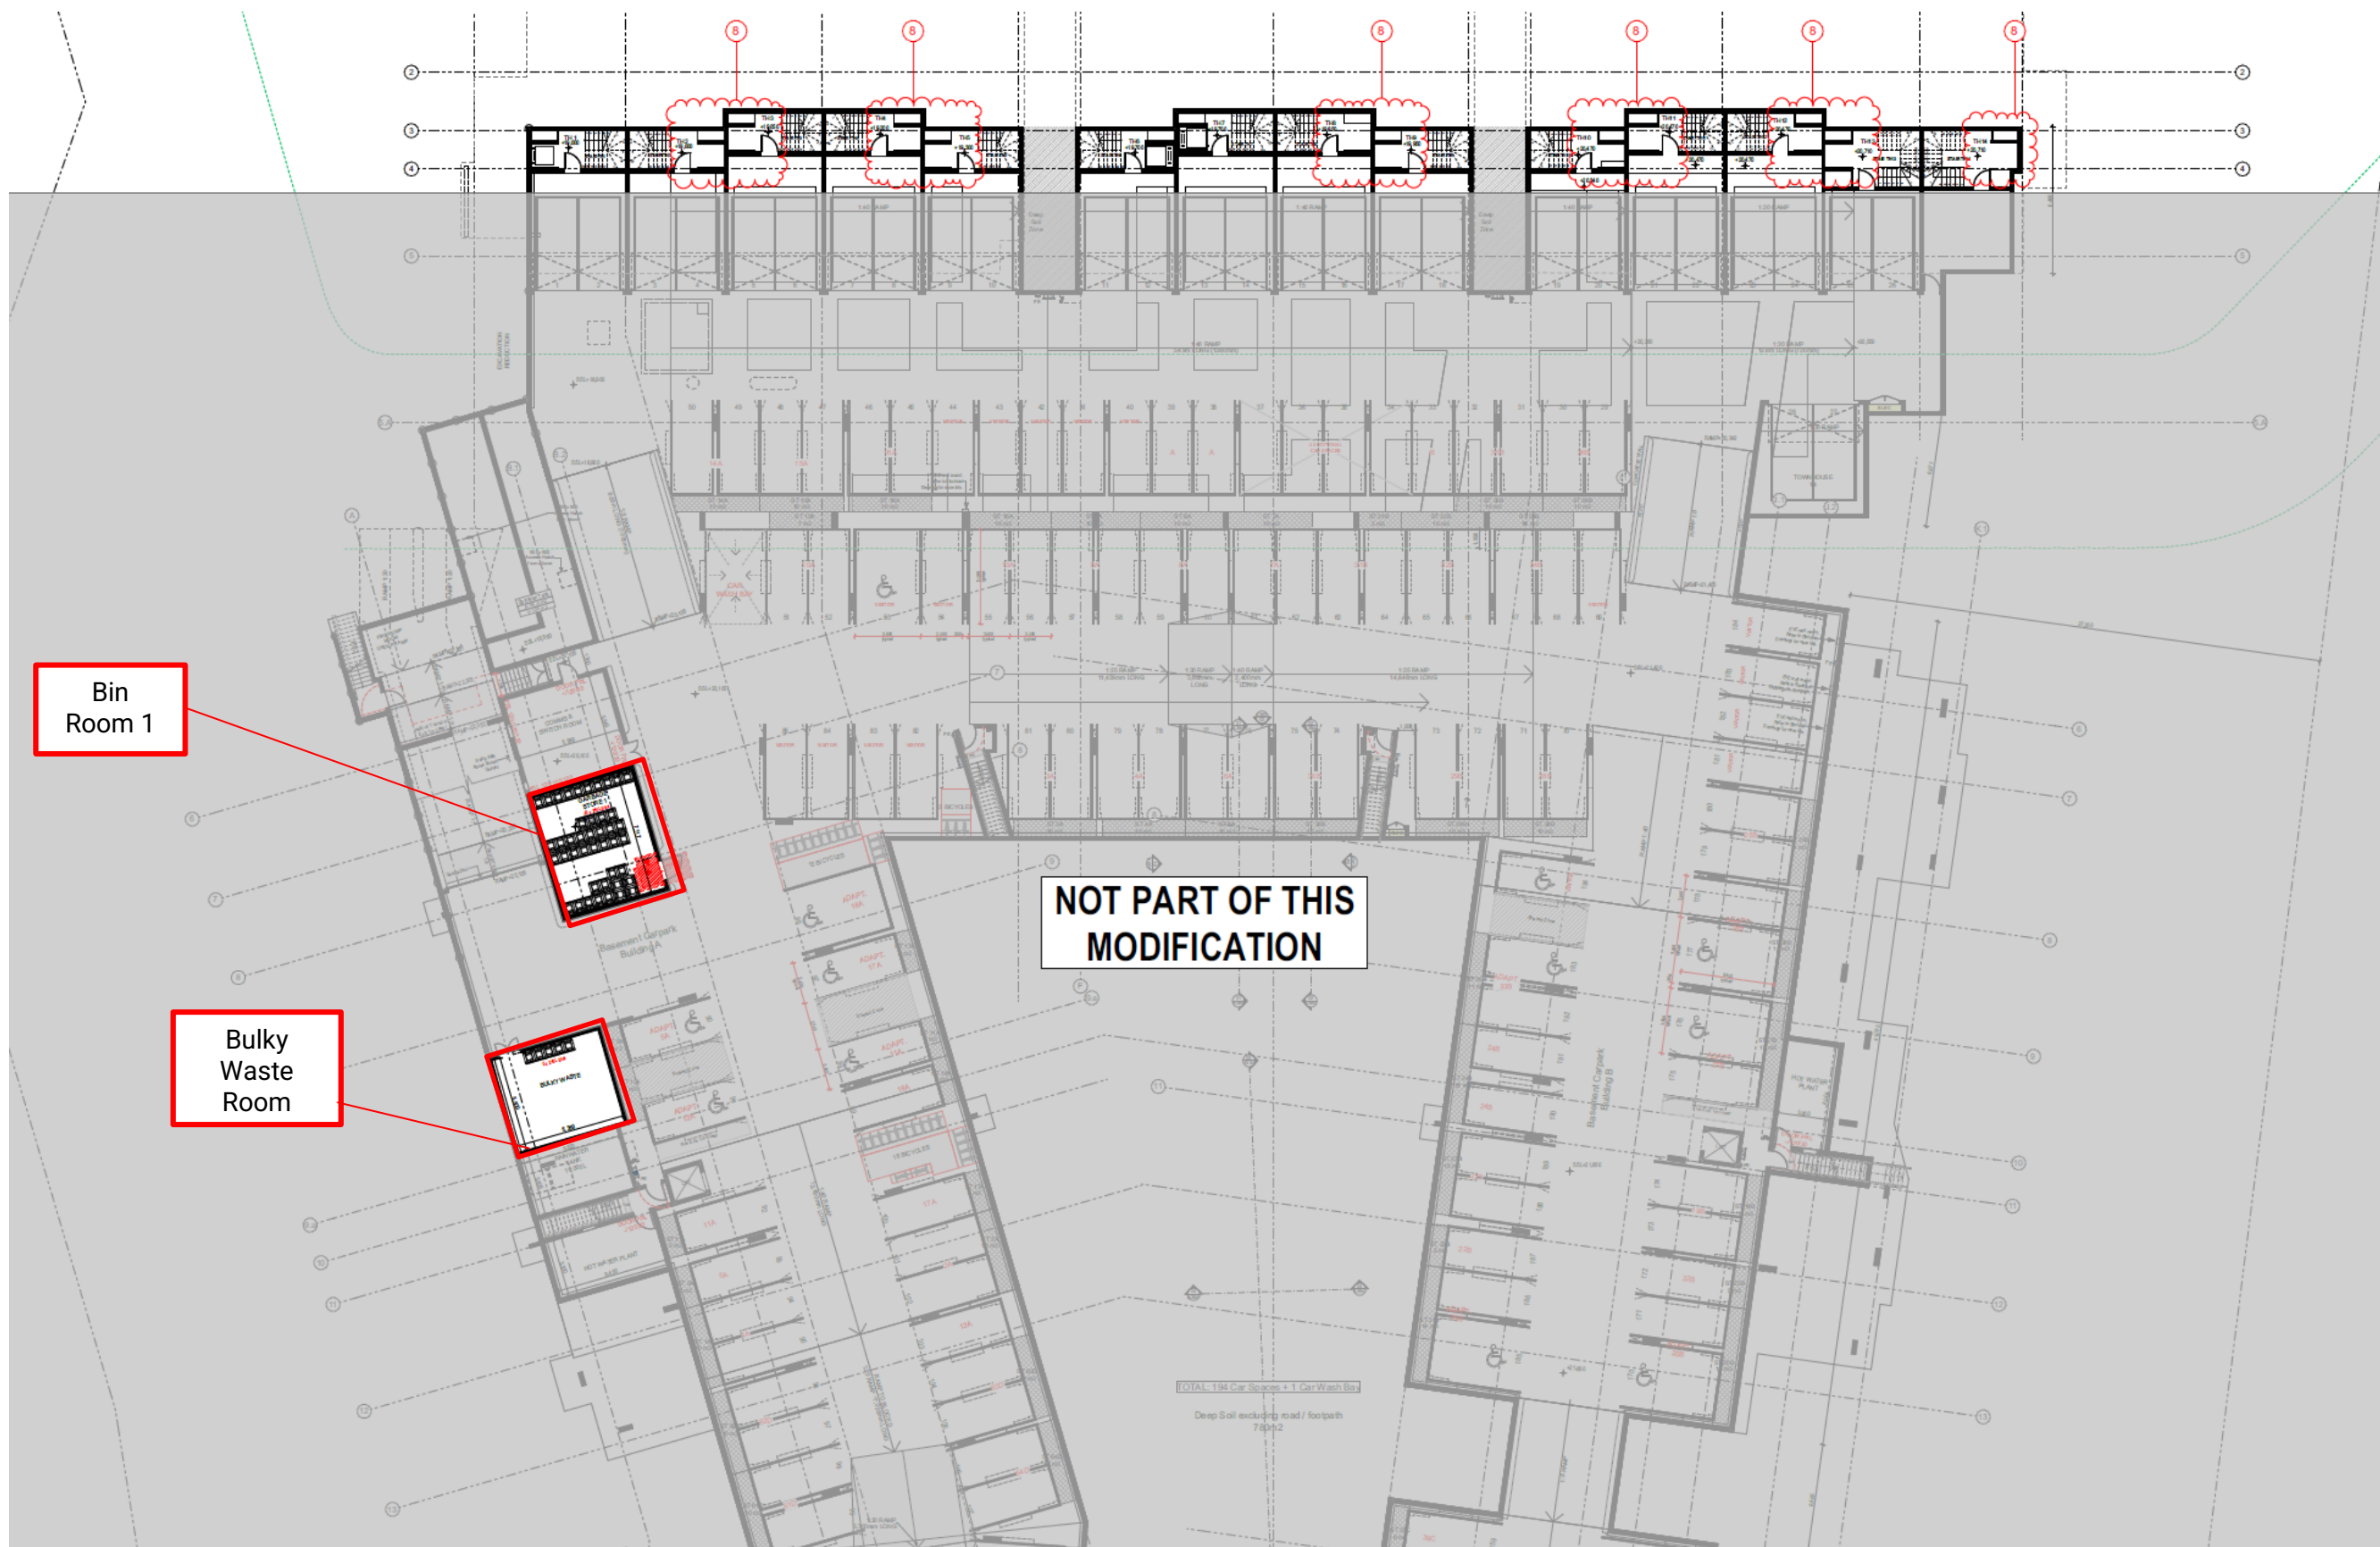

Source: ADS architects, Project No. 0800, Drawing A0999.1, Rev 11, June2024, GA Plans Basement 1 – East

## APPENDIX B: NORTHEN BEACH COUNCIL WASTE MANAGEMENT GUIDELINES – APPENDIX A

**Waste Storage Area Requirements for developments of 3 or more dwellings**

No of dwellings	Garbage bins	Paper bins	Bottles bins	Vegetation bins	Total Bins
3	1	1	1	2	5
4	2	1	1	2	6
5	2	2	2	2	8
6	2	2	2	2	8
7	3	2	2	2	9
8	3	2	2	2	9
9	3	2	2	2	9
10	4	3	3	2	12
11	4	3	3	2	12
12	4	3	3	2	12
13	5	3	3	2	13
14	5	3	3	2	13
15	5	4	4	2	15
16	6	4	4	2	16
17	6	4	4	2	16
18	6	4	4	2	16
19	7	4	4	2	17
20	7	5	5	2	19
21	7	5	5	2	19
22	8	5	5	2	20
23	8	5	5	2	20
24	8	5	5	2	20
25	9	6	6	2	23
26	9	6	6	2	23
27	9	6	6	2	23
28	10	6	6	2	24
29	10	7	7	2	26
30	10	7	7	2	26
31	11	7	7	2	27
32	11	7	7	2	27
33	11	7	7	2	27
34	12	8	8	2	30
35	12	8	8	2	30
36	12	8	8	2	30
37	13	8	8	2	31
38	13	8	8	2	31
39	13	9	9	2	33
40	14	9	9	2	34


**APPENDIX A**

41	14	9	9	2	34
42	14	9	9	2	34
43	15	9	9	2	35
44	15	10	10	2	37
45	15	10	10	2	37
46	16	10	10	2	38
47	16	10	10	2	38
48	16	10	10	2	38
49	17	11	11	2	41
50	17	11	11	2	41
51	17	11	11	2	41
52	18	11	11	2	42
53	18	12	12	2	44
54	18	12	12	2	44
55	19	12	12	2	45
56	19	12	12	2	45
57	19	12	12	2	45
58	20	13	13	2	48
59	20	13	13	2	48
60	20	13	13	2	48
61	21	13	13	2	49
62	21	13	13	2	49
63	21	14	14	2	51
64	22	14	14	2	52
65	22	14	14	2	52
66	22	14	14	2	52
67	23	14	14	2	53
68	23	15	15	2	55
69	23	15	15	2	55
70	24	15	15	2	56
71	24	15	15	2	56
72	24	15	15	2	56
73	25	16	16	2	59
74	25	16	16	2	59
75	25	16	16	2	59
76	26	16	16	2	60
77	26	17	17	2	62
78	26	17	17	2	62
79	27	17	17	2	63
80	27	17	17	2	63
81	27	17	17	2	63
82	28	18	18	2	66
83	28	18	18	2	66
84	28	18	18	2	66

85	29	18	18	2	67
86	29	18	18	2	67
87	29	19	19	2	69
88	30	19	19	2	70
89	30	19	19	2	70
90	30	19	19	2	70
91	31	19	19	2	71
92	31	20	20	2	73
93	31	20	20	2	73
94	32	20	20	2	74
95	32	20	20	2	74
96	32	20	20	2	74
97	33	21	21	2	77
98	33	21	21	2	77
99	33	21	21	2	77
100	34	21	21	2	78

### Council MGB Specifications



Bin Dimensions	240L
Height	1080mm lid closed 1830mm lid open
Depth	750mm
Width	600mm



## APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

## APPENDIX: C.1 TYPICAL BIN SPECIFICATIONS


### Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

**Table G1.1: Average dimension ranges for two-wheel mobile bins**




Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m <sup>2</sup> )	0.24	0.26–0.33	0.27-0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

**Wheelie bin**

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

**Table G1.2: Average dimension ranges for four-wheel bulk bins**



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m <sup>2</sup> )	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

**Dome or flat lid container**

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

## APPENDIX: C.2 SIGNAGE FOR WASTE AND RECYCLING BINS

### Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at [businessrecycling.com.au/research/signage.cfm](http://businessrecycling.com.au/research/signage.cfm)

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

## Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



## Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

## APPENDIX: C.3 EXAMPLE COLLECTION VEHICLE INFORMATION

### General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

**Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles**

Vehicle class	Overall length (m)	Design width (m)	Design turning radius (m)	Swept circle (m)	Clearance (travel) height (m)
Medium rigid vehicle	8.80	2.5	10.0	21.6	4.5
Heavy rigid vehicle	12.5	2.5	12.5	27.8	4.5

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

### Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

**Table B2.1: Collection vehicle dimensions**


Vehicle type	Rear-loading	Side-loading*	Front-lift-loading	Hook truck	Crane truck
Length overall (m)	10.5	9.6	11.8	10.0	10.0
Width overall (m)	2.5	2.5	2.5	3.0	2.5
Travel height (m)	3.9	3.6	4.8	4.7	3.8
Operational height for loading (m)	3.9	4.2	6.5	3.0	8.75
Vehicle tare weight (t)	13.1	11.8	16.7	13.0	13.0
Maximum payload (t)	10.0	10.8	11.0	14.5	9.5
Turning circle (m)	25.0	21.4	25.0	25.0	18

\* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

### Rear-loading collection vehicles


These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.

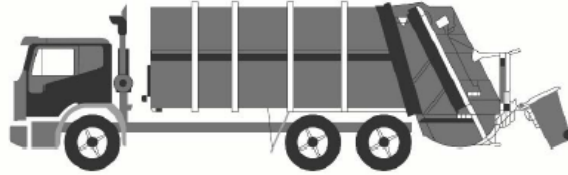

Rear-loading waste collection vehicle

### Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.

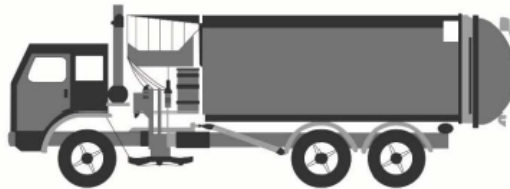

Side-loading waste collection vehicle

### Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

### Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

## APPENDIX D: SECONDARY WASTE MANAGEMENT PROVISIONS



## APPENDIX: D.1 EXAMPLE HANDHELD BIN MOVERS

**moveXX**  
 smart electric tugs

### MOVEXX T2500 BIN MOVER BATTERY ELECTRIC

MoveXX T2500 Tow Tug is an extremely user friendly battery powered mobile towing unit that is ideal for applications where trolleys and rolling objects need to be moved from one place to another simply, efficiently and without physical effort. Some standard features included are: battery indicator, on board battery charger, battery, adjustable handle, dual speed and electric brake.

These units are fitted with an electromagnetic brake system for use on ramps and slopes

**Features**

- Electromagnetic brake for use on ramps and slopes
- Adjustable height handle



SPECIFICATION				
MODEL	DIMENSIONS (MM)	OPTIONS	PULL - PUSH CAPACITY (KG)	BATTERY
T2500-D	511 (w) x 757 (l)	* Centre mount 2x 240 lt. wheelie bin attachment	<b>2500</b>	AGM batteries 2x 85AH up to 8 hrs continuous operation
TOWING CAPACITY - ON FLAT GROUND ( all models)			TOWING CAPACITY - SLOPE ( all models)	
Towing up to 4x 660 lt. Wheelie Bin			Towing up to 2x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
Towing up to 4x 1100 lt. Wheelie Bin			Towing up to 1x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
**Electromagnetic brake for use on ramps and slopes				



*Please Note: This is an example only – please contact supplier for specific recommendations.*

Source: Sitecraft - [www.sitecraft.net.au](http://www.sitecraft.net.au)



## APPENDIX: D.2 EXAMPLE SEATED BIN MOVERS



### MOTREC MT180 36V BATTERY ELECTRIC BIN MOVER

This hardworking tow device delivers outstanding performance. With its efficient motor and 4,500kg push-pull capacity. The MT180 is ideal for moving bin trailer also narrow enough to fit through most door openings. From its all-steel construction to its all-wheel braking, this tow tractor is built for years of heavy use in total comfort and safety. All this combined with superior AC technology makes short work of tough requests.

#### Features

- Front & rear brakes
- Pneumatic Tyres
- Comfortable ergonomic adjustable seat
- Complete with headlight, break lights, tailing lights & horn



### SPECIFICATION

MODEL	DIMENSIONS (MM)	OPTIONAL EXTRAS	PULL - PUSH CAPACITY (KG)	BATTERY
MT180 36V	760 (w) x 2030 (l) x 1160 (h)	Flashing light on pole Conditional registration kit Cabin includes windscreen Weather Curtains	<b>4500</b>	48V TPPL battery pack, 157AH

#### TOWING CAPACITY - ON FLAT GROUND / SLOPE ( all models) ( all models)

Towing up to 5x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)

Towing up to 4x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)



*Please Note: This is an example only – please contact supplier for specific recommendations.*

Source: Sitecraft - [www.sitecraft.net.au](http://www.sitecraft.net.au)

## APPENDIX: D.3 EXAMPLE BIN TRAILERS



### BIN TRAILER WITH ALUMINUM RAMP

Bin trailer suitable for moving 240lt, 660lt and 1,100lt bins including a 1200mm rear ramp complete with locking latches and gas strut assist. Height draw bar fitted with a jockey wheel large pneumatic tyres with precision bearing hubs



#### SPECIFICATION

MODEL	DIMENSION (MM)	SUITABLE FOR MOVING	PART NUMBERS	REAR RAMP DIMENSION (MM)
4x Bins Trailer	Internal - 1560 (l) x 1200 (w)	<b>4x 240lt.</b> Wheelie Bin	78811604	1200mm rear ramp complete with positive locking and gas strut assist
	External - 2300 (l) x 1500	<b>2x 660lt.</b> Wheelie Bin		
		<b>1x 110lt.</b> Wheelie Bin		
6x Bins Trailer	Internal - 2350 (l) x 1200 (w)	<b>6x 240lt.</b> Wheelie Bin	78811065	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3100 (l) x 1500 (w)	<b>3x 660lt.</b> Wheelie Bin		
		<b>2x 1100lt.</b> Wheelie Bin		
8x Bins Trailer	Internal - 3200 (l) x 1200 (w)	<b>8x 240lt.</b> Wheelie Bin	78811066	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3900 (l) x 1500 (w)	<b>4x 660lt.</b> Wheelie Bin		
		<b>3x 1100lt.</b> Wheelie Bin		
10x Bins Trailer	Internal - 3900 (l) x 1200 (w)	<b>10x 240lt.</b> Wheelie Bin	78811067	1200mm rear ramp complete with positive locking and gas strut assist
	External - 4600 (l) x 1500 (w)	<b>5x 660lt.</b> Wheelie Bin		
		<b>4x 1100lt.</b> Wheelie Bin		

#### OPTIONS

- Full registration
- Upgrade Includes : Lights | Wiring | Suspension | aaa Tyres | Compliance Plate

*Please Note: This is an example only – please contact supplier for specific recommendations.*

Source: Sitecraft - [www.sitecraft.net.au](http://www.sitecraft.net.au)

APPENDIX: D.4 EXAMPLE BIN TOWING ATTACHMENTS



# UNIVERSAL BIN TOWING ATTACHMENTS

SUITE 660LT / 1100LT WHEELIE BINS

## PARTS & FEATURES

### Front Only - Part Number: 78811672

- Suit Sulo & Otto 600lt / 1100lt MGBs
- Spring loaded draw bar folds up
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

### Rear Only - Part Number: 78811673

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

### For Steel Bin Front Only - Part Number: 78811781

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

### Direction Lock : 53191001


- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used



*Please Note: This is an example only – please contact supplier for specific recommendations.*

Source: Sitecraft - [www.sitecraft.net.au](http://www.sitecraft.net.au)

APPENDIX: D.5 EXAMPLE SOURCE SEPARATION RECEPTACLES

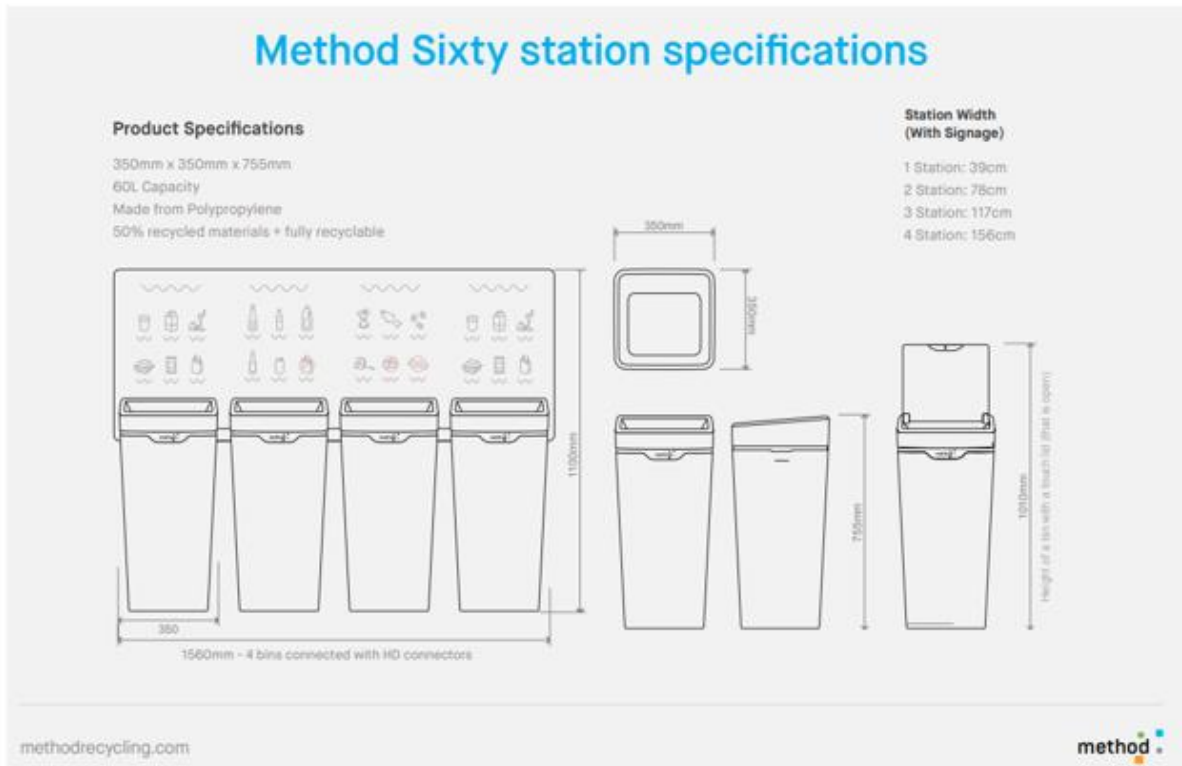

Source: Method Recycling - [www.methodrecycling.com](http://www.methodrecycling.com)