



Morris Goding
Access Consulting

Flower Power

277 Mona Vale Road, Terrey
Hills

Final v1.0

24 August 2023



Morris Goding
Access Consulting

REPORT REVISIONS		
Date	Version	Drawing No / Revision
25.01.22	Draft	Pre-DA drawing set – Issued For Review. Prepared by Leffler Simes Architects.
04.03.22	Final	Final DA drawing set issued. Prepared by Leffler Simes Architects.
05.06.23	Draft v2.0	Draft Report (new DA documents). Prepared by Leffler Symes.
24.08.23	V1.0	Final Report issued.

This report prepared by:

Reviewed by:

DocuSigned by:
Peter Bedford
445F133707634B6...

Peter Bedford
Senior Access Consultant
MGAC(Australia) Pty Ltd

DocuSigned by:
Anthony Leuzzi
C7E1E55B20864D3...

Anthony Leuzzi
Associate Director
MGAC(Australia) Pty Ltd



Morris Goding
Access Consulting

Table of contents

1. Executive Summary	4
2. Introduction	5
2.1 Background	5
2.2 Objectives	5
2.3 Limitations	5
2.4 Accessibility of Design	6
2.5 Statutory Requirements	6
3. General Access Planning Considerations	8
4. Ingress & Egress	10
4.1 External Linkages	10
4.2 Entrances	11
4.3 Emergency Egress	11
5. Paths of Travel	11
5.1 Circulation Areas	11
5.2 Passenger Lifts	12
5.3 Stairs & Ramps	12
6. Facilities & Amenities	13
6.1 Sanitary Facilities	13
6.2 Common Areas	13
6.3 Car Parking	14
7. Conclusion	15



Morris Goding
Access Consulting

1. Executive Summary

The Access Review Report is a key element in the design development of the proposed Flower Power retail outlet located at 277 Mona Vale Road, Terrey Hills and an appropriate response to the AS1428 series, Building Code of Australia (BCA), DDA Access to Premises Standards (including DDA Access Code) and ultimately the Commonwealth Disability Discrimination Act (DDA).

Morris-Goding Accessibility Consulting has prepared the Access Report to provide advice and strategies to maximise reasonable provisions of access for people with disabilities.

The review will ensure that ingress and egress, paths of travel, circulation areas, and sanitary facilities comply with relevant statutory guidelines, and in addition, compliance with a higher level of accessibility and inclusiveness benchmarks set by the project.



2. Introduction

2.1 Background

Statewide Project Management on behalf of Syesun Pty Ltd has engaged MGAC(Australia) Pty Ltd to provide a design review of the proposed retail outlet, located at 277 Mona Vale Road, Terrey Hills. The development consists of a single storey retail outlet and associated carparking to be used by Flower Power. A Draft and Final version of a DA Access Review Report was provided by this office on 25 January 2022 and 4 March 20222 respectively; since that time the project has been re-designed and a new set of documents prepared and issued for our assessment.

The proposed development falls under a number of BCA classifications:

- Class 6 (retail)
- Class 7a (carpark)

The requirements of the investigation are to:

- Review supplied drawings of the proposed development;
- Provide a report that will analyse the provisions of disability design of the development, and
- Recommend solutions that will ensure the design complies with the Disability Discrimination Act (DDA), Building Code of Australia (BCA), relevant Australian Standards, and enhanced benchmark requirements set by the project.

2.2 Objectives

The Report seeks to ensure compliance with statutory requirements and enhanced benchmark requirements set by the project. The Report considers user groups, who include staff and members of the public. The Report attempts to deliver equality, independence and functionality to people with a disability inclusive of:

- People with a mobility impairment (ambulant and wheelchair);
- People with a sensory impairment (hearing and vision); and
- People with a dexterity impairment

The Report seeks to provide compliance the Disability Discrimination Act 1992. In doing so, the report attempts to eliminate, as far as possible, discrimination against persons on the ground of disability.

2.3 Limitations

This report is limited to the accessibility provisions of the building in general. It does not provide comment on detailed design issues, such as: internals of accessible/ambulant toilet, fit-out, lift specification, slip resistant floor finishes, door schedules, hardware and controls, glazing, luminance contrast, stair nosing, TGSIs, handrail design, signage etc. that will be included in construction documentation.



2.4 Accessibility of Design

The proposed design will utilise the Federal Disability Discrimination Act (DDA), Disability (Access to Premises – Buildings) Standards 2010, BCA/DDA Access Code, Universal Design principles, the AS 1428 Series, and other design guidelines, to develop appropriate design documentation, to provide reasonable access provisions for people with disabilities.

The Project Architect and an appropriately qualified accessibility consultant will examine key physical elements during design development stage, to identify physical barriers and incorporate solutions as a suitable response to disability statutory regulations and other project objectives.

The design will be developed to ensure the principles of the DDA are upheld. Under the DDA, it is unlawful to discriminate against people with disabilities in the provision of appropriate access, where the approach or access to and within a premise, makes it impossible or unreasonably difficult for people with disabilities to make use of a particular service or amenity.

The design will comply with the requirements of the DDA Access to Premises Standards and include requirements for accessible buildings, linkages and the seamless integration of access provisions compliant with AS1428.1. The developed design will consider all user groups, who include members of the public, visitors and staff members.

2.5 Statutory Requirements

The statutory and regulatory guidelines to be encompassed in the developed design to ensure effective, appropriate and safe use by all people including those with disabilities will be in accordance with:

- Federal Disability Discrimination Act (DDA);
- Disability (Access to Premises – Buildings) Standards 2010;
- Building Code of Australia (BCA) Part D4, E3D7 and E3D8, F4;
- AS 1428.1:2009 - (General Requirement of Access);
- AS 1428.4.1:2009 - (Tactile Ground Surface Indicators);
- AS/NZS 2890.6:2009 - (Parking for People with Disabilities);
- AS 1735.12:1999 - (Lift Facilities for Persons with Disabilities);
- Northern Beaches Local Council DCP

Please note that there are also additional advisory standards (not currently referenced by BCA or DDA Premises Standards) as well as other relevant guidelines that will be considered, as relevant to promote equity and dignity in line with over-arching DDA principles and aspirational objectives. These include:

- Universal Design Principles;



Morris Goding
Access Consulting

- Human Rights Commission (HEREOC)
- Advisory Note February 2013 on streetscape, public, outdoor areas, fixtures, fittings and furniture;
- AS1428.2:1992 Enhanced and Additional requirements;
- AS1428.4.1 Draft Way-finding Standard;
- AS3745:2010 – Planning for Emergencies in Facilities (to assist with design strategies for provision for escape for people with disability that may require assistance)



3. General Access Planning Considerations

The Disability Discrimination Act 1992 (DDA) is legislation that protects the rights of all people. The Act makes disability discrimination unlawful and promotes equal rights, equal opportunity and equal access for people with disabilities. The Australian Human Right Commission is the governing body who control and enforce DDA compliance.

Nevertheless, building elements that provide insufficient accessible provisions for people with disabilities remain subject to the DDA. The improvement of non-compliant building elements and areas to meet current access requirements will mitigate the risk of a DDA complaint be made against the building owner.

Since 1 May 2011, the Commonwealth's Disability (Access to Premises – Buildings) Standards 2010 (DDA Premises Standards) apply to all new building works and to affected parts of existing buildings.

The DDA Premises Standards' requirements (DDA Access Code) are mirrored in the access provisions of the BCA. New building work and affected parts must comply with the DDA Premises Standards and AS1428.1-2009 in the same manner as they would comply with the BCA by meeting deemed-to-satisfy provisions or by adopting an alternative solution that achieves the relevant performance requirements.

By utilising the AS 1428 suite of Standards, the overall aim is to provide continuous accessible paths of travel to connect the proposed development to and through public domain areas and between associated accessible buildings in accordance with the DDA Access Code.

MGAC supports the use and consideration of universal design (UD) principles into the design to maximize access for all people. We will assist the design team to incorporate UD principles where possible within the project, while still meeting mandatory compliance requirements.

A UD approach has numerous benefits for the client, for businesses within the building, for individual users and for society in general. An inclusive environment that can be accessed, understood and used by as many people as possible, is good business sense, is more sustainable and is socially progressive, in line with the aims of the DAP.

Universal design principles consider the needs of a broad range of people including older people, families with children and pushing prams, people from other cultures and language groups, visitors in transit and people with disability. By considering the diversity of users, the design will embed access into and within it, so that benefits can be maximized, without adding on specialized 'accessible' features that can be costly, visually unappealing and may perpetuate exclusion and potential stigma.

The seven key Universal design principles to consider in the on-going design include:

- Principle 1: Equitable Use
- Principle 2: Flexibility in Use
- Principle 3: Simple and Intuitive Use
- Principle 4: Perceptible Information



Morris Goding
Access Consulting

- Principle 5: Tolerance for Error
- Principle 6: Low Physical Effort
- Principle 7: Size and Space for Approach and use



4. Ingress & Egress


4.1 External Linkages

The BCA and DDA Premises Standards contain requirements for site approaches for the use of persons with disabilities. These requirements can be summarised as follows:

- It will be necessary to provide an accessible path of travel from main pedestrian entry points at the site allotment boundary to all building entrances compliant with AS1428.1:2009.
- An accessible path of travel between buildings (or parts of buildings) that are connected by a pedestrian linkage, within the site allotment boundary, compliant with AS1428.1:2009 is also required.
- An accessible path of travel to building entrances (required to be accessible) from associated accessible car-parking bays, compliant with AS1428.1:2009 is required.

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. An accessible path of travel has been provided from the site boundary to the building entry (refer part site plan below). Further work will be required during design development stage to ensure appropriate outcomes are achieved.

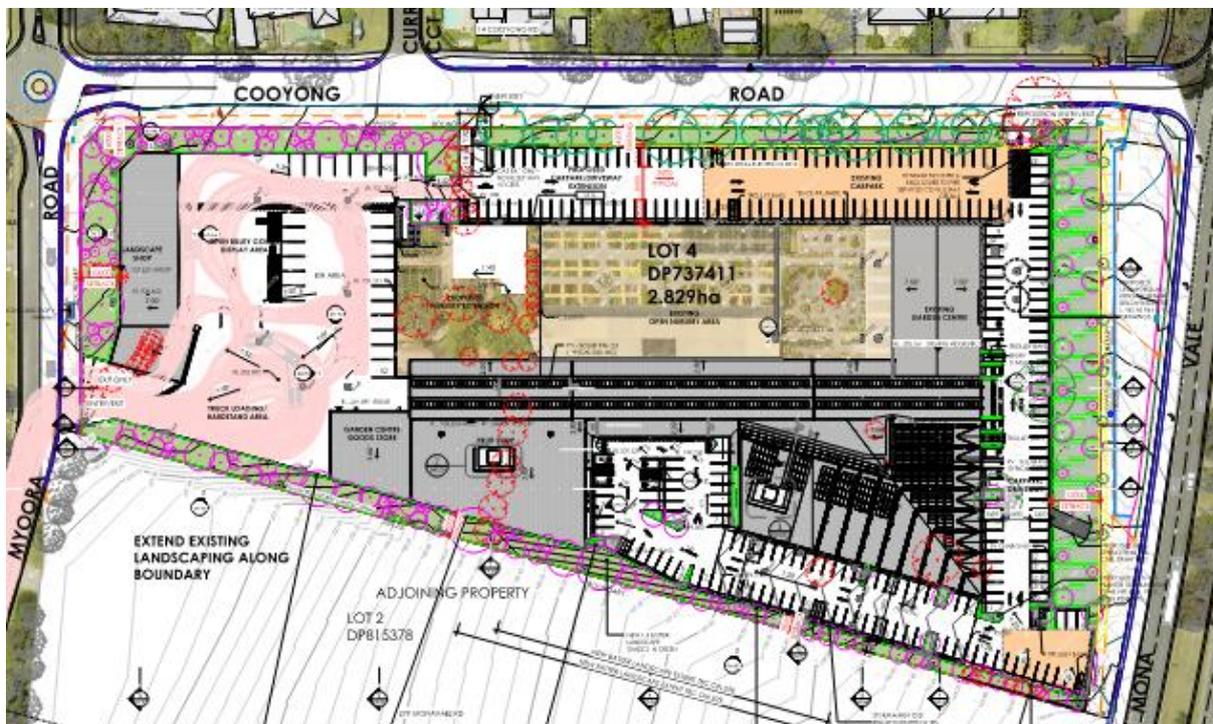



4.2 Entrances

The BCA and DDA Premises Standards contain requirements for building entry for the use of persons with disabilities. These requirements can be summarised as follows:

- Access is required through at least 50% of entrances, including the principal pedestrian entrance/s to all buildings or parts of buildings (ie. when they have a separate function and/or use eg. external retail tenancy). Note it is preferred that all entrances are accessible.
- A non-accessible entry cannot be located more than 50m distance from an accessible entry (for buildings greater than 500m²).
- All accessible doors to have 850mm min. clear width opening and suitable door circulation area, compliant with AS1428.1:2009. Note: Manual doors require lightweight door forces to be operable by people with disabilities (20N max.). We recommend that main entrances include automated sliding doors to be used where possible. Revolving doors are not accessible, if maintained an alternate accessible door is required adjacent.
- An accessible path of travel eg. ramp or lift needs to be provided adjacent (or in reasonable proximity) to any stair access. Note: providing choice of access route directly adjacent so that people can start and finish in the same location/travel similar route promotes inclusion and UD principles.

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. On the basis of the current level of detail all access requirements appear capable of achieving compliance. Further work will be required during design development stage to ensure appropriate outcomes are achieved.

4.3 Emergency Egress

BCA 2022 Part D3D22 has requirements for all fire-isolated egress stairs from areas required to be accessible (not communication stairs) to include at least one continuous handrail designed to be compliant with AS1428.1 Clause 12. Provision of an off-set tread at the base of stair flights or an extended mid-landing that will allow a 300mm extension clear of egress route is considered appropriate for achieving a consistent height handrail (without vertical or raked sections). Such an off-set tread configuration has been shown at the majority of stairs and would appear to be possible elsewhere, subject to further detail design.

It is noted that no fire-isolated stairways are proposed in the development.

5. Paths of Travel

5.1 Circulation Areas

The BCA and DDA Premises Standards contain requirements for circulation areas for the use of persons with disabilities. These requirements can be summarised as follows:



Morris Goding
Access Consulting

- Wheelchair passing bays (1800mm width x 2000 length) are also required when a direct line of sight is not available and are to be provided at 20m max. intervals along access-ways.
- Turning spaces (at least 1540mm W x 2070mm L) are required within 2m of every corridor end and at 20m.max intervals along all access-ways. This is needed for wheelchairs to make a 180 degree turn, compliant with AS1428.1:2009.
- All common-use doors (ie. not excluded under Part D3.4) to have 850mm min. clear width opening (each active door leaf) and suitable door circulation area, compliant with AS1428.1:2009.
- All common-use corridors and accessible paths of travel to be at least 1000mm min. width when travelling in linear direction. Note: Increased clear width paths of travel required for doorway circulation, turning areas etc.

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. On the basis of the current level of detail all access requirements appear capable of achieving compliance. Further work will be required during design development stage to ensure appropriate outcomes are achieved.

5.2 Passenger Lifts

The BCA and DDA Premises Standards contain requirements for passenger lifts and circulation areas for the use of persons with disabilities.

It is noted that no passenger lifts are envisaged in the proposal.

5.3 Stairs & Ramps

The BCA and DDA Premises Standards contain requirements for stairs and ramps for the use of persons with disabilities. These requirements can be summarised as follows:

- Ramps are to have maximum 1:14 gradient with landings at no more than 9 metre intervals
- Ramps are to have handrails on both sides with minimum 1 metre clearance in accordance with AS1428.1
- Landings are to have 1200mm length with 1500mm length at 90 degree turns
- Stairs are to have handrails on both sides in accordance with AS1428.1
- Stairs and ramps are to be offset to ensure no encroachment of handrail extensions into from transverse path of travel at top and bottom of stair/ramp



Morris Goding
Access Consulting

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. It is noted that some ramps do not comply with the provisions of AS1428.1-2009, particularly alongside the proposed Pet Shop; we refer to the comments made on pdfs of the drawings for specific issues. Further work will be required during design development stage to ensure appropriate outcomes are achieved.

6. Facilities & Amenities

6.1 Sanitary Facilities

The BCA and DDA Premises Standards contain requirements for sanitary facilities suitable for the use of persons with disabilities. These requirements can be summarised as follows:

- For Class 5, 6, 7a, 9b: Provide at least 1 unisex accessible toilet, adjacent to every bank of toilets (where provided) on each storey, compliant with AS1428.1 under BCA/DDA Access Code part F2.4. If more than 1 toilet bank provided on each level, accessible toilet is required at 50% min. of toilet banks at each level.
- An even number of left hand (LH) and right hand (RH) transfer WC pans (accessible toilets) is required within the building. Alternating LH/RH layouts on each subsequent level is the most appropriate and inclusive approach.
- Accessible WC requires 2300mm x 1900mm around the pan with the basin to sit outside this area in accordance with AS1428.1.
- An ambulant cubicle is required within every standard toilet bank adjacent to an accessible toilet under DDA Access Code Part F2.4 compliant with AS1428.1:2009.

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. On the basis of the current level of detail all access requirements appear capable of achieving compliance. Further work will be required during design development stage to ensure appropriate outcomes are achieved.

6.2 Common Areas

The BCA and DDA Premises Standards contain requirements for common use areas suitable for the use of persons with disabilities. These requirements can be summarised as follows:

- Accessibility is required to common use courtyards within buildings
- Wheelchair access is required to any external and outdoor terrace areas including roof terraces compliant with AS1428.1.



Morris Goding
Access Consulting

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements. On the basis of the current level of detail all access requirements appear capable of achieving compliance. Further work will be required during design development stage to ensure appropriate outcomes are achieved.

6.3 Car Parking

The BCA and DDA Premises Standards contain requirements for parking which are applicable to this project. These requirements can be summarised as follows:

- Class 6 retail development: Provide 1 accessible car bay for every 50 car bays or part thereof, compliant with AS2890.6.
- Accessible car bays require 2.4 metre with 2.4 metre shared area.
- All accessible car bays to be located near relevant lifts and/or associated building entry points to minimise distance to relevant lift and ensure accessible path of travel between these areas.
- Ensure 2.5m min. height clearance, compliant with AS2890.6 fig 2.7 over accessible car bays with 2.2 m min. vertical clearance leading to the accessible and adaptable unit car bays (Note: consideration for 2.3 or 2.4m min. height preferred for higher vans/adapted vehicles is recommended as good practice).

Assessment

MGAC has reviewed the drawings and documentation in relation to the aforementioned requirements.

It is noted that a total of 259 carparking spaces are proposed in association with the proposed building; the BCA requires 1 accessible carparking space for each 50 spaces provided, therefore 5 accessible carparking spaces are required. 8 accessible carparking spaces are provided and therefore compliance is achieved. Further work will be required during design development stage to ensure appropriate outcomes are achieved.



Morris Goding
Access Consulting

7. Conclusion

MGAC has assessed the proposed scheme for the Flower Power retail outlet located at 277 Mona Vale Road, Terrey Hills. The proposed drawings indicate that accessibility requirements, pertaining to external site linkages, building access, common area access, sanitary facilities and parking can be readily achieved. It is advised that MGAC will work with the project team as the scheme progresses to ensure appropriate outcomes are achieved in building design and external domain design.