


Industrial Sectional

P7 INDUSTRIAL (P7)



Aluminium sectional door suitable for applications such as factory and warehouse, underground car parks, residential and commercial developments.

PANEL

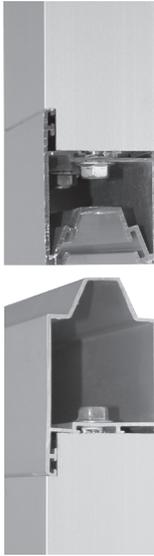

1.5mm, box shaped aluminium extruded frame, screwed together.
Range of insert options available.
Panels assembled with zinc plated hinges and hangers.

SIZE	MINIMUM	MAXIMUM
HEIGHT	1370mm	4500mm
WIDTH	1800mm	7620mm

Reinforcing on doors over 3800mm wide.

BOTTOM RAIL

Aluminium bottom rail with weatherseal.
Taper: Optional. Fixed tapers 20mm-70mm. Hinged tapers 80mm-460mm.

GUIDES

Supplied with track 1.5mm Galvabond® Z250 guides.
Windlocking: No.

SPRINGS

Spring life 20,000 cycles.
OPTIONAL: High cycle springing for frequent use applications.

OPERATION

Doors can be operated manually or electrically operated.

LOCKING

Locking not supplied as standard, but available as an option.


LIFTING SYSTEMS

- Standard
- Low Headroom Independent Single Track
- Low Headroom Independent Double Track
- Low Headroom Front & Rear Mount Double Track
- Low Headroom Double Track Follow the roof
- Standard Headroom Independent
- Rear Torsion – Double Track
- Standard headroom follow the roof
- Vertical lift
- High lift
- High lift follow the roof

FINISHES

Frame and inserts available in aluminium finish or powder coated.

INSERT OPTIONS

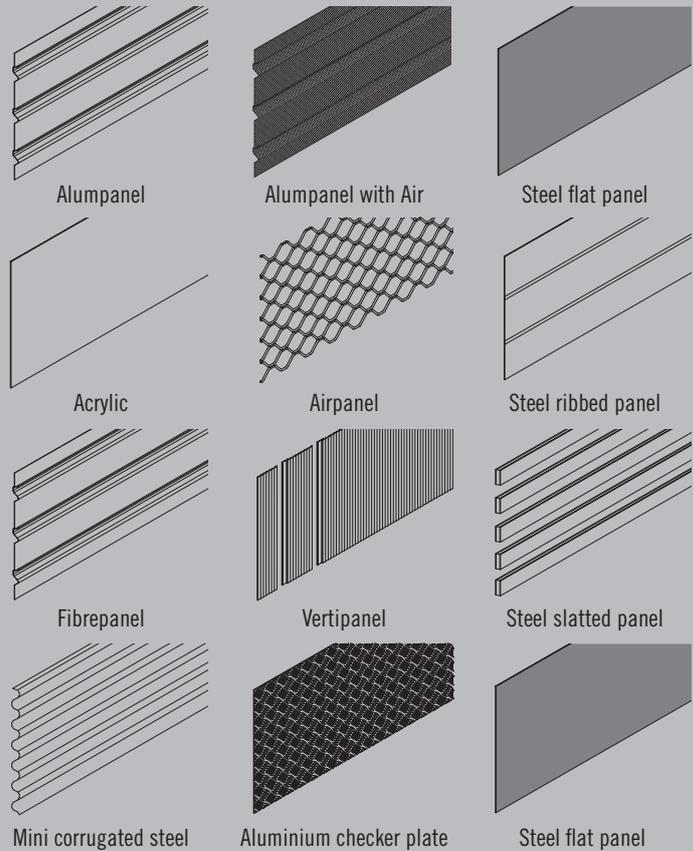

INSTALLATION REQUIREMENTS

INSTALLATION CLEARANCES – STANDARD HEADROOM								
		HEADROOM (MM)						SIDEROOM (MM)
		RECOMMENDED			WITH OPENER*			RECOMMENDED EACH SIDE
From (incl.) Height	To (incl.) Height	Up to 4710W	4710 to 5285W	Over 5285W	Up to 4710W	4710 to 5285W	Over 5285W	
1370	2440	340	340	390	390	390	440	120
2445	3050	340	340	390	390	390	440	120
3055	3660	340	390	390	390	440	440	120
3665	4500	390	390	390	440	440	440	120

INSTALLATION CLEARANCES – LOW HEADROOM									
		HEADROOM (MM)						SIDEROOM (MM)	
		RECOMMENDED			WITH OPENER*			RECOMMENDED EACH SIDE	
From (incl.) Height	To (incl.) Height	Up to 4710W	4710 to 5285W	Over 5285W	Up to 4710W	4710 to 5285W	Over 5285W	Up to 15m²	Over 15m²
1370	2440	190	190	190	240	240	240	155	195
2445	3050	190	190	200	240	240	250	155	195
3055	3660	190	200	200	240	250	250	155	195
3665	4500	200	200	200	250	250	250	155	195

Information relating to product measurements, colours and specifications is accurate at the time of print and is subject to slight variations resulting from the manufacturing process. B&D reserves the right to change product specifications at any time. Installation measurements are approximate and may vary depending on application and other factors, including the opening and structure. Take care when handling and storing slats. Damage to the slats can affect door performance.

Installation should only be performed by a professional garage door installer. Installers should refer to the instruction manual for this product prior to commencing installation. The instruction manual contains important safety and other information that must be followed when installing the product.



Doors & Openers®

THERE'S SO MUCH MORE BEHIND A B&D DOOR

Call 13 62 63 or visit www.bnd.com.au for further information.

B&D Doors is a division of B&D Australia Pty Ltd ABN 25 010 473 971 © 2013 B&D Australia