


Stockpile soil if suitable for reuse or provide landscape soil that meets Australian Standards to replace site top soil. Install plant material as per plan. Keep planting areas moist, stake plants as required and 'water in'. Fertilise exotic plants with Osmocote 'Plus' 8-9 month slow release fertiliser and native plants with Osmocote zero Phosphorus 5-6 month slow release. Apply as per manufacturer's instructions.

Gardens are to be mulched to a 75mm depth using Native Leaf Litter Mulch or wood chip that meets Australian Standards. Keep mulch clear of all plant stems.

Level turf areas and spread lawn food as per manufacturers instructions. Lay turf, water well and roll with turf roller. Keep moist at all times.

Fill gaps and depressions with sand and allow 4 weeks before

Paving to be laid on compacted surface of 50mm sand bedding on 100mm compacted fine crushed rock. Ensure ground below is also compacted. Check paving and setout prior to laying. Retaining walls and concrete driveways / paths to engineers details.

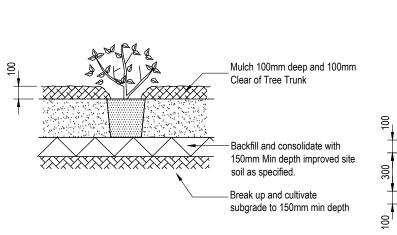

TYPICAL SHRUB PLANTING DETAIL

Hessian Ties

40x40 Timber Stakes

Apply Slow Release Fertiliser
to Manufacturers Instructions

Mulch 100mm deep and 100mm
Clear of Tree Trunk

Existing Soil Conditioned to
Australian Standards

Gardens Cultivated an Extra 100mm
Sub soil

TYPICAL PLANTING DETAIL



PROPOSED POOL AND ASSOCIATED WORKS MICHAEL AND DANIELA CALO LOT 17 SEC A DP8139 No. 176 HEADLAND ROAD NORTH CURL CURL 2099

DWG NAME

LANDSCAPE PLAN

DATE	SCALE AT A3	JOB NUMBER	DWG NUMBER
DEC 2023	1:200	RADD23089	P4