

6 March 2020



Boston Blyth Fleming Pty Ltd  
Suite 1 9 Narabang Way  
BELROSE NSW 2085

Dear Sir/Madam

**Application Number:** DA2019/1173  
**Address:** Lot A DP 411784 , 3 Berith Street, WHEELER HEIGHTS NSW 2097  
**Proposed Development:** Demolition of existing development and construction of a Seniors Housing development comprising 6 x infill self care housing units and basement parking, and strata subdivision

Please find attached the Notice of Determination for the above mentioned Application.

Please note that the consent is not operative until the following deferred commencement conditions have been satisfied:

- Deferred Commencement Approval - Surrender Consent

The evidence required to satisfy these conditions must be submitted to Council within three (3) months of the date of this Deferred Commencement Consent. This evidence is to be submitted along with a completed 'Deferred Commencement Document Review Form' (available on Council's website) and the application fee, as per Council's Schedule of Fees and Charges.

Upon satisfaction of the deferred commencement conditions, the consent shall be operative for Development Application DA2019/1173 subject to the conditions listed within the Notice of Determination.

(Note: Implementing the development consent prior to written confirmation may result in legal proceedings. If such proceedings are required, Council may seek all costs associated with such proceedings, as well as any penalty or Order that the Court may impose. No Construction Certificate can be issued until all conditions, including this condition have been satisfied).

**You may apply for modification of the conditions attached to your Deferred Commencement Consent under Section 4.16(3) of the Environmental Planning and Assessment Act, 1979.**

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

**Please read your deferred commencement consent carefully** as you are required to undertake and complete specific tasks before the consent becomes operative. A Construction Certificate cannot be issued and subsequent works cannot commence until Council acknowledges, in writing, that the

conditions for deferred commencement have been satisfied.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to [council@northernbeaches.nsw.gov.au](mailto:council@northernbeaches.nsw.gov.au)

Regards,



Anna Williams  
**Manager Development Assessments**

## NOTICE OF DETERMINATION

<b>Application Number:</b>	DA2019/1173
<b>Determination Type:</b>	Development Application

### APPLICATION DETAILS

<b>Applicant:</b>	Boston Blyth Fleming Pty Ltd
<b>Land to be developed (Address):</b>	Lot A DP 411784 , 3 Berith Street WHEELER HEIGHTS NSW 2097
<b>Proposed Development:</b>	Demolition of existing development and construction of a Seniors Housing development comprising 6 x infill self care housing units and basement parking, and strata subdivision

### DETERMINATION - APPROVED - DEFERRED COMMENCEMENT CONSENT

<b>Made on (Date)</b>	04/03/2020
<b>Consent to operate from (Date):</b>	Once Council is satisfied as to those matters specified in the deferred commencement conditions, Council will nominate by way of written notice to the Applicant, the date from which the consent operates
<b>Consent to lapse on (Date):</b>	5 years from the operation date of Consent

### Detail of Conditions

*The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.*

### Note:

*If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.*

## DEFERRED COMMENCEMENT CONDITIONS

### 1. Deferred Commencement Approval - Surrender Consent

The applicant shall surrender to Council Development Consent No: DA2018/1828 in accordance with the requirements of the Environmental Planning and Assessment Act 1979.

Evidence required to satisfy the deferred commencement condition/s must be submitted to Council within three (3) months of the date of this consent, or the consent will lapse in accordance with Section 95 of the Environmental Planning and Assessment Regulation 2000. This evidence is to be submitted along with a completed 'Deferred Commencement Document Review

Form' (available on Council's website) and the application fee, as per Council's Schedule of Fees and Charges.

Upon satisfaction of the deferred commencement condition/s, the following conditions apply:

## DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

### 2. Approved Plans and Supporting Documentation

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

#### a) Approved Plans

Architectural Plans - Endorsed with Council's stamp		
Drawing No.	Dated	Prepared By
A03 Basement Floor Plan	7.11.2018	Barry Rush & Associates Pty Ltd
A05 Site / Ground Floor Plan*	7.11.2018	Barry Rush & Associates Pty Ltd
A06 First Floor Plan	7.11.2018	Barry Rush & Associates Pty Ltd
A07 Roof Plan	7.11.2018	Barry Rush & Associates Pty Ltd
A08 Elevations	7.11.2018	Barry Rush & Associates Pty Ltd
A09 Elevations* & Sections A-A	7.11.2018	Barry Rush & Associates Pty Ltd
A11 External Colour Schedule*	7.11.2018	Barry Rush & Associates Pty Ltd

\*Subject to consistency between plans and schedule details shown on the architectural plans and conditions of consent.

Engineering Plans		
Drawing No.	Dated	Prepared By
A04 Footpath Plan (subject to conditions requiring amendment)	7.11.2018	Barry Rush & Associates Pty Ltd
Sheet 1A Stormwater Management Plan (subject to conditions requiring	10.9.2018	Taylor Consulting

amendment)		
Sheet 2 Stormwater Management Details (subject to conditions requiring amendment)	21.8.2018	Taylor Consulting

<b>Reports / Documentation – All recommendations and requirements contained within:</b>		
<b>Report No. / Page No. / Section No.</b>	<b>Dated</b>	<b>Prepared By</b>
Arborist Report - 3 Berith Street	12.6.2019	Ross Jackson
Basix Certificate 952573M_03	18.11.2019	Building Sustainability Assessments
Geotechnical Assessment	17.10.2019	White Geotechnical Group
Peer Review of the White Geotechnical Report Ref: 32859YFlet	13.12.2019	JK Geotechnics
Additional Geotechnical Report Ref:32859SFprt	20.01.2020	JK Geotechnics
Access Report - 3 Berith Street	15.10.2018	Accessibility Solutions
Design Compliance Report V2	1.10.2018	Private Certifiers Australia

b) Any plans and / or documentation submitted to satisfy the Conditions of this consent.

c) The development is to be undertaken generally in accordance with the following:

<b>Landscape Plans</b>		
<b>Drawing No.</b>	<b>Dated</b>	<b>Prepared By</b>
1921.GD01 Landscape Plan (subject to amendments to address earthworks and accessible footpath conditions)	10.9.2018	Greenland Design
192.GD.02 Landscape Details and Specification	10.9.2018	Greenland Design

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

### 3. Prescribed Conditions

- All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:

- (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
- (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
- (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.

- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
  - (i) in the case of work for which a principal contractor is required to be appointed:
    - A. the name and licence number of the principal contractor, and
    - B. the name of the insurer by which the work is insured under Part 6 of that Act,
  - (ii) in the case of work to be done by an owner-builder:
    - A. the name of the owner-builder, and
    - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.

- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
  - (i) protect and support the adjoining premises from possible damage from the excavation, and
  - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
  - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
  - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

#### 4. **General Requirements**

- (a) Unless authorised by Council:  
Building construction and delivery of material hours are restricted to:

- 7.00 am to 5.00 pm inclusive Monday to Friday,
- 8.00 am to 1.00 pm inclusive on Saturday,
- No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (c) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (d) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (e) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (f) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (g) No building, demolition, excavation or material of any nature and no hoist, plant and machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (h) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.
- (i) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.
- (j) Prior to the commencement of any development onsite for:
  - i) Building/s that are to be erected
  - ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
  - iii) Building/s that are to be demolished
  - iv) For any work/s that is to be carried out
  - v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

## FEES / CHARGES / CONTRIBUTIONS

### 5. Policy Controls

Northern Beaches 7.12 Contributions Plan 2019

A monetary contribution of \$28,299.00 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan 2019. The monetary contribution is based on a development cost of \$2,829,900.00.

The monetary contribution is to be paid prior to the issue of the first Construction Certificate or Subdivision Certificate whichever occurs first, or prior to the issue of the Subdivision Certificate where no Construction Certificate is required. If the monetary contribution (total or in part) remains unpaid after the financial quarter that the development consent is issued, the amount unpaid (whether it be the full cash contribution or part thereof) will be adjusted on a quarterly basis in accordance with the applicable Consumer Price Index. If this situation applies, the cash contribution payable for this development will be the total unpaid monetary contribution as adjusted.

The proponent shall provide to the Certifying Authority written evidence (receipt/s) from Council that the total monetary contribution has been paid.

The Northern Beaches Section 7.12 Contributions Plan 2019 may be inspected at 725 Pittwater Rd, Dee Why and at Council's Customer Service Centres or alternatively, on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

This fee must be paid prior to the issue of the Construction Certificate. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

### 6. Security Bond

A bond (determined from cost of works) of \$10,000 and an inspection fee in accordance with Council's Fees and Charges paid as security to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).



All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, details demonstrating payment are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)).

Reason: To ensure adequate protection of Council's infrastructure.

7. **Construction, Excavation and Associated Works Bond (Drainage works)**

The applicant is to lodge a bond of \$ 5500 as security against any damage or failure to complete the construction of stormwater drainage works as part of this consent.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's Infrastructure.

8. **Construction, Excavation and Associated Works Security Bond (Crossing / Kerb)**

The applicant is to lodge a Bond of \$ 40000 as security against any damage or failure to complete the construction of any vehicular crossings, kerb and gutter, any footpath works and removal of any redundant driveways required as part of this consent.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's Infrastructure.

9. **Construction, Excavation and Associated Works (Failure to remove waste)**

A bond of \$ 5000 as security against damage to Council's roads fronting the site caused by the transport and disposal of materials and equipment to and from the site.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's Infrastructure.

## CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

10. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in the Geotechnical Investigation Report; White Group, Reference No: J2436, Dated: 17 October 2019, the JK Geotechnical Peer Review Report Ref: 32859YFlet dated 13 December 2019 and the JK Geotechnical Investigation Report Ref: 32859SFprt, Dated: 20 January 2020 are to be incorporated into the construction plans.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

## 11. **Amendments to the Approved Plans**

The following amendments to the approved plans are to be included:

### a) Excavation

i) No excavation for retaining walls / terraces within 1.0m of the north and south side boundaries, or within 3.0m of the east (rear) boundary.

### b) Ancillary Structures

i) The waste room shall be redesigned to comply with Councils Waste Management Plan, noting that bulky goods storage is not required, and be setback 1.0m from the southern side boundary.

ii) Plans detailing the footpath installation along Berith Street are to be amended to reflect the recommendations of the Arboricultural Impact Assessment Report dated 12 June 2019 prepared by Jackson Nature Works with regards to tree protection, offsets from trees and pavement materials to be used. Amended landscape plans are required to show the revision to the accessible footpath.

### c) Seniors Living Buildings

i) The outer wall & roof recess for bedrooms 'B2' and 'B3' for Units 3 and 4 (upper storey) shall be setback an additional 500mm from the side boundaries.

ii) The front balconies for the upper level to Units 3 and 4 are to include 50% open style or glazed or lightweight (infill) balustrade sections facing the street to reduce visual impact on the streetscape.

iii) Secondary colours and material change is to be made to the upper wall side walls for Units 5 and Unit 6 to improve visual interest and design, consistent with the external colours and materials used for Unit 1 to Unit 4.

iv) Privacy treatment to windows and balconies. The kitchen window to Unit 3 on the southern elevation shall be modified to a high level window. Fixed privacy screens angled to prevent direct overlooking to neighbours shall be installed on the following windows / balconies: Unit 3 and 4 bedrooms 1,2 and 3 and Units 5 and 6 the kitchen and living room windows. The northern and southern edge of the balconies to Units 3 and 4.

v) The basement car park design shall be amended to requiring a total of ten (10) car parking spaces, eight (8) residential car parking spaces, two (2) visitor spaces, one (1) residential car park space to be increased to 3.8m in width and all car parking spaces to comply with the requirements for parking with a disability as set out in AS 2890.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue the Construction Certificate

Reason: Reasons: In the interest of protecting residential amenity, the quality of the streetscape and the natural environment and maintaining the requirements of the WDCP and SEPP HSPD.

## 12. **Boundary Identification Survey**

A boundary identification survey, prepared by a Registered Surveyor, is to be prepared in

respect of the subject site.

The plans submitted for the Construction Certificate are to accurately reflect the property boundaries as shown on the boundary identification survey, with setbacks between the property boundaries and the approved works consistent with those nominated on the Approved Plans of this consent.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To ensure all approved works are constructed within the subject site and in a manner anticipated by the development consent.

### 13. **Building Code of Australia Report**

The details and recommendations contained in the Building Code of Australia Report prepared Private Certifiers Australia, dated 1 October 2018 (received by Council on 12 November 2019) are to be taken into consideration as part of the assessment of the Construction Certificate. Details demonstrating compliance are to be provided to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure adequate provision is made for Health, Amenity, access and Fire safety for building occupant health and safety.

### 14. **On-site Stormwater Detention Details**

The Applicant is to provide a certification of drainage plans detailing the provision of on-site stormwater detention in accordance with Northern Beaches Council's WATER MANAGEMENT POLICY, and generally in accordance with the concept drainage plans prepared by Taylor Consulting with the submission of the proposal and including required redesigned of the stormwater drainage is required to be provided by a suitably qualified engineer.

The required re-design of stormwater drainage shall implement the following:

- 1) The site stormwater discharge by gravity shall be directed to a boundary control pit, located within the property and outside of the driveway, and shall be piped from the control pit to a new pit constructed over the existing Council pipeline in Berith Street;
- 2) Connection to Council's pipeline must be in accordance with Council's standard drawing A2 5476/A and a new pit must include a minimum of 1.8 m kerb inlet/lintel;
- 3) The new pit shall be located to the south of a new layback, with a minimum of 1.0 m distance between the new layback wing and the new lintel;
- 4) Where there are any conflicts between the proposed stormwater drainage pipeline from the site and any utility services within the road reserve, all costs related to a potential re-location or lowering of affected utility services shall be borne by the applicant;

Details demonstrating compliance are to be to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater and stormwater management arising from the development.

### 15. **Submission Roads Act Application for Civil Works in the Public Road**

The Applicant is to submit an application for approval for Infrastructure works on Councils

roadway, including engineering design plans shall be submitted to Council for approval under the provisions of Sections 138 and 139 of the Roads Act 1993. The application is to include four (4) copies of Civil Engineering design plans for the design of civil works required for the development (as outlined below) which are to be generally in accordance with the approved consent and Council's specification for engineering works as per Council's AUSPEC and Minor Works Policy. The design plan shall be prepared by a qualified structural engineer.

The civil design must include the following information:

- 1) Detail design for a 1.5 m wide concrete footpath along the full frontage of the development site on Berith Street and must extend to the existing footpath in Rose Avenue. The design shall include a longitudinal section and cross sections taken at every few meters. The sections shall show all existing, proposed levels and if necessary transition works designed in accordance with Council requirements;
- 2) Detail design for a 5.5 m wide vehicular crossing incorporating Council's standard 'Normal' driveway profile. The crossing shall be placed for a minimum of 1.0 m away from the existing Power Pole/Street light. A minimum of three long sections shall be presented on the plans showing all existing, proposed levels and if necessary transition works designed in accordance with Council requirements. The long sections shall be taken from the center line of the road through the end of the parking area. A long section of the new footpath shall have clearly indicated intersection points with long sections taken through the crossing; and
- 3) Detail design for a new stormwater pit with a 1.8m long lintel, shall be in accordance with Council's standard drawing A2 5476/A. The pit must be located to the south of the new layback, with implemented a minimum of 1.0 m distance between the new layback wing and the lintel.

The fee associated with the assessment and approval of the application is to be in accordance with Council's Fee and Charges. An approval is to be submitted to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To provide public and private safety.

16. **Structural Adequacy and Excavation Work**

Excavation work is to ensure the stability of the soil material of adjoining properties, the protection of adjoining buildings, services, structures and / or public infrastructure from damage using underpinning, shoring, retaining walls and support where required. All retaining walls are to be structurally adequate for the intended purpose, designed and certified by a Structural Engineer, except where site conditions permit the following:

- (a) maximum height of 900mm above or below ground level and at least 900mm from any property boundary, and
- (b) Comply with AS3700, AS3600 and AS1170 and timber walls with AS1720 and AS1170.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To provide public and private safety.

17. **Sub-Soil Seepage**

The Applicant is to submit plans demonstrating that all sub-soil seepage drainage is discharged

via a suitable silt arrester pit, directly to Council's nearest stormwater drainage line and is to be carried out in accordance with relevant Australian Standards. (Note: At the time of determination the following (but not limited to) Standards applied:

- Australian/New Zealand Standard AS/NZS 3500.3 - 2003 Plumbing and drainage - Stormwater drainage
- Australian/New Zealand Standard AS/NZS 3500.3 - 2003 / Amdt 1 - 2006 Plumbing and drainage - Stormwater drainage.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure appropriate drainage and Stormwater management on site to protect amenity of residents.

**18. Shoring of Adjoining Property**

Should the proposal require shoring to support an adjoining private property or Council's land, owner's consent for the encroachment onto the affected property shall be provided with the engineering drawings. Council approval is required if any temporary ground anchors are proposed to be installed within the Council's land/road reserve.

A Temporary Ground Anchors Application is to be submitted with Council for assessment and approval subject to Council's Fees and Charges. Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To ensure that owners consent is obtained for ancillary works, and to ensure the protection of adjoining properties and Council land.

**19. Pre-Construction Stormwater Assets Dilapidation Report**

The Applicant is to submit a pre-construction / demolition Dilapidation Survey of Council's Stormwater Assets is to be prepared by a suitably qualified person in accordance with Council's Guidelines for Preparing a Dilapidation Survey of Council Stormwater Asset, to record the existing condition of the asset prior to the commencement of works. Council's Guidelines are available on our web site.

The pre-construction / demolition dilapidation report must be submitted to Council for approval and the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's Infrastructure.

**20. Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

**21. Requirements for Seniors Housing or Housing for Persons with a Disability**

The development is for the purposes of Seniors Housing or Housing for Persons with a Disability and is required to comply with all the standards specified in Schedule 3 - "*Standards concerning accessibility and useability for hostels and self-contained dwellings*".

Details demonstrating compliance with the above requirement are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure public safety and equitable access for seniors or people with a disability. (DACPLC16)

**22. Condition for prior to construction certificate**

Construction of Footpath:

A footpath with minimum width of 1.5m shall be constructed along all frontage of site continuing to Rose Avenue to connect the site to the existing footpath on Rose Avenue.

Reason: To provide seniors and people with disabilities a convenient access to the adjacent bus stops.

Car Park Design:

In accordance with AS2890.1:2004, the proposed single-sided aisle within the basement car parking area is to be minimum 6.1m wide.

Reason: Compliance with Australian Standards.

**23. Construction Traffic Management Plan**

A Construction Traffic Management Plan (CTMP) and report shall be prepared by an RMS accredited person and submitted to and approved by the Certifying Authority prior to issue of any Construction Certificate. The CTMP shall address the safety around the school and minimise any adverse impact on the school. Due to the proximity of the site adjacent to Wheeler Heights Primary School, no heavy vehicle movements or construction activities effecting vehicle and pedestrian traffic are permitted in school zone hours (8:00am-9:30am and 2:30pm-4:00pm weekdays).

The CTMP must address following:

- The proposed phases of construction works on the site, and the expected duration of each construction phase;
- The proposed order in which works on the site will be undertaken, and the method statements on how various stages of construction will be undertaken;
- Make provision for all construction materials to be stored on site, at all times;
- The proposed areas within the site to be used for the storage of excavated materials, construction materials and waste containers during the construction period;
- The proposed method of access to and egress from the site for construction vehicles, including access routes and truck routes through the Council area and the location and type of temporary vehicular crossing for the purpose of minimising traffic congestion and noise in the area, with no access across public parks or reserves being allowed;
- The proposed method of loading and unloading excavation and construction machinery, excavation and building materials, formwork and the erection of any part of the structure within the site. Wherever possible mobile cranes should be located wholly within the site;
- Make provision for parking onsite. All Staff and Contractors are to use the basement parking once available;
- Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site are not permitted unless approved by Council prior.
- Due to the proximity of the site adjacent to Wheeler Heights Primary School, no heavy vehicle movements or construction activities effecting vehicle and pedestrian traffic are permitted in school zone hours (8:00am-9:30am and 2:30pm-4:00pm weekdays);
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for



- any activities involving the management of vehicle and pedestrian traffic;
- The proposed manner in which adjoining property owners will be kept advised of the timeframes for completion of each phase of development/construction process. It must also specify that a minimum Fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measure;
- Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes and concrete pumps, structures proposed on the footpath areas (hoardings, scaffolding or shoring) and any tree protection zones around Council street trees.
- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the CTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities, such as (but not limited to) concrete pours, crane lifts and dump truck routes. These communications must be documented and submitted to Council prior to work commencing on site;
- The proposed method/device to remove loose material from all vehicles and/or machinery before entering the road reserve, any run-off from the washing down of vehicles shall be directed to the sediment control system within the site;
- Specify that the roadway (including footpath) must be kept in a serviceable condition for the duration of construction. At the direction of Council, undertake remedial treatments such as patching at no cost to Council;
- The proposed method of support to any excavation adjacent to adjoining properties, or the road reserve. The proposed method of support is to be designed and certified by an appropriately qualified and practising Structural Engineer, or equivalent;
- Proposed protection for Council and adjoining properties, and
- The location and operation of any on site crane.

The CTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – “Manual of Uniform Traffic Control Devices”, RMS’ Manual – “Traffic Control at Work Sites”.

All fees and charges associated with the review of this plan is to be in accordance with Council’s Schedule of Fees and Charges and are to be paid at the time that the Construction Traffic Management Plan is submitted.

Reason: To ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems. Confirming appropriate measures have been considered for site access, storage and the operation of the site during all phases of the construction process in a manner that respects adjoining owner’s property rights and protects amenity in the locality, without unreasonable inconvenience to the community. The CTMP is intended to minimise impact of construction activities on the surrounding community, in terms of vehicle traffic (including traffic flow and parking) and pedestrian amenity adjacent to the site.

#### 24. **Waste and Recycling Requirements**

Details demonstrating compliance with Warringah Development Control Plan – Part C9 Waste Management, including the required Warringah Waste Management Plan, are to be submitted to and approved by the Certifying Authority prior to the issue of any Construction Certificate.

Note: If the proposal, when compliant with Warringah Development Control Plan – Part C9 Waste Management, causes inconsistencies with other parts of the approval i.e. architectural or landscaped plans a modification(s) to the development may be required.

Reason: To ensure adequate and appropriate waste and recycling facilities are provided.  
(DACWTC01)

## CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

### 25. **Pre-Construction Dilapidation Report**

Dilapidation reports, including photographic surveys, of the following adjoining properties must be provided to the Principal Certifying Authority prior to any works commencing on the site (including demolition or excavation). The reports must detail the physical condition of those properties listed below, both internally and externally, including walls, ceilings, roof, structural members and other similar items.

1 Berith Street, Wheeler Heights  
5 Berith Street, Wheeler Heights

The dilapidation report is to be prepared by a suitably qualified person. A copy of the report must be provided to Council, the Principal Certifying Authority and the owners of the affected properties prior to any works commencing.

In the event that access for undertaking the dilapidation report is denied by an adjoining owner, the applicant must demonstrate, in writing that all reasonable steps have been taken to obtain access. The Principal Certifying Authority must be satisfied that the requirements of this condition have been met prior to commencement of any works.

Note: This documentation is for record keeping purposes and may be used by an applicant or affected property owner to assist in any action required to resolve any civil dispute over damage rising from the works.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the commencement of any works on site.

Reason: To maintain proper records in relation to the proposed development.

### 26. **Public Liability Insurance - Works on Public Land**

Any person or contractor undertaking works on public land must take out Public Risk Insurance with a minimum cover of \$20 million in relation to the occupation of, and approved works within Council's road reserve or public land, as approved in this consent. The Policy is to note, and provide protection for Northern Beaches Council, as an interested party and a copy of the Policy must be submitted to Council prior to commencement of the works. The Policy must be valid for the entire period that the works are being undertaken on public land.

Reason: To ensure the community is protected from the cost of any claim for damages arising from works on public land.

### 27. **Notification of Rock-breaking Activities**

The activity of rock-breaking associated with the development of the site, must only occur between the hours of:

- 9.00 AM – 5.00 PM on weekdays (Monday – Friday).



Rock-breaking activities must not occur on weekends or public holidays. As a minimum the following adjoining properties must be notified in writing of the times and days in which rock-breaking activities will be carried out. Wheeler Heights Public School, 25 Rose Avenue, Wheeler Heights, 27 Rose Avenue Wheeler Heights, 1 Berith Street, Wheeler Heights and 5 Berith Street Wheeler Heights. Notices must be distributed at least seven (7) days before the activity is to occur.

*Reason: To protect the acoustic amenity of neighbouring properties and the public.* (DACHPDPC6)

**28. Tree protection**

(a) Existing trees which must be retained

- i) All trees not indicated for removal in the Arboricultural Impact Assessment report dated 12 June 2019 prepared by Jacksons Nature Works, unless exempt under relevant planning instruments or legislation
- ii) Trees located on adjoining land

(b) Tree protection

- i) No tree roots greater than 25mm diameter are to be cut from protected trees unless authorised by the Project Arborist on site.
- ii) All structures are to bridge tree roots greater than 25mm diameter unless directed otherwise by the Project Arborist on site.
- iii) All tree protection to be in accordance with the Arboricultural Impact Assessment report dated 12 June 2019 prepared by Jacksons Nature Works and AS4970-2009 Protection of trees on development sites, with particular reference to Section 4 Tree Protection Measures.
- iv) All tree pruning within the subject site is to be in accordance with WDCP2011 Clause E1 Private Property Tree Management and AS 4373 Pruning of amenity trees
- v) All tree protection measures, including fencing, are to be in place prior to commencement of works.
- vi) Footpath installation in Berith Street is to be supervised by the Project Arborist and include paving material as specified in the Arboricultural Impact Assessment report dated 12 June 2019 prepared by Jacksons Nature Works

Reason: To ensure compliance with the requirement to retain and protect significant planting on the site.

**29. Project Arborist**

- i) A Project Arborist with minimum qualification AQF Level 5 is to be appointed prior to commencement of works.
- ii) The Project Arborist is to oversee all tree protection measures, removals and works adjacent to protected trees as outlined in the Arboricultural Impact Assessment report dated 12 June 2019 prepared by Jacksons Nature Works and AS4970-2009 Protection of trees on development sites.
- iii) The Project Arborist is to ensure compliance as relevant with any other environmental requirements conditioned under this consent.

Reason: to ensure protection of vegetation proposed for retention on the site.

## CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

30. **Road Reserve**

The applicant shall ensure the public footways and roadways adjacent to the site are maintained in a safe condition at all times during the course of the work.

Reason: Public Safety.

31. **Removing, Handling and Disposing of Asbestos**

Any asbestos material arising from the demolition process shall be removed and disposed of in accordance with the following requirements:

- Work Health and Safety Act
- Work Health and Safety Regulation
- Code of Practice for the Safe Removal of Asbestos [NOHSC:2002 (1998)] and
- Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)]
- Clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005.
- The demolition must be undertaken in accordance with Australian Standard AS2601 – The Demolition of Structures.

Reason: For the protection of the environment and human health.

32. **Demolition Works - Asbestos**

Demolition works must be carried out in compliance with Demolition Plan, drawing reference A12 dated 7 November 2018 prepared by Barry Rush and Associates Pty Ltd and Waste Minimisation and Management Plan, prepared by Barry Rush dated 7 November 2019. Demolition works must be carried out in compliance with WorkCover Short Guide to Working with Asbestos Cement and Australian Standard AS 2601 2001 The Demolition of Structures.

The site must be provided with a sign containing the words DANGER ASBESTOS REMOVAL IN PROGRESS measuring not less than 400 mm x 300 mm and be erected in a prominent visible position on the site. The sign is to be erected prior to demolition work commencing and is to remain in place until such time as all asbestos cement has been removed from the site and disposed to a lawful waste disposal facility.

All asbestos laden waste, including flat, corrugated or profiled asbestos cement sheets must be disposed of at a lawful waste disposal facility. Upon completion of tipping operations the applicant must lodge to the Principal Certifying Authority, all receipts issued by the receiving tip as evidence of proper disposal.

As a minimum, the following adjoining property owners are to be given at least seven (7) days' notice in writing of the intention to disturb and remove asbestos from the development site. Wheeler Heights Public School, 25 Rose Avenue, Wheeler Heights, 27 Rose Avenue Wheeler Heights, 1 Berith Street, Wheeler Heights and 5 Berith Street Wheeler Heights.

Reason: To ensure the long term health of workers on site and occupants of the building is not put at risk unnecessarily.

33. **Survey Certificate**

DA2019/1173

A survey certificate prepared by a Registered Surveyor at the following stages of construction:

(a) Commencement of perimeter walls columns and or other structural elements to ensure the wall or structure, to boundary setbacks are in accordance with the approved details.

(b) At ground level to ensure the finished floor levels are in accordance with the approved levels, prior to concrete slab being poured/flooring being laid.

(c) At completion of the roof frame confirming the finished roof/ridge height is in accordance with levels indicated on the approved plans.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To determine the height of buildings under construction comply with levels shown on approved plans.

34. **Installation and Maintenance of Sediment Control**

Prior to any works commencing on site, including demolition, sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004). Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site.

35. **Civil Works Supervision**

The Applicant shall ensure all civil works approved in the Construction Certificate are supervised by an appropriately qualified and practising Civil Engineer.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority and/or Roads Authority.

Reason: To ensure compliance of civil works with Council's specification for engineering works.

36. **Footpath Construction**

The applicant shall construct a 1.5 m wide footpath for the purpose of providing an access of the subject site to Rose Avenue. The works shall be in accordance with the following:

(a) All footpath works are to be constructed in accordance with Council's Specification for an access appropriate to Seniors Living development and include widening of the existing connection to the bus (shelter) stops in Wheelers Parade within 400m of the site, and Clauses 26(2) and 38 of State Environmental Planning Policy (Housing for Seniors or People with a Disability) 2004;

(b) Council is to inspect the formwork prior to pouring of concrete to ensure the works are to be completed in accordance with the Council's specification for footpath. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To ensure compliance of footpath works with Council's specification for engineering works.

37. **Notification of Inspections (Infrastructure works to be handed over to Council)**

Council's Development Engineer is to be given 48 hours notice when the works reach the following stages:

- (a) Installation of Silt and Sediment control devices
- (b) Prior to backfilling of pipelines
- (c) Prior to pouring of stormwater gully pits
- (d) Prior to pouring of kerb and gutter
- (e) Subgrade level / basecourse level / subbase
- (f) Sealing road pavement

NOTE: Any inspections carried out by Council do not imply Council approval or acceptance of the work, and do not relieve the developer/applicant from the requirement to provide an engineer's certification.

Reason: To ensure new Council infrastructure is constructed in accordance with Auspec 1 Council's design and specification standards.

38. **Traffic Control During Road Works**

Lighting, fencing, traffic control and advanced warning signs shall be provided for the protection of the works and for the safety and convenience of the public and others in accordance with RMS Traffic Control At Work Sites Manual (<http://www.rms.nsw.gov.au/business-industry/partners-suppliers/documents/technical-manuals/tcws-version-4/tcwsv4i2.pdf>) and to the satisfaction of the Roads Authority. Traffic movement in both directions on public roads, and vehicular access to private properties is to be maintained at all times during the works

Reason: Public Safety.

39. **Vehicle Crossings**

The Applicant is to construct one vehicle crossing 5.5 metres wide in accordance with Northern Beaches Council Drawing No A4-3330/1 N and the driveway levels application approval. An Authorised Vehicle Crossing Contractor shall construct the vehicle crossing and associated works within the road reserve in plain concrete. All redundant laybacks and crossings are to be restored to footpath/grass. Prior to the pouring of concrete, the vehicle crossing is to be inspected by Council and a satisfactory "Vehicle Crossing Inspection" card issued.

A copy of the vehicle crossing inspection form is to be submitted to the Principal Certifying Authority.

Reason: To facilitate suitable vehicular access to private property.

40. **Stormwater Pipeline Construction/Connection**

Where connection to Council's nearest stormwater drainage system is required, being in Berith Street fronting the site, the applicant shall construct the pipeline in accordance with AUSPEC specification and Council's Minor Works Policy for engineering works (see [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)), including reconstruction of all affected kerb and gutter, bitumen reinstatements, adjustments of any vehicular crossings for paths, grass verges and household stormwater connections to suit the kerb and gutter levels. All works shall be undertaken at the applicant's cost, and upon completion shall be certified by an appropriately qualified and practicing Civil Engineer. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To ensure compliance of drainage works with Council's specification for engineering works.

41. **Trees Condition**

During the construction period the applicant is responsible for ensuring all protected trees are maintained in a healthy and vigorous condition. This is to be done by ensuring that all identified tree protection measures are adhered to. In this regard all protected plants on this site shall not exhibit:

- (a) A general decline in health and vigour.
- (b) Damaged, crushed or dying roots due to poor pruning techniques.
- (c) More than 10% loss or dieback of roots, branches and foliage.
- (d) Mechanical damage or bruising of bark and timber of roots, trunk and branches.
- (e) Yellowing of foliage or a thinning of the canopy untypical of its species.
- (f) An increase in the amount of deadwood not associated with normal growth.
- (g) An increase in kino or gum exudation.
- (h) Inappropriate increases in epicormic growth that may indicate that the plants are in a stressed condition.
- (i) Branch drop, torn branches and stripped bark not associated with natural climatic conditions.

Any mitigating measures and recommendations required by the Arborist are to be implemented.

The owner of the adjoining allotment of land is not liable for the cost of work carried out for the purpose of this clause.

Reason: Protection of Trees.

42. **Protection of rock and sites of significance**

- a) All rock outcrops outside of the area of approved works are to be preserved and protected at all times during demolition excavation and construction works.
- b) Should any Aboriginal sites be uncovered during the carrying out of works, those works are to cease and Council, the NSW Office of Environment and Heritage (OEH) and the Metropolitan Local Aboriginal Land Council are to be contacted.

Reason: Preservation of significant environmental features.

43. **Implementation of Construction Traffic Management Plan**

All works and construction activities are to be undertaken in accordance with the approved Construction Traffic Management Plan (CTMP). All controls in the CTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the CTMP be impacted by surrounding major development not encompassed in the approved CTMP, the CTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved CTMP is to be kept onsite at all times and made available to the accredited certifier or Council on request.

Reason: to ensure compliance of the developer/builder in adhering to the Construction Traffic Management procedures agreed and are held liable to the conditions of consent.

44. **Waste/Recycling Requirements (Waste Plan Submitted)**

During demolition and/or construction the proposal/works shall be generally consistent with the submitted Waste Management Plan titled Waste Minimisation and Management Plan and dated 7 November 2019.

Reason: To ensure waste is minimised and adequate and appropriate waste and recycling facilities are provided. (DACWTE01)

45. **Waste/Recycling Requirements (Materials)**

During demolition and/or construction the following materials are to be separated for recycling – timber – bricks – tiles – plasterboard – metal – concrete, and evidence of disposal for recycling is to be retained on site.

Reason: To ensure waste is minimised and recovered for recycling where possible.  
(DACWTE02)

**CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE  
OCCUPATION CERTIFICATE**

46. **Landscape completion certification**

a) Prior to the issue of an Occupation Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the landscape works have been completed in accordance with the approved landscape plan and inclusive of any conditions of consent.

b) Prior to the issue of an Occupation Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the landscape works have been established and maintained in accordance with the approved landscape plan.

Reason: To ensure that the landscape treatments are installed to provide landscape amenity.

47. **Condition of retained vegetation**

Prior to the issue of an Occupation Certificate, a report prepared by the Project Arborist, shall be submitted to the Certifying Authority, assessing the health and impact of trees and vegetation required to be retained as a result of the proposed development, including the following information:

- a) Compliance to Arborist recommendations for tree protection and excavation works.
- b) Extent of damage sustained by vegetation as a result of the construction works.
- c) Any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: To ensure compliance with the requirement to retain and protect significant planting on development sites.

48. **A post-construction Dilapidation Survey of Council's Stormwater Assets**

A post-construction Dilapidation Survey of Council's Stormwater Assets is to be prepared by a suitably qualified person in accordance with Council's Guidelines for Preparing a Dilapidation Survey of Council Stormwater Asset in order to determine if the asset has been damaged by the works. Council's Guidelines are available on our web site.

The post construction dilapidation report must be submitted to the Council for review and the Certifying Authority prior to the issue of the Occupation Certificate. Any damaged to Council's stormwater infrastructure is to be rectified in accordance with Council's technical specifications prior to the release of the security bond.

Reason: Protection of Council's Infrastructure



49. **Post-Construction Dilapidation Report**

Post-Construction Dilapidation Reports, for No. 1 Berith Street, Wheeler Heights and No. 5 Berith Street, Wheeler Heights, including photos of any damage evident at the time of inspection, must be submitted after the completion of works. The report must:

- Compare the post-construction report with the pre-construction report,
- Clearly identify any recent damage and whether or not it is likely to be the result of the development works,
- Should any damage have occurred, suggested remediation methods.

Copies of the reports must be given to the property owners referred to in the Pre-Construction Dilapidation Report Condition. Copies must also be lodged with Council.

Details demonstrating compliance with this condition are to be submitted to the Principal Certifying Authority prior to the issuing of any Occupation Certificate.

Reason: To maintain proper records in relation to the proposed development.

50. **Positive Covenant for the Maintenance of Stormwater Pump-out Facilities**

The Applicant shall lodge the Legal Documents Authorisation Application with the original completed request forms (NSW Land Registry standard forms 13PC and/or 13RPA) to Council and a copy of the Works-as-Executed plan (details overdrawn on a copy of the approved drainage plan), hydraulic engineers' certification.

The Applicant shall create on the Title a positive covenant in respect to the ongoing maintenance of the pump-out facility on the property being developed. Northern Beaches Council shall be nominated in the instrument as the only party authorised to release, vary or modify the instrument. Northern Beaches Council's delegate shall sign these documents prior to the submission to the NSW Land Registry Services. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the final Occupation Certificate.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction for on-site storm water detention as to user is to be submitted.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure adequate provision is made for the stormwater pump out system to be maintained to an appropriate operational standard.

51. **Positive Covenant and Restriction as to User for On-site Stormwater Disposal Structures**

The Applicant shall lodge the Legal Documents Authorisation Application with the original completed request forms (NSW Land Registry standard forms 13PC and/or 13RPA) to Council and a copy of the Works-as-Executed plan (details overdrawn on a copy of the approved drainage plan), hydraulic engineers' certification.

The Applicant shall create on the Title a restriction on the use of land and a positive covenant in respect to the ongoing maintenance and restriction of the on-site stormwater disposal structures within this development consent. The terms of the positive covenant and restriction are to be prepared to Council's standard requirements at the applicant's expense and endorsed by Northern Beaches Council's delegate prior to lodgement with the NSW Land Registry Services. Northern Beaches Council shall be nominated as the party to release, vary or modify such

covenant.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction for on-site storm water detention as to user is to be submitted.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure the on-site stormwater disposal system is maintained to an appropriate operational standard.

52. **Geotechnical and structural Certification**

All civil works approved in this Development Consent shall be certified as compliant with all relevant Australian Standards and Codes by an appropriately qualified and practising Civil Engineer.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any final Occupation Certificate.

Reason: Public and Private Safety

53. **Certification of Civil Works and Works as Executed Data on Council Land**

The Applicant shall submit a suitably qualified Civil Engineer's certification that the completed works have been constructed in accordance with this consent and the approved Section 138. Works as Executed data certified by a registered surveyor in relation to boundaries, prepared in accordance with Council's 'Guideline for preparing Works as Executed data for Council Assets' in an approved format shall be submitted to Council and the Principal Certifying Authority for approval prior to the issue of the Occupation Certificate.

Reason: To ensure compliance of works with Council's specification for engineering works.

54. **Environmental Reports Certification**

Written certification from a suitably qualified person(s) shall be submitted to the Principal Certifying Authority and Northern Beaches Council, stating that all the works/methods/procedures/control measures/recommendations in the following reports have been completed:

- (a) Arborist Report prepared dated 12 June 2019 by Ross Jackson
- (b) Geotechnical Report dated 17/10/2019 prepared by White Geotechnical Group
- (c) Peer Review of the White Geotechnical report dated 13 December 2019 prepared by JK Geotechnics
- (d) Additional Geotechnical Investigation Report dated 20 January 2020 Ref 32859SFprt prepared by JK Geotechnics
- (e) Design Compliance Report V2 dated 1/10/2018 prepared by Private Certifiers Australia

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of a Interim / Final Occupation Certificate.

Reason: To ensure compliance with standards.

55. **Required Planting**

- a) Trees shrubs and ground-covers shall be planted in accordance with the Landscape Plan Dwg No.1921.GD.01 Issue A dated 10.09.18 prepared by Greenland Design
- b) Details demonstrating compliance are to be submitted to the Principal Certifying Authority



prior to the issue of any interim / final Occupation Certificate.

Reason: To maintain environmental amenity.

56. **Garbage and Recycling Facilities**

All internal walls of the storage area shall be rendered to a smooth surface, coved at the floor/wall intersection, graded and appropriately drained to the sewer with a tap in close proximity to facilitate cleaning.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To prevent pollution of the environment and to protect the amenity of the area.  
(DACPLF03)

57. **House / Building Number**

House/building number is to be affixed to the building / letterbox to be readily visible from the public domain.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: Proper identification of buildings. (DACPLF04)

58. **Sydney Water**

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation.

Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site [www.sydneywater.com.au](http://www.sydneywater.com.au) <<http://www.sydneywater.com.au>> then refer to "Water Servicing Coordinator" under "Developing Your Land" or telephone 13 20 92 for assistance.

Following application a "Notice of Requirements" will advise of water and sewer infrastructure to be built and charges to be paid. Please make early contact with the Co-ordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

59. **Occupation of Seniors Housing or Housing for Persons with a Disability**

A positive covenant pursuant to s88E of the Conveyancing Act 1919 is to be registered on the title of the land to which this development consent applies.

The covenant shall stipulate that Council is the sole authority to release or modify the covenant and that the development is only permitted to be occupied by persons detailed as follows:

- (a) seniors or people who have a disability;
- (b) people who live within the same household with seniors or people who have a disability;
- (c) staff employed to assist in the administration of and provision of services to housing provided

under this Policy.

(Note: Under State Environmental Planning Policy (Housing for Seniors or People with a Disability 2004):

Seniors are people aged 55 or more years, people who are resident at a facility at which residential care (within the meaning of the Aged Care Act 1997 <http://www.comlaw.gov.au/> of the Commonwealth) is provided and/or people who have been assessed as being eligible to occupy housing for aged persons provided by a social housing provider.

AND

People with a disability are people of any age who have, either permanently or for an extended period, one or more impairments, limitations or activity restrictions that substantially affect their capacity to participate in everyday life.)

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue any Interim / Final Occupation Certificate.

Reason: Statutory requirements. (DACPLF11)

60. **Fire Safety Matters**

At the completion of all works, a Fire Safety Certificate will need to be prepared which references all the Essential Fire Safety Measures applicable and the relative standards of Performance (as per Schedule of Fire Safety Measures). This certificate must be prominently displayed in the building and copies must be sent to Council and the NSW Fire Brigade.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Interim / Final Occupation Certificate.

Each year the Owners must send to the Council and the NSW Fire Brigade an annual Fire Safety Statement which confirms that all the Essential Fire Safety Measures continue to perform to the original design standard.

Reason: Statutory requirement under Part 9 Division 4 & 5 of the Environmental Planning and Assessment Regulation 2000.

61. **Side and rear boundary fencing**

The applicant is to replace all side and rear boundary fencing (above ground) with the agreement and at no cost to, the adjoining property owners Wheeler Heights Public School, 25 Rose Avenue, Wheeler Heights, 27 Rose Avenue Wheeler Heights, 1 Berith Street, Wheeler Heights and 5 Berith Street Wheeler Heights with 1.8m lapped and capped timber paling fencing as indicated on the plans. Any fence forward of the building line shall be 1.2m in height. Details to be provided to the satisfaction of the Certifying Authority prior to any Occupation Certificate.

Reason: To maintain visual privacy.

62. **Waste and Recycling Facilities Certificate of Compliance**

The proposal shall be constructed in accordance with Warringah Development Control Plan – Part C9 Waste Management

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste and recycling facilities are provided. (DACWTF01)

63. **Waste/Recycling Compliance Documentation**

Evidence of disposal for recycling from the construction/demolition works shall be submitted to the Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste is minimised and recycled. (DACWTF02)

64. **Positive Covenant for Waste Services**

A positive covenant shall be created on the title of the land requiring the proprietor of the land to provide access to the waste storage facilities prior to the issue of an Interim/Final Occupation Certificate. The terms of the positive covenant are to be prepared to Council's standard requirements, (available from Warringah Council), at the applicant's expense and endorsed by Council prior to lodgement with the Department of Lands. Warringah Council shall be nominated as the party to release, vary or modify such covenant.

Reason: To ensure ongoing access for servicing of waste facilities (DACWTF03)

65. **Authorisation of Legal Documentation Required for Waste Services**

The original completed request form (Department of Lands standard form 13PC) must be submitted to Council for authorisation prior to the issue of the Interim/Final Occupation Certificate. A copy of the work-as-executed plan (details overdrawn on a copy of the approved plan) must be included with the above submission. Where required by Council or the Certifying Authority, a Compliance Certificate shall also be provided in the submission to Council.

If Council is to issue the Compliance Certificate for these works, the fee is to be in accordance with Council's Fees and Charges.

Reason: To create encumbrances on the land. (DACWTF04)

## ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

66. **Landscape maintenance**

i) Trees shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilized as required at the time of planting.

ii) If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan.

Reason: To maintain local environmental amenity.

67. **Allocation of Spaces**

Car parking spaces provided shall be provided, made accessible and maintained at all times. The spaces shall be allocated as follows:

- 8 - Residential (6 spaces are to be for persons with a disability)
- 2 - Residential - Visitors

Car-parking provided shall be used solely in conjunction with the uses contained within the

development. Each car parking space allocated to a particular unit / tenancy shall be line marked and numbered or signposted to indicate the unit / tenancy to which it is allocated.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure that adequate parking facilities to service the development are provided on site. (DACPLG01)

## **CONDITIONS THAT MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF ANY STRATA SUBDIVISION OR SUBDIVISION CERTIFICATE**

### **68. Sydney Water Compliance Certification**

The Applicant shall submit a Section 73 Compliance Certificate under the Sydney Water Act 1994 issued by Sydney Water Corporation. Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site [www.sydneywater.com.au](http://www.sydneywater.com.au) <<http://www.sydneywater.com.au>> then refer to "Water Servicing Coordinator" under "Developing Your Land" or telephone 13 20 92 for assistance.

Following application a "Notice of Requirements" will advise of water and sewer infrastructure to be built and fees to be paid. Please make early contact with the coordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Subdivision Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

## Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application should be submitted to Council within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

*NOTE: A fee will apply for any request to review the determination.*

## Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

**Signed**

On behalf of the Consent Authority



Name

Anna Williams, Manager Development Assessments


Date

04/03/2020

## GENERAL ADVICE

### Advisory Notes (General)

Where are you in the development process?

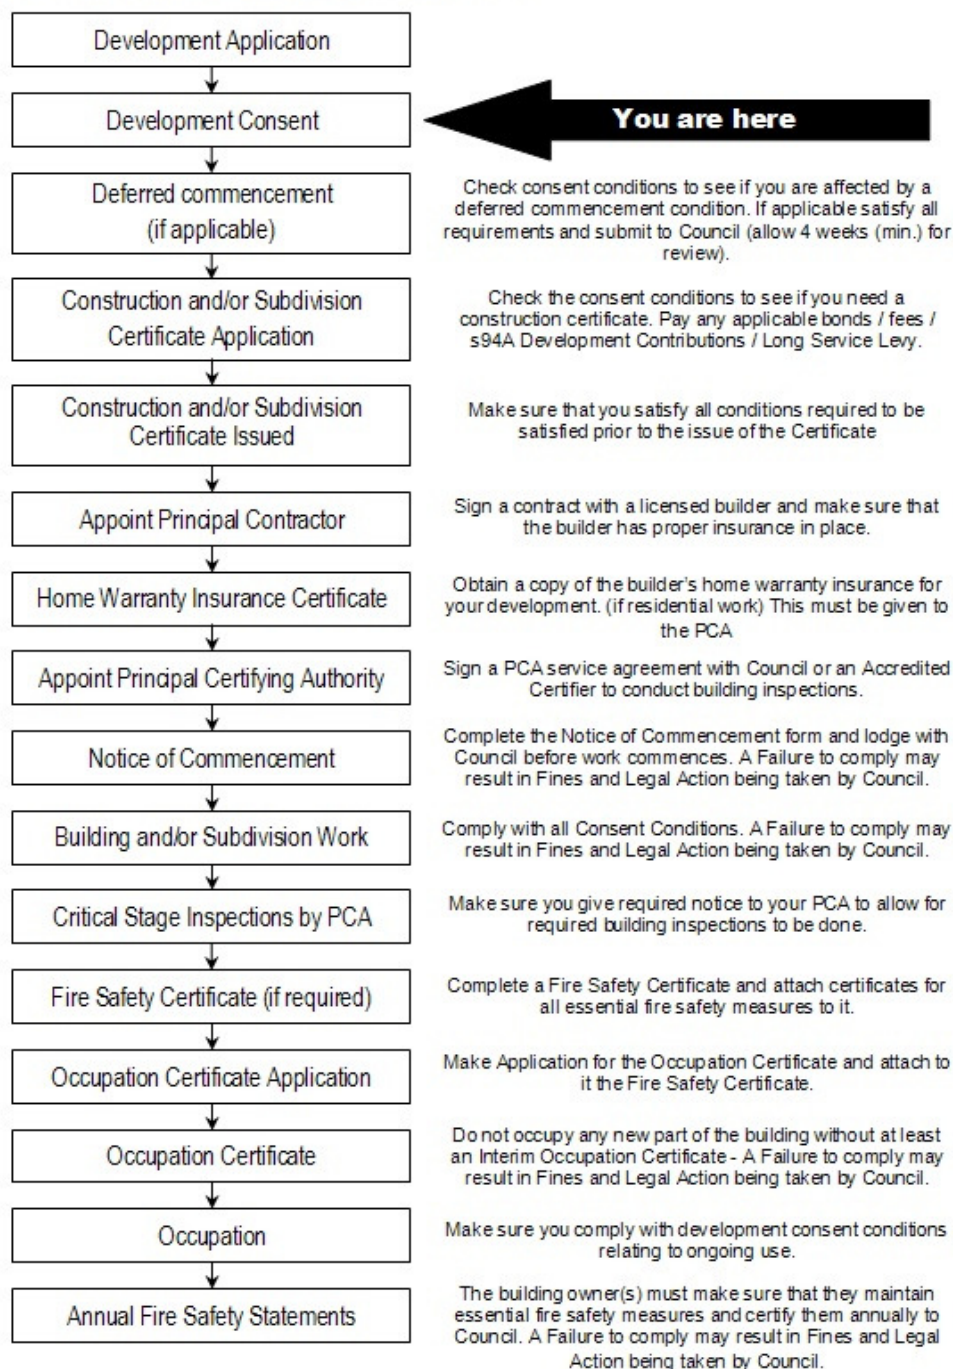

**Note:** The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)



## **Building Certification**

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

## **Certification Services**

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au) or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

## **Charges Associated with the Development Consent**

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

## **Bonds are released after:**

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
  - the development is complete
  - damage has not been caused to council assets during the works
  - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

## **Acceptable Form of Security Bonds**

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

## **Modifications to the consent**

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

### **Other Matters not detailed within the Notice of Determination**

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

### **Dial Before You Dig**

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at [www.1100.com.au](http://www.1100.com.au) or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

### **Telecommunications Act 1997 (Commonwealth)**

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted



to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

### **Model**

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

### **Trade waste agreement**

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

### **Waste collection**

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

### **Aboriginal Heritage**

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

### **On-Site Sewage Management System**

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

### **Cost of Works**

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

### **Relocation of stormwater drainage**

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

### **Tree preservation**

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

### **Storage bins on footpath and roadway**

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

### **Protection of Public Places**

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
  - (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

### **Road Opening Permit**

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

### **Special Permits**

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone.

Other permits may include out of construction hours permits.

### **Licensing requirements for removal of bonded asbestos**

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

### **Pool Access**

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

### **Dewatering**

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

### **Requirement to Notify about New Contamination Evidence**

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

### **Flood Evacuation Plan**

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

### **Utility Service Requirements**

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

### **Plant & Equipment Kept Within Site**

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

### **Lighting**

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

### **Silt and Sediment Control**

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

**Maintenance of Sediment and Erosion Control** Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

### **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004)'.

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

### **Dividing Fences Act 1991**

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

### **OTHER MATTERS**

**Child Care Centres**

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

**Disability Access**

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

**Food Premises**

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at [www.foodnotify.nsw.gov.au](http://www.foodnotify.nsw.gov.au) or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

**Wheel washing facility**

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

**Monitoring State of Roadways**

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

**Storage of Dangerous Goods**

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

**Storage of Flammable and Combustible Liquids**

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

**Noise and Vibration**

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

**Hairdressing/Beauty Treatment/ Skin penetration Requirements**

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.

- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

### **Food Premises Construction Requirements**

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

### **Legionella Control**

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

### **Pool/Spa Safety**

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

### **Grease Trap**

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

### **Bandicoot/Penguin**

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.