







Drawing Number

21308

21308-1

21308-2

21308-3

21308-4

21308-5

21308-6

21308-7

21308-8

21308-9

21308-10

21308-11

21308-12

21308-13

Signed/Requested

Date Requested

S.G

S.G.

ΑI

SG

AL

BS

BS

SG

SG

SG

AL

SG

SG

Date

16-11-21

25-11-21

02-12-21

27-01-22

08-02-22

3-3-22

10-3-22

29-03-22

04-04-22

11-07-22

26-07-22

10-09-22

12-09-22

14-09-22

Notes:

Levels shown are approx. and should be verified on site

Figured dimensions are to be taken in preference to scaling All measurements are in mm unless otherwise stated

Window sizes are nominal only. Final window sizes by builder

Dimensions are to be verified on site by builder before commencement of work

Centre line of downpipes to be 350mm from corner of face brickwork (unless specified on elevation) Refer to the builders project specification for inclusions

Construction to be in accordance with the Relevant BCA/NCC and other relevant Australian standards

All service positions, air conditioning droppers, outlets, return air grills, manholes and bulkheads to be determined on site by supervisor

10. Termite protection to Australian standards

Brick sill to be greater than 18'

. Refer to Basix page for energy requirements . 20mm tolerance to be allowed for frames that are built to the low side of the slab

. All upstairs windows with a sill height less than 1700mm to have a max opening width of 125mm or fitted with a screen with secure fittings to comply with BCA

15. Final AJ's to engineers specifications 16. Plus or minus 200mm to floor level

Copyright to plans remains at all times with Abeaut design t/a Accurate Design and Drafting.

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN

THIS INCLUDES (but is not limited): OWNER, BUILDER, SUBCONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTAINERS, DEMOLISHERS.

1 FALLS, SLTPS, TRTPS

a) WORKING AT HEIGHTS DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimize the risk of workers falling more than two meters. However, construction of this building will require workers to be working at heights where a fall in excess of two meters is possible and injury is likely to result from such a fall. The builder should provide such a barrier wherever a person is required to work in a situation where

DURING OPERATION OR MAINTENANCE

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings when scaffolding is appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two meters is possible. Where this type of activity is required scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation.

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be in situations where a fall from a height in excess of two meters is possible. Where this type of activity is required, scaffolding fall barriers or Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislations.

b) SLIPPERY OR UNEVEN SURFACES FLOOR FINISHES Specified

FLOVE FINISHES Specified
If finishes have been specified by the designer these have been selected to minimize the risk of floors and
paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to
The specified finished should be made in consultation with the designer, or if this is not practical, surfaces
with an equivalent or better slip resistance should be chosen.

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES

Due to design restrictions for building, steps and/or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace.

Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from assess ways. Contractors should be required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be sorted in designated areas away from access ways and work areas.

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above foor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the works is being carried out onto persons below.

1. Prevent or restrict access to areas below where the works is being carried out.
2. Provide is boards to scaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area.
6. (PPE)

During construction, renovation or demolition of this building, parts of the structure including fabricated steelwork, heavy panels and many other components will remain standing prior to or after the support parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times to avoid a collapse, which may injure persons in the area.

Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

For building on a major, narrow or steeply sloping road:
Parking of vehicles or leadinglunloading of vehicles on this roadway may cause a traffic hazard. During construction,
maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained
traffic management personnel should be responsible for the supervision of these areas.
For building where on-site loadinglunloading is restricted:
Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be planned to
a great ongestion of loading areas and trained traffic management personnel should be used to supervise loading/unloading

Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site.

A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

Locations with underground power lines:

Underground power lines MAY be located near or on this site. These pose a risk of electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by a mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass. All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be sorted on site in a way which minimizes bending before lifting. Advice should be provided about unsafe lifting methods in areas where lifting methods control construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturers The second pursue was and equipment. I hese should be fully maintained in accordance with manufacturers specifications and not used when faulty or (in the case of electrical equipment) not carnying a current electrical safety aga. All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in an accordance with the manufacturer's specification.

6. HAZARDOUS SUBSTANCES

ASBESTOS
For alterations to a building constructed prior to:
For alterations to a building constructed prior to:
For alteration as bestos

considering considerations, operations maintenance in definition strong ensure floor vertilization and wear Personal active Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting therwise disturbing or creating powdered material.

TREATEU INDEX.

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this material can be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation of harmful materials when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

NON-TILE UNDANNIC LOWN-UUNDS

Man typed of glue, solvents, spray back, paints, vanishes, and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well vertilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

STALLE IC MINERAL PIECE

Theeglass, Rockwell, ceramics and other material used for thermal or sound insulation may contain synthetic miners which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts of the body. Pers Protective Equipment including protection against inhalation of harmful materials should be used when installing, rer or working near bulk insulation material.

IMBEAN FLOURS
This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendation for use must be carefully considered at all times.

Construction of this building and some maintenance of the building will require excavation and installation of items within excavation. Where practical, installation should be carried out using methods which do not require workers to enter the excavations. Where this is not practical, adequate support for the excavated rans should be provided to prevent a collap Warning signs and barriers to prevent accidental or unauthorized access to all excavations should be provided.

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public.
Warning signs and secure barriers to unauthorized access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secure when not gully supervised.

9. OPERATIONAL USE OF BUILDING RESIDENTIAL BUIDLINGS

All electrical work should be carried out in accordance with the Code of Practice:

Managing Electrical Risks at the Workplace, AS/NZ 3012 and all licensing requirements.

All work using Plant should be carried out in accordance with the Code of Practice:

Managing Risks of Plant at the Workplace.

All work should be carried out in accordance with the Code of Practice: Managing Noise and Preventing Hearing Loss at

Work. Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work

involving steel construction and concrete placement

G

Amendments

Sketch

Survey Added

Amendments size + Facade

Small Amendments

Alterations

Alterations

Estimating

BASIX

variation 2 Rc

Garage Window

Small Amendments

DA SUBMISSION PLANS

Sheet Number

01

02

Preliminary Plans

Facade, size, floor plan amended

TSSUE

Α

В

C

D

Ε

F

Changes

SYNTHETIC MINERAL FIBRE

For buildings with small spaces where maintenance or other access may be required: some small spaces within this building will require access to provide a constant or maintenance workers. The design documentation calls for warning signs and barriers to unauthorized access. These should be maintained throughout the of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual filting and other manual activity should be restricted in small spaces.

This building has been designed as a residential building. If it, at a later date, is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new uses

10. OTHER HIGH RISK ACTIVITY

	03	Existing Site Plan
04		Demolition Site Plan
	05	Proposed Site Plan
	06	Landscape Plan
	07	Shadow Diagrams 21st June
	08	Ground Floor Plan
	09	Upper Floor Plan

Sheet Name

Cover Page

Perspective View

10 Front & Rear Elevations 11 Side Elevations 12 Section & Details 13 Electrical Plan Wet Area Details


Slab Detail

DRAWING: 21308-13 SHEET: 2/15







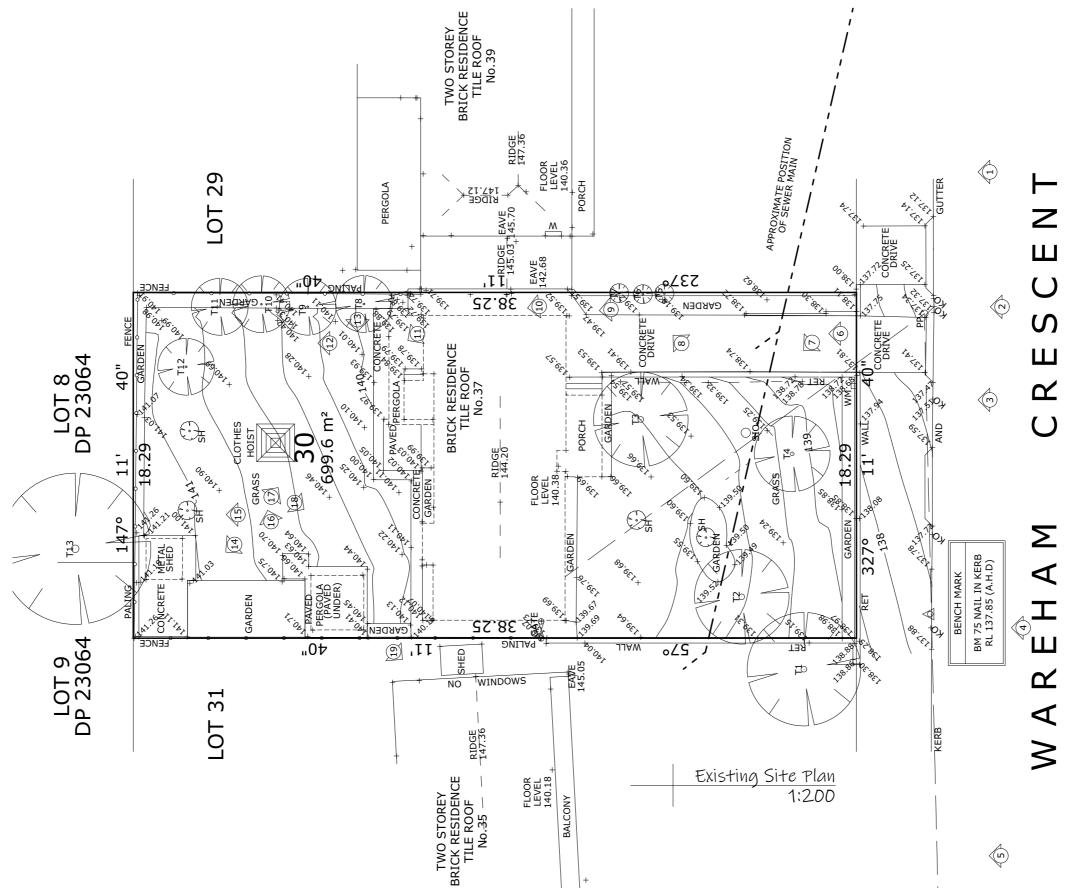




Lot 30 699.60m² DP: 215216

note: all works to be carried out in conj with the construction notes on sheet 2



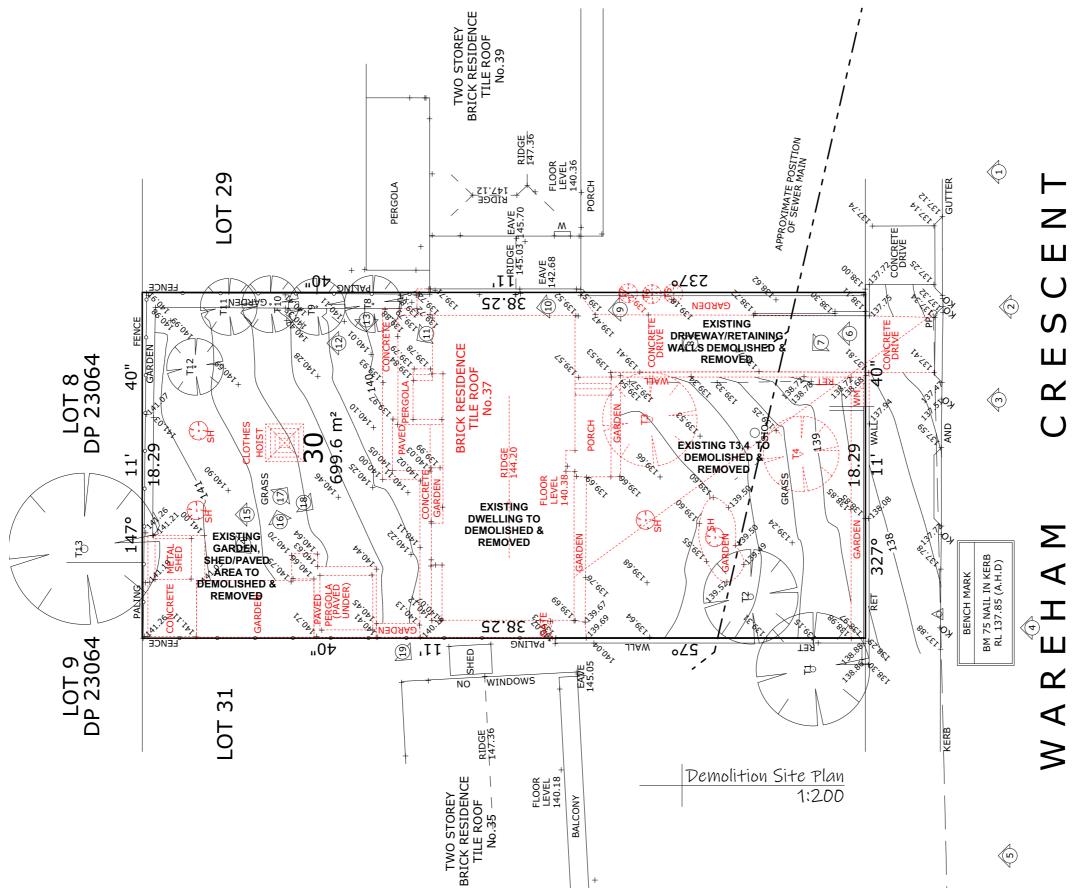




Lot 30 699.60m² DP: 215216

note: all works to be carried out in conj with the construction notes on sheet 2



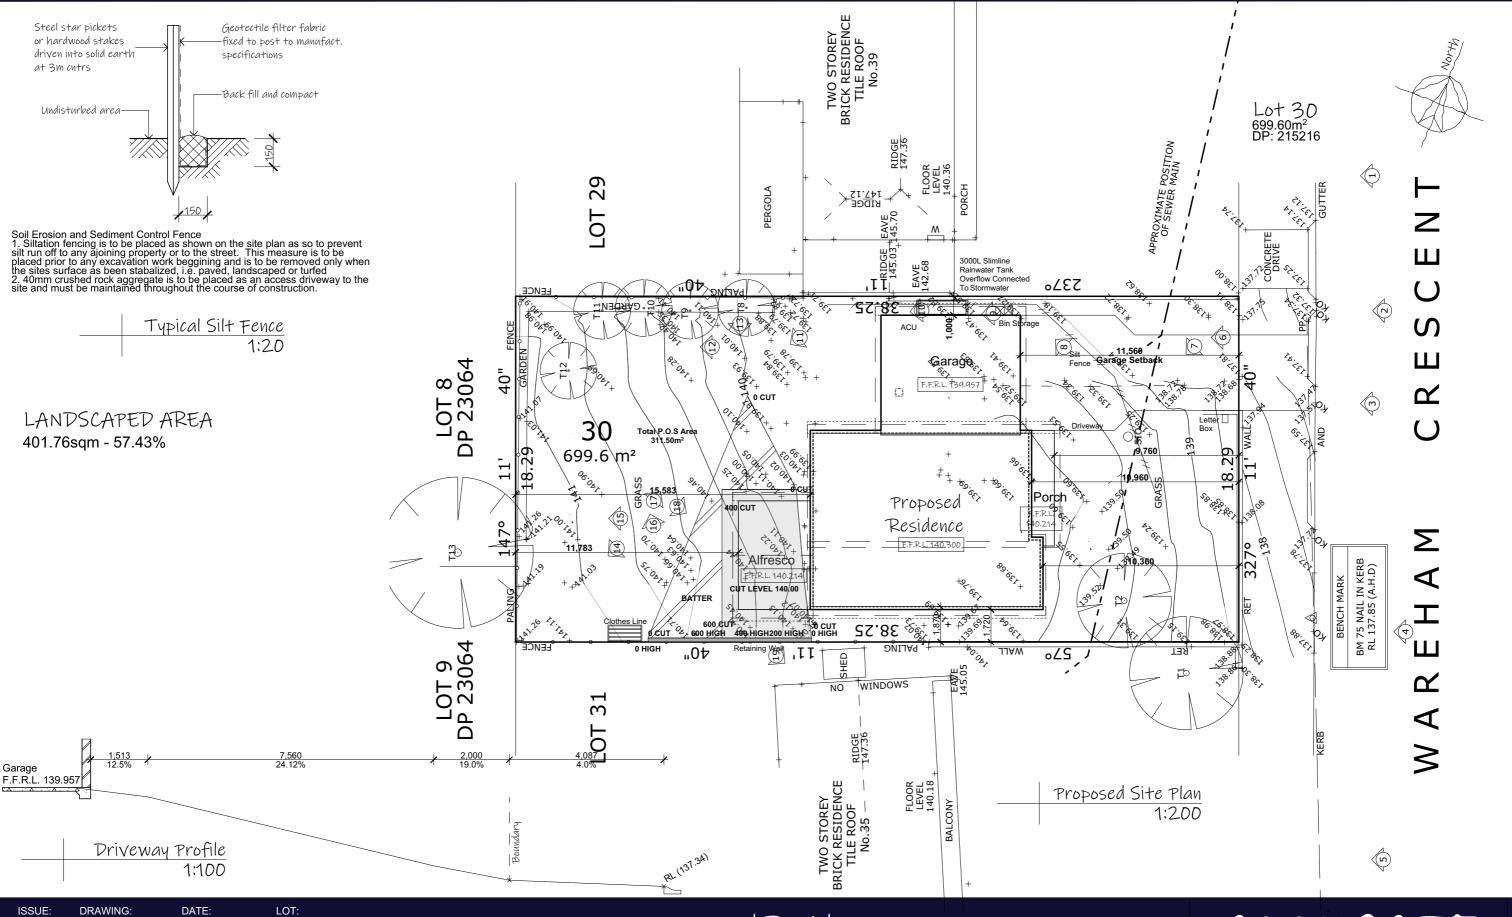

SHEET:

21308-13


30

215216

14-09-22

PAPER:



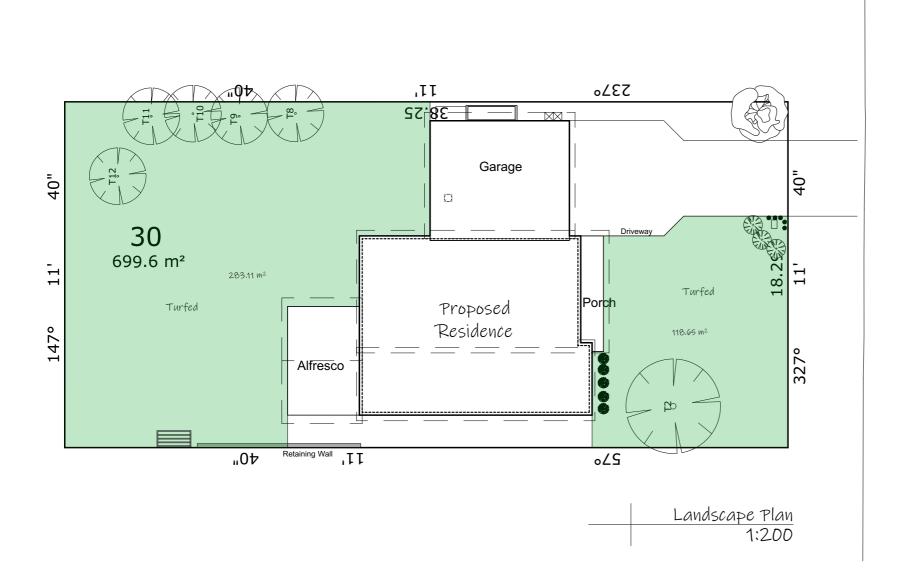



Z

Ш

S

Ш

 $\boldsymbol{\alpha}$

O

Σ

∀ H

Ш

 Δ

NOTES:

* All plants to be planted in premium garden mix and slow release fertilizer


* Gardens to be mulched with Eucalyptus Mulch

* Plants are to be maintained for 6 months or until established


* Any losses are to be replaced

Lot 30 699.60m² DP: 215216



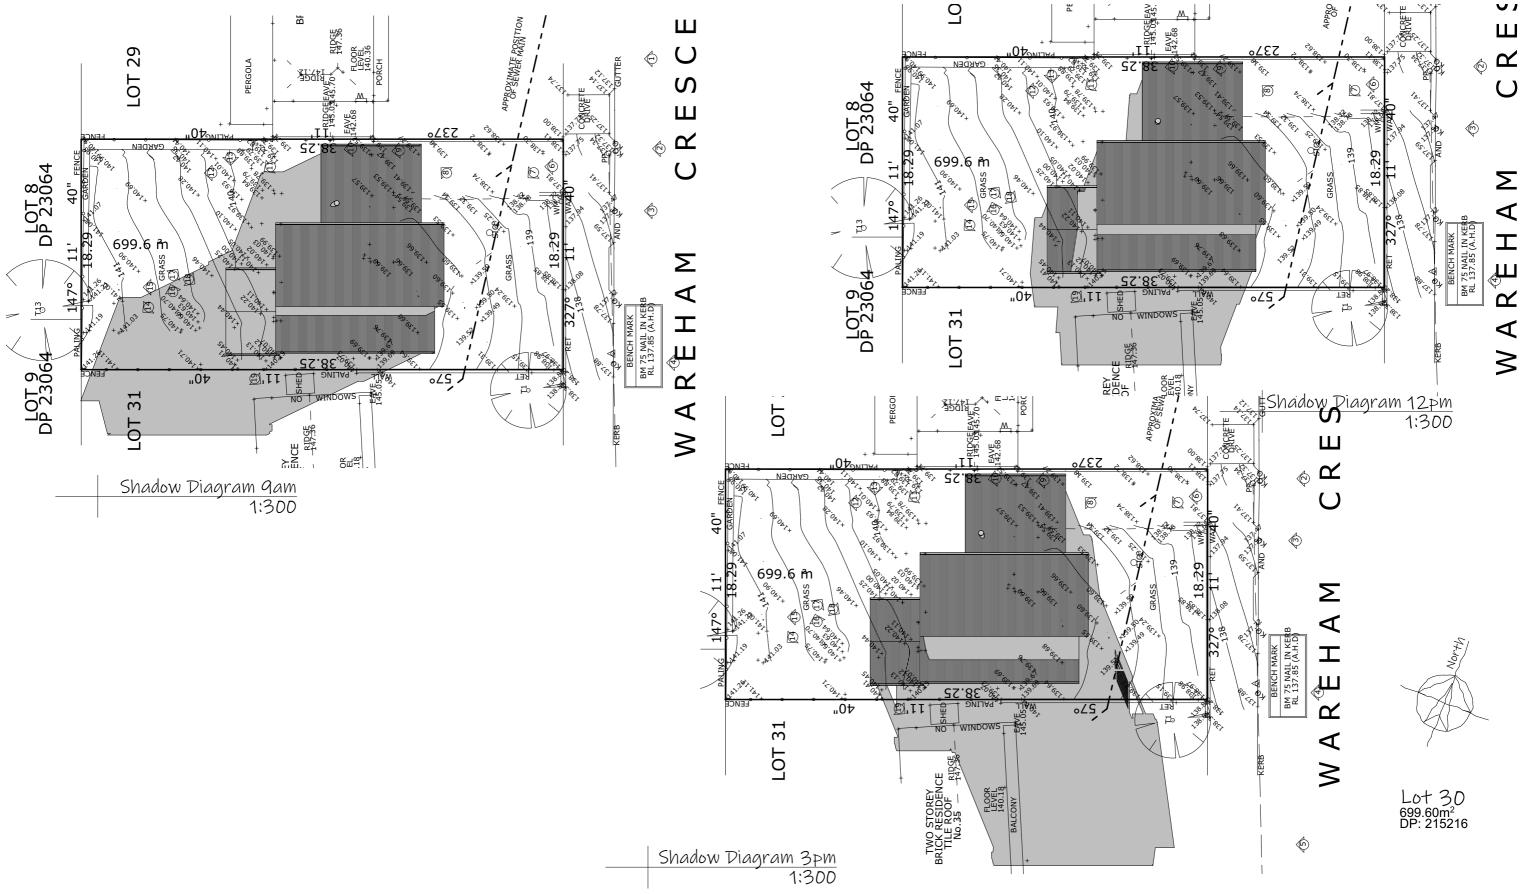



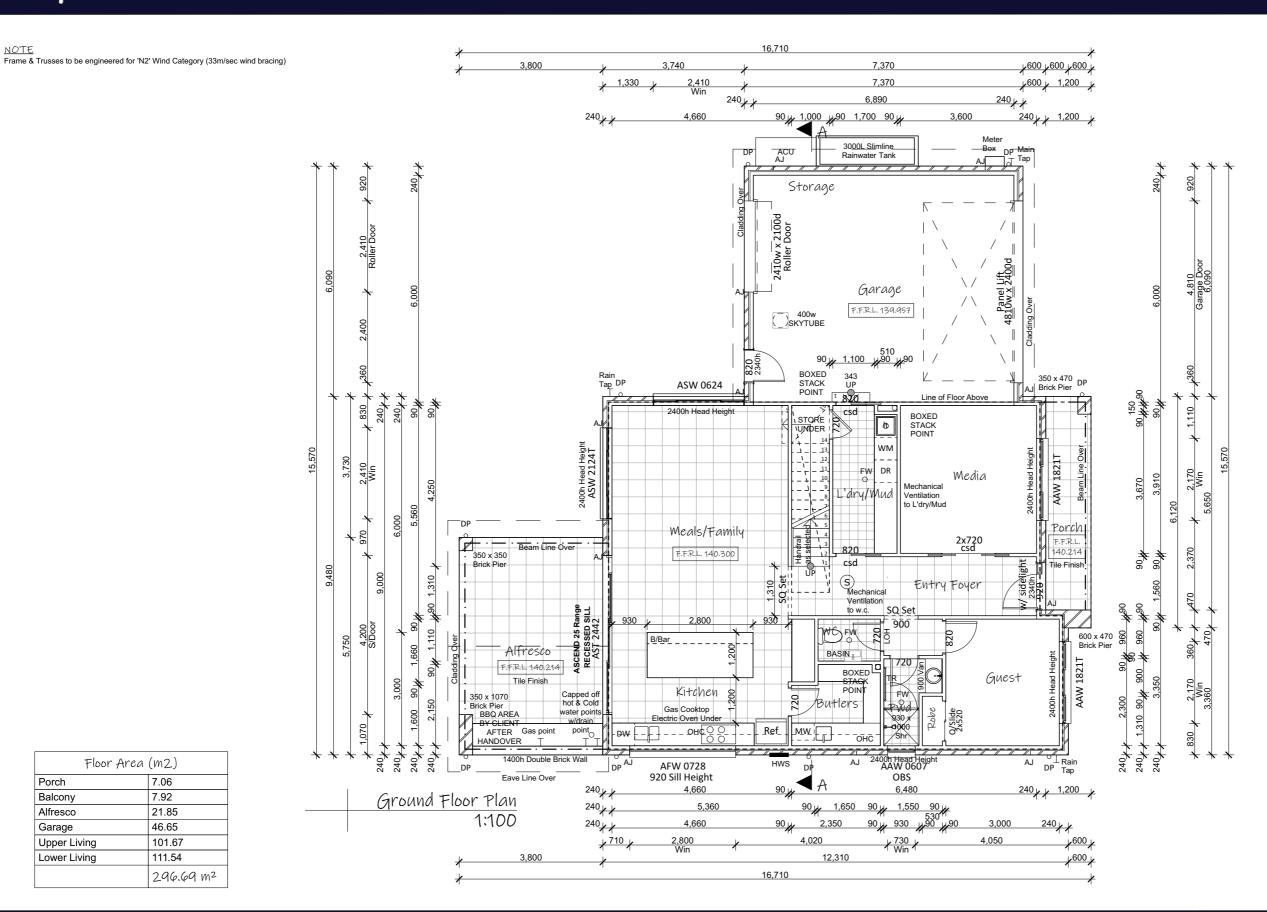

Legend:

ACÚ - Air Conditioning Unit B/Bar - Breakfast Bar DP - Downpipe DW - Dishwashe

Ens - Ensuite F/P - Fire Place FW - Floor Waste HWS - Hot Water Sys L - Linen

LC - Laundry Chute LC - Laundry Chute
LOH - Lift off Hinge
LT - Laundry Tub
MH - Manhole
MW - Microwave Oven OBS - Obscure OHC - Over Head Cupboar P - Pantry
R - Robe
RHS - Rolled Hollow Steel S - Smoke Alarm Shr - Shower

TR - Towel Rail Van - Vanity w.i.l. - Walk in Linen w.i.r. - Walk in Robe w.i.p. - Walk in Pantry w.c. - Wash Closet

ISSUE: DRAWING: 21308-13 SHEET:

8/15

note: all works to be carried out in conjuith the construction notes on sheet 2

Porch

Balcony

Alfresco

Garage

Upper Living

Lower Living

Floor Area (m2)

7.06

7.92

21.85

46.65

101.67

111.54

296.69 m²

DATE: 14-09-22 PAPER:


A3

LOT: 30 215216

Proposed Residence #37 Wareham Crescent, Frenchs Forest





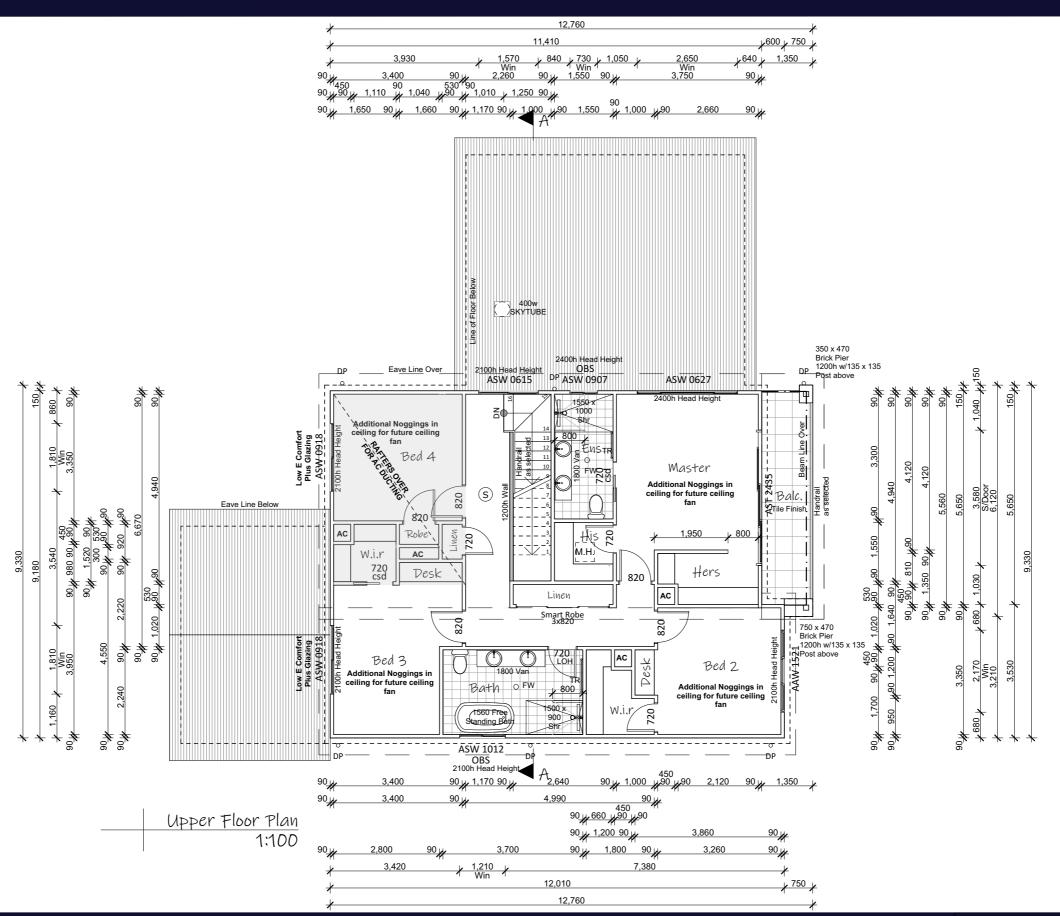

Floor Area (m2)

Porch 7.06

Balcony 7.92

Alfresco 21.85

Garage 46.65

Upper Living 101.67

Lower Living 111.54

296.69 m²

Legend:

ACU - Air Conditioning Unit AJ - Articulation Joint B/Bar - Breakfast Bar DP - Downpipe DW - Dishwasher

DW - Dishwasher Ens - Ensuite F/P - Fire Place FW - Floor Waste HWS - Hot Water Syst L - Linen

L - Linen LC - Laundry Chute LOH - Lift off Hinge LT - Laundry Tub MH - Manhole MW - Microwave Oven TR - Towel Rail Van - Vanity w.i.l. - Walk in Linen w.i.r. - Walk in Robe w.i.p. - Walk in Pantry w.c. - Wash Closet WM - Washing Machine

S - Smoke Alarm Shr - Shower

OBS - Obscure OHC - Over Head Cupboar

P - Pantry R - Robe RHS - Rolled Hollow Steel

SSUE: DRAWING:
21308-13
SHEET:

9/15

note: all works to be carried out in conj with the construction notes on sheet 2 DATE: 14-09-22 PAPER: A3


LOT: 2 30 DP: 215216

Proposed Residence #37 Wareham Crescent, Frenchs Forest






Legend:
ACU - Air Conditioning Unit
AJ - Articulation Joint
CL - Ceiling Level
FGL - Finish Ground Line
FL - Floor Level
HWS - Hot Water System
NGL - Natural Ground Line
OBS - Obscure
DP - Downpipe
RW - Retaining Wall

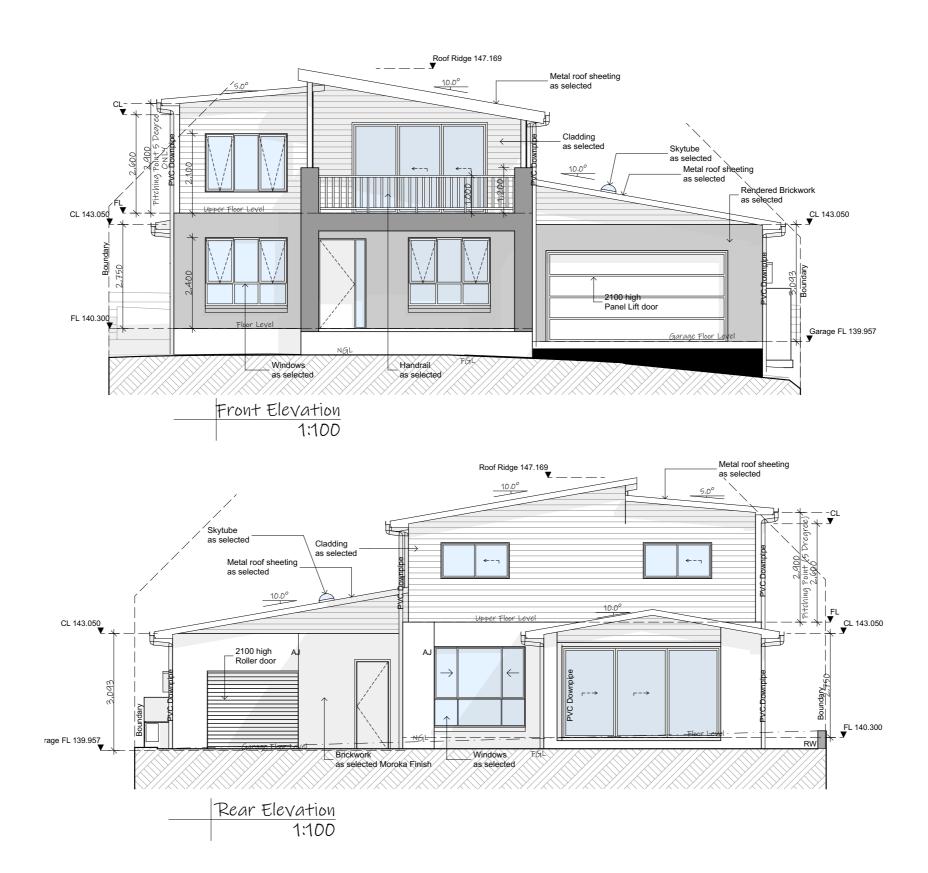





Legend:
ACU - Air Conditioning Unit
AJ - Articulation Joint
CL - Ceiling Level
FGL - Finish Ground Line
FL - Floor Level
HWS - Hot Water System
NGL - Natural Ground Line
OBS - Obscure
DP - Downpipe
RW - Retaining Wall

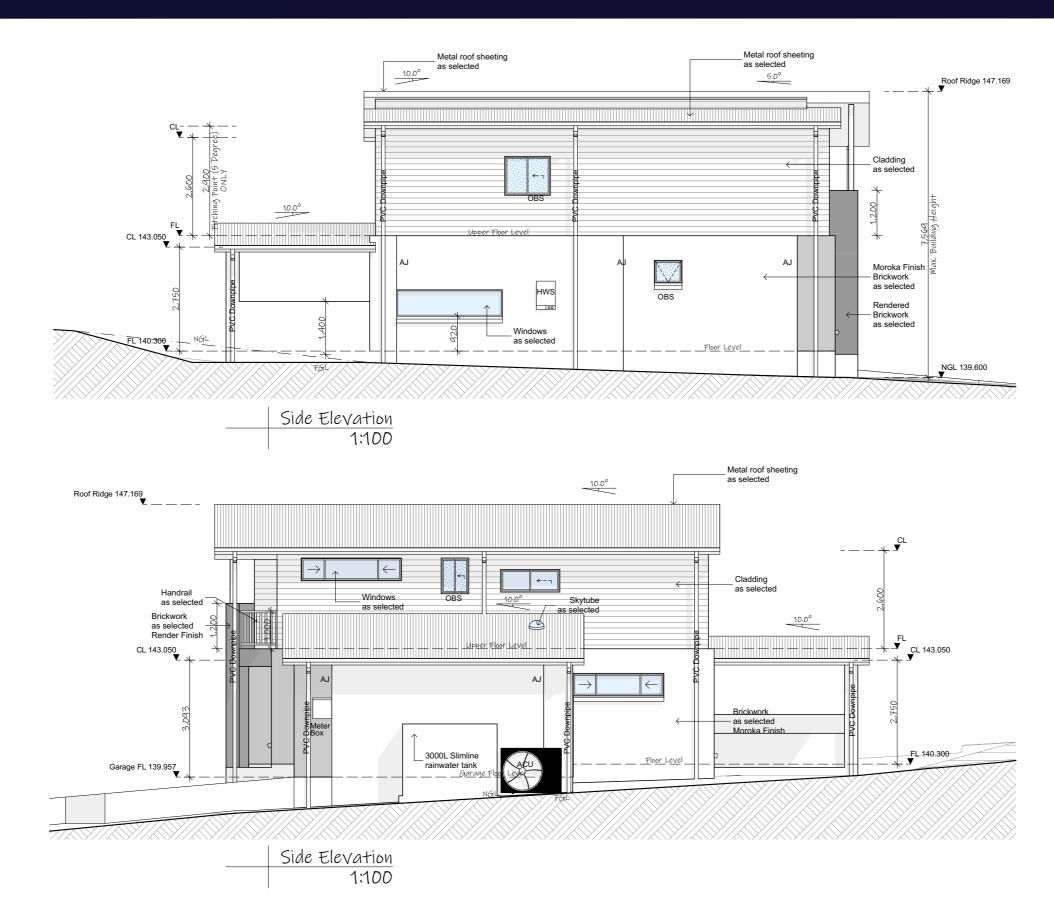



Legend:
ACU - Air Conditioning Unit
AJ - Articulation Joint
CL - Ceiling Level
FGL - Finish Ground Line FL - Floor Level HWS - Hot Water System NGL - Natural Ground Line OBS - Obscure DP - Downpipe RW - Retaining Wall

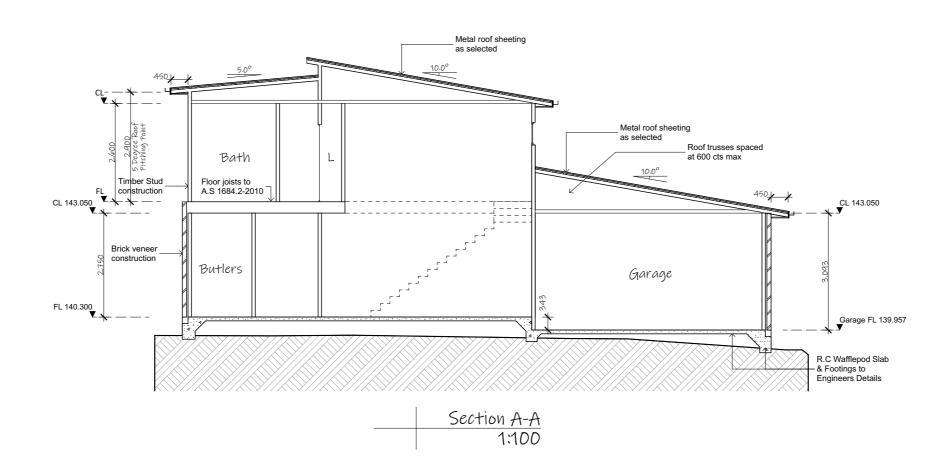





note: all works to be carried out in conjugith the construction notes on sheet 2





Description	Symbol	Qty	Notes	Description	Symbol	Qty	Notes	Description	Symbol	Qty	Notes
Light Point	0	-		T.V Point	TV	-				-	
Pendant Light	\otimes	-		Exhaust Fan	*	-				-	
Wall Light Point	<u></u>	-		2 in 1	\oplus	-				-	
Downlight		-		3 in 1	\otimes	-				-	
Spotlight	W	-		Door Chime	_	-				-	
Small Up/Down Light	-0-	-		Smoke Alarm	(S)	-				-	
20W Flouro		-		Ceiling Fan	8	-				-	
Dimmer Switch	0	-		Ceiling Fan/Light		-				-	
Light Switch	•	-		Sensor Light	0	-				-	
Single G.P.O	A	-		Phone Point	PH	-				-	
Double G.P.O	M	-		Gas Point	GAS	-				-	
Ext. Single G.P.O		-		Data Point	DATA	-				-	
Ext. Double G.P.O		-		Alarm Pad	AP	-				-	

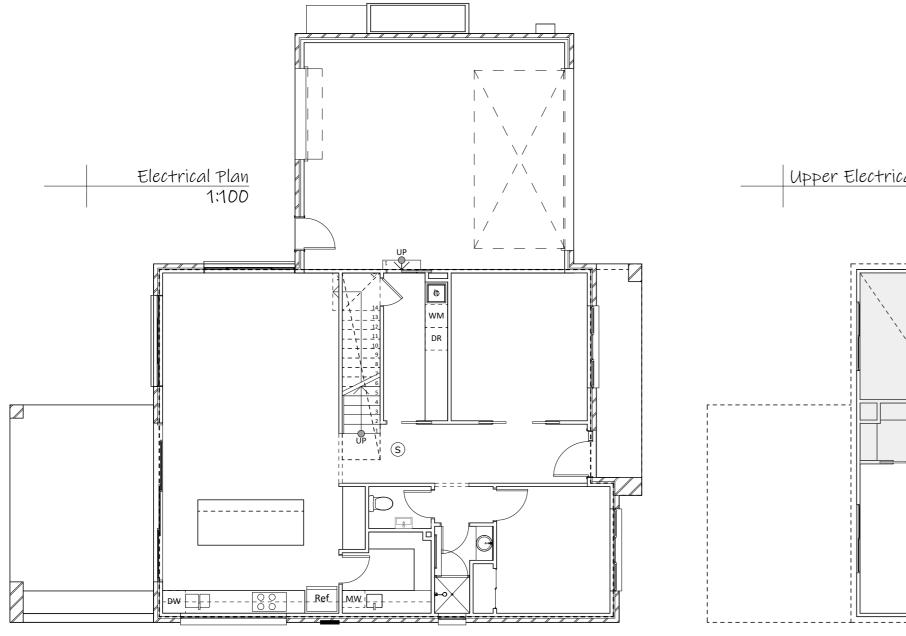

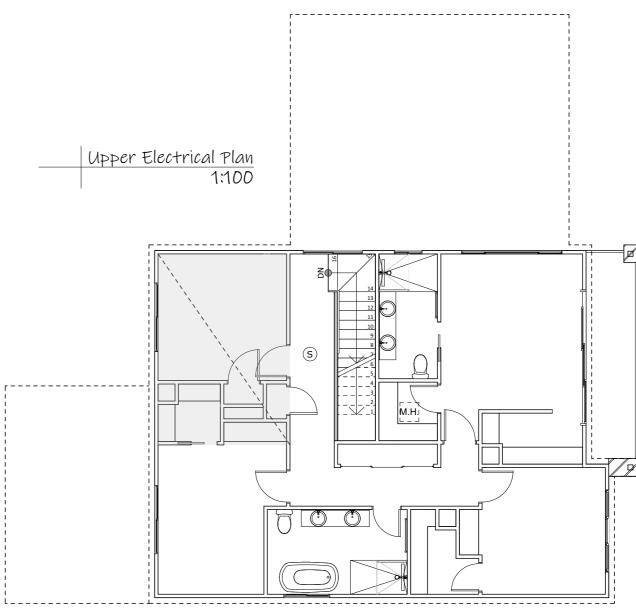



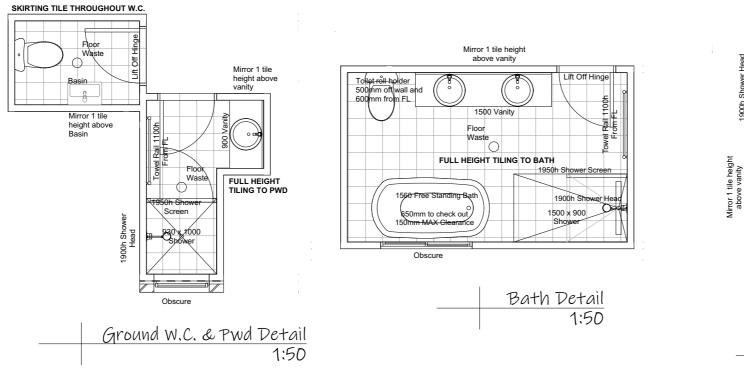

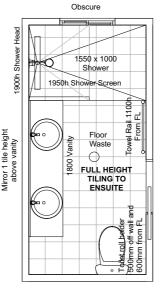


Ensuite Detail 1:50



Note:

Frames built to the low side of the slab, allow 20mm tolerance

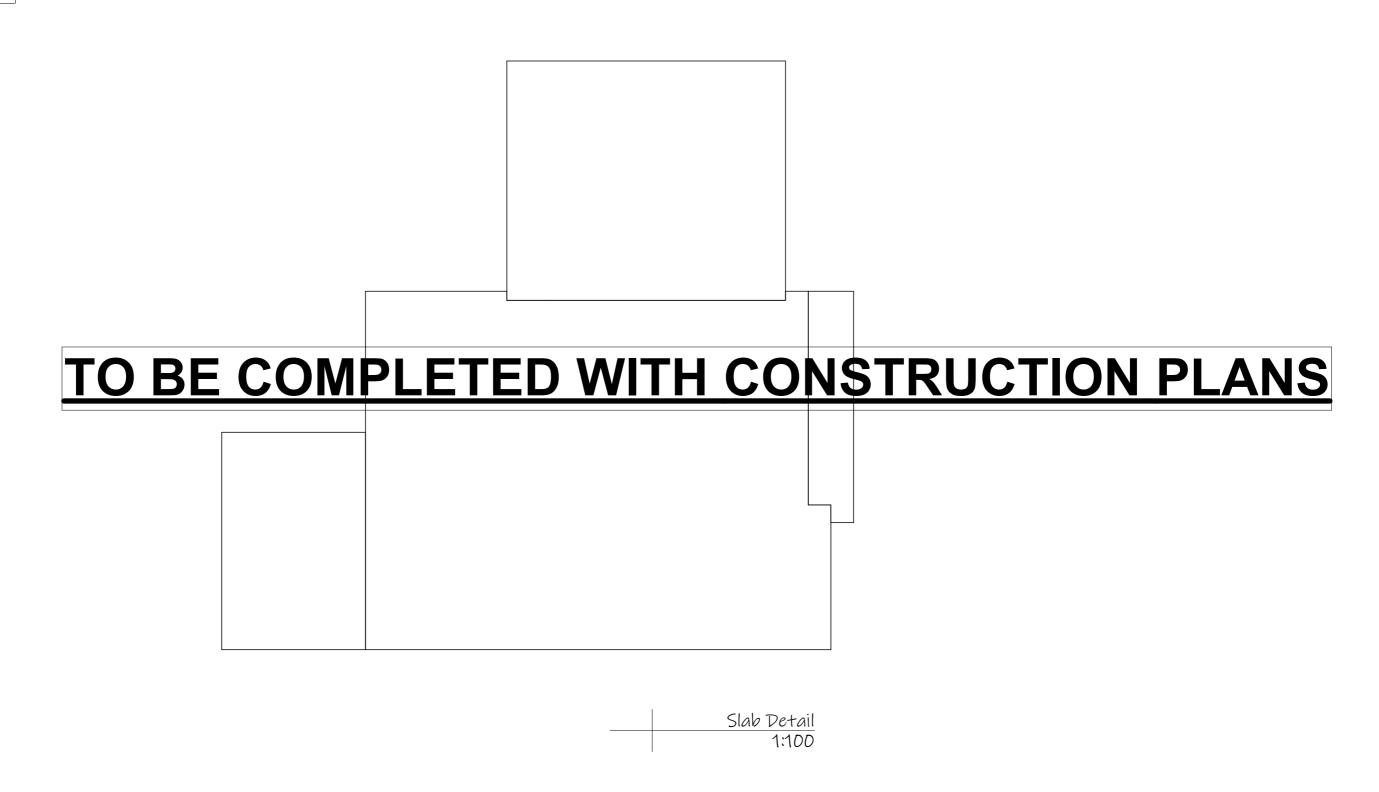



BASIX Certificate

Secretary
Date of issue: Wednesday, 14 September 2022
To be valid, this certificate must be lodged within 3 months of the date of issue.



Project summary	
Project name	21308 - 37 Wareham Crescent Frenchs _04
Street address	37 Wareham Crescent Frenchs Forest 2086
Local Government Area	Northern Beaches Council
Plan type and plan number	deposited 215216
Lot no.	30
Section no.	-
Project type	separate dwelling house
No. of bedrooms	5
Project score	
Water	✓ 40 Target 40
Thermal Comfort	✓ Pass Target Pass
Energy	✓ 51 Target 50

Certificate Prepared by	
Name / Company Name: Abeaut Design Pty Ltd t/a Accurate Design and Draf	
ADN (if applicable): 66116356551	

oject address		Assessor details and thermal le	oads	
oject name	21308 - 37 Wareham Crescent Frenchs	Assessor number	n/a	
	_04	Certificate number	n/a	
reet address	37 Wareham Crescent Frenchs Forest 2086	Climate zone	n/a	
cal Government Area	Northern Beaches Council	Area adjusted cooling load (MJ/m².year)	n/a	
an type and plan number	Deposited Plan 215216	Area adjusted heating load (MJ/m².year)	n/a	
t no.	30	Ceiling fan in at least one bedroom	n/a	
ection no.	-	Ceiling fan in at least one living room or other conditioned area	n/a	
roject type		Project score		
oject type	separate dwelling house	Water		
o. of bedrooms	5	Water	✓ 40	Targ
ite details		Thermal Comfort	✓ Pass	Targ
te area (m²)	700	Energy		
oof area (m²)	222	Lingy	✓ 51	Targ
onditioned floor area (m2)	175.25]		
nconditioned floor area (m2)	19.32	1		
ital area of garden and lawn (m2)	410	1		

ject address		Assessor details and thermal I	oads	
ct name	21308 - 37 Wareham Crescent Frenchs	Assessor number	n/a	
arldress	_04 37 Wareham Crescent Frenchs Forest	Certificate number	n/a	
address	2086	Climate zone	n/a	
Sovernment Area	Northern Beaches Council	Area adjusted cooling load (MJ/m².year)	n/a	
pe and plan number	Deposited Plan 215216	Area adjusted heating load (MJ/m².year)	n/a	
	30	Ceiling fan in at least one bedroom	n/a	
n no.	-	Ceiling fan in at least one living room or other conditioned area	n/a	
ect type		Project score		_
type	separate dwelling house			
bedrooms	5	Water	✓ 40	Target 40
details		Thermal Comfort	✓ Pass	Target Pass
rea (m²)	700	Energy	-	
area (m²)	222	Lileigy	✓ 51	Target 50
tioned floor area (m2)	175.25			
nditioned floor area (m2)	19.32	1		
area of garden and lawn (m2)	410	1		

Thermal Comfort Commitments		Show on DA plans	Show on CC/CDC plans & specs	Certifier check
General features				
The dwelling must not have more than 2 storeys.				
The conditioned floor area of the dwelling must not exceed 3	00 square metres.		· .	
				~
The dwelling must not contain open mezzanine area exceedi	ing 25 square metres.	_	_	-
The dwelling must not contain third level habitable attic room	L			J
Floor, walls and ceiling/roof				
	oof of the dwelling in accordance with the specifications listed in the	table	~	-
Construction	Additional insulation required (R-Value)	ther specifications		
floor - concrete slab on ground, 90 square metres	nii			
floor - above habitable rooms or mezzanine, 83.41 square metres, framed	nil			
external wall - brick veneer	1.86 (or 2.40 including construction)			
internal wall shared with garage - plasterboard	nil			
ceiling and roof - flat ceiling / flat roof, framed	ceiling: 4.5 (up), roof: foil/sarking fr	amed; medium (solar	absorptance 0.475-0.70	0)
	filed in accordance with Plant 3.12.1.1 of the Building Code of Austral ad with due consideration of condensation and associated interaction		ng materials.	

BASIX	Planning, Industry & Environment	www.basix.nsw.gov.au	Version: 3.0 / DARWINIA_3_20_0	Certificate No.: 1325329S_04	Wednesday, 14 September 2022

					DA plans	plans & specs	check
Windows, glazed doo	rs and skylight	S					
			evices described in the table below, in ons must be satisfied for each window		~	~	-
The dwelling may have 1 sk	ylight (<0.7 square r	metres) which is not I	listed in the table.		~	~	~
The following requirements	must also be satisfie	ed in relation to each	window and glazed door:		~	~	~
For the following glass a	nd frame types, the	certifier check can b	e performed by visual inspection.				-
- Aluminium single cle	ar						
- Aluminium double (a	ir) clear						
- Timber/uPVC/fibregla	ass single clear						
- Timber/uPVC/fibregla	ass double (air) clea	r					
than that listed and a S	olar Heat Gain Coel lance with National I	fficient (SHGC) within	ist be accompanied with certification s in the range of those listed. Total syste Council (NFRC) conditions. Frame and	m U values and SHGC must			~
Overshadowing building door, as specified in th			stance from the centre and the base of	f the window and glazed	~	_	
Window/glazed door no.	Maximum height (mm)	Maximum width (mm)	Туре	Shading Device (Dimen: 10%)	sion within	Overshadowing	
North facing							
Ensuite	900	700	aluminium, single, clear	eave 600 mm, 0 mm abor window or glazed door	ve head of	not overshadowed	
Meals/Family	600	2400	aluminium, single, clear	eave 600 mm, 0 mm abor window or glazed door	ve head of	not overshadowed	
Master	600	2700	aluminium, single, clear	eave 600 mm, 0 mm abor window or glazed door	ve head of	not overshadowed	
Staircase	600	1500	aluminium, single, clear	eave 600 mm, 0 mm abov	ve head of	not overshadowed	

BASIX	Planning, Industry & Environment	www.basix.nsw.gov.au	Version: 3.0 / DARWINIA_3_20_0	Certificate No.: 1325329S_04	Wednesday, 14 September 2022	

Window/glazed door no.	Maximum height (mm)	Maximum width (mm)	Туре	Shading Device (Dimension within 10%)	Overshadowing
East facing					
Guest	1800	2100	U-value: 5.6, SHGC: 0.324 - 0.396 (aluminium, single, Lo-Tsol Low-e)	none	not overshadowed
Media	1800	2100	aluminium, single, clear	eave 1200 mm, 0 mm above head of window or glazed door	not overshadowed
Bed 2	1500	2100	U-value: 6.6, SHGC: 0.369 - 0.451 (aluminium, single, tint)	eave 300 mm, 500 mm above head of window or glazed door	not overshadowed
Master	2400	3500	U-value: 5.6, SHGC: 0.369 - 0.451 (aluminium, single, Lo-Tsol Low-e)	eave 1350 mm, 1000 mm above head of window or glazed door	not overshadowed
South facing					
Pwd	600	700	aluminium, single, clear	none	>4 m high, 2-5 m away
Kitchen	700	2800	aluminium, single, clear	none	>4 m high, 2-5 m away
Bath	1000	1200	aluminium, single, clear	eave 600 mm, 0 mm above head of window or glazed door	>4 m high, 2-5 m away
West facing		·	<u>'</u>	<u>'</u>	<u>'</u>
Meals/Family	2100	2400	U-value: 3.1, SHGC: 0.441 - 0.539 (aluminium: thermally broken, double (air), Hi-Tsol Low-e/clear)	none	not overshadowed
Bed 3	900	1800	aluminium, single, clear	eave 300 mm, 0 mm above head of window or glazed door	not overshadowed
Alfresco	2400	4200	U-value: 5.4, SHGC: 0.522 - 0.638 (aluminium, single, Hi-Tsol Low-e)	eave 3800 mm, 0 mm above head of window or glazed door	not overshadowed
Bed 4	900	1800	aluminium, single, clear	eave 300 mm, 0 mm above head of window or glazed door	not overshadowed
	1				1

w on CC/CDC s & specs	Certifier check	
•	-	
✓	~	
•	I	
•	-	
V	~	
~	•	
•	•	
	~	
•	v	
Š		
	ایا	
•	•	J L
per 2022	page	7/9 BA

nergy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
all bathrooms/toilets;		_	-
the laundry;			
all hallways;			Ü
atural lighting			
e applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting.			-
e applicant must install a window and/or skylight in 3 bathroom(s)/toilet(s) in the development for natural lighting.	_	~	_
ther			<u> </u>
e applicant must install a gas cooktop & electric oven in the kitchen of the dwelling.			П
e applicant must construct each refrigerator space in the development so that it is "well ventilated", as defined in the BASIX finitions.		~	
e applicant must install a fixed outdoor clothes drying line as part of the development.		J	

these commitments, "applicant" me				
commitments identified with a in to evelopment application is to be lodge		companying the development ap	blication for the proposed developmen	t (if a
commitments identified with a in the ordificate / complying development or in the ordificate is a complying development or in the or		in the plans and specifications a	ccompanying the application for a cor	struction
commitments identified with a in to inal) for the development may be issued.	ast be certified by a certifying auth	nority as having been fulfilled, bet	ore a final occupation certificate(eithe	r interim or

The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER 3.0 - 3.5 Laundry: individual fan, not ducted; Operation control: manual switch on/off · at least 2 of the living / dining rooms; the kitchen;

DRAWING: 21308-13 SHEET: 16/15

note: all works to be carried out in conju-with the construction notes on sheet 2

DATE: 14-09-22 30 A3

LOT: 215216 Proposed Residence #37 Wareham Crescent, Frenchs Forest





37 WAREHAM CRESCENT FRENCHS FOREST NSW 2086– SCHEDULE OF DETAILS AND FINISHES

FINISHES: EXTERIOR

AREA	ITEM	FINISH/COLOUR	DESCRIPTION	IMAGE
ROOF	COLOURBOND	WINDSPRAY COLOURBOND CB 13		
GUTTER	COLOURBOND	WINDSPRAY COLOURBOND CB 13		
FASCIA	COLOURBOND	WINDSPRAY COLOURBOND CB 613		
DOWNPIPES	PVC	GEMINI SILVER TAUBMANS NH 46 GREY GAMUT TAUBMANS T15 27.2		

SIDES & REAR GROUND FLOOR ELEVATIONS	CAVITY BRICKWORK	GEMINI SILVER TAUBMANS NH 46	MOROKA	
FAÇADE GROUND FLOOR ELEVATION	CAVITY BRICKWORK	GEMINI SILVER TAUBMANS NH 46	RENDER	
FAÇADE + REAR + SIDE FIRST FLOOR ELEVATIONS	WEATHERTEX PRIMELOCK SMOOTH CLADDING	GEMINI SILVER TAUBMANS NH 46	HORIZONTAL CLADDING	
FAÇADE BALCONY & BRICK PIERS	CAVITY BRICKWORK	GREY GAMUT TAUBMANS T15 27.2	RENDER	
EXTERNAL CORNER CLADDING WINDOW & FRONT DOOR TRIMS		AKIMBO TAUBMANS T12 2A 11		
FAÇADE BALCONY POSTS	PINE TIMBER	AKIMBO TAUBMANS T12 2A 11	PAINTED	

WINDOWS	ALUMINIUM	PEARL WHITE	SATIN	PEARL WHITE (Gloss)
FRONT DOOR	TIMBER	SPLICED PACIFIC MAPLE CLEAR STAINED	HUME DOORS LINEAR XLR500	
GARAGE DOOR	ALUMINIUM	DOVER WHITE COLOURBOND	MADISON	
REAR ELEVATION ROLLER DOOR	ROLLER	SHALE GREY COLOURBOND C4		
RAINWATER TANK		WINDSPRAY COLOURBOND CB 13		

DRIVEWAY COLOURED CONCRETE	SALT DUNE		
----------------------------	-----------	--	--