

8 June 2022

Bayview Golf Club Ltd
C/- Vaughan Milligan Development Consulting Pty Ltd Po Box 49
NEWPORT NSW 2106

Dear Sir/Madam

Application Number: DA2021/1338

Address: Lot 1 DP 662920 , 52 Cabbage Tree Road, BAYVIEW NSW 2104
Lot 5 DP 45114 , 52 Cabbage Tree Road, BAYVIEW NSW 2104
Lot 7 DP 45114 , 52 Cabbage Tree Road, BAYVIEW NSW 2104
Lot A DP 339874 , 1825 Pittwater Road, BAYVIEW NSW 2104
Lot 1 DP 986894 , 1825 Pittwater Road, BAYVIEW NSW 2104
Lot 2 DP 986894 , 1825 Pittwater Road, BAYVIEW NSW 2104
Lot 3 DP 986894 , 1825 Pittwater Road, BAYVIEW NSW 2104
Lot 150 DP 1003518 , 1825 Pittwater Road, BAYVIEW NSW 2104
Lot 191 DP 1039481 , 1825 Pittwater Road, BAYVIEW NSW 2104

Proposed Development: Construction of water harvesting and sub-surface drainage of golf course fairways

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at www.northernbeaches.nsw.gov.au

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to council@northernbeaches.nsw.gov.au

Regards,



Gareth David
Planner

NOTICE OF DETERMINATION

Application Number:	DA2021/1338
Determination Type:	Development Application

APPLICATION DETAILS

Applicant:	Bayview Golf Club Ltd
Land to be developed (Address):	Lot 1 DP 662920 , 52 Cabbage Tree Road BAYVIEW NSW 2104 Lot 5 DP 45114 , 52 Cabbage Tree Road BAYVIEW NSW 2104 Lot 7 DP 45114 , 52 Cabbage Tree Road BAYVIEW NSW 2104 Lot A DP 339874 , 1825 Pittwater Road BAYVIEW NSW 2104 Lot 1 DP 986894 , 1825 Pittwater Road BAYVIEW NSW 2104 Lot 2 DP 986894 , 1825 Pittwater Road BAYVIEW NSW 2104 Lot 3 DP 986894 , 1825 Pittwater Road BAYVIEW NSW 2104 Lot 150 DP 1003518 , 1825 Pittwater Road BAYVIEW NSW 2104 Lot 191 DP 1039481 , 1825 Pittwater Road BAYVIEW NSW 2104
Proposed Development:	Construction of water harvesting and sub-surface drainage of golf course fairways

DETERMINATION - APPROVED

Made on (Date)	07/06/2022
Consent to operate from (Date):	07/06/2022
Consent to lapse on (Date):	07/06/2027

Detail of Conditions

The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.

Note:

If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.

DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

1. **Approved Plans and Supporting Documentation**

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

a) Approved Plans

Architectural Plans - Endorsed with Council's stamp		
Drawing No.	Dated	Prepared By
C110 Rev.F - ZONE MAP AREAS & GENERAL WORKS	17/03/2021	Chrisp Consulting
C111 Rev.F - ZONE 1 DETAIL PLAN	17/03/2021	Chrisp Consulting
C112 Rev.F - ZONE 2 DETAIL PLAN	17/03/2021	Chrisp Consulting
C113 Rev.F - ZONE 3 DETAIL PLAN	17/03/2021	Chrisp Consulting
C115 Rev.D - ZONE 5 DETAIL PLAN	17/03/2021	Chrisp Consulting
C116 Rev.D - ZONE 6 DETAIL PLAN	17/03/2021	Chrisp Consulting
C117 Rev.D - ZONE 7 DETAIL PLAN	17/03/2021	Chrisp Consulting
C118 Rev.D - ZONE 8 DETAIL PLAN - SHEET 1 OF 2	17/03/2021	Chrisp Consulting
C119 Rev.D - ZONE 8 DETAIL PLAN - SHEET 2 OF 2	17/03/2021	Chrisp Consulting
C120 Rev.D - ZONE 9 DETAIL PLAN - SHEET 1 OF 3	17/03/2021	Chrisp Consulting
C121 Rev.D - ZONE 9 DETAIL PLAN - SHEET 2 OF 3	17/03/2021	Chrisp Consulting
C122 Rev.D - ZONE 9 DETAIL PLAN - SHEET 3 OF 3	17/03/2021	Chrisp Consulting
C123 Rev.D - ZONE 10 DETAIL PLAN - SHEET 1 OF 2	17/03/2021	Chrisp Consulting
C124 Rev.D - ZONE 10 DETAIL PLAN - SHEET 2 OF 2	17/03/2021	Chrisp Consulting
C200 Rev.B - PUMP STATION AND GENERAL WORKS DETAILS	23/02/2021	Chrisp Consulting

Engineering Plans		
Drawing No.	Dated	Prepared By
C130 Rev.C - TYPICAL SEDIMENT & EROSION CONTROL PLAN & DETAILS	17/03/2021	Chrisp Consulting

Reports / Documentation – All recommendations and requirements contained within:		
Report No. / Page No. / Section No.	Dated	Prepared By
Arboricultural Impact Assessment Report (BGC9221)	19/03/2021	Bellevue Tree Consultants
Estuarine Risk Management and Water	01/08/2021	Horton Coastal

Management Report		Engineering Pty Ltd
Acid Sulfate Soil Assessment Report (P2108485JR02V01)	17/10/2021	Martens & Associates Pty Ltd
Acid Sulfate Soil Management Plan (P2108485JR03V01)	17/10/2021	Martens & Associates Pty Ltd
Geotechnical Assessment Report (P2108485JR01V01)	18/10/2021	Martens & Associates Pty Ltd

b) Any plans and / or documentation submitted to satisfy the Conditions of this consent.

c) The development is to be undertaken generally in accordance with the following:

Waste Management Plan		
Drawing No/Title.	Dated	Prepared By
Excavation & Fill Plan	-	-
Waste Management Plan	02/08/2021	Vaughan Milligan

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

2. **Compliance with Other Department, Authority or Service Requirements**

The development must be carried out in compliance with all recommendations and requirements, excluding general advice, within the following:

Other Department, Authority or Service	EDMS Reference	Dated
Natural Resources Access Regulator (NRAR)	NRAR Referral Response - General Terms of Approval (IDAS-2021 10364)	17 March 2022
Water NSW	Water NSW General Terms of Approval (IDAS1143400)	30 May 2022

(NOTE: For a copy of the above referenced document/s, please see Application Tracking on Council's website www.northernbeaches.nsw.gov.au)

Reason: To ensure the work is carried out in accordance with the determination and the statutory requirements of other departments, authorities or bodies.

3. **No Approval for works within Zone 4**

No approval is granted under this Development Consent for any works within the area identified as "zone 4" within the approved plans.

Reason: To ensure compliance with the relevant legislation and environmental protection.

4. **No approval for existing works**

This approval/consent relates only to the new work nominated on the approved consent plans and does not approve or regularise any existing buildings or structures within the property boundaries.

Reason: To ensure that this consent grants approval only for future works.

5. Prescribed Conditions

- (a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
 - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
 - (i) in the case of work for which a principal contractor is required to be appointed:
 - A. the name and licence number of the principal contractor, and
 - B. the name of the insurer by which the work is insured under Part 6 of that Act,
 - (ii) in the case of work to be done by an owner-builder:
 - A. the name of the owner-builder, and
 - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.
- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
 - (i) protect and support the adjoining premises from possible damage from the excavation, and
 - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
 - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
 - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost

of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

6. **No approval for works within Coastal Wetlands**

No works are permitted to be carried out on land identified as “coastal wetlands” as identified by State Environmental Planning Policy (Coastal Management) 2018 and its associated mapping and as identified within Estuarine Risk Management and Water Management Report dated 01 August 2021 prepared by Horton Coastal Engineering Pty Ltd.

Reason: Biodiversity and wetland protection

7. **General Requirements**

(a) Unless authorised by Council:

Building construction and delivery of material hours are restricted to:

- 7.00 am to 5.00 pm inclusive Monday to Friday,
- 8.00 am to 1.00 pm inclusive on Saturday,
- No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) Should any asbestos be uncovered on site, its demolition and removal must be carried out in accordance with WorkCover requirements and the relevant Australian Standards.
- (c) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (d) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (e) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (f) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and

construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.

- (g) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (h) No skip bins, building materials, demolition or excavation waste of any nature, and no hoist, plant or machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (i) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.
- (j) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.
- (k) Prior to the commencement of any development onsite for:
 - i) Building/s that are to be erected
 - ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
 - iii) Building/s that are to be demolished
 - iv) For any work/s that is to be carried out
 - v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.

- (l) A "Road Opening Permit" must be obtained from Council, and all appropriate charges paid, prior to commencement of any work on Council property. The owner/applicant shall be responsible for all public utilities and services in the area of the work, shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.
- (m) The works must comply with the relevant Ausgrid Network Standards and SafeWork NSW Codes of Practice.
- (n) Requirements for new swimming pools/spas or existing swimming pools/spas affected by building works.
 - (1) Child resistant fencing is to be provided to any swimming pool or lockable cover to any spa containing water and is to be consistent with the following;

Relevant legislative requirements and relevant Australian Standards (including but not limited) to:

- (i) Swimming Pools Act 1992
- (ii) Swimming Pools Amendment Act 2009
- (iii) Swimming Pools Regulation 2018
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools.

- (2) A 'KEEP WATCH' pool safety and aquatic based emergency sign, issued by Royal Life Saving is to be displayed in a prominent position within the pool/spa area.
- (3) Filter backwash waters shall be conveyed to the Sydney Water sewerage system in sewered areas or managed on-site in unsewered areas in a manner that does not cause pollution, erosion or run off, is separate from the irrigation area for any wastewater system and is separate from any onsite stormwater management system.
- (4) Swimming pools and spas must be registered with the Division of Local Government.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

FEES / CHARGES / CONTRIBUTIONS

8. Policy Controls

Northern Beaches 7.12 Contributions Plan 2021

A monetary contribution of \$907.50 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan 2021. The monetary contribution is based on a development cost of \$181,500.00.

The monetary contribution is to be paid prior to the issue of the first Construction Certificate or Subdivision Certificate whichever occurs first, or prior to the issue of the Subdivision Certificate where no Construction Certificate is required. If the monetary contribution (total or in part) remains unpaid after the financial quarter that the development consent is issued, the amount unpaid (whether it be the full cash contribution or part thereof) will be adjusted on a quarterly basis in accordance with the applicable Consumer Price Index. If this situation applies, the cash contribution payable for this development will be the total unpaid monetary contribution as adjusted.

The proponent shall provide to the Certifying Authority written evidence (receipt/s) from Council that the total monetary contribution has been paid.

The Northern Beaches Section 7.12 Contributions Plan 2021 may be inspected at 725 Pittwater Rd, Dee Why and at Council's Customer Service Centres or alternatively, on Council's website at www.northernbeaches.nsw.gov.au

This fee must be paid prior to the issue of the Construction Certificate. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

9. Security Bond

A bond (determined from cost of works) of \$1,500 and an inspection fee in accordance with Council's Fees and Charges paid as security are required to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from

the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, and details demonstrating payment are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at www.northernbeaches.nsw.gov.au).

Reason: To ensure adequate protection of Council's infrastructure.

CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

10. **Flooding**

In order to protect property and occupants from flood risk the following is required:

Flood Effects Caused by Development – A2

There is to be no filling of the land or any other reduction of the available flood storage which results in a net loss of storage below the 1% AEP flood level of 1.92m AHD.

Building Components and Structural Soundness – B3

All new electrical equipment, power points, wiring, fuel lines, sewerage systems or any other service pipes and connections must be waterproofed and/or located above the Flood Planning Level of 2.42m AHD.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To reduce the impact of flooding and flood liability on owners and occupiers of flood-prone property and reduce public and private losses in accordance with Council and NSW Government policy.

11. **No Clearing of Vegetation**

Unless otherwise exempt, no vegetation is to be cleared prior to issue of a Construction Certificate.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to issue of Construction Certificate.

Reason: To protect native vegetation.

12. **Erosion and Sediment Control Plan**

An Erosion and Sediment Control Plan (ESCP) shall be prepared by an appropriately qualified person and implemented onsite prior to commencement. The ESCP must meet the requirements outlined in the Landcom publication *Managing Urban Stormwater: Soils and Construction - Volume 1, 4th Edition (2004)*. The ESCP must include the following as a

minimum:

- Site Boundaries and contours
- Approximate location of trees and other vegetation, showing items for removal or retention (consistent with any other plans attached to the application)
- Location of site access, proposed roads and other impervious areas (e.g. parking areas and site facilities)
- Existing and proposed drainage patterns with stormwater discharge points
- Locations and methods of all erosion and sediment controls that must include sediment fences, stabilised site access, materials and waste stockpiles locations, location of any stormwater pits on the site and how they are going to be protected.
- North point and scale.

Details demonstrating compliance are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: Protection of the receiving environment.

13. **Amendments to the approved plans**

The following amendments are to be made to the approved plans:

- All works within the area identified as "Zone 4" shall be deleted from the plans.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the construction certificate.

Reason: To ensure development minimises unreasonable impacts upon surrounding land.

14. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in the Geotechnical Report referenced in Condition 1 of this consent are to be incorporated into the construction plans.

Prior to issue of the Construction Certificate, Form 2 of the Geotechnical Risk Management Policy for Pittwater (Appendix 5 of P21 DCP) is to be completed and submitted to the Accredited Certifier.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

15. **Waste Management Plan**

A Waste Management Plan must be prepared for this development. The Plan must be in accordance with the Development Control Plan.

Details demonstrating compliance must be provided to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that any demolition and construction waste, including excavated material, is reused, recycled or disposed of in an environmentally friendly manner.

16. **Structural Adequacy and Excavation Work**

Excavation work is to ensure the stability of the soil material of adjoining properties, the protection of adjoining buildings, services, structures and / or public infrastructure from damage using underpinning, shoring, retaining walls and support where required. All retaining walls are to be structurally adequate for the intended purpose, designed and certified by a Structural Engineer, except where site conditions permit the following:

- (a) maximum height of 900mm above or below ground level and at least 900mm from any property boundary, and
- (b) Comply with AS3700, AS3600 and AS1170 and timber walls with AS1720 and AS1170.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To provide public and private safety.

17. **Estuarine Hazard Design Requirements**

All development or activities must be designed and constructed such that they will not increase the level of risk from estuarine processes for any people, assets or infrastructure in surrounding properties; they will not adversely affect estuarine processes; they will not be adversely affected by estuarine processes.

Reason: To minimise potential hazards associated with development in an estuarine habitat.

18. **Compliance with Estuarine Risk Management Report**

The development is to comply with all recommendations of the approved Estuarine Risk Management Report prepared by Horton Coastal Engineering Pty Ltd, dated 1 August 2021 and these recommendations are to be incorporated into construction plans.

Reason: To minimise potential hazards associated with development in an estuarine habitat.

19. **Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

20. **Sydney Water "Tap In"**

The approved plans must be submitted to the Sydney Water Tap in service, prior to works commencing, to determine whether the development will affect any Sydney Water assets and/or easements. The appropriately stamped plans must then be submitted to the Certifying Authority demonstrating the works are in compliance with Sydney Water requirements.

Please refer to the website www.sydneywater.com.au for:

- "Tap in" details - see <http://www.sydneywater.com.au/tapin>
- Guidelines for Building Over/Adjacent to Sydney Water Assets.

Or telephone 13 000 TAP IN (1300 082 746).

Reason: To ensure compliance with the statutory requirements of Sydney Water.

21. **Construction site management plan**

Before the issue of a construction certificate, the applicant must ensure a construction site management plan is prepared before it is provided to and approved by the certifier. The plan must include the following matters:

- location and materials for protective fencing and hoardings to the perimeter on the site
- provisions for public safety
- pedestrian and vehicular site access points and construction activity zones
- details of construction traffic management, including proposed truck movements to and from the site and estimated frequency of those movements, and measures to preserve pedestrian safety in the vicinity of the site
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for any activities involving the management of vehicle and pedestrian traffic
- protective measures for on-site tree preservation (including in accordance with AS 4970-2009 Protection of trees on development sites and Council's DCP, if applicable) and trees in adjoining public domain (if applicable)
- details of any bulk earthworks to be carried out
- location of site storage areas and sheds
- equipment used to carry out all works
- a garbage container with a tight-fitting lid
- dust, noise and vibration control measures
- location of temporary toilets.

The applicant must ensure a copy of the approved construction site management plan is kept on-site at all times during construction.

Reason: To require details of measures that will protect the public, and the surrounding environment, during site works and construction.

CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

22. **Project Arborist**

A Project Arborist with minimum AQF Level 5 in arboriculture shall be engaged to provide tree protection measures in accordance with Australian Standard 4970-2009 Protection of Trees on Development Sites. The Project Arborist is to specify and oversee all tree protection measures such as tree protection fencing, trunk and branch protection, and ground protection.

The Project Arborist is to supervise all demolition, excavation and construction works near all trees to be retained, including construction methods near the existing trees to protect tree roots, trunks, branches and canopy. Where required, manual excavation is to occur ensuring no tree root at or >25mm (Ø) is damaged by works, unless approved by the Project Arborist.

Existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by the Project Arborist.

The Project Arborist shall be in attendance and supervise all works as nominated in the Arboricultural Impact Assessment, including:

- i) all demolition, excavation and construction works within the TPZ's and SRZ's of trees to be retained.

All tree protection measures specified must:

- a) be in place before work commences on the site, and
- b) be maintained in good condition during the construction period, and

c) remain in place for the duration of the construction works.

The Project Arborist shall provide certification to the Certifying Authority that all recommendations listed for the protection of the existing tree(s) have been carried out satisfactorily to ensure no impact to the health of the tree(s). Photographic documentation of the condition of all trees to be retained shall be recorded, including at commencement, during the works and at completion.

Note:

- i) A separate permit or development consent may be required if the branches or roots of a protected tree on the site or on an adjoining site are required to be pruned or removed.
- ii) Any potential impact to trees as assessed by the Project Arborist will require redesign of any approved component to ensure existing trees upon the subject site and adjoining properties are preserved and shall be the subject of a modification application where applicable.

Reason: Tree protection.

23. **Tree Removal Within the Property**

This consent approves the removal of the following tree(s) within the property (as recommended in the Arboricultural Impact Assessment):

- i) *Casuarina glauca*, located within proposed works Zone 1, Tree No. 1,
- ii) *Casuarina glauca*, located within proposed works Zone 8, Tree No. 24,
- iii) *Casuarina glauca*, located within proposed works Zone 8, Tree No. 25,
- iv) *Casuarina glauca*, located within proposed works Zone 10, Tree No. 44.

Note:

- i) Exempt Species as listed in the Development Control Plan or the Arboricultural Impact Assessment do not require Council consent for removal.
- ii) Any request to remove a tree approved for retention under the development application is subject to a Section 4.55 modification application, or an assessment by an Arborist with minimum AQF Level 5 in arboriculture that determines that the tree presents an imminent risk to life or property.

Reason: To enable authorised building works.

24. **Dead or Injured Wildlife**

If construction activity associated with this development results in injury or death of a native mammal, bird, reptile or amphibian, a registered wildlife rescue and rehabilitation organisation must be contacted for advice.

Reason: To protect native wildlife.

25. **Temporary Protection Fencing – Exclusion Zones**

Prior to the commencement of any works onsite, temporary mesh construction fencing is to be erected surrounding areas of retained native vegetation on the site.

Details demonstrating compliance must be submitted to the Principal Certifying Authority prior to any commencement.

Reason: To protect native vegetation.

26. **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing

Urban Stormwater: Soils and Construction' (2004). Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

27. **Natural Resources Access Regulator Approval**

Prior to the commencement of any works, an application must be submitted to Natural Resources Access Regulator, and obtained, for a controlled activity approval under the Water Management Act 2000.

Reason: To ensure the work is carried out in accordance with the determination and the statutory requirements of other departments, authorities or bodies.

CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

28. **Protection of Landscape Features and Sites of Significance**

All natural landscape features, including natural rock outcrops, natural vegetation, soil and watercourses, are to remain undisturbed during demolition, excavation and construction works, except where affected by works detailed on approved plans.

Should any Aboriginal sites be uncovered during the carrying out of works, those works are to cease and Council, the NSW Office of Environment and Heritage (OEH) and the Metropolitan Local Aboriginal Land Council are to be contacted.

Reason: Preservation of significant environmental features.

29. **Tree and Vegetation Protection**

a) Existing trees and vegetation shall be retained and protected, including:

- i) all trees and vegetation within the site not approved for removal, excluding exempt trees and vegetation under the relevant planning instruments of legislation,
- ii) all trees and vegetation located on adjoining properties,
- iii) all road reserve trees and vegetation.

b) Tree protection shall be undertaken as follows:

- i) tree protection shall be in accordance with Australian Standard 4970-2009 Protection of Trees on Development Sites, including the provision of temporary fencing to protect existing trees within 5 metres of development,
- ii) existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by an Arborist with minimum AQF Level 5 in arboriculture,
- iii) removal of existing tree roots at or >25mm (Ø) diameter is not permitted without consultation with an Arborist with minimum AQF Level 5 in arboriculture,
- iv) no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained,
- v) structures are to bridge tree roots at or >25mm (Ø) diameter unless directed by an Arborist with minimum AQF Level 5 in arboriculture on site,
- vi) excavation for stormwater lines and all other utility services is not permitted within the tree protection zone, without consultation with an Arborist with minimum AQF Level 5 in arboriculture including advice on root protection measures,
- vii) should either or all of v), vi) and vii) occur during site establishment and construction works, an Arborist with minimum AQF Level 5 in arboriculture shall provide recommendations for tree

- protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist to the Certifying Authority,
- viii) any temporary access to, or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of Australian Standard 4970-2009 Protection of Trees on Development Sites,
 - ix) the activities listed in section 4.2 of Australian Standard 4970-2009 Protection of Trees on Development Sites shall not occur within the tree protection zone of any tree on the lot or any tree on an adjoining site,
 - x) tree pruning from within the site to enable approved works shall not exceed 10% of any tree canopy, and shall be in accordance with Australian Standard 4373-2007 Pruning of Amenity Trees,
 - xi) the tree protection measures specified in this clause must: i) be in place before work commences on the site, and ii) be maintained in good condition during the construction period, and iii) remain in place for the duration of the construction works.
- c) Tree protection shall specifically be undertaken in accordance with the recommendations in the Arboricultural Impact Assessment, as listed in the following sections:
- i) Section 4 - Observations and Discussion,
 - ii) Section 5 - Conclusion,
 - iii) Section 6 - Recommendations,
 - iv) Section 7 - Arboricultural Method Statement.

The Certifying Authority must ensure that:

- d) The arboricultural works listed in c) are undertaken and certified by an Arborist as compliant to the recommendations of the Arboricultural Impact Assessment.
- e) The activities listed in section 4.2 of Australian Standard 4970-2009 Protection of Trees on Development Sites, do not occur within the tree protection zone of any tree, and any temporary access to, or location of scaffolding within the tree protection zone of a protected tree, or any other tree to be retained on the site during the construction, is undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of that standard.

Note: All street trees within the road verge and trees within private property are protected under Northern Beaches Council development control plans, except where Council's written consent for removal has been obtained. The felling, lopping, topping, ringbarking, or removal of any tree (s) is prohibited.

Reason: Tree and vegetation protection

30. **Aquatic sediment management**

Environmental safeguards (e.g. silt curtains) are to be used during construction to prevent the escape of turbid plumes into the aquatic environment. The silt curtains must be carefully placed and secured to ensure they do not drag over any nearby seagrass beds.

The safeguards must be regularly maintained and removed once the works are completed.

Reason: Protection of seagrass.

31. **Installation and Maintenance of Sediment and Erosion Controls**

Council proactively regulates construction sites for sediment management.

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing

Urban Stormwater: Soils and Construction' (2004) and the Erosion and Sediment Control Plan prior to commencement of any other works on site.

Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and vegetation cover has been re-established across 70 percent of the site, and the remaining areas have been stabilised with ongoing measures such as jute mesh or matting.

Reason: Protection of the receiving environment.

32. **Dewatering Management**

Tailwater (surface water and rainwater): Please contact catchment@northernbeaches.nsw.gov.au for advice on Council's water quality requirements for a single instance of dewatering tailwater that collects in an excavation during works. A dewatering permit application must be made for expected multiple instances or continuous dewatering of tailwater.

Groundwater: A permit from Council is required for any dewatering of groundwater. An application for interference with an aquifer is required to the Natural Resources Access Regulator. Contact catchment@northernbeaches.nsw.gov.au for more information about permits.

The groundwater/tailwater to be discharged must be compliant with the General Terms of Approval/Controlled Activity permit issued by WaterNSW (if applicable), Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004) (Blue Book), Council's Compliance and Enforcement Policy and legislation including Protection of the Environment Operations Act 1997 and Contaminated Lands Act 1997.

All approvals, water discharges and monitoring results are to be documented and kept on site. Copies of all records shall be provided to the appropriate regulatory authority, including Council, upon request.

Reason: Protection of the receiving environment and groundwater resources.

33. **Geotechnical Requirements**

All recommendations identified in the Geotechnical Report referenced in Condition 1 of this consent, that are required to occur during works must be done.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority during works.

Reason: To ensure geotechnical risk is mitigated appropriately.

34. **Installation and Maintenance of Sediment Control**

Prior to any works commencing on site, including demolition, sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004). Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion

from the site.

35. **Waste Management During Development**

The reuse, recycling or disposal of waste during works must be done generally in accordance with the Waste Management Plan for this development.

Details demonstrating compliance must be submitted to the Principal Certifying Authority.

Reason: To ensure demolition and construction waste is recycled or reused and to limit landfill.

36. **No Fill in Native Vegetation Areas**

No fill is to be introduced in the area of native vegetation or habitat remaining on the site.

Reason: To ensure the protection of the natural environment.

37. **Site filling - Virgin Excavated Natural Material (VENM)**

Where site fill material is necessary, fill materials must:

1. Be Virgin Excavated Natural Material (VENM) only, as defined in: The Protection of the Environment Operations Act 1997
2. Be free of slag, hazardous, contaminated, putrescibles, toxic or radioactive excavated material and soil, rock or similar material. Putrescibles and non-putrescibles solid waste (including demolition material) is not permitted.
3. The Applicant shall provide certification by a N.A.T.A. approved laboratory to the Principal Certifying Authority for approval prior to importation of material.

Reason: To ensure protection of the natural environment.

38. **Protection of Concrete Elephant Statues**

The heritage listed concrete elephant statues, located on the 18th green, are to be protected at all times during any construction works.

Reason: To ensure that the heritage listed concrete elephant statues are not damaged.

39. **Acid Sulfate Soils**

All excavation, construction and associated works must be conducted in accordance with the approved Acid Sulfate Soil Management Plan titled "Stormwater Harvesting and Irrigation Works" dated October 2021 ref. no. P2108485JR03V01.

Reason: To ensure management of potential acid sulfate soils.

40. **Site Contamination Controls – Acid Sulfate Soils**

All stockpiles of potentially contaminated soil must be stored in a secure area in a way that is not likely to cause pollution or be a public health risk.

All contaminated soil removed from the site must be disposed of at a waste facility that can lawfully receive that waste and must be done in accordance with all relevant Acts, Regulations and Guidelines.

Copies of all test results and disposal dockets must be retained for at least 3 years and be made

available to authorised Council officers on request.

Note: The following Acts and Guidelines applied at the time of determination:

- i) Protection of the Environment Operations Act 1997;
- ii) Environment Protection Authority, *Waste Classification Guidelines* (2014);
- iii) Water Quality Australia, *National Acid Sulfate Soils Guidance* (2018); and
- iv) Acid Sulfate Soil Advisory Committee, *Acid Sulfate Soil Manual* (1998).

Reason: to protect environment and public health.

41. **Stockpiling materials**

During construction, all material associated with works is to be contained at source, covered and must be within the construction area. All waste material is to be removed off site and disposed of according to local regulations. The property is to be kept clean and any building debris removed as frequently as required to ensure no debris enters receiving waters.

Reason: To ensure pollution control measures are effective to protect the aquatic habitats within receiving waters throughout the construction period.

42. **Aboriginal Heritage**

If in undertaking excavations or works any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Northern Beaches Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

Any work to a site that is discovered to be the location of an Aboriginal object, within the meaning of the National Parks and Wildlife Act 1974, requires a permit from the Director of the DECC.

Reason: Aboriginal Heritage Protection.

43. **Maintenance of Sediment**

Sedimentation and erosion controls are to be effectively maintained at all times during the course of construction and shall not be removed until the site has been stabilised or landscaped to the Principal Certifying Authority's satisfaction.

Reason: To ensure sediment controls are effective

44. **Storage of Materials on Land Owned or Managed by Council Prohibited**

The dumping or storage of building materials, spoil, vegetation, green waste or any other material in land owned or managed by Council is prohibited.

Reason: Public safety and environmental protection.

45. **No Access Through Land Owned or Managed by Council**

Site access is not approved for delivery of materials nor construction of the development through adjacent land owned or managed by Council, without the written approval of Council.

Reason: Public safety, landscape amenity and tree protection.

46. **Stockpiling of Topsoil**

During site excavation, topsoil which is to be used in later landscape works is to be stockpiled on site and stabilised during construction works. Stockpiles are to be stored outside of hazard areas and are to not to be located in close proximity to waterways or wetland areas. Stockpiles shall not be located within the dripline of existing trees which are to be retained.

Reason: To ensure protection and retention of the Urban Forest/Natural Environment.

CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

47. **Required Tree Planting**

Trees shall be planted in accordance with the following:

i) at minimum, 4x *Casuarina glauca* are required to be planted within the site in order to compensate the removal of existing trees. Minimum 75L pot size.

Tree planting shall be located within a 9m² deep soil area wholly within the site and be located a minimum of 3 metres from existing and proposed buildings, and other trees.

Tree planting shall be located to minimise significant impacts on neighbours in terms of blocking winter sunlight, or where the proposed tree location may impact upon significant views.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Occupation Certificate.

Reason: To maintain environmental amenity.

48. **Condition of Retained Vegetation - Project Arborist**

Prior to the issue of an Occupation Certificate, a report prepared by the project arborist shall be submitted to the Certifying Authority, assessing the health and impact on all existing trees required to be retained, including the following information:

- a) compliance to any Arborist recommendations for tree protection generally and during excavation works,
- b) extent of damage sustained by vegetation as a result of the construction works,
- c) any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: Tree protection.

49. **Protection of Habitat Features**

All natural landscape features, including any rock outcrops, native vegetation and/or watercourses, are to remain undisturbed except where affected by necessary works detailed on approved plans.

Details demonstrating compliance are to be provided to the Principal Certifying Authority prior to issue of any Occupation Certificate.

Reason: To protect wildlife habitat.

50. **Replacement of Canopy Trees**

At least eight (8) *Casuarina glauca* trees are to be planted on site to replace protected trees

approved for removal. Species are to have a minimum mature height of 8.5m.

Tree plantings are to be retained for the life of the development and/or for their safe natural life. Trees that die or are removed must be replaced with another locally native canopy tree.

Replacement plantings are to be certified as being completed in accordance with these conditions of consent by a qualified landscape architect, and details submitted to the Principal Certifying Authority prior to issue of any Occupation Certificate.

Reason: To establish appropriate native landscaping.

51. No Weeds Imported On To The Site

No Priority or environmental weeds (as specified in the Northern Beaches Local Weed Management Plan 2021 – 2026) are to be imported on to the site prior to or during construction works.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to issue of any Occupation Certificate.

Reason: To reduce the risk of site works contributing to spread of Priority and environmental weeds.

52. Geotechnical Certification Prior to Occupation Certificate

The Applicant is to submit the completed Form 3 of the Geotechnical Risk Management Policy (Appendix 5 of P21 DCP) to the Principal Certifying Authority prior to issue of the Occupation Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

53. Waste Management Confirmation

Prior to the issue of a Final Occupation Certificate, evidence / documentation must be submitted to the Principal Certifying Authority that all waste material from the development site arising from demolition and/or construction works has been appropriately recycled, reused or disposed of generally in accordance with the approved Waste Management Plan.

Reason: To ensure demolition and construction waste is recycled or reused and to limit landfill.

54. Removal of All Temporary Structures/Material and Construction Rubbish

Once construction has been completed all silt and sediment fences, silt, rubbish, building debris, straw bales and temporary fences are to be removed from the site.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure bushland management.

55. Acoustic Treatment

The water pumps, pumping stations and any other sound producing plant, equipment and/or machinery is to be acoustically treated and housed in a soundproof enclosure so that it does not emit any noise louder than 5dB (A) above background noise at the nearest residential receiver. Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Occupation Certificate.

Reason: To ensure the acoustic amenity of the neighbouring residents.

56. **Environmental Reports Certification**

Written certification from a suitably qualified person(s) shall submit to the Principal Certifying Authority, stating that all the works/methods/procedures/control measures/recommendations approved by Council in the following reports have been completed:

- (a) Arboricultural Impact Assessment Report (BGC9221), dated 19/03/2021, prepared by Bellevue Tree Consultants.
- (b) Estuarine Risk Management and Water Management Report, dated 01/08/2021, prepared by Horton Coastal Engineering Pty Ltd.
- (c) Acid Sulfate Soil Management Plan (P2108485JR03V01), dated 17/10/2021, prepared by Martens & Associates Pty Ltd.
- (d) Geotechnical Assessment Report (P2108485JR01V01), dated 18/10/2021, prepared by Martens & Associates Pty Ltd

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To ensure compliance with standards.

57. **Sydney Water**

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation.

Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site www.sydneywater.com.au <<http://www.sydneywater.com.au>> then refer to “Water Servicing Coordinator” under “Developing Your Land” or telephone 13 20 92 for assistance.

Following application a “Notice of Requirements” will advise of water and sewer infrastructure to be built and charges to be paid. Please make early contact with the Co-ordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

58. **Landscape Maintenance**

If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components. Trees, shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilised as required at the time of planting.

If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan and any conditions of consent.

All weeds are to be removed and controlled in accordance with the NSW Biosecurity Act 2015.

Reason: To maintain local environmental amenity.

59. **Protection of Habitat Features**

All natural landscape features, including any rock outcrops, native vegetation, soil and/or watercourses, are to remain undisturbed except where affected by necessary works detailed on approved plans.

Reason: To protect wildlife habitat.

60. **Replacement of Canopy Trees**

Tree replacement plantings required under this consent are to be retained for the life of the development and/or for their safe natural life.

Trees that die or are removed must be replaced with another locally native canopy tree.

Reason: To replace locally native trees.

61. **Geotechnical Recommendations**

Any ongoing recommendations of the risk assessment required to manage the hazards identified in the Geotechnical Report referenced in Condition 1 of this consent are to be maintained and adhered to for the life of the development.

Reason: To ensure geotechnical risk is mitigated appropriately.

62. **Compliance with Estuarine Risk Management Report**

The development is to comply with all recommendations of the approved Estuarine Risk Management Report prepared by Horton Coastal Engineering Pty Ltd, dated 1 August 2021 and these recommendations are to be maintained over the life of the development.

Reason: To ensure preservation of the development and the estuarine environment

63. **Water Pollution**

No water pollution shall result from the operation of any plant or equipment or activity carried out.

Reason: Protection of the surrounding environment.

64. **No works within Coastal Wetland mapped areas**

No works are permitted to be carried out on land identified as "coastal wetlands" as identified by State Environmental Planning Policy (Coastal Management) 2018 and its associated mapping and as identified within Estuarine Risk Management and Water Management Report dated 01 August 2021 prepared by Horton Coastal Engineering Pty Ltd.

Reason: Biodiversity and wetland protection

65. **No approval for existing works**

This approval/consent relates only to the new work nominated on the approved consent plans and does not approve or regularise any existing buildings or structures within the property boundaries.

This consent does not approve or regularise any existing works or use associated with any

completed drainage works, sanitary/toilet facilities, earthworks, golf course reconfiguration or storage tanks.

Reason: To ensure that this consent grants approval only for future works.

66. **Noise**

All sound producing plant, equipment, machinery or fittings and the use of the water harvesting and drainage system, including the pumps and pumping stations, must be installed and operated at times so as to not cause 'offensive noise' as defined by the Protection of the Environments Operation Act 1997. Noise levels from the system and and pumping stations must not exceed 5dBA above background noise when measured from any property boundary and/or the nearest residential receiver.

Reason: To ensure compliance with legislation and to protect the acoustic amenity of neighbouring properties.

Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application must be lodged on the NSW Planning portal within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

NOTE: A fee will apply for any request to review the determination.

Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

Signed On behalf of the Consent Authority




Name Gareth David, Planner

Date 07/06/2022

GENERAL ADVICE

Advisory Notes (General)

Where are you in the development process?

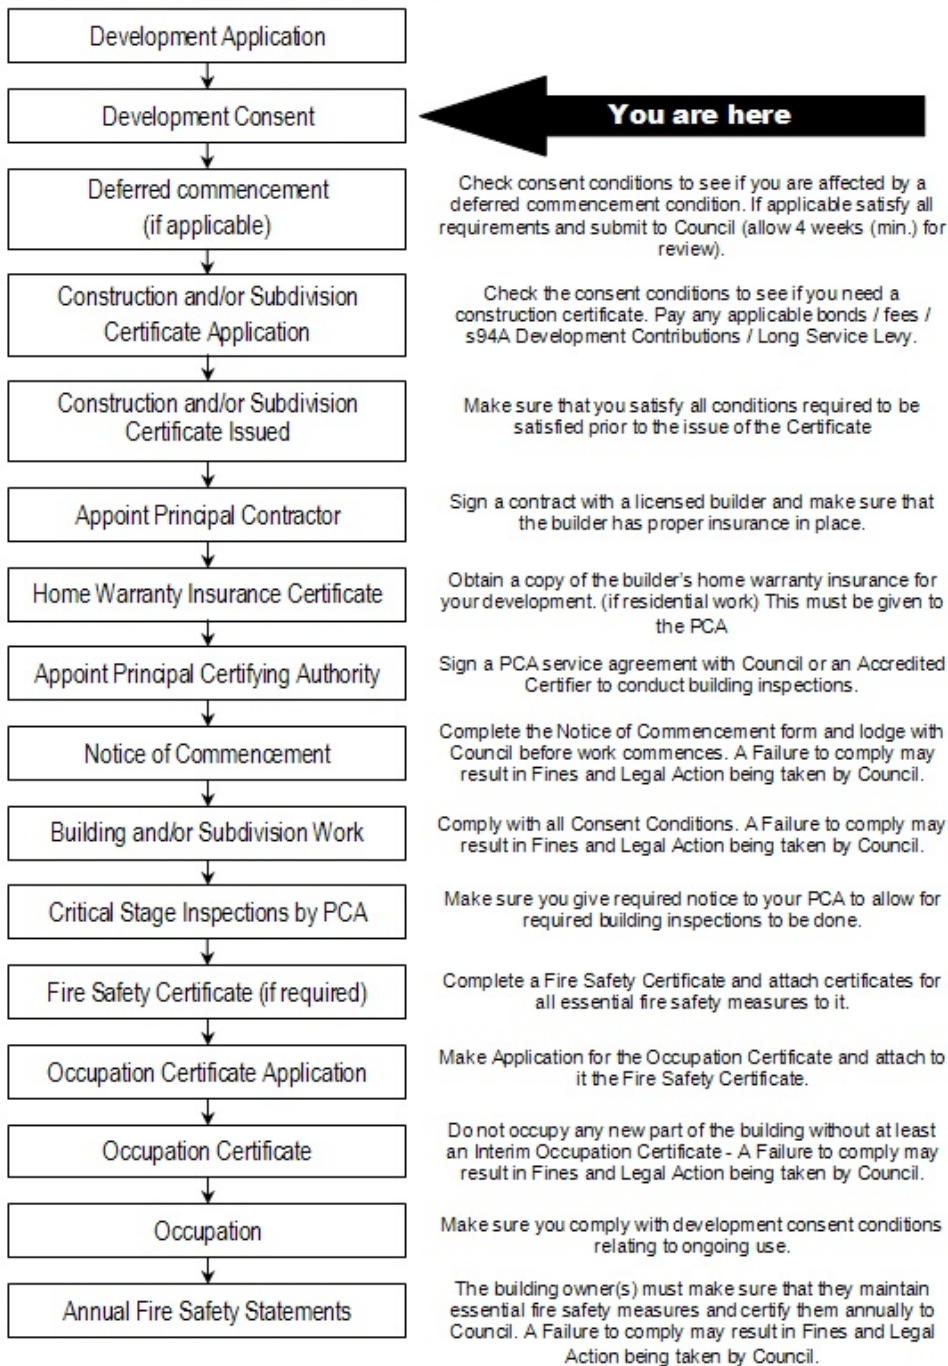

Note: The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Building Certification

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Certification Services

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site www.northernbeaches.nsw.gov.au or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

Charges Associated with the Development Consent

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

Bonds are released after:

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
 - the development is complete
 - damage has not been caused to council assets during the works
 - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

Acceptable Form of Security Bonds

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

Modifications to the consent

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Other Matters not detailed within the Notice of Determination

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

Dial Before You Dig

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at www.1100.com.au or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

Telecommunications Act 1997 (Commonwealth)

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

Model

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

Trade waste agreement

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

Waste collection

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

Aboriginal Heritage

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

On-Site Sewage Management System

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

Cost of Works

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

Relocation of stormwater drainage

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

Tree preservation

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

Storage bins on footpath and roadway

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

Protection of Public Places

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
 - (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

Road Opening Permit

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

Special Permits

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone.

Other permits may include out of construction hours permits.

Licensing requirements for removal of bonded asbestos

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

Pool Access

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

Dewatering

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

Requirement to Notify about New Contamination Evidence

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

Flood Evacuation Plan

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

Utility Service Requirements

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

Plant & Equipment Kept Within Site

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

Lighting

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

Silt and Sediment Control

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

Maintenance of Sediment and Erosion Control Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

Installation and Maintenance of Sediment and Erosion Control

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

Dividing Fences Act 1991

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

OTHER MATTERS

Child Care Centres

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

Disability Access

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

Food Premises

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at www.foodnotify.nsw.gov.au or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

Wheel washing facility

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

Monitoring State of Roadways

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

Storage of Dangerous Goods

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

Storage of Flammable and Combustible Liquids

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

Noise and Vibration

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

Hairdressing/Beauty Treatment/ Skin penetration Requirements

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.

- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

Food Premises Construction Requirements

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

Legionella Control

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

Pool/Spa Safety

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

Grease Trap

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

Bandicoot/Penguin

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.