GENERAL NOTES

- G1 THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS DRAWINGS AND SPECIFICATIONS.
- G2 ANY DISCREPANCIES SHALL BE REFERRED TO THE PROJECT MANAGER/ CONTRACT ADMINISTRATOR FOR DECISION BEFORE PROCEEDING WITH THE WORK.
- G3 DIMENSIONS SHALL NOT BE OBTAINED BY SCALING THE DRAWINGS.
- G4 ANY SETTING OUT DIMENSIONS SHOWN ON THE DRAWING SHALL BE VERIFIED BY THE BUILDER.
- G5 DURING CONSTRUCTION THE CONTRACTOR SHALL MAINTAIN STRUCTURES IN A STABLE CONDITION.
- G6 ALL WORK SHALL COMPLY WITH THE BUILDING CODE OF AUSTRALIA AND RELEVANT AUSTRALIAN STANDARD CODES.
- G7 THE DESIGN AND DETAILS SHOWN ON THESE DRAWINGS ARE APPLICABLE TO THIS PROJECT ONLY AND MAY NOT BE REPRODUCED IN WHOLE OR IN PART, OR BE USED FOR ANY OTHER PROJECT OR PURPOSE, WITHOUT THE WRITTEN PERMISSION OF WOOLACOTTS WITH WHOM COPYRIGHT RESIDES.
- G8 THE CONTRACTOR SHALL MAKE GOOD ADJACENT TO NEW WORKS, ENSURING A SMOOTH TRANSITION WITH EXISTING INFRASTRUCTURE.
- G9 LIMIT OF WORKS TO MATCH LANDSCAPE ARCHITECT'S DRAWINGS.
- G10 PROVIDE SILT PROTECTION AT STORMWATER PITS AS REQUIRED DURING CONSTRUCTION.

DRAINAGE NOTES

- D1 ALL WORKS SHALL BE IN ACCORDANCE WITH AS 3500.3
- D2 FOR PIPE DIAMETERS NOT EXCEEDING 225mm USE SEWER GRADE UPVC TO AS 1260
- D3 FOR PIPE DIAMETERS EXCEEDING 225mm, USE: - CLASS 2 REINFORCED CONCRETE PIPE TO AS 4058 OR - CLASS 2 FIBRE REINFORCED CONCRETE TO AS 4139
- D4 PVC PIPES SHALL BE SOLVENT WELDED. ALL OTHER PIPES SHALL BE RUBBER RING JOINTED UNLESS NOTED OTHERWISE.
- D5 UNLESS SPECIFIED OTHERWISE, BED & BACKFILL SHALL BE COMPACTED SAND TO 100mm AROUND THE PIPE AND 100mm THICK LAYER OF 5mm AGGREGATE AROUND THE PIPE IF UNDER CONCRETE. REMAINDER OF BACKFILL SHALL BE COMPACTED EXCAVATED MATERIAL. WHEN UNDER VEHICULAR PAVEMENT, REMAINDER OF BACKFILL SHALL BE COMPACTED BASECOURSE.
- D6 LOADS ON PIPES DURING CONSTRUCTION SHALL NOT EXCEED THE REQUIREMENT OF AS 3725, OR THE RECOMMENDATIONS OF THE PIPE MANUFACTURER.
- D7 TRENCH WIDTHS SHALL BE IN ACCORDANCE WITH AS 3500, BUT NOMINALLY THE GREATER OF 1.5 PIPE DIAMETER OR PIPE DIAMETER PLUS 300.
- D8 IN LOCATIONS WHERE NEW STORMWATER PIPES CONNECT TO EXISTING STORMWATER PITS, CONFIRM THE INVERT LEVEL OF ALL EXISTING STORMWATER PITS AT THE START OF THE WORKS.

ON SITE DETENTION SUMMARY:

- STORMWATER MANAGMENT DESIGN IN ACCORDANCE WITH NORTHERN BEACH COUNCIL - WATER MANAGEMENT FOR DEVELOPMENT POLICY (AUGUST 2020).
 - SECTION 9.0 ON SITE STORMWATER MANAGEMENT
- SITE LOCATED IN "REGION 1 NORTHERN CATCHMENT". - OSD SYSTEM SIZED TO THE STORAGE & DISCHARGE REQUIREMENTS
- DETAILED IN TABLE 7.0. - SIZING BASED ON ADDITIONAL IMPERVIOUS AREA.
- SITE INFORMATION: ADDITIONAL IMPERVIOUS AREA = 173.50m²

WINDUW HÉAD, 26.59 SILL 25.64

OSD REQUIREMENTS: - DETENTION TANK STORAGE = 12m3 - DISCHARGE RATE = 6 L/S

o Db

MELALEUCA

LEGEND

PORTION OF OSD STORAGE AS ALTANTIS FLO-TANK. NEW STORMWATER PIPE

4040


PORTION OF OSD STORAGE


BOUNDARY LINE NEW GRATED PIT


UNDER TERRACE.

NEW COVER PIT NEW DOWN PIPE EXISTING SPOT LEVEL

ex44.62 • PROPOSED SPOT LEVEL 44.62 • NEW GRATED DRAIN GD CO NEW CLEAR OUT OPENING RW0 **NEW RAINWATER OUTLET** EQUAL TO SPS DRAINS TIA100F

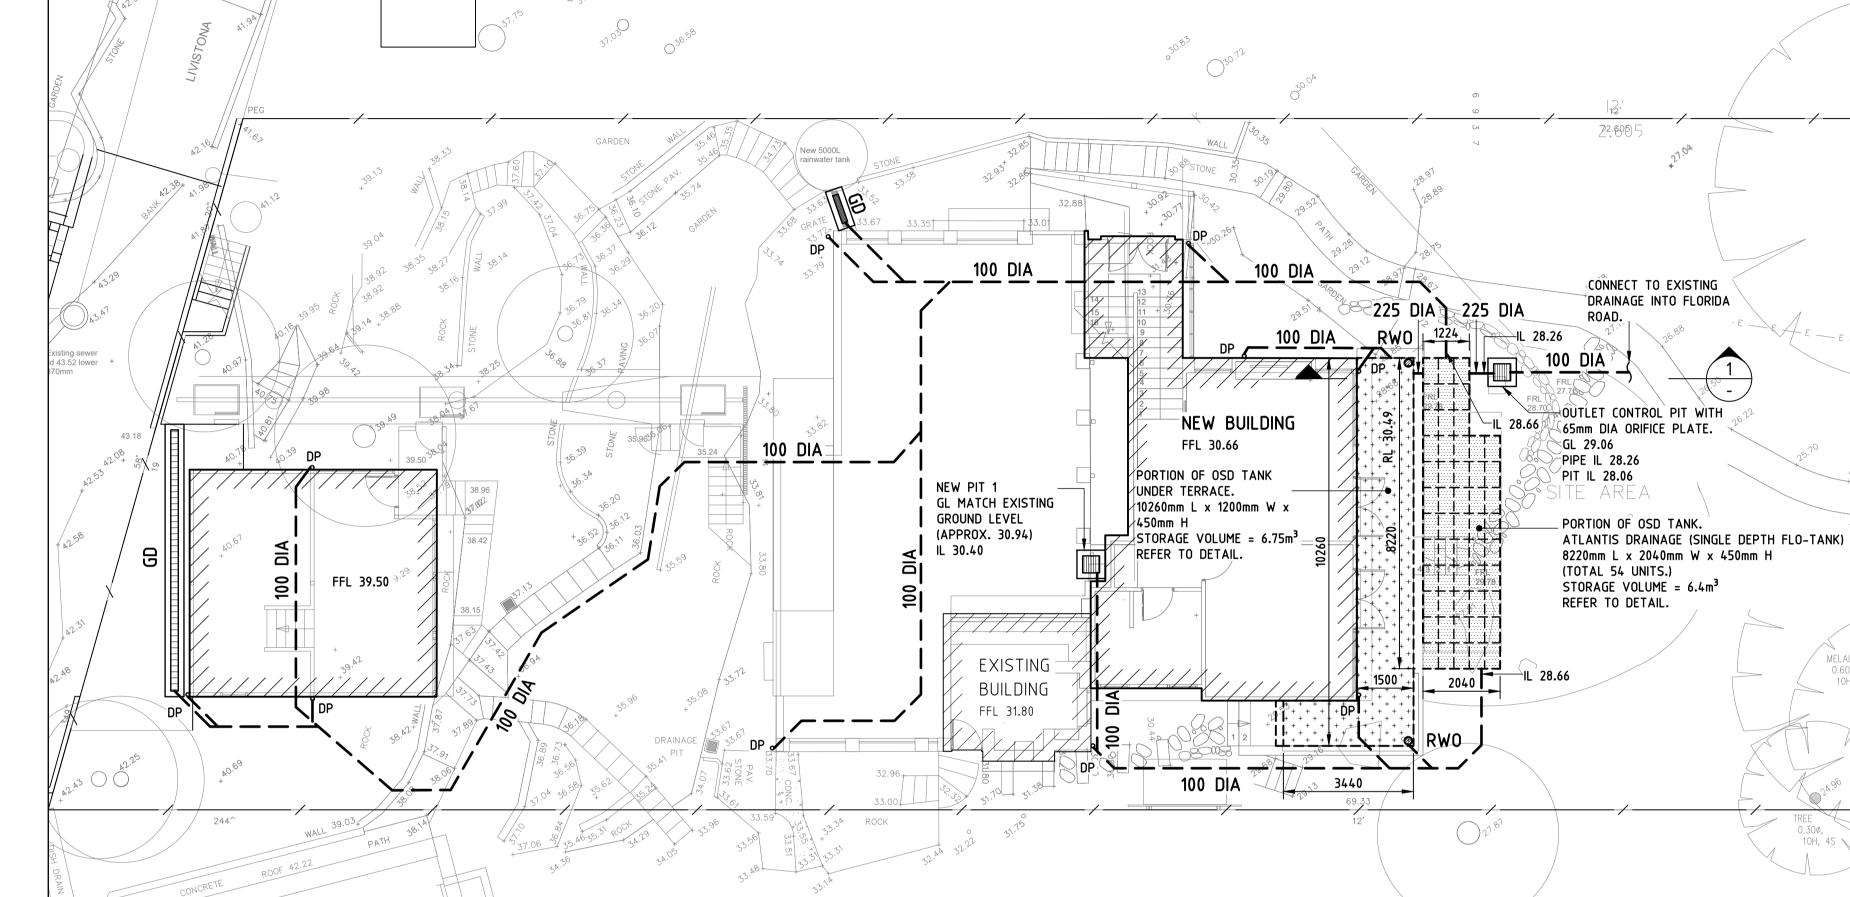

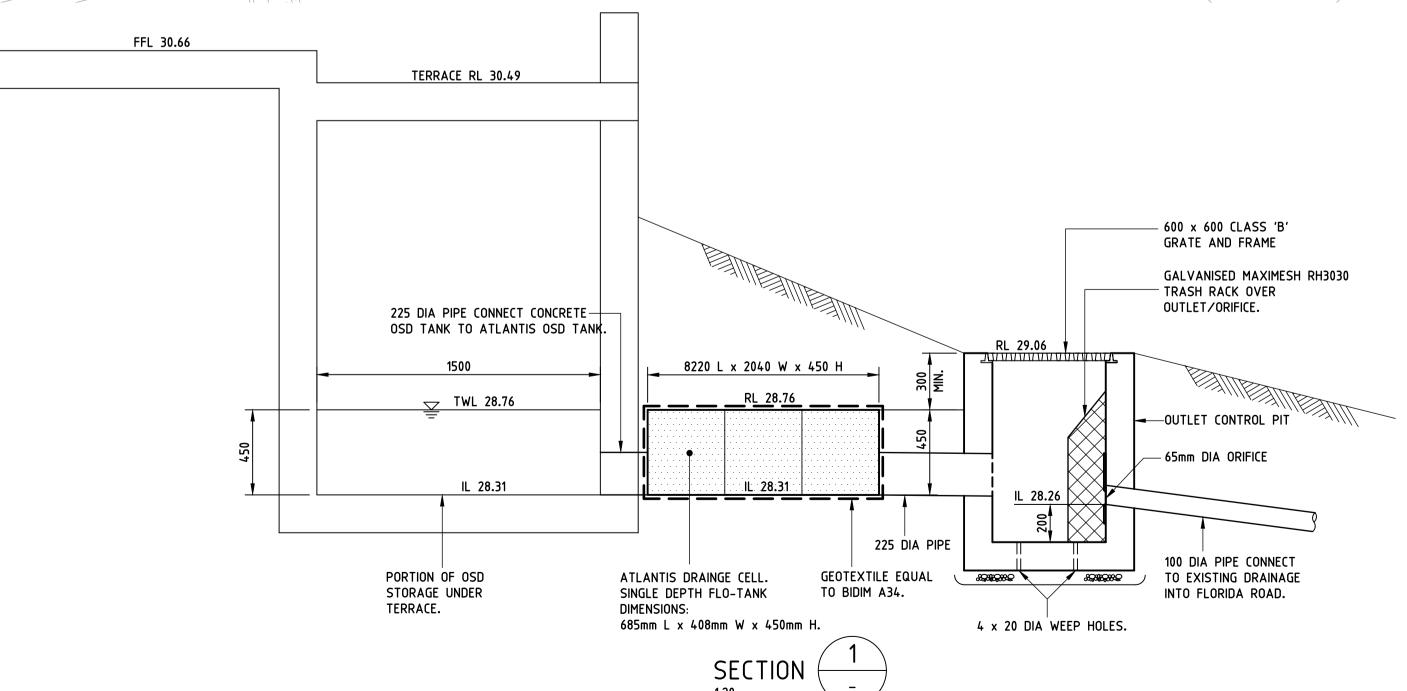

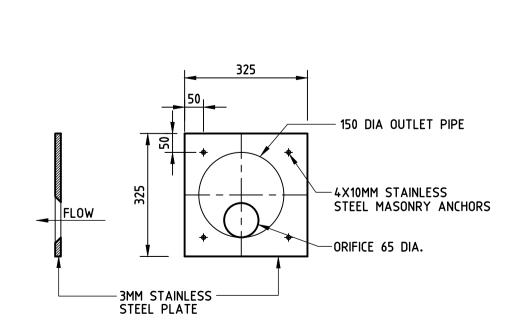


ORIFICE PLATE DETAIL NOT TO SCALE

150 450 x 450 150 STORMWATER PIT DETAIL

-CLASS 'B' GRATE & FRAME

PLAN.

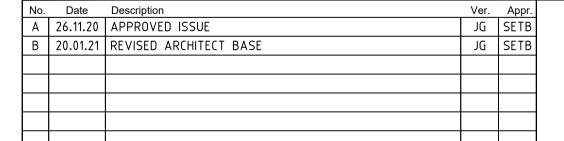



ROBERTJONES ARCHITECTS 57 AVALON PARADE, AVALON BEACH NSW, 2107

Woolacotts.

T +61 2 8203 1500 I www.woolacotts.com.au Ground Floor, 12a Brown Street, Chatswood, NSW 2067 This drawing is copyright and must not be used, reproduced or copied wholly or in part without written permission of Woolacotts Consulting Engineers Pty Ltd.

ALTERATION AND ADDITION TO EXISTING HOUSE	NOVEMBER 2020	Approved SETB	Verified JG	Prepared
	Scale @ A1			SC
91 FLORIDA ROAD, PALM BEACH	1:100, 1:20	26.11.20	13.11.20	11.11.20
TORMWATER MANAGMENT	Job number	Drawing number		Amendment
TORTWATER TIANAGILENT	20 222	C\./01		В
LAN (LOWER LEVEL) & DETAILS	20-233 SW01			

GRATE RL

AS PLAN.

N12-250 CENTRAL

BOTH WAYS ALL ROUND.

