



**Sediment and Erosion Control**

- Install 600 high silt fence as shown.
- Clear fences of sediment periodically and after periods of heavy rain.
- Repair any damage to silt fence immediately.
- Brush clean truck tyres before leaving site.
- Clean up spillages outside silt fence immediately.
- Sediment control measures to be left in place until final surface finishes have been established.

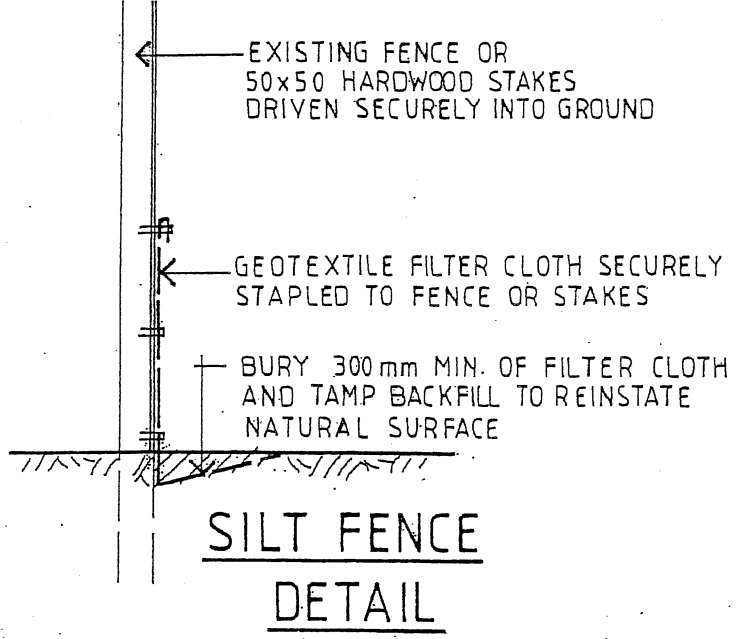

SEDIMENT CONTROL PLAN

	lic 139095c abn 44 002 281 263 info@beecraft.com.au www.beecraft.com.au 9450 1530 6a larool rd terrey hills nsw	NEW RESIDENCE & SECONDARY DWELLING 1186 BARRENJOEY ROAD, PALM BEACH LOT 1 DP1050253	
	DATE SEPT. 2016	DRAWN J.WRIGHT	DRG. BAR-13