





DATE:	DRAWN BY:	SCALE:
FEB.21	LB	1:200 @ A3
JOB No:	CHECKED BY:	DRAWING No:
871/21	JJ	DA.01

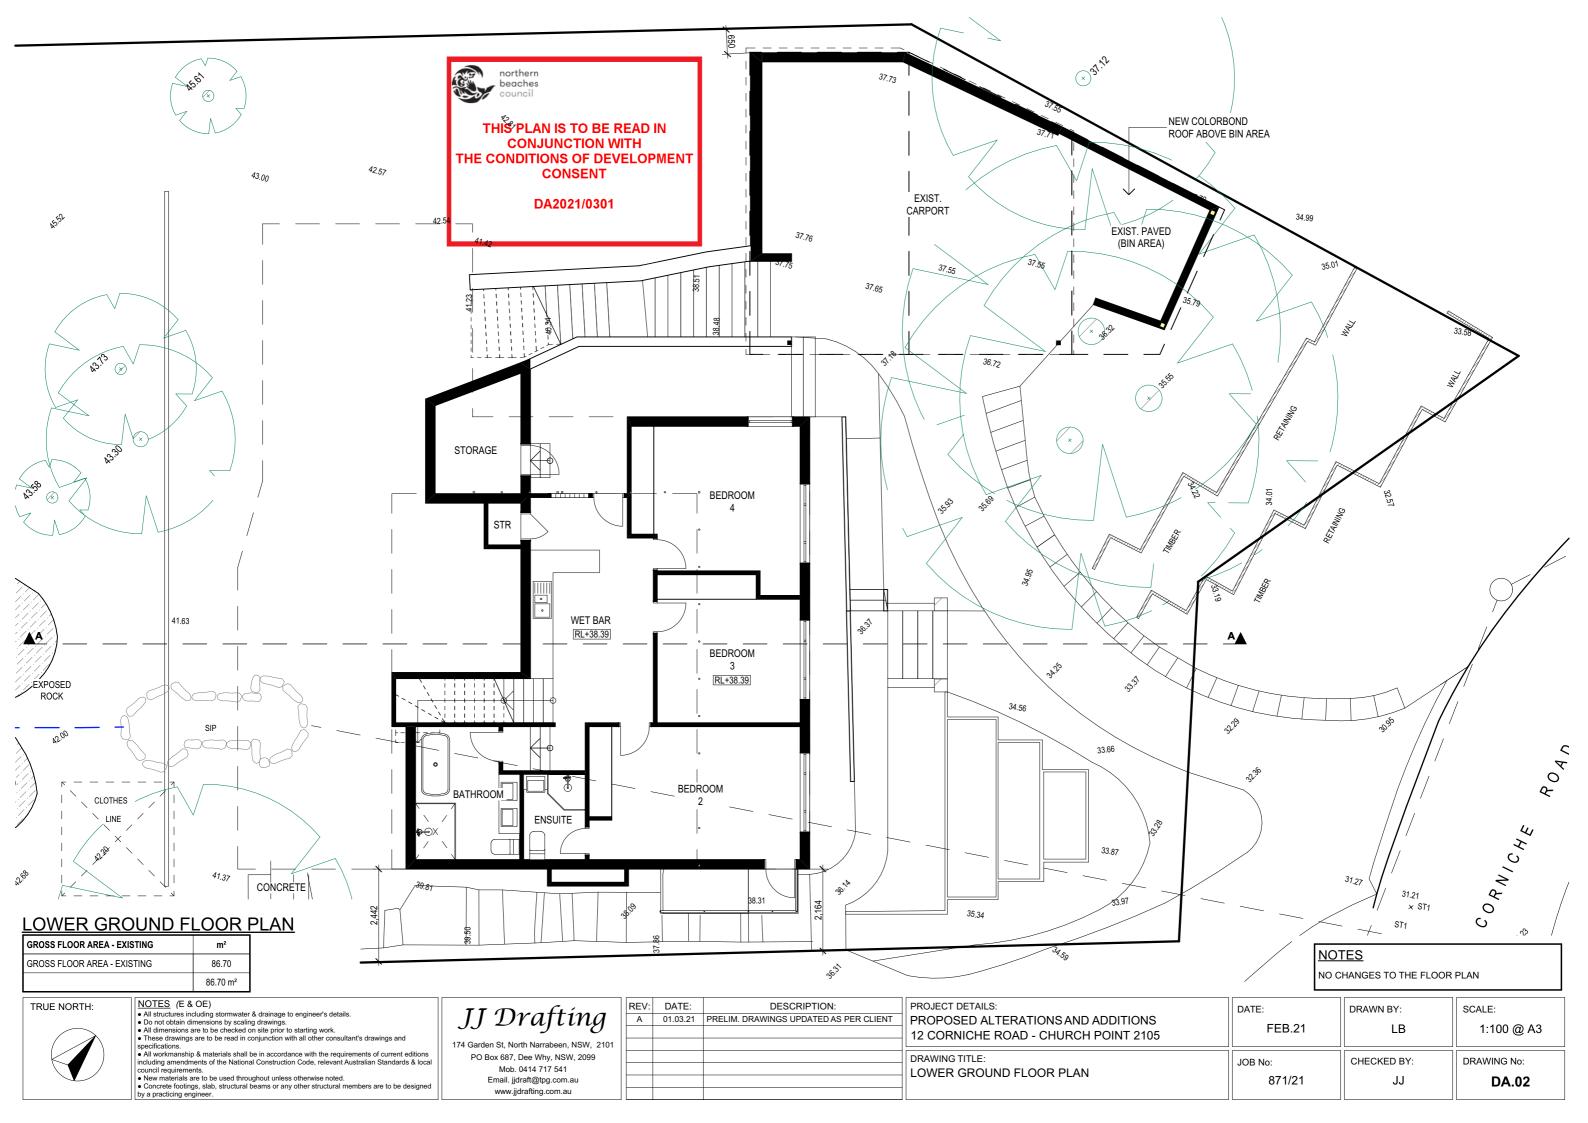

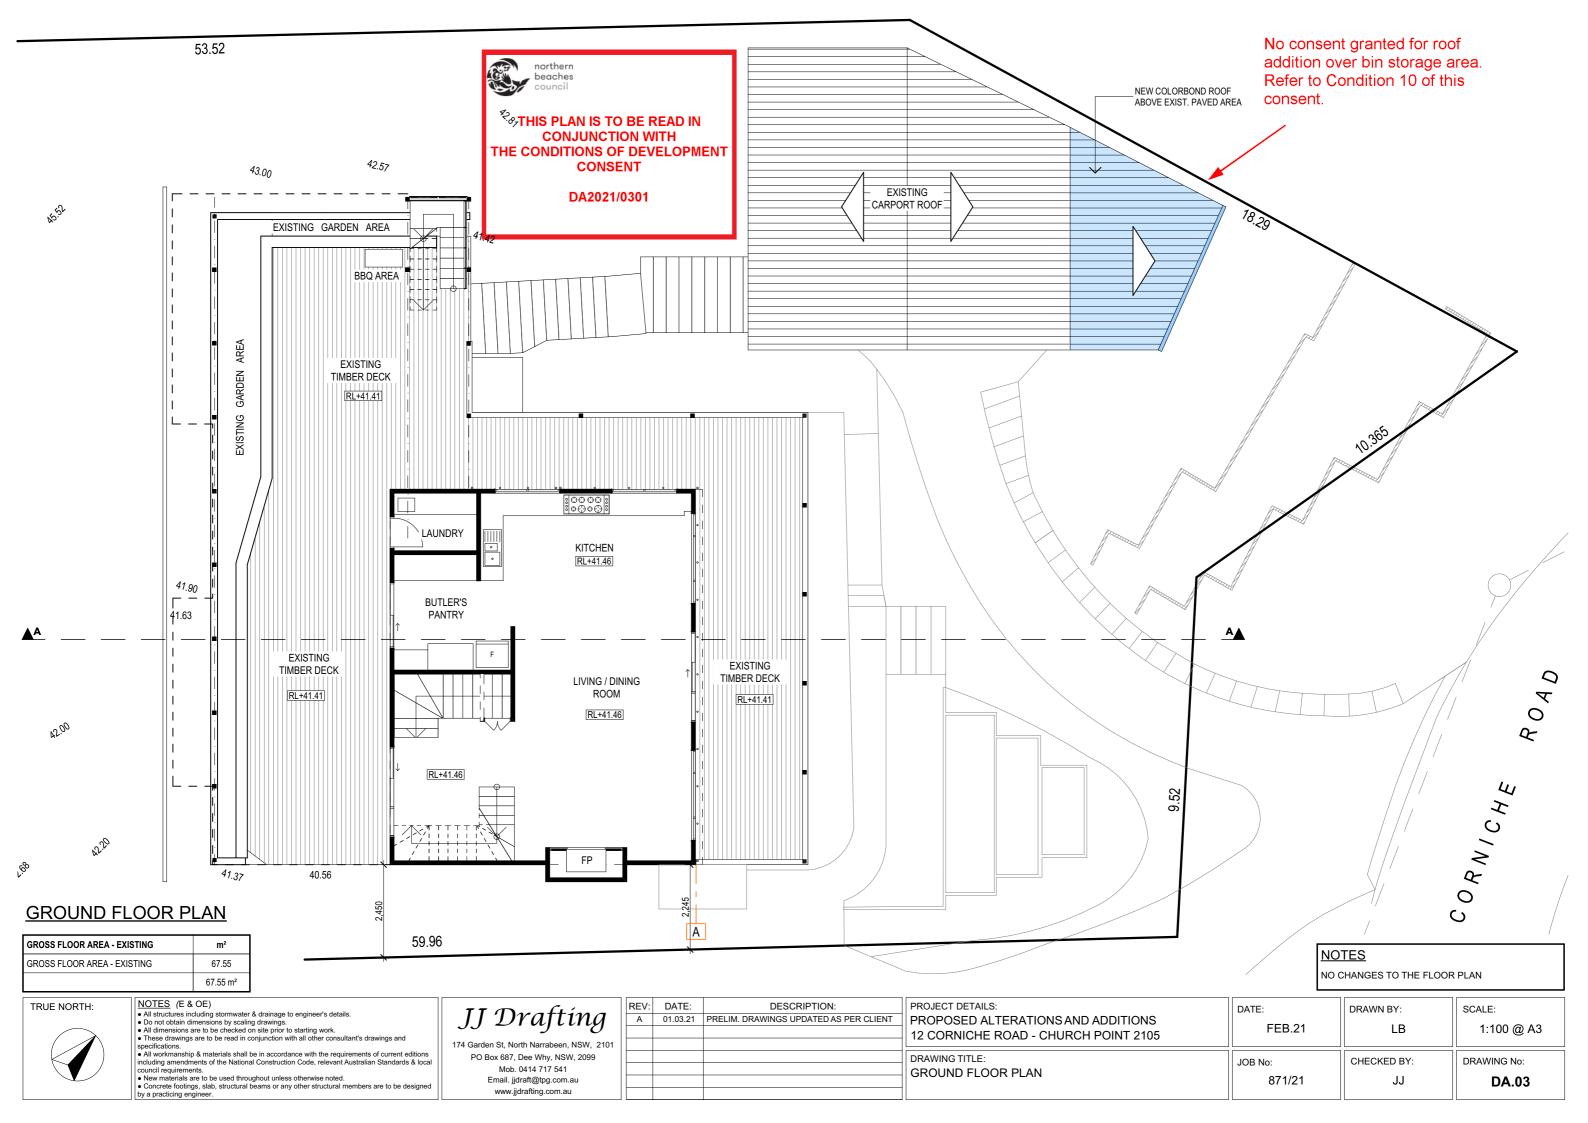

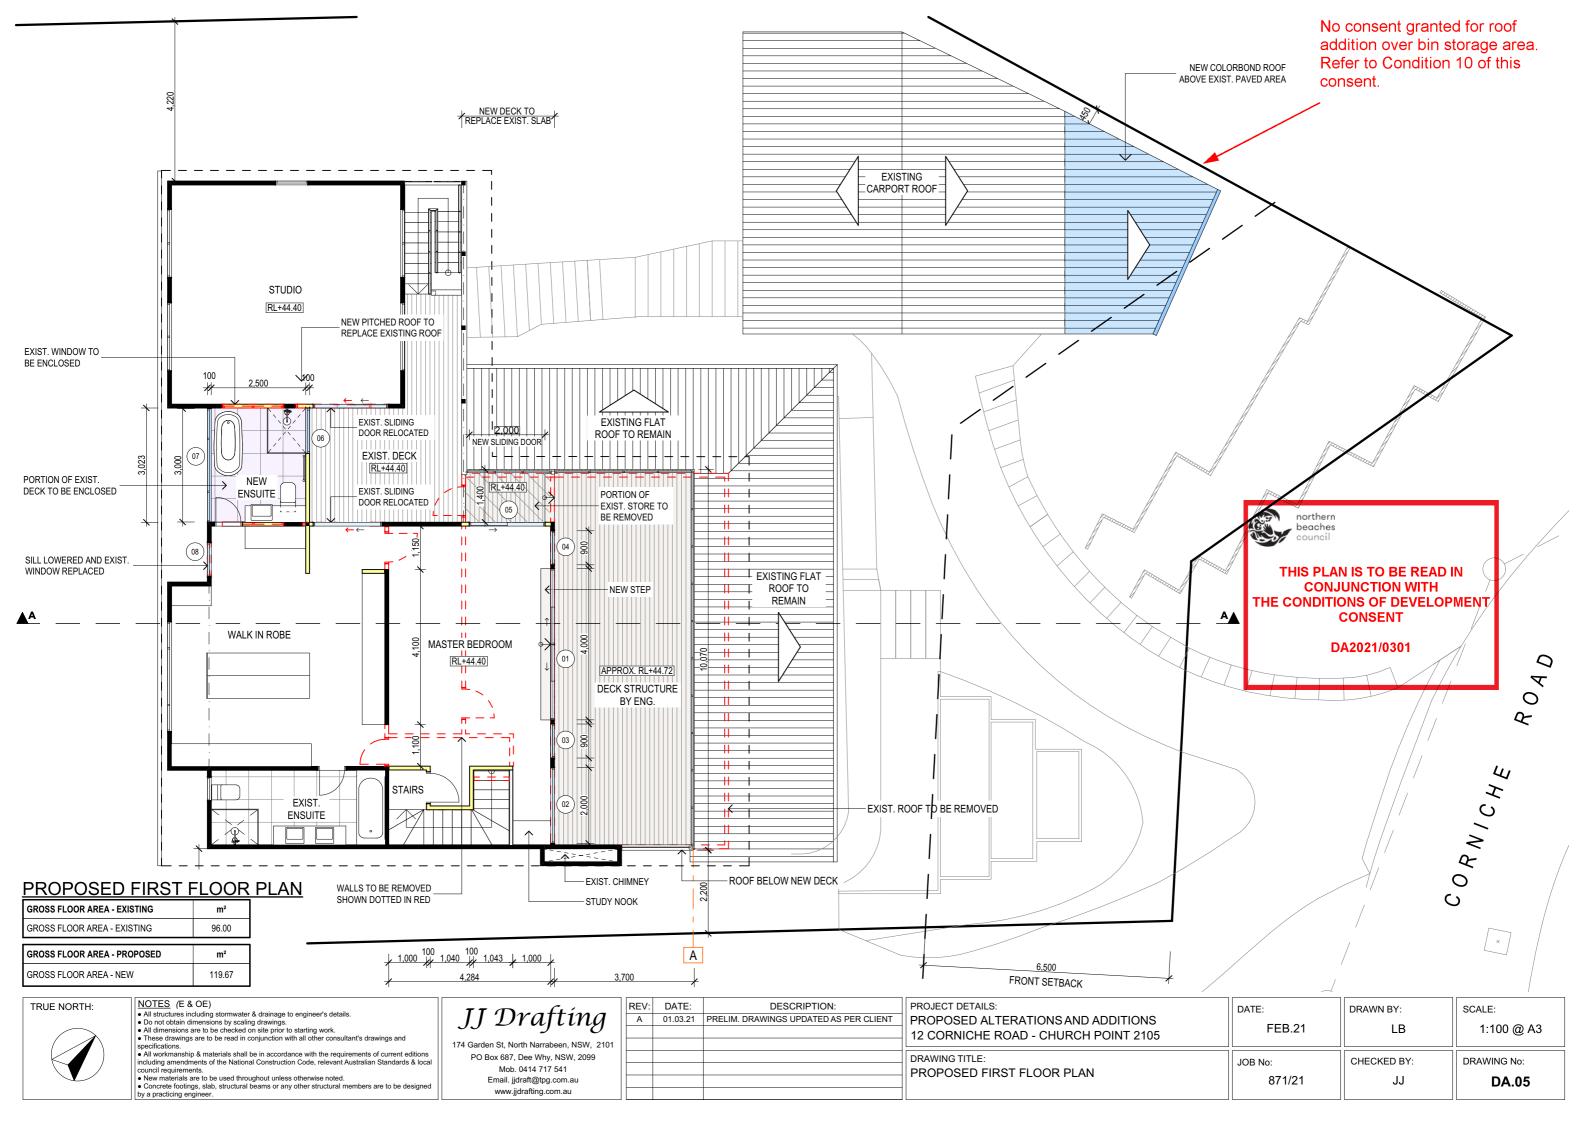


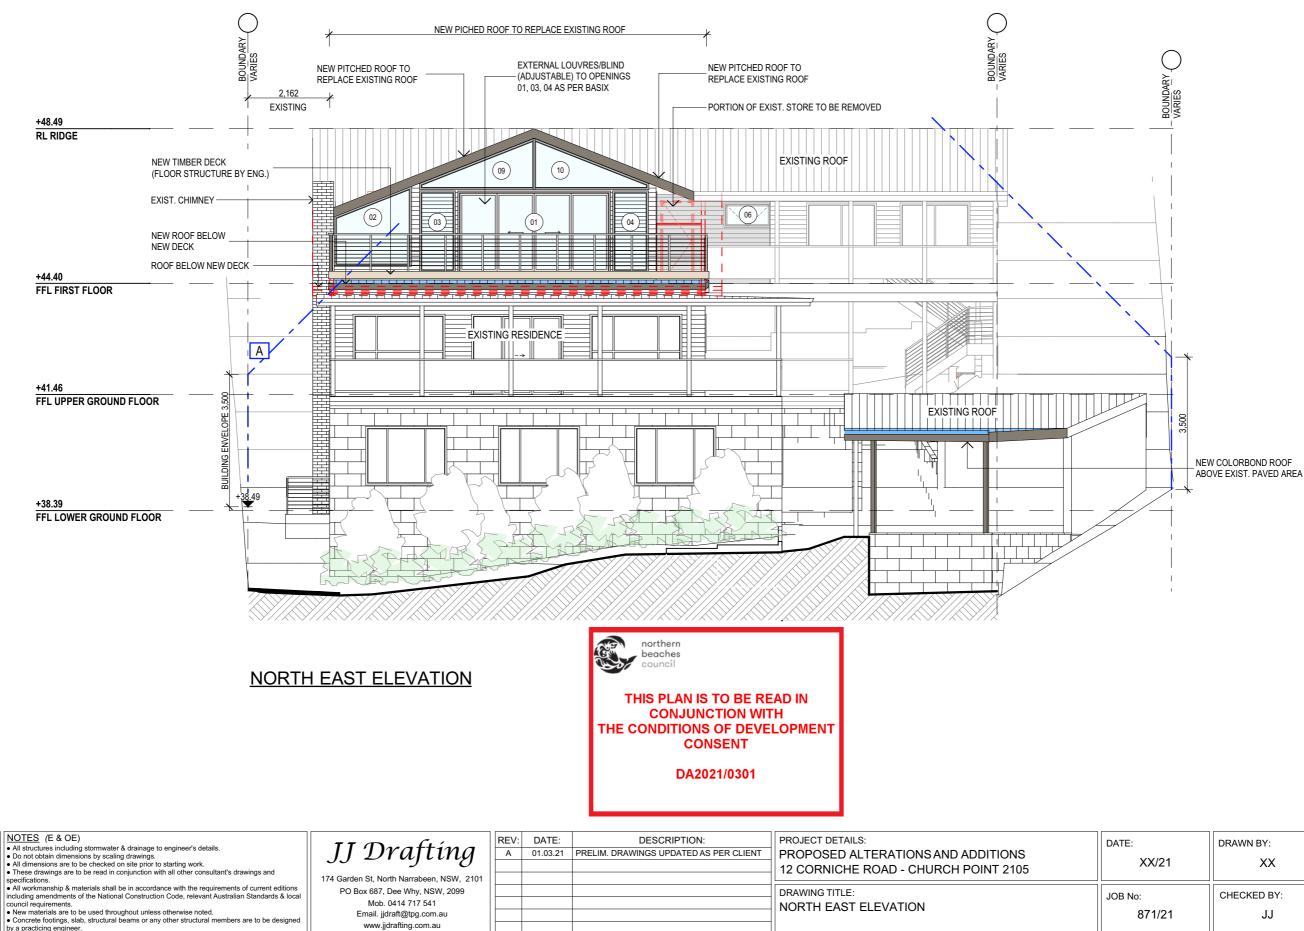

by a practicing engineer.


Email. jjdraft@tpg.com.au www.jjdrafting.com.au

DATE:	DRAWN BY:	SCALE:
XX/21	XX	1:100 @ A3
JOB No:	CHECKED BY:	DRAWING No:
871/21	JJ	DA.06

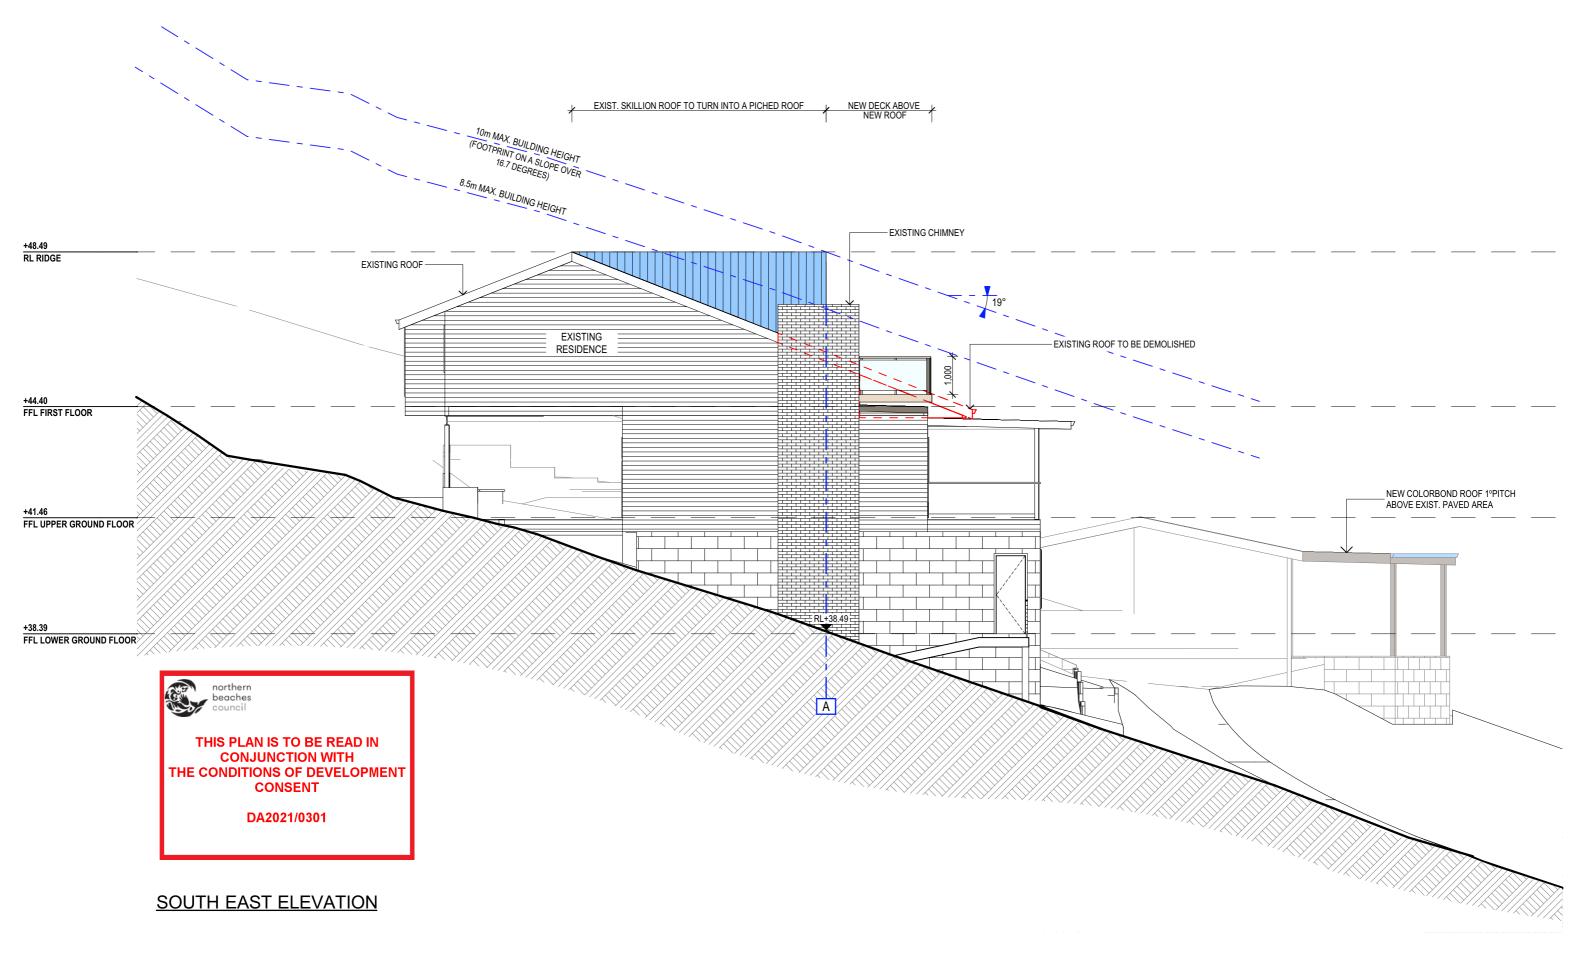

NOTES (E & OE)	TT Des flier	REV:	DATE:	DESCRIPTION:	PROJECT DETAILS:
 All structures including stormwater & drainage to engineer's details. Do not obtain dimensions by scaling drawings. 	II Drafting	A	01.03.21	PRELIM. DRAWINGS UPDATED AS PER CLIENT	PROPOSED ALTERATIONS AND ADDITIONS
All dimensions are to be checked on site prior to starting work.					12 CORNICHE ROAD - CHURCH POINT 2105
 These drawings are to be read in conjunction with all other consultant's drawings and specifications. 	174 Garden St, North Narrabeen, NSW, 2101				
All workmanship & materials shall be in accordance with the requirements of current editions	PO Box 687, Dee Why, NSW, 2099				DRAWING TITLE:
including amendments of the National Construction Code, relevant Australian Standards & local council requirements.	Mob. 0414 717 541				
 New materials are to be used throughout unless otherwise noted. 	Email.jjdraft@tpg.com.au				SOUTH EAST ELEVATION
 Concrete footings, slab, structural beams or any other structural members are to be designed by a practicing engineer. 	www.jjdrafting.com.au				
				1	


DATE:	DRAWN BY:	SCALE:
XX/21	XX	1:100 @ A3
 JOB No:	CHECKED BY:	DRAWING No:
871/21	JJ	DA.07

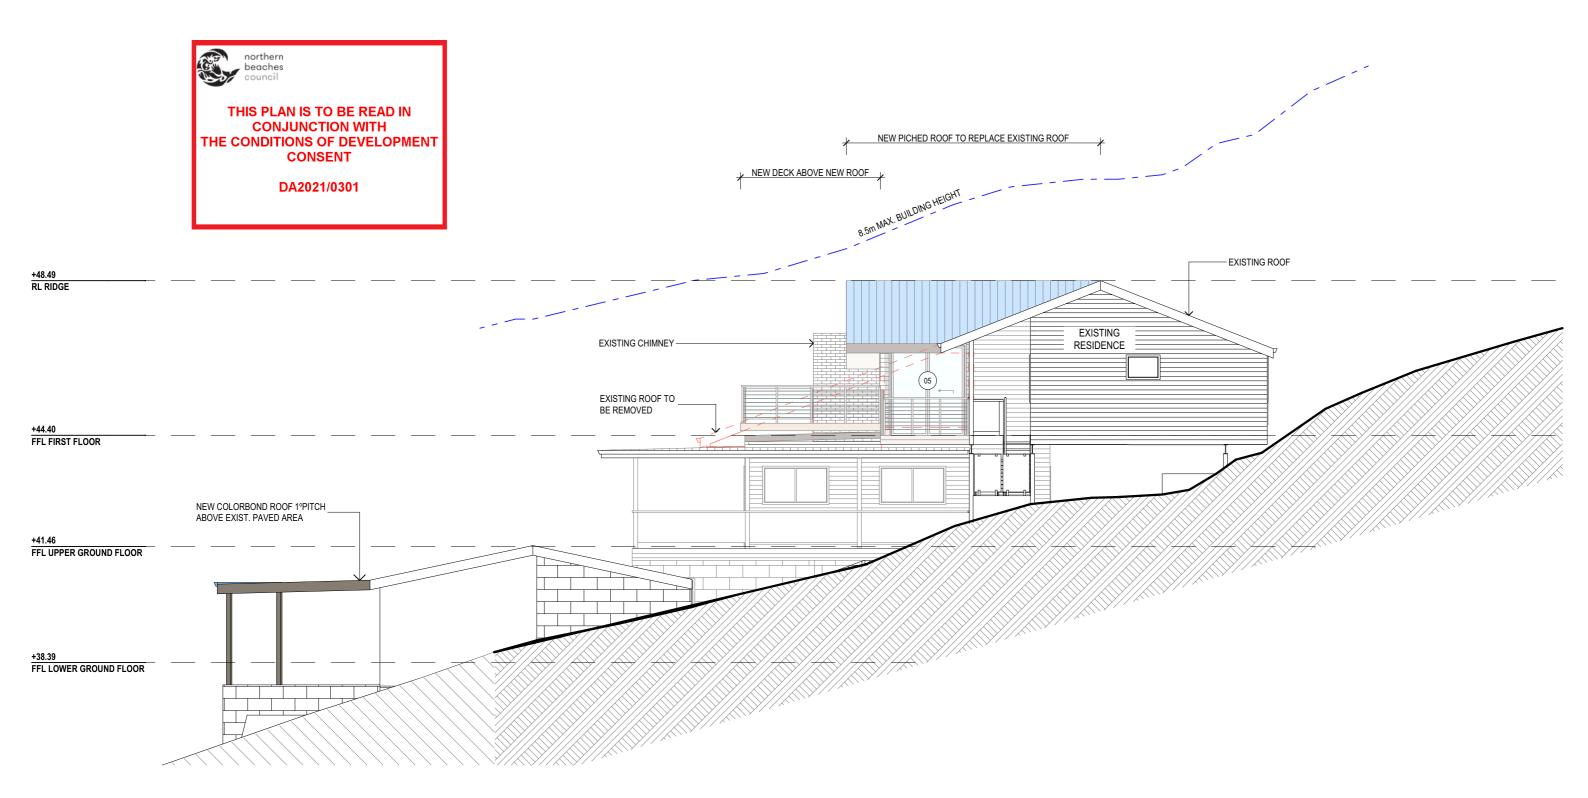

NORTH WEST ELEVATION

NOTES (E & OE)		REV:	DATE:	DESCRIPTION:	PROJECT DETAILS:
 All structures including stormwater & drainage to engineer's details. Do not obtain dimensions by scaling drawings. 	JJ Drafting	A	01.03.21	PRELIM. DRAWINGS UPDATED AS PER CLIENT	PROPOSED ALTERATIONS AND ADDITIONS
 All dimensions are to be checked on site prior to starting work. These drawings are to be read in conjunction with all other consultant's drawings and 	55 - 55				12 CORNICHE ROAD - CHURCH POINT 2105
specifications.	174 Garden St, North Narrabeen, NSW, 2101				
All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local	PO Box 687, Dee Why, NSW, 2099				DRAWING TITLE:
council requirements.	Mob. 0414 717 541				NORTH WEST ELEVATION
 New materials are to be used throughout unless otherwise noted. Concrete footings, slab, structural beams or any other structural members are to be designed 	Email. jjdraft@tpg.com.au				
by a practicing engineer.	www.jjdrafting.com.au				

DATE:	DRAWN BY:	SCALE:
XX/21	XX	1:100 @ A3
JOB No:	CHECKED BY:	DRAWING No:
871/21	JJ	DA.08

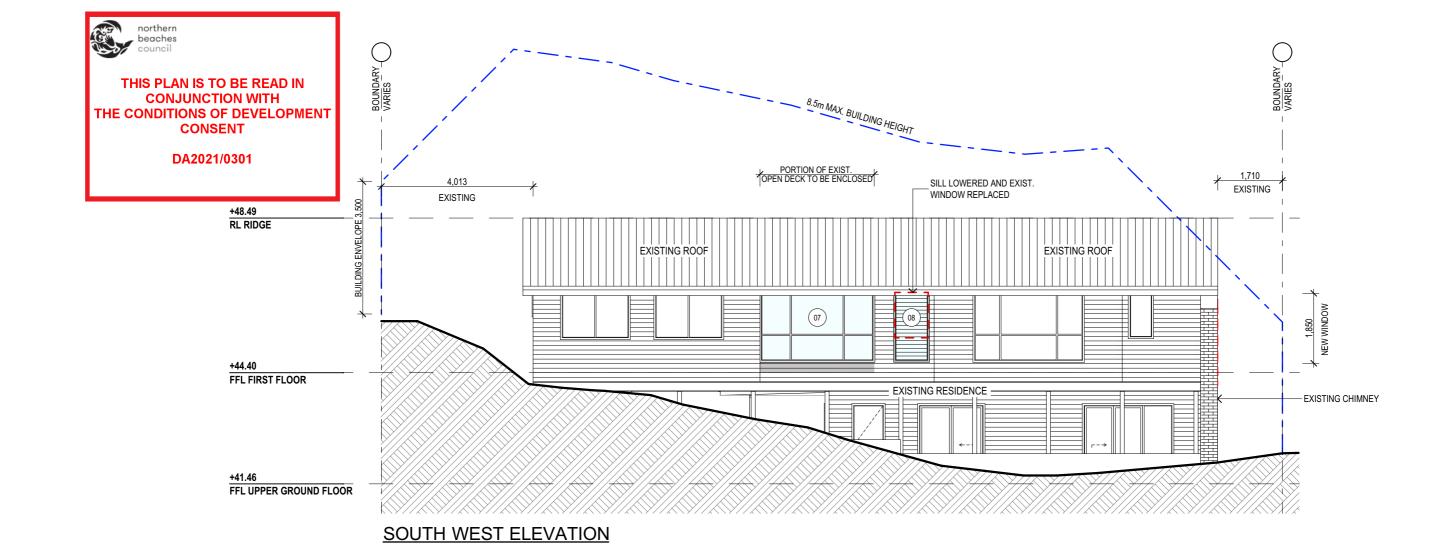

SPECIFICATION NOTES

INTERNAL LINING

PROVIDE PLASTERBOARD LINING. INSTALL TO MANUFACTURERS SPECIFICATIONS & AS 2589

EXTERNAL WALLS:

LIGHTWEIGHT TIMBER CLADDING OR SIMILAR TO DWELLING.

FLOOR: FIRST FLOOR TO BE TIMBER FRAMED FINISHED WITH T&G HARDWOOD FLOORING.

WET AREAS:

ALL WATERPROOFING TO AS 3740 - PROVIDE A GUARANTEED FLEXIBLE WATERPROOF MEMBRANE TO ALL WET AREA FLOORS & SHOWERS WALLS TO MANUFACTURES INSTRUCTIONS

BEARERS AND JOISTS:

- SHALL BE INSTALLED TO COMPLY WITH AS1684 AS AMENDED FOR TIMBER COMPONENTS OR AS3620 FOR LIGTHWEIGHT STEEL FRAMING SECTIONS OR AS PER THE NASH ALTERNATIVES TO AS 3623.

ANT CAPS: - SHALL BE INSTALLED IN ACCORDANCE WITH AS3660.

PROFILED STEEL ROOF:

NCC VOL 2 PART 3.5.1 - DESIGN AND INSTALLATION SHALL BE IN ACCORDANCE WITH AS/NZS 1562.

ROOFING: - COLORBOND ROOF CLADDING

CONCRETE:

- SHALL BE IN ACCORDANCE WITH NCC VOL.1 PART B1.4 OR VOL.2 PART 3.2.3. - ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH CURRENT EDITIONS OF THE AS3600

FOOTINGS:

FOOTINGS TO BE IN ACCORDANCE WITH AS1480. - FOOTINGS TO BE IN ACCORDANCE WITH NCC VOL.2 PARTS 3.2.3, 3.2.4 AND 3.2.5 - ALL REINFORCEMENTS SHALL CONFORM TO AS1302, AS1303 AND AS1304

CARPENTRY:

TIMBER TO COMPLY WITH AS1170.2 OR AS4055.

- ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS1684 AND 1720 AS APPLICABLE.

TIMBER FRAMING: - TO COMPLY WITH NCC VOL.2 PART 3.4

- GROUND FLOOR TIMBERS SHALL BE ONLY OF HARDWOOD, CYPRESS PINE OR PRESSURE TREATED RADIATA OR CANADA PINE BELOW A HEIGHT OF 300mm ABOVE FINISHED GROUND LEVEL AND MUST NOT BE BUILT INTO BRICKWORK.

- SUBFLOOR VENTILATION SHALL CONFORM TO NCC VOL.2 PART 3.4.1. - IN BUSHFIRE PRONE AREAS SPECIAL CONDITIONS APPLY.
- WHERE TERMITE BARRIERS NEED TO BE INSPECTED, 400mm CLEARANCE IS REQUIRED BETWEEN THE UNDERSIDE OF BEARER AND GROUND SURFACE. - USE TREATED TIMBER WHERE REQUIRED FOR DURABILITY.
- DO NOT USE TIMBER UNSUITABLE FOR EXPOSURE TO MOISTURE IN EXPOSED LOCATION. PROVIDE STRUCTURE BRACING IN ACCORDANCE WITH AS1684
- PROVIDE STRUCTURE TIEDOWN IN ACCORDANCE WITH AS1684
- USE GALVANISED FIXINGS WHERE EXPOSED TO WEATHER

TERMITE CONTROL:

TO BE IN ACCORDANCE WITH TO AS3660.1 SHALL BE IN ACCORDANCE WITH NCC VOL.2 PART 3.1.3 OR VOL.1 PART B1.4.

FLASHING AND CAPPINGS:

- SELECTION AND INSTALLATION OF METAL RAINWATER GOODS REFER TO AS2180 FLASH PROJECTIONS ABOVE THE ROOF WITH TWO PART FLASHINGS CONSISTING OF AN APRON FLASHING AND OVER FLASHING, WITH AT LEAST 100mm OVERLAP. PROVIDE FOR INDEPENDENT MOVEMENT BETWEEN ROOF AND PROJECTION.

CONCRETE BLOCKS OR BRICKS:

- TO COMPLY WITH TO AS4455 MANSORY BUILDING BLOCKS/PAVER.

LIGHTING:

- 40% OF NEW OR ALTERED LIGHT FIXTURES TO BE FITTED WITH FLUORESCENT, COMPACT FLUORESCENT, OR LIGHT-EMITTING-DIODE (LED) LAMPS

DOOR & WINDOWS:

- ALL FRAMED WINDOWS SHALL BE INSTALLED IN ACCORDANCE WITH AS2047-48 FOR ALUMINIUM WINDOWS AND AS2047 FOR TIMBER WINDOWS.

ALUMINIUM FRAMED WINDOWS AND DOORS.
 WEATHER STRIPPING IS TO BE PROVIDED TO ALL EXTERNAL WINDOWS AND DOORS.

STAIRS, HANDRAILS AND BALUSTRADES:

- NCC VOL.2 PARTS 3.9.1 AND 3.9.2

- NGC VUL 2 PARTS 3.9: 1 AND 3.9:2 - RELATIONSHIP OF RISER TO GOING SHALL BE BETWEEN 1:2 AND 1:1.35 UNLESS OTHERWISE DIRECTED TO GOING SHALL BE BETWEEN 1:2 AND 1:1.35 UNLESS OTHERWISE DIRECTED OR AS PERMITTED IN AS1657

ASIGUT. BALUSTRADES SHALL BE PROVIDED TO ALL LANDINGS, RAMPS, DECKS, ROOFS AND OTHER ELEVATED PLATFORMS WHERE THE VERTICAL DISTANCE FROM THAT LEVEL IS MORE THAN 1m ABOVE THE ADJOINING FLOOR OR FINISHED GROUND LEVEL.

- THE HEIGHT OF BALUSTRADE MUST BE A MINIMUM OF 1m HIGH ABOVE LANDING AND NOT LESS THAN 865mm ABOVE THE NOSINGS OF ANY STAIR TREADS OR FLOOR RAMP AND HAVE NO OPENING GREATER

THAN 125mm. - THE HEIGHT OF BALUSTRADE TO THE NEW STAIR CASES IS TO BE MEASURED A MINIMUM 865mm ABOVE THE NOSING LINE AND HAVE NO OPENING GREATER NO OPENING GREATER THAN 125mm

SLIP RESISTANCE:

- MATERIALS TO BE USED FOR SURFACES OF FLOORS, STAIR LANDING, STEPS AND NOSINGS SHALL BE IN ACCORDANCE WITH THE CLASSIFICATIONS FOR SLIP RESISTANCE AS APPLY IN AS4586 AND HB198

STORMWATER:

EAVES GUTTERS, VALLEY GUTTERS AND DOWPIPES

- TO COMPLY WITH AS/NZS 2179 FOR METAL AND AS1273 FOR UPVC COMPONENTS. - NEW DOWNPIPES TO BE CONNECTED INTO EXISTING STORMWATER LINE

- COLORBOND GUTTERS AND DOWNPIPES

MINIMUM SLOPE OF EAVES AND GUTTERS 1:200

NOTES (E & OE)		REV:	DATE:	DESCRIPTION:	PROJECT DETAILS:
 All structures including stormwater & drainage to engineer's details. Do not obtain dimensions by scaling drawings. 	JJ Draftíng	A	01.03.21	PRELIM. DRAWINGS UPDATED AS PER CLIENT	PROPOSED ALTERATIONS AND ADDITIONS
 All dimensions are to be checked on site prior to starting work. These drawings are to be read in conjunction with all other consultant's drawings and 	55 - 5 - 6				12 CORNICHE ROAD - CHURCH POINT 2105
specifications.	174 Garden St, North Narrabeen, NSW, 2101				
All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local	PO Box 687, Dee Why, NSW, 2099				DRAWING TITLE:
council requirements.	Mob. 0414 717 541				SOUTH WEST ELEVATION & SPECIFICATION
 New materials are to be used throughout unless otherwise noted. Concrete footings, slab, structural beams or any other structural members are to be designed 	Email. jjdraft@tpg.com.au				
by a practicing engineer.	www.jjdrafting.com.au				NOTES
	· · · · · · · · · · · · · · · · · · ·	· · · ·		· · · · · · · · · · · · · · · · · · ·	

GLAZING: - NCC VOL.1 PARTS B 1.4, D 3.12, F1.13 OR NCC VOL.2 PART 3.6

SMOKE DETECTORS/ALARMS:

- NCC VOL 2 PART 3.7.2, FIRE/SMOKE DETECTORS COMPLYING WITH THE REQUIREMENTS OF THE LOCAL GOVERNMENT ACT AND/OR STATE OR TERRITORY REGULATIONS MUST BE FITTED IN THE LOCATIONS REQUIRED AND APPROVED BY THE AUTHORITY AND SHALL BE INSTALLED IN ACCORDANCE WITH AS3786. - INSTALLATIONS IN BUILDINGS OTHER THAN CLASS 1 AND 10 MUST BE INSTALLED AND MANAGED TO COMPLY WITH NCC SPEC. E2.2a.

- MULTIPLE ALARMS WITHIN HOUSES AND SOLE OCCUPANCY UNITS MUST BE HARD WIRED AND INTERCONNECTED.

WASTE MANAGEMENT:

- ALL WASTE SHALL BE TAKEN AWAY BY TRUCKS TO A SUITABLE LANDFILL OR RECYCLE DEPOT. - ALL WASTE SHALL BE COVERED DURING TRANSPORTATION. - WASTE GENERATED DURING CONSTRUCTION SHALL BE PLACED IN STEEL BINS AND TAKEN AWAY BY AN APPROVED CONTRACTOR TO A APPROVED LANDFILL SITE


SEDIMENT CONTROL:

- A FILTER CLOTH SYSTEM SHALL BE INSTALLED TO STOP ANY SEDIMENT ENTERING COUNCILS STORMWATER SYSTEM.

NOTE:

ALL PLANS ARE TO BE READ IN CONJUNCTION AND COMPLY WITH THE BASIX CERTIFICATE, BUSHFIRE AND GEOTECH REPORTS

JOB No: 871/21	CHECKED BY: JJ	DRAWING No: DA.09	
XX/21	XX	1:100 @ A3	
DATE:	DRAWN BY:	SCALE:	

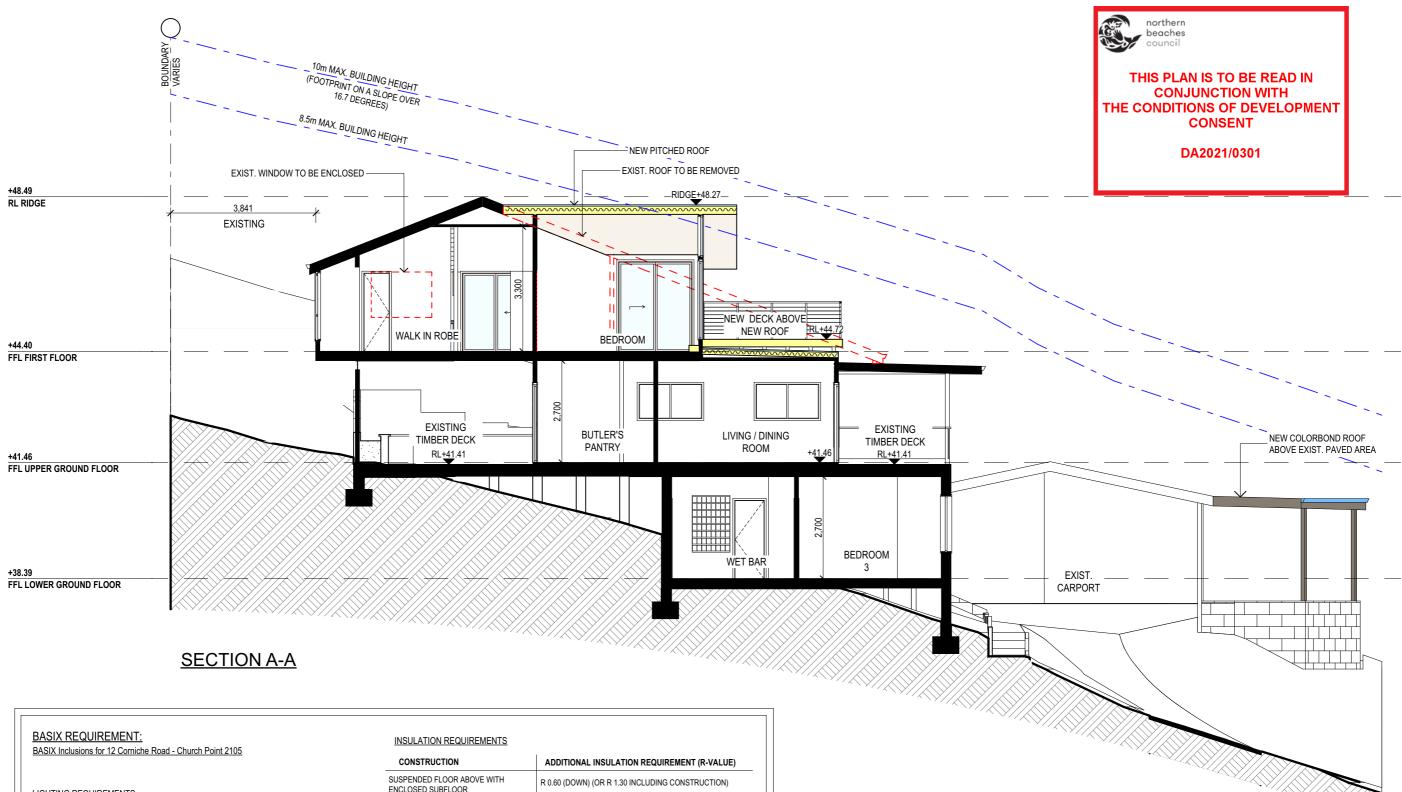

LIGHTING REQUIREMENTS

40% OF NEW OR ALTERED LIGHT FIXTURES TO BE FITTED WITH FLUORESCENT, COMPACT FLUORESCENT, OR LIGHT-EMITTING-DIODE (LED) LAMPS

<u>WATER</u>

- SHOWER RATING - TAP RATING - WC`S RATING	 MINIMUM 3 STAR MINIMUM 3 STAR MINIMUM 3 STAR

CONSTRUCTION	ADDITIONAL INSULATION REQUIREMENT (R-VALUE)
SUSPENDED FLOOR ABOVE WITH ENCLOSED SUBFLOOR	R 0.60 (DOWN) (OR R 1.30 INCLUDING CONSTRUCTION)
EXTERNAL WALL: FRAMED (WEATHERBOARD, FIBRO, METAL CLAD)	R 1.30 (OR R 1.70 INCLUDING CONSTRUCTION)
RAKED CEILING, PITCHED/SKILLION ROOF:FRAMED	Ceiling: R2.24 (up), roof: foil backed blanket (55 mm)

GLAZING DOORS / WINDOWS

- STANDARD ALUMINIUM, SINGLE CLEAR, (or U-value: 7.63, SHGC: 0.75)

WINDOWS - W1, W2, W3, W4, W5, W6, W7, W8, W9, W10

* ADJUSTABLE EXTERNAL LOUVRE/BLIND TO DOOR 01 AND WINDOWS 03 & 04

NOTES (E & OE) All structures including stormwater & drainage to engineer's details. Do not obtain dimensions by scaling drawings. All dimensions are to be checked on site prior to starting work. These drawings are to be read in conjunction with all other consultant's drawings and engentifications. REV: DATE: PROJECT DETAILS: DESCRIPTION: JJ Drafting A 01.03.21 PRELIM. DRAWINGS UPDATED AS PER CLIENT PROPOSED ALTERATIONS AND ADDITIONS 12 CORNICHE ROAD - CHURCH POINT 2105 174 Garden St, North Narrabeen, NSW, 2101 specifications. • • All workmanship & materials shall be in accordance with the requirements of current editions PO Box 687, Dee Why, NSW, 2099 DRAWING TITLE: An working a matching share of the National Construction Code, relevant Australian Standards & local council requirements. New materials are to be used throughout unless otherwise noted. Concrete footings, slab, structural beams or any other structural members are to be designed Mob. 0414 717 541 SECTION / BASIX Email. jjdraft@tpg.com.au www.jjdrafting.com.au by a practicing engineer.

DATE:	DRAWN BY:	SCALE:
XX/21	XX	1:100 @ A3
JOB No:	CHECKED BY:	DRAWING No:
871/21	JJ	DA.10