

Landscape Referral Response

Application Number:	DA2025/0150
Date:	04/04/2025
Proposed Development:	Demolition works and construction of a dwelling house including swimming pool
Responsible Officer:	Anaiis Sarkissian
Land to be developed (Address):	Lot 19 DP 8698 , 77 Central Road AVALON BEACH NSW 2107

Reasons for referral

This application seeks consent for the following:

- Construction / development works within 5 metres of a tree or
- New residential works with three or more dwellings. (RFB's, townhouses, seniors living, guesthouses, etc). or
- Mixed use developments containing three or more residential dwellings.
- New Dwellings or

Officer comments

Additional Information Comment 04/04/1963

Amended Plans and updated Arborist's Report are noted.

The amended plans indicate retention of the existing crossover location, reducing impact on Tree 7.

The Arborist's Report indicates that the tree can now be retained with an acceptable level of impact, subject to Arboricultural supervision.

No objections are now raised subject to conditions.

Original Comment

The application seeks consent for: Demolition works and construction of a dwelling house including swimming pool.

The Arborist's report prepared by Jackson's Nature Works and Landscape Plan prepared by Mathieson are noted.

The Arborist's Report indicates that four exempt trees and one non-exempt tree are required to be removed to accommodate the new crossover and driveway. No objections are raised to the removal of the exempt trees.


The non-exempt tree to be removed, Tree 7 *Eucalyptus resinifera*, is located within the Central Road road reserve, adjacent to an existing layback and crossover.




Tree 7 is described as of Medium landscape significance and High retention value.

Tree 7 forms part of a significant streetscape along Central Road, dominated by tall native trees.

The plans indicate that the tree would be immediately adjacent to the new driveway crossover. It is noted that the proposed crossover is located closer to the tree than the existing crossover.

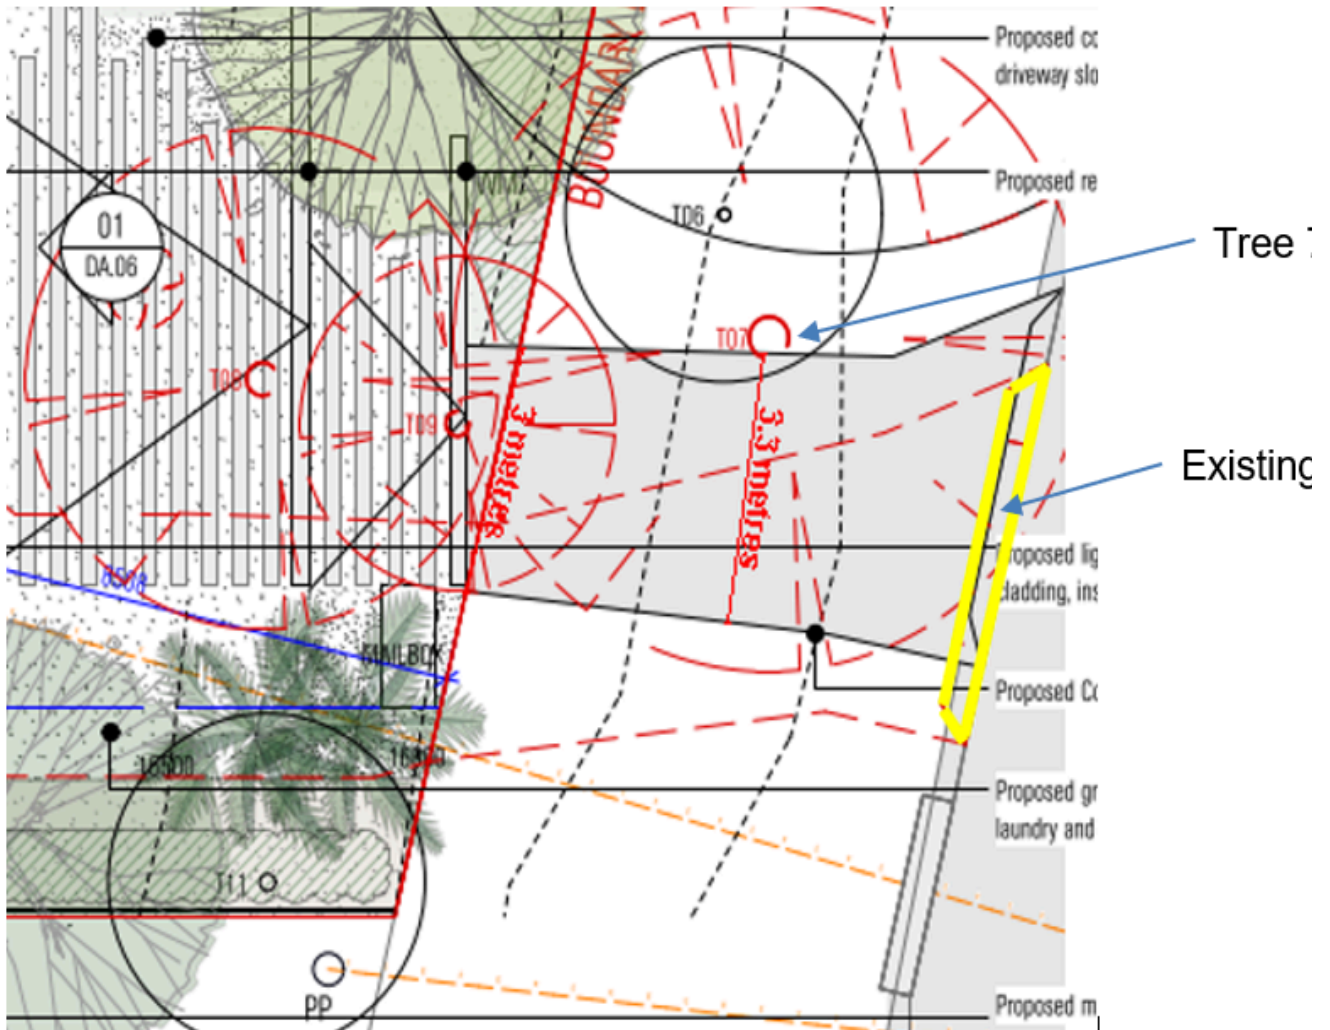


The Driveway Long Section provided by Intrax indicates that the driveway is to be constructed above existing levels to achieve compliant grades.

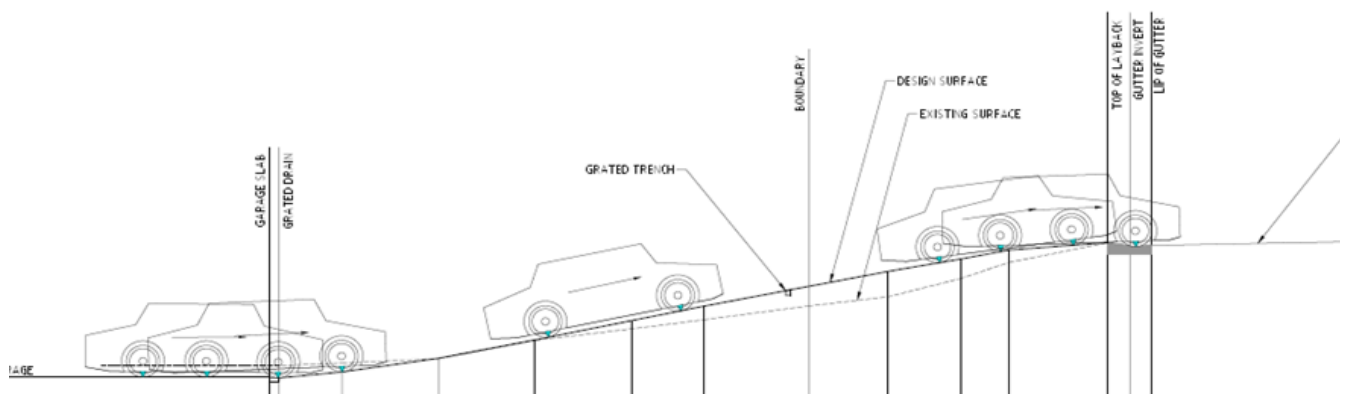

New crossover above existing ground levels

If the existing layback location is maintained the new driveway could be provided clear of the tree trunk, enabling its retention.

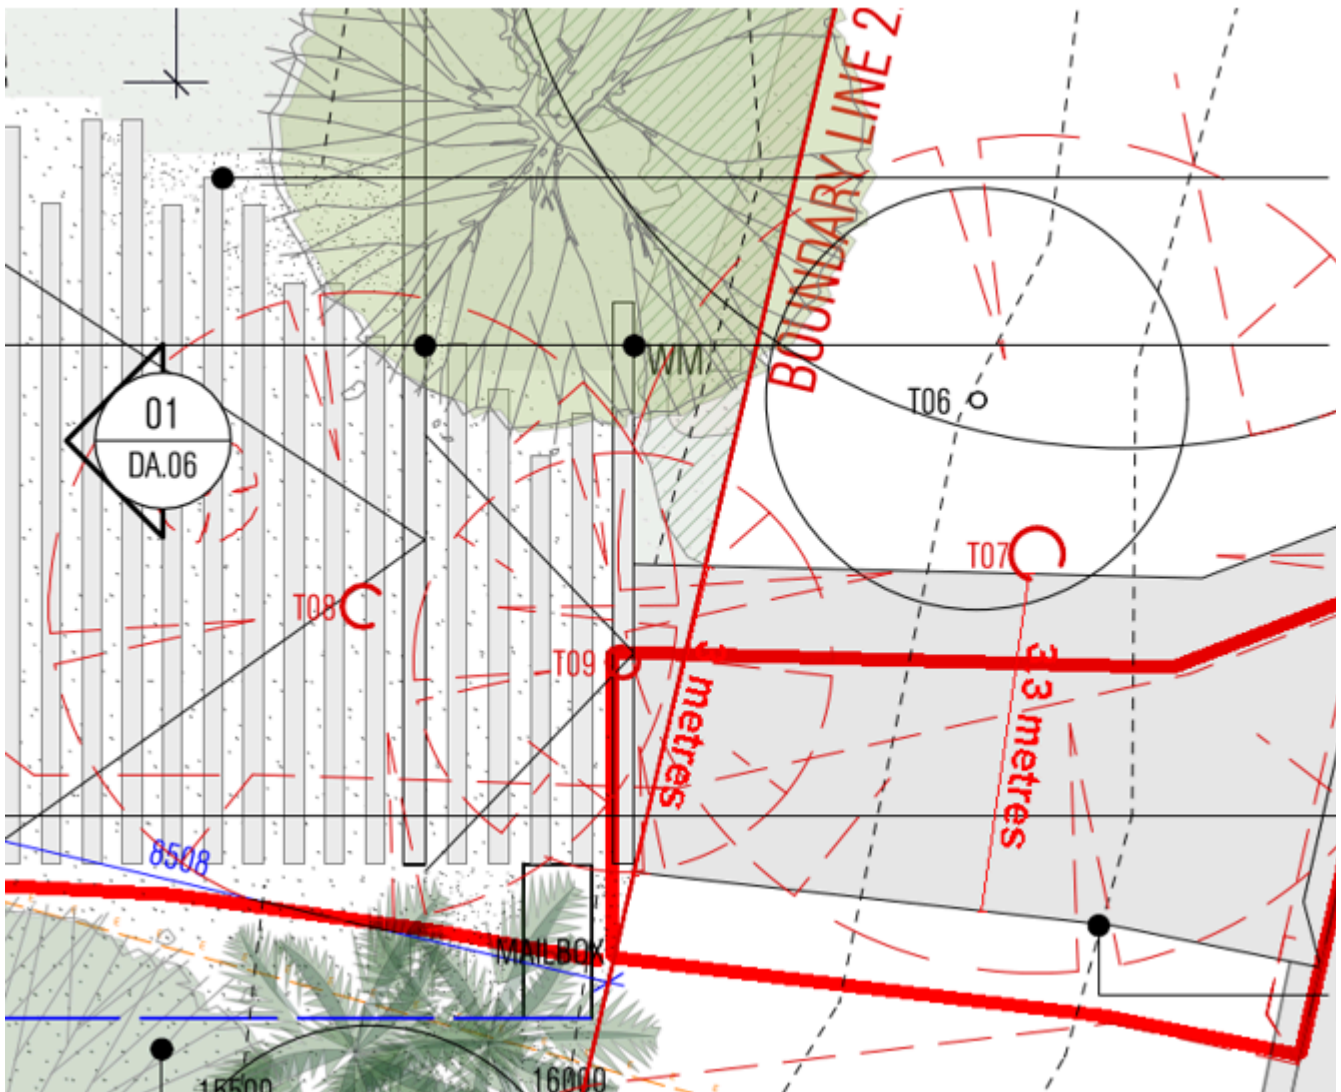

Suggested crossover alignment (Red lines)

As the removal of the tree is not supported and there appears to be an alternate solution to enable retention, the proposal is not able to be supported with regard to landscape issues at this stage.

The proposal is therefore supported.

Note: Should you have any concerns with the referral comments above, please discuss these with the Responsible Officer.

Recommended Landscape Conditions:

CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

Project Arborist

A Project Arborist with minimum AQF Level 5 in arboriculture shall be engaged prior to any commencement of works on site to provide tree protection measures in accordance with the Arboricultural Impact Assessment Report dated 1 April 2025 prepared by Jacksons Nature Works and AS4970-2009 Protection of trees on development sites.

The Project Arborist shall be in attendance and supervise all works as nominated in the Arboricultural Impact Assessment, and in particular:

- a) Excavation for and construction of the new driveway, layback and crossover

All tree protection measures specified must:

- a) be in place before work commences on the site, and
- b) be maintained in good condition during the construction period, and
- c) remain in place for the duration of the construction works.

The Project Arborist shall provide certification to the Principal Certifier that all tree protection measures under AS4970-2009 have been satisfied, and the recommendations listed for the protection of the existing tree(s) have been carried out satisfactorily to ensure no impact to the health of the tree(s). Photographic documentation of the condition of all trees to be retained shall be recorded, including at commencement, during the works and at completion.

Note: Any potential impact to trees as assessed by the Project Arborist will require redesign of any approved component to ensure existing trees upon the subject site and adjoining properties are preserved and shall be the subject of a modification application where applicable.

Reason: Tree protection.

CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

Protection of Landscape Features and Sites of Significance

All natural landscape features including natural rock outcrops, natural vegetation, soil and watercourses are to remain undisturbed during demolition, excavation and construction works except where affected by works detailed on approved plans.

Should any Aboriginal Cultural Heritage items be uncovered during earthworks, works should cease in the area and the Aboriginal Heritage Office contacted to assess the finds.

Under Section 89a of the NPW Act should the objects be found to be Aboriginal, NSW Biodiversity and Conservation Division, Heritage NSW and the Metropolitan Local Aboriginal Land Council (MLALC) should be contacted.

Reason: Preservation of significant environmental features.

Tree and Vegetation Protection

- a) Existing trees and vegetation shall be retained and protected, including:
 - i) all trees within the site not indicated for removal in the Arboricultural Impact Assessment Report dated 1 April 2025 prepared by Jacksons Nature Works,
 - ii) all trees and vegetation located on adjoining properties,
 - iii) all trees and vegetation within the road reserve.
- b) Tree protection shall be undertaken as follows:
 - i) tree protection shall be in accordance with the Arboricultural Impact Assessment Report dated 1 April 2025 prepared by Jacksons Nature Works AS4970-2009

- Protection of trees on development sites, and any recommendations of an approved Arboricultural Impact Assessment,
- ii) existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by the Project Arborist,
 - iii) removal of existing tree roots at or >25mm (Ø) diameter is not permitted without consultation with the Project Arborist,
 - iv) no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained,
 - v) structures are to bridge tree roots at or >25mm (Ø) diameter unless directed by the Project Arborist on site,
 - vi) excavation for stormwater lines and all other utility services is not permitted within the tree protection zone, without consultation with an Arborist/Project Arborist with minimum AQF Level 5 in arboriculture including advice on root protection measures,
 - vii) should either or all of v) or vi) occur during site establishment and construction works, the Project Arborist shall provide recommendations for tree protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist/Project Arborist to the Principal Certifier,
 - viii) any temporary access to, or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of AS4970-2009 Protection of trees on development sites,
 - ix) the activities listed in section 4.2 of AS4970-2009 Protection of trees on development sites, shall not occur within the tree protection zone of any tree on the lot or any tree on an adjoining site,
 - x) tree pruning from within the site to enable approved works shall not exceed 10% of any tree canopy, and shall be in accordance with AS4373-2007 Pruning of amenity trees,
 - xi) the tree protection measures specified in this clause must: i) be in place before work commences on the site, and ii) be maintained in good condition during the construction period, and iii) remain in place for the duration of the construction works.

The Principal Certifier must ensure that:

- c) The arboricultural works listed in a) and b) are undertaken and certified by the Project Arborist as compliant to AS4970-2009 Protection of trees on development sites, and any recommendations of an approved Arboricultural Impact Assessment.

Reason: Tree and vegetation protection.

Condition of Trees

During the construction period the applicant is responsible for ensuring all existing trees required to be retained are maintained in a healthy and vigorous condition. This is to be done by ensuring that all identified tree protection measures are adhered to or by seeking arboricultural advice from the Project Arborist during the works.

In this regard all protected trees shall not exhibit:

- i) a general decline in health and vigour,
- ii) damaged, crushed or dying roots due to poor pruning techniques,

- iii) more than 10% loss or dieback of roots, branches and foliage,
- iv) mechanical damage or bruising of bark and timber of roots, trunk and branches,
- v) yellowing of foliage or a thinning of the canopy untypical of its species,
- vi) an increase in the amount of deadwood not associated with normal growth,
- vii) an increase in kino or gum exudation,
- viii) inappropriate increases in epicormic growth that may indicate that the plants are in a stressed condition,
- ix) branch drop, torn branches and stripped bark not associated with natural climatic conditions.

Any mitigating measures and recommendations required by the Arborist are to be implemented.

The owner of the adjoining allotment of land is not liable for the cost of work carried out for the purpose of this clause.

Reason: Protection of trees.

CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

Landscape Completion

Landscape works are to be implemented in accordance with the approved Landscape Plans and inclusive of the following conditions:

- a) landscape works are to be contained within the legal property boundaries,
- b) all tree planting shall be a minimum pre-ordered planting size of 75 litres or as otherwise scheduled; may be selected from Northern Beaches Council's Native Plant Species Guide, or Council's Tree Guide; to achieve at least 5 metres height at maturity; meet the requirements of Natspec - Specifying Trees; planted into a prepared planting hole 1m x 1m x 600mm depth, backfilled with a sandy loam mix or approved similar, mulched to 75mm depth minimum and maintained, and watered until established; and located either within garden bed or within a prepared bed within lawn,
- c) tree, shrub and groundcover planting shall be installed as indicated on the approved Landscape Plan(s),
- e) all proposed tree planting shall be positioned in locations to minimise significant impacts on neighbours in terms of blocking winter sunlight to living rooms, private open space and where the proposed location of trees may otherwise be positioned to minimise any significant loss of views from neighbouring and nearby dwellings and from public spaces,
- f) where swimming pools are part of the development works, selected planting shall comply with the planting and care requirements of AS1926.1 for a non-climbable zone,
- g) where the property is certified Bush Fire Prone Land, any new planting may be managed in accordance with Planning for Bushfire Protection 2019.

Prior to the issue of an Occupation Certificate, details (from a qualified landscape architect, landscape designer or horticulturalist) shall be submitted to the Principal Certifier, certifying that the landscape works have been completed in accordance with any conditions of consent.

Reason: Environmental amenity.

Condition of Retained Vegetation

Prior to the issue of an Occupation Certificate, a report prepared by the Project Arborist shall be

submitted to the Principal Certifier, assessing the health and impact on all existing trees required to be retained on the approved Plans or as listed in the Arboricultural Impact Assessment, including the following information:

- a) compliance to any Arborist recommendations for tree protection generally and during excavation works,
- b) extent of damage sustained by vegetation as a result of the construction works,
- c) any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: Tree and vegetation protection.