


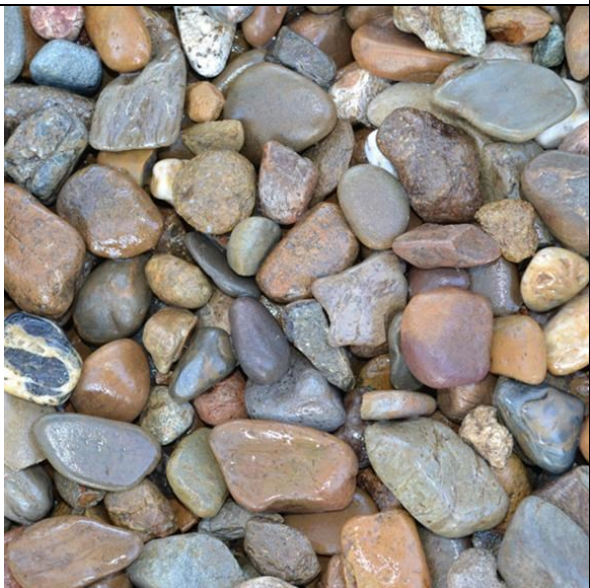

ARCHITECTURAL NON TRAFFICABLE CONCRETE ROOF AREAS - EXTERNAL FINISH

Job No:	Job Name / Address	Date	Revision
2424	46 Victoria Parade, Manly	JAN 2020	A

EXTERIOR MATERIALS – Addendum 1 - Non Trafficable Roof Terrace

CONCRETE ROOF					
Code	Image	Location	Description	Specification	R
CR1		Level 1 – South Concrete Roof over driveway entry ramp	200mm RC suspended slab 180/180/180 with seamless Waterproof membrane covered with impact board for 60mm deep pebble ballast evenly spread. Ref drawing A002 for extent	Sandy/Brown washed river gravel. Ensure gravel size is adequate to prevent removal by birds. (30mm-40mm diameter) Australian Native Landscapes (\$106/tonne)	A