

No	Revision Description	Date
1	Development Application	09.12.2024

SCOPE | 80 WEST ST BALGOWLAH NSW 2093 mail@scopearchitects.com.au ph: 9400 4554 www.scopearchitects.com.au


DAVID FROGGATT


Alterations & Additions
39 LOVETT ST MANLY VALE 2093
LOT:1 DP: 237712

CONCEPT FOOTINGS PLAN

TRUE NORTH	
ZI	


	DRAWN	PROJECT NO.	D
\	XK	02404	
)	SIZE	SCALE	
<b>'</b>	A3	1:100	

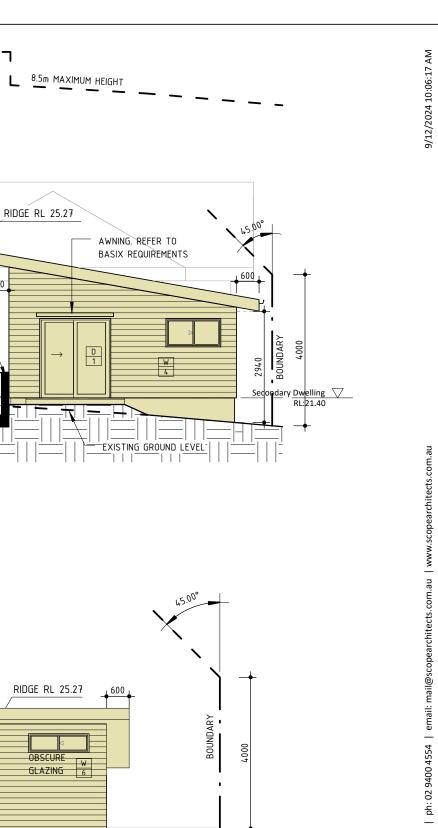

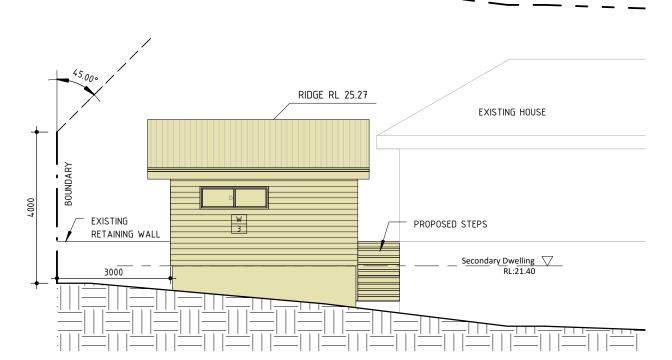

8.5 MAXIMUM HEIGHT

**East Elevation** 1:100

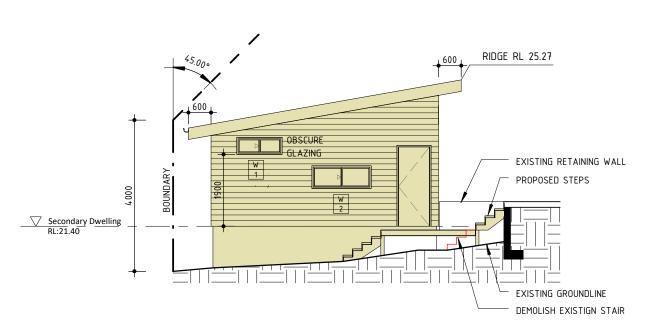

North Elevation

RIDGE RL 25.27 EXISTING HOUSE OBSCURE W 6 OBSCURE 5 GLAZING

EXISTING HOUSE

EXISTING RETAINING WALL

West Elevation

South Elevation

1:100

09.12.2024 Development Application Date **Revision Description** 

SCOPE ARCHITECTS ARCHITECTS | www.scopearchitects.com.au

80 WEST ST BALGOWLAH NSW 2093 mail@scopearchitects.com.au ph: 9400 4554 **DAVID FROGGATT** 

Alterations & Additions 39 LOVETT ST MANLY VALE 2093 LOT:1 DP: 237712

DRAWING TITLE **ELEVATIONS** 

PROJECT NO. TRUE NORTH DRAWN XK 02404 SIZE SCALE А3 1:100

A04

LEGEND

EXISTING WALL NEW TIMBER WALL

NEW BRICK WALL

PROPOSED WORKS


DEMOLISH

DRAWING NO REV NO

ECTS.

SCOPE



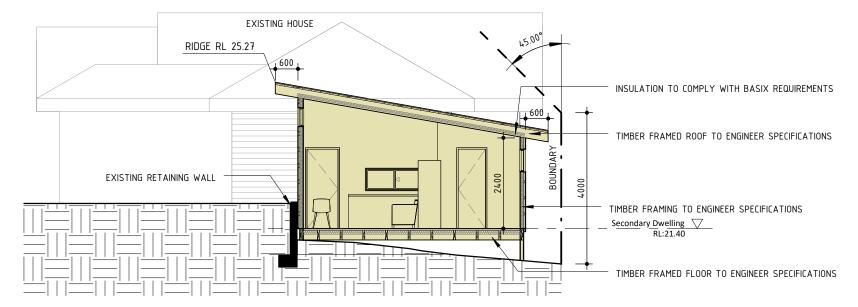

Section 1

	Window Schedule		
Mark	Description	Height	Width
1	Sliding Window	450	1200
2	Sliding Window	600	1570
3	Sliding Window	600	1810
4	Sliding Window	750	1450
5	Sliding Window	500	1600
6	Sliding Window	500	1600

External Door Schedule				
Mark	Description	Height	Width	Comments
1	Sliding Door	2100	1800	External

No	Revision Description	Date
1	Development Application	09.12.2024



80 WEST ST BALGOWLAH NSW 2093 mail@scopearchitects.com.au ph: 9400 4554

DAVID FROGGATT


Alterations & Additions
39 LOVETT ST MANLY VALE 2093 LOT:1 DP: 237712


DRAWING TITLE SECTIONS

PROJECT NO. TRUE NORTH DRAWN 02404 XK SIZE SCALE А3 1:100

DRAWING NO A05


REV NO



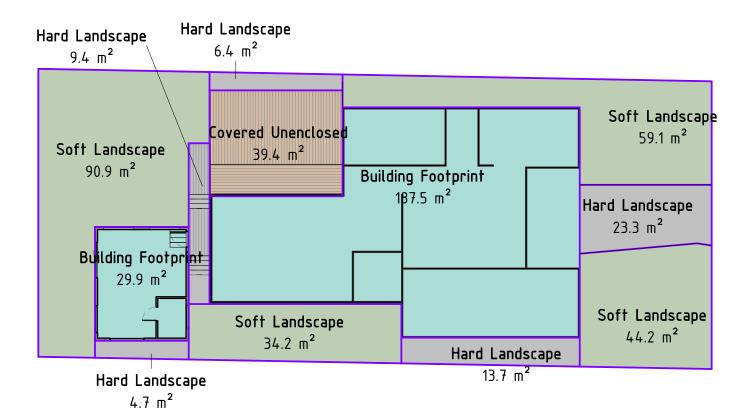


Landscape Area Calculations		
Name	Area	% of site
Building Footprint	217 m <sup>2</sup>	40%
Covered Unenclosed	39 m²	7%
Hard Landscape	57 m <sup>2</sup>	11%
Soft Landscape	228 m²	42%
	543 m <sup>2</sup>	100%

Landscape Area Plan 1:200

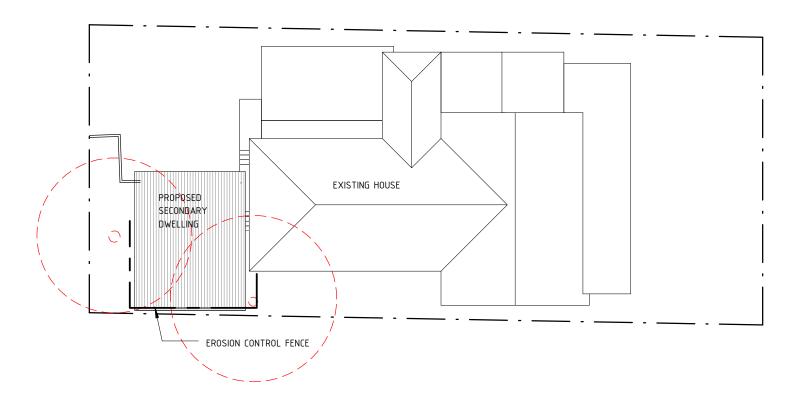

DRAINAGE AREA 0.6HA MAX. SLOPE GRADIENT 1:2 MAX. SLOPE LENGTH 60M MAX.

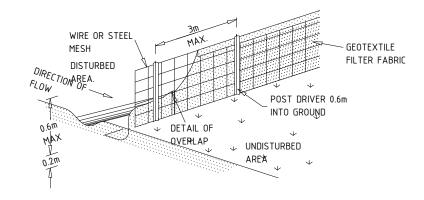

Erosion Control Fence Detail 3

No	Revision Description	Date
1	Development Application	09.12.2024

1:200

80 WEST ST BALGOWLAH NSW 2093

**Erosion Control plan** 

**DAVID FROGGATT** 

Alterations & Additions 39 LOVETT ST MANLY VALE 2093 LOT:1 DP: 237712

DRAWING TITLE **CALCULATIONS &** 

TRUE NORTH	
ZI	ľ

	DRAWN	PROJECT NO.
7	XK	02404
)	SIZE	SCALE
/	A3	As indicated

DRAWING NO REV NO

A06 mail@scopearchitects.com.au ph: 9400 4554 SEDIMENT & EROSION ARCHITECTS | www.scopearchitects.com.au **CONTROL PLAN** 

Ö



## Single Dwelling

Certificate number: 1775302S

Construction	Area - m²	Additional insulation required	Options to address thermal bridging	Other specifications
floor - suspended floor above enclosed subfloor, particle board; frame: timber - H2 treated softwood.	26.5	2 (or 2.7 including construction) (down);not specified	nil	subfloor wall insulation: None
external wall: framed (fibre cement sheet or boards); frame; timber - H2 treated softwood.	all external walls	3.00 (or 3.50 including construction); not specified	nil	wall colour: Medium (solar absorptance 0.48-0.7)
internal wall: plasterboard; frame: ceiling and roof - flat ceiling / flat roof, framed - metal roof, timber - H2 treated softwood.	9.7 38.4	not specified ceiling: 5 (up), roof: foil backed blanket ;ceiling: fibreglass batts or roll; roof: foil backed blanket.	nil nil	roof colour: medium (solar absorptance 0.6-0.7); ceiling area fully insulated

Ceiling fans	
The applicant mu	st install at least one ceiling fan in at least one daytime habitable space, such as living room.
The applicant mu	st install at least one ceiling fan in each bedroom.
	number and diameter of ceiling fans in a daytime habitable space must be installed in accordance with the ABCB one (Part 13.5.2) of the National Construction Code.

Glazed window/door no.	Maximum height (mm)	Maximum width (mm)	Frame and glass specification	Shading device (Dimension within 10%)	Overshadowing
North facing		-			
W01	450.00	1200.00	aluminium, double glazed (U-value: <=6.0, SHGC: 0.60 - 0.74)	eave 300 mm, 220 mm above head of window or glazed door	2-4 m high, 8-12 m away
W02	600.00	1570.00	aluminium, double glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	eave 300 mm, 1400 mm above head of window or glazed door	2-4 m high, 2 m away
East facing					
W03	600.00	1810.00	aluminium, double glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	eave 725 mm, 410 mm above head of window or glazed door	not overshadowed
South facing					
W04	750.00	1450.00	aluminium, double glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	eave 600 mm, 500 mm above head of window or glazed door	not overshadowed
D1	2100.00	1800.00	aluminium, double glazed (U-value: <=3.0, SHGC: 0.49 - 0.60)	awning (adjustable) 1200 mm, 2000 mm above base of window or glazed door	not overshadowed
West facing	•	•	<u> </u>	•	
W05	500.00	1600.00	aluminium, double glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	external louvre/vertical blind (adjustable)	not overshadowed
W06	500.00	1600.00	aluminium, double glazed (U-value: <=3.5, SHGC: 0.60 - 0.74)	external louvre/vertical blind (adjustable)	not overshadowed

The applicant must install taps with a minimum rating of 3 star in the kitchen in the development

### Alternative water

### Rainwater tank

The applicant must install a rainwater tank of at least 800 lires on the site. This rainwater tank must meet, and be installed in accordance with, the requirements of all applicable regulatory authorities.

The applicant must configure the rainwater tank to collect rain runoff from at least 38 square metres of the roof area of the development (excluding the area of the roof which drains to any stormwater tank or private dam).

The applicant must connect the rainwater tank to:

· all toilets in the development

The applicant must install the following hot water system in the development, or a system with a higher energy rating: electric box solar with a performance of 26 to 30 STCs or better.

The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 living area: 1-phase airconditioning - non ducted; Energy rating: 3 star (average zone)

The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 living area: 1-phase airconditioning - ducted; Energy rating: 3 star (average zone)

The bedrooms must not incorporate any heating system, or any ducting which is designed to accommodate a heating system.

The applicant must install the following exhaust systems in the development:

At least 1 Bathroom: individual fan, ducted to façade or roof; Operation control: manual switch on/off

Kitchen: individual fan, ducted to façade or roof, Operation control: manual switch on/off

Laundry: natural ventilation only, or no laundry; Operation control: n/a

### Artificial lighting

The applicant must ensure that a minimum of 80% of light fixtures are fitted with fluorescent, compact fluorescent, or light-emitting-diode (LED) lamps.

# Natural lighting

The applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting.

e applicant must install a fixed outdoor clothes drying line as part of the development.

	No	Revision Description	Date
ı	1	Development Application	09.12.2024



**DAVID FROGGATT** 

**Alterations & Additions** 39 LOVETT ST MANLY VALE 2093 LOT:1 DP: 237712

DRAWING TITLE
BASIX COMPLIANCE

TRUE NORTH	DRAWN	PROJECT NO.	DRAWING NO
	XK	02404	^ ~ ~
	SIZE	SCALE	AU7
	A3		

REV NO