

21 November 2019



Meraki Developments Pty Ltd  
C/- Mark Hurcum Design Practice Level 2 271 Alfred Street North  
NORTH SYDNEY NSW 2060

Dear Sir/Madam

**Application Number:** DA2018/1996  
**Address:** Lot 9 DP 629464 , 104 Cabarita Road, AVALON BEACH NSW 2107  
Lot 8 DP 629464 , 102 Cabarita Road, AVALON BEACH NSW 2107  
Lot 15 DP 858130 , 100 Cabarita Road, AVALON BEACH NSW 2107  
Lot 14 DP 858130 , 96 Cabarita Road, AVALON BEACH NSW 2107  
**Proposed Development:** Construction of a dwelling house on lot 9 of proposed subdivision

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to [council@northernbeaches.nsw.gov.au](mailto:council@northernbeaches.nsw.gov.au)

Regards,



Renee Ezzy  
**Principal Planner**

## NOTICE OF DETERMINATION

<b>Application Number:</b>	DA2018/1996
<b>Determination Type:</b>	Development Application

### APPLICATION DETAILS

<b>Applicant:</b>	Meraki Developments Pty Ltd
<b>Land to be developed (Address):</b>	Lot 9 DP 629464 , 104 Cabarita Road AVALON BEACH NSW 2107 Lot 8 DP 629464 , 102 Cabarita Road AVALON BEACH NSW 2107 Lot 15 DP 858130 , 100 Cabarita Road AVALON BEACH NSW 2107 Lot 14 DP 858130 , 96 Cabarita Road AVALON BEACH NSW 2107
<b>Proposed Development:</b>	Construction of a dwelling house on lot 9 of proposed subdivision

### DETERMINATION - APPROVED - DEFERRED COMMENCEMENT CONSENT

<b>Made on (Date)</b>	11/11/2019
<b>Consent to operate from (Date):</b>	Once Council is satisfied as to those matters specified in the deferred commencement conditions, Council will nominate by way of written notice to the Applicant, the date from which the consent operates
<b>Consent to lapse on (Date):</b>	5 years from the operation date of Consent

### Detail of Conditions

*The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.*

### Note:

*If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.*

## DEFERRED COMMENCEMENT CONDITIONS

### 1. Registration of Title - Lot 9

Proposed Lot 9 is to be registered with NSW Land and Registry Services. Evidence that the lot has been registered with NSW Land and Registry Services is to be provided to Council in order to activate the consent.

Reason: To ensure the orderly development of land (DACPLADC1)

Evidence required to satisfy the deferred commencement condition/s must be submitted to Council within five (5) years of the date of this consent, or the consent will lapse in accordance with Section 95 of the Environmental Planning and Assessment Regulation 2000. This evidence is to be submitted along with a completed 'Deferred Commencement Document Review Form' (available on Council's website) and the application fee, as per Council's Schedule of Fees and Charges.

Upon satisfaction of the deferred commencement condition/s, the following conditions apply:

## DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

### 2. Approved Plans and Supporting Documentation

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

#### a) Approved Plans

Architectural Plans - Endorsed with Council's stamp		
Drawing No.	Dated	Prepared By
A9.000 - Rev A - Lot 9 Cover Sheet	November 2018	Mark Hurcum Design Practice
A9.002 - Rev A - Lot 9 Lot/Roof Plan	November 2018	Mark Hurcum Design Practice
A9.101 - Rev A - Lot 9 Lower Level Plan	November 2018	Mark Hurcum Design Practice
A9.102 - Rev A - Lot 9 Mid Level Plan	November 2018	Mark Hurcum Design Practice
A9.103 - Rev A - Lot 9 Upper Level Plan	November 2018	Mark Hurcum Design Practice
A9.201 - Rev A - North-East Elevation	November 2018	Mark Hurcum Design Practice
A9.202 - Rev A - South-East Elevation	November 2018	Mark Hurcum Design Practice
A9.203 - Rev A - South-West Elevation	November 2018	Mark Hurcum Design Practice

A9.204 - Rev A - North-West Elevation	November 2018	Mark Hurcum Design Practice
A9.301 - Rev A - Section A- A	November 2018	Mark Hurcum Design Practice
A9.302 - Rev A - Section B-B	November 2018	Mark Hurcum Design Practice
A9.SK03 - Rev A - External Finishes Schedule	November 2018	Mark Hurcum Design Practice
SK220 - Rev A - Proposed Privacy Finishes	September 2019	Mark Hurcum Design Practice

**Reports / Documentation – All recommendations and requirements contained within:**

Report No. / Page No. / Section No.	Dated	Prepared By
Stormwater Management Plan	6 December 2018	Northern Beaches Consulting Engineers
Geotechnical Assessment - 31842BMrpt Rev 2	30 November 2018	JK Geotechnics
Estuarine Risk Management Report	10 December 2018	Horton Coastal Engineering
BASIX Certificate No. 972259S	10 December 2018	NSW Planning and Environment

b) Any plans and / or documentation submitted to satisfy the Deferred Commencement Conditions of this consent as approved in writing by Council.

c) Any plans and / or documentation submitted to satisfy the Conditions of this consent.

d) The development is to be undertaken generally in accordance with the following:

<b>Landscape Plans</b>		
Drawing No.	Dated	Prepared By
1916 - Sht 101 Rev C - Landscape Masterplan	28 November 2018	Jamie King Landscape Architect
1916 - Sht 110 Rev C - Landscape Concept Plan Lot 9	28 November 2018	Jamie King Landscape Architect
1916 - Sht 401 Rev C - Plant Palette	28 November 2018	Jamie King Landscape Architect
1916 - Sht 402 Rev C - Materials Palette	28 November 2018	Jamie King Landscape Architect

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

### 3. Prescribed Conditions

- (a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
  - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
  - (i) in the case of work for which a principal contractor is required to be appointed:
    - A. the name and licence number of the principal contractor, and
    - B. the name of the insurer by which the work is insured under Part 6 of that Act,
  - (ii) in the case of work to be done by an owner-builder:
    - A. the name of the owner-builder, and
    - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.
- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
  - (i) protect and support the adjoining premises from possible damage from the excavation, and
  - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
  - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
  - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

Reason: Legislative requirement.

#### 4. **General Requirements**

- (a) Unless authorised by Council:  
Building construction and delivery of material hours are restricted to:

- 7.00 am to 5.00 pm inclusive Monday to Friday,
- 8.00 am to 1.00 pm inclusive on Saturday,
- No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (c) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (d) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (e) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (f) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (g) No building, demolition, excavation or material of any nature and no hoist, plant and machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (h) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.
- (i) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.
- (j) Prior to the commencement of any development onsite for:



- i) Building/s that are to be erected
- ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
- iii) Building/s that are to be demolished
- iv) For any work/s that is to be carried out
- v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.

- (k) Requirements for new swimming pools/spas or existing swimming pools/spas affected by building works.

- (1) Child resistant fencing is to be provided to any swimming pool or lockable cover to any spa containing water and is to be consistent with the following;

Relevant legislative requirements and relevant Australian Standards (including but not limited) to:

- (i) Swimming Pools Act 1992
  - (ii) Swimming Pools Amendment Act 2009
  - (iii) Swimming Pools Regulation 2008
  - (iv) Australian Standard AS1926 Swimming Pool Safety
  - (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
  - (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools.
- (2) A 'KEEP WATCH' pool safety and aquatic based emergency sign, issued by Royal Life Saving is to be displayed in a prominent position within the pool/spa area.
- (3) Filter backwash waters shall be conveyed to the Sydney Water sewerage system in sewered areas or managed on-site in unsewered areas in a manner that does not cause pollution, erosion or run off, is separate from the irrigation area for any wastewater system and is separate from any onsite stormwater management system.
- (4) Swimming pools and spas must be registered with the Division of Local Government.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

## FEES / CHARGES / CONTRIBUTIONS

### 5. Policy Controls

Northern Beaches 7.12 Contributions Plan 2019

A monetary contribution of \$33,272.40 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan 2019. The



monetary contribution is based on a development cost of \$3,327,240.00.

The monetary contribution is to be paid prior to the issue of the first Construction Certificate or Subdivision Certificate whichever occurs first, or prior to the issue of the Subdivision Certificate where no Construction Certificate is required. If the monetary contribution (total or in part) remains unpaid after the financial quarter that the development consent is issued, the amount unpaid (whether it be the full cash contribution or part thereof) will be adjusted on a quarterly basis in accordance with the applicable Consumer Price Index. If this situation applies, the cash contribution payable for this development will be the total unpaid monetary contribution as adjusted.

The proponent shall provide to the Certifying Authority written evidence (receipt/s) from Council that the total monetary contribution has been paid.

The Northern Beaches Section 7.12 Contributions Plan 2019 may be inspected at 725 Pittwater Rd, Dee Why and at Council's Customer Service Centres or alternatively, on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

This fee must be paid prior to the issue of the Construction Certificate. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

## 6. **Security Bond**

A bond (determined from cost of works) of \$10,000 and an inspection fee in accordance with Council's Fees and Charges paid as security to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, details demonstrating payment are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)).

Reason: To ensure adequate protection of Council's infrastructure.

## **CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE**

## 7. **Stormwater Disposal**

Engineering Plans in accordance with the requirements of section 3.1.2 Drainage of the Building Code of Australia Housing Provision and AS/NZS 3500.3.2:1998 - Stormwater Drainage – Acceptable solutions are to be submitted and certified by an appropriately qualified and practicing Civil Engineer, indicating all details relevant to the collection and disposal of



stormwater from the site, buildings, paved areas and where appropriate adjacent catchments. Stormwater shall be conveyed from the site to the inter-allotment drainage system provided as part of the subdivision of the lot.

Details demonstrating compliance are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for disposal and stormwater management arising from the development.

8. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in the Geotechnical Report prepared by JK Geotechnics dated 30 November 2018 are to be incorporated into the construction plans. Prior to issue of the Construction Certificate, Form 2 of the Geotechnical Risk Management Policy for Pittwater (Appendix 5 of P21 DCP) is to be completed and submitted to the Accredited Certifier.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

9. **Traffic Management and Control**

The Applicant is to submit an application for Traffic Management Plan to Council for approval prior to issue of the Construction Certificate. The Traffic Management Plan shall be prepared to RMS standards by an appropriately certified person.

Reason: To ensure appropriate measures have been considered for site access, storage and the operation of the site during all phases of the construction process.

10. **Vehicle Driveway Gradients**

Driveway gradients within the private property are not to exceed a gradient of 1 in 4 (25%) with transition gradients in accordance with AS/NZS 2890.1:2004. Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure suitable vehicular access to private property.

11. **Structural Adequacy and Excavation Work**

Excavation work is to ensure the stability of the soil material of adjoining properties, the protection of adjoining buildings, services, structures and / or public infrastructure from damage using underpinning, shoring, retaining walls and support where required. All retaining walls are to be structurally adequate for the intended purpose, designed and certified by a Structural Engineer, except where site conditions permit the following:

(a) maximum height of 900mm above or below ground level and at least 900mm from any

property boundary, and

(b) Comply with AS3700, AS3600 and AS1170 and timber walls with AS1720 and AS1170.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To provide public and private safety.

12. **Shoring of Adjoining Property**

Should the proposal require shoring to support an adjoining property or Council land, owner's consent for the encroachment onto the affected property owner shall be provided with the engineering drawings.

Council approval is required if temporary ground anchors are to be used within Council land. A Temporary Ground Anchors (Road Reserve) Application is to be submitted with Council for assessment and approval subject to Council's Fees and Charges. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that owners consent is obtained for ancillary works, and to ensure the protection of adjoining properties and Council land.

13. **Soil and Water Management Program**

A Soil and Water Management Plan prepared in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004) and implemented on site until the works are completed.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To protect the environment from the effects of sedimentation and erosion from development sites. (DACHPC02)

14. **Amended landscape plans**

A) An amended Landscape Plan shall be submitted to the Certifying Authority, demonstrating the following landscape requirements:

i) the amended landscape plan for Lot 9 shall include a detailed layout of the built and soft landscape elements including walling, paving, decking, and proposed landscape levels. The soft landscape elements shall include the location of all tree planting within the native revegetation area type A and type B area; and all tree, shrub and groundcover planting within the remaining garden areas,

ii) the amended landscape plans shall locate and identify the distribution of how many of the 50 canopy tree saplings as recommended in the Biodiversity Development Assessment Report prepared by GIS Environmental Consultants, are to be planted on Lot 9. These shall be planted at 45 litre pot size minimum, and larger where indicated in the planting schedule,

iii) the amended landscape plan shall locate and identify the distribution of how many of the proposed 109 native canopy trees are to be planted on Lot 9. These shall be planted at 140mm pot size,

iv) no tree is to be planted within 3 metres of the building where the building slab is elevated and

no tree is to be planted within 5 metres of the building where the building slab is excavated into the natural ground,

v) vegetation screening with small trees and mixed height shrubs shall be included to provide privacy to adjoining dwellings and to private open space areas,

vi) turf is permitted on Lot 9 only to the extent as shown on the Landscape Masterplan, drawing Sht- 101, as prepared by Jamie King Landscape Architect, along the foreshore setback north of the dwelling, and shall be contained with garden bed planting to the south, east and west,

vii) at least one(1) tall canopy tree shall be planted in the foreshore setback within the turf area, consisting of *Corymbia gummifera* (Spotted Gum) species, planted at a minimum of 75 litre pot size, and planted within a 1m x 1m garden bed, planted no closer than 4-5 metres apart, and planted with supporting tree staking,

viii) the landscape plans shall be amended identifying the following changes to selected tree species:

- Cupaniopsis and Tristaniopsis shall be removed from the planting schedule and replaced with species typical of the Swamp Oak Floodplain Forest including *Casuarina glauca*, *Melaleuca ericifolia*, and *Glochidion ferdinandi*.

B) Prior to the issue of an Construction Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the amended landscape plans have been completed in accordance with the design intent of the Landscape Masterplan, drawing Sht-101, the Materials Palette, drawing Sht-402, and the Plant Palette, drawing Sht-401, as prepared by Jamie King Landscape Architect, and inclusive of any conditions of consent.

Reason: to ensure that the landscape treatments are installed to provide landscape amenity.

15. **Stormwater quality management**

The boundary pit must be designed and constructed according to the Discharge Control Pit Detail as specified in Council's On-site Stormwater Detention Technical Specification with a trash screen that fits the guidelines of Section 4.10 - Trash Screens of this specification ie. a stainless steel or galvanised mesh screen (Maxi-mesh RH3030 or equivalent) with a minimum of 50 times the orifice area between the orifice and all inlets. The screen is to be placed diagonally against the face of the tank wall and should include a lifting handle welded to the top of the mesh to allow for easy removal of the screen for cleaning purposes.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To support overall management of water quality on the subdivision (DACNECPCC1)

16. **Estuarine Hazard Design Requirements**

The following applies to all development:

All development or activities must be designed and constructed such that they will not increase the level of risk from estuarine processes for any people, assets or infrastructure in surrounding properties; they will not adversely affect estuarine processes; they will not be adversely affected by estuarine processes; they will not reduce access to or diminish the amenity of adjoining public foreshore land.

Reason: To minimise potential risk associated with estuarine hazards for development in the coastal zone.

17. **Estuarine Planning Level Requirements**

An Estuarine Planning Level (EPL) of RL 3.2m AHD has been independently derived for the subject site as outlined in the approved Estuarine Risk Management Report, prepared by Horton Coastal Engineering Pty Ltd dated 10 December 2018, and shall be applied to all development proposed below this level as follows:

- All structural elements below RL 3.2m AHD shall be of flood compatible materials;
- All electrical equipment, wiring, fuel lines or any other service pipes and connections must be located either above RL 3.2m AHD or waterproofed to this level; and
- The storage of toxic or potentially polluting goods, chemicals or materials, which may be hazardous or pollute the waterway, is not permitted below RL 3.2m AHD.

Reason: To ensure aspects of the development that may be affected by estuarine processes are built at the appropriate level.

**18. Compliance with Estuarine Risk Management Report**

The development is to comply with all relevant recommendations of the approved Estuarine Risk Management Report prepared by Horton Coastal Engineering Pty Ltd, dated 10 December 2018 and these recommendations are to be incorporated into construction plans and engineering specifications as necessary.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To minimise potential risk associated with estuarine hazards for development in the coastal zone.

**19. Project Ecologist**

Project Ecologist is to be employed for the duration of the approved works to ensure all bushland biodiversity protection measures are carried out according to the conditions of consent, BDAR (GIS Environmental) and the Biodiversity Management Plan Parts 1 and 2 (GIS Environmental April 2019).

The Project Ecologist must have one of the following memberships/accreditation:

- Practising member of the NSW Ecological Consultants Association  
<https://www.ecansw.org.au/findaconsultant/>

OR

- Biodiversity Assessment Method assessor accreditation under the NSW Biodiversity Conservation Act 2016 (<https://customer.lmbc.nsw.gov.au/assessment/AccreditedAssessor>)

Employment of a project ecologist is to be certified by the Principal Certifying Authority Prior to issue of Construction Certificate.

Reason: To protect native vegetation and wildlife in accordance with relevant Natural Environment LEP/DCP controls.

**20. Compliance with Ecologist's Recommendations – Pre-construction**

All pre-construction biodiversity-related measures specified in the approved Biodiversity Development Assessment Report (GIS Environmental December 2018), Biodiversity Management Plan (GIS Environmental April 2019) and these conditions of consent are to be implemented at the appropriate stage of the development. Compliance with pre-construction measures is to be certified by the project ecologist prior to issue of the Construction Certificate.

Reason: To confirm compliance with wildlife and habitat protection/replacement measures in accordance with relevant Natural Environment LEP/DCP controls (DACNECPCC2)

21. **Implementation of Biodiversity Management Plan**

All requirements in the Biodiversity Management Plan (GIS Environmental 5 April 2019) are to be implemented prior, during and post construction.

Details demonstrating pre-construction compliance are to be certified by the project ecologist and submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Biodiversity/Vegetation Conservation and Management.

22. **Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

23. **External Finishes to Roof**

The external finish to the roof shall have a medium to dark range (BCA classification M and D) in order to minimise solar reflections to neighbouring properties. Any roof with a metallic steel finish is not permitted.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that excessive glare or reflectivity nuisance does not occur as a result of the development. (DACPLC03)

24. **Sydney Water "Tap In"**

The approved plans must be submitted to the Sydney Water Tap in service, prior to works commencing, to determine whether the development will affect any Sydney Water assets and/or easements. The appropriately stamped plans must then be submitted to the Certifying Authority demonstrating the works are in compliance with Sydney Water requirements.

Please refer to the website [www.sydneywater.com.au](http://www.sydneywater.com.au) for:

- "Tap in" details - see <http://www.sydneywater.com.au/tapin>
- Guidelines for Building Over/Adjacent to Sydney Water Assets.

Or telephone 13 000 TAP IN (1300 082 746).

Reason: To ensure compliance with the statutory requirements of Sydney Water.

25. **Aboriginal Heritage**

A preliminary inspection ('due diligence' under the *National Parks and Wildlife Act 1974*) of the site by a qualified Aboriginal heritage professional is required. The assessment is to provide information on what potential Aboriginal heritage issues exist on the land and recommendations for any further action if required.

Any recommendations of the assessment must be implemented.

Reason: Aboriginal Heritage Protection.

26. **Construction Traffic Management Plan**

A CTMP is to be submitted to and approved by the Certifying Authority prior to the issue of any Construction Certificate. The CTMP must be in accordance with RMS Guidelines for preparation of a Construction Traffic Management Plan.

Reason: To ensure all construction vehicular activities are managed with minimal impact on the local road network (DACTRCPC1)

## CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

27. **Project Arborist**

A Project Arborist with AQZ Level 5 qualification in horticulture is to be appointed to supervise and certify tree protection measures identified in the Tree Assessment & Development Impact report prepared by Growing My Way Tree Services for the following tree on Lot 9: tree number 102A, 103, 104E, and 118.

The Project Arborist is to supervise all excavation and construction works near these trees, including recommending the construction methods near existing trees, including flexible location of footings, pier and beam, suspended slabs, cantilevered building sections, screw piles and contiguous piling.

Photographic documentation of the condition of all trees to be retained shall be recorded, including at commencement, during the works and at completion.

Reason: to ensure the protection of the existing landscape amenity

28. **Approved tree removal**

Approval is granted for the removal of the following existing trees as assessed in section 6. Recommendations of the Tree Assessment & Development Impact Report prepared by Growing My Way Tree Services: tree number 103, 116, 117, and 118A.

Exempt species on Lot 9, including the following Phoenix palm: 101B, does not require Council consent for removal.

29. **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site (DACNED06)

30. **Bushland Protection Fencing and Signage**

Prior to the commencement of any onsite building works or commencement of vegetation



clearance/modification, the boundary between the Conservation Management Areas and the construction area as shown on Biodiversity Management Plan (BMP) Part 1a (GIS Environmental 5/4/19) - is to be surveyed and marked clearly on the ground.

A temporary 2.0 metre steel mesh fence (or similar), incorporating BMP signage, is to be erected on the surveyed boundary between the Conservation Management Areas and the construction area for the duration of construction work.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to commencement of works.

Reason: To ensure that the vegetation in the restricted development area is protected during and after construction.

31. **Protection Fencing**

Protection fencing measures (including sedimentation fences) are to be installed in accordance with all approved plans including those specified in the Arborist Report and/or Bushland Management Plan. Protection measures are to be maintained for the duration of the works. Protection fencing that is no longer required is to be removed once all works are completed.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to commencement of works.

Reason: Environmental Protection

## CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

32. **Maintenance of Road Reserve**

The public footways and roadways adjacent to the site shall be maintained in a safe condition at all times during the course of the work.

Reason: Public Safety.

33. **Traffic Control During Road Works**

Lighting, fencing, traffic control and advanced warning signs shall be provided for the protection of the works and for the safety and convenience of the public and others in accordance with RMS Traffic Control At Work Sites Manual (<http://www.rms.nsw.gov.au/business-industry/partners-suppliers/documents/technical-manuals/tcws-version-4/tcwsv4i2.pdf>) and to the satisfaction of the Principal Certifying Authority. Traffic movement in both directions on public roads, and vehicular access to private properties is to be maintained at all times during the works.

Reason: Public Safety

34. **Protection of Adjoining Property - Excavation**

Where excavations extend below the level of the base of the footings of a building on an adjoining allotment of land, the person causing the excavation must preserve and protect the



building from damage and, if necessary, underpin and support the adjoining building in an approved manner.

Reason: To ensure private and public safety.

35. **Tree and vegetation protection**

A) Existing trees and vegetation shall be retained and protected as follows:

- i) all trees and vegetation within the site identified for retention as listed in the Tree Assessment & Development Impact report prepared by Growing My Way Tree Services, including trees identified as tree number 102, 102A, 104, 104A, 104D, 104E, 118, 119, and 119B, with the following trees subject to on-site investigations by a Project Arborist - 102A, 104D, 104E, 118, and 119,
- ii) all trees and vegetation located on adjoining properties,
- iii) all road reserve trees and vegetation.

B) Tree protection shall be generally undertaken as follows:

- i) all tree protection shall be in accordance with AS4970- 2009 Protection of Trees on Development Sites, with particular reference to Section 4,
- ii) removal of existing tree roots greater than 25mm is not permitted without consultation with an Arborist with a AQF Level 5 qualification in horticulture,
- iii) any tree roots exposed during excavation with a diameter greater than 25mm within the tree protection zone must be assessed by an Arborist. Details including photographic evidence of works undertaken shall be submitted by an AQF Level 5 Arborist to the Certifying Authority,
- iv) to minimise the impact on trees and vegetation to be retained and protected, no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained,
- v) no tree roots greater than 25mm diameter are to be cut from protected trees unless authorised by a Project Arborist on site,
- vi) all structures are to bridge tree roots greater than 25mm diameter unless directed by a AQF Level 5 Arborist on site,
- vii) excavation for stormwater lines is not permitted within the tree protection zone, without consultation with a AQF Level 5 Arborist,
- viii) should either or all of v), vi) and vii) occur during site establishment and construction works, a AQF Level 5 Arborist shall provide recommendations for tree protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist to the Certifying Authority,
- ix) any temporary access to, or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works, is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of AS 4970-2009,
- x) tree pruning to enable construction shall not exceed 10% of any tree canopy, and shall be in accordance with AS4373-2009 Pruning of Amenity Trees.

Reason: to retain and protect significant planting on development and adjoining sites.

36. **Project Arborist**

A Project Arborist with AQZ Level 5 qualification in horticulture is to be appointed to provide a definitive recommendation on the suitability to retain trees identified in the Tree Assessment & Development Impact Report prepared by Growing My Way Tree Services as sustainable through on site management during excavation and construction works.

On Lot 9 these trees include tree number 104D and 104E.

Should any of these trees be assessed as unsustainable and require removal, tree replacement at a ratio of 1:1 is required on the Lot, consisting of locally native tree species selected from the following list: *Corymbia gummifera*, *Corymbia maculata*, *Glochidion ferdinandi* and *Syncarpia glomulifera*, and installed at a minimum 45 litre size.

Details including field reports and photos are to be submitted to the Certifying Authority.

Note: The Project Arborist as conditioned is to be appointed at the commencement of the works and shall demonstrate that their attendance on site has occurred as required to provide such recommendations.

37. **Tree Hollow Inspection by Ecologist**

During any vegetation clearance for Asset Protection Zones and construction works the Project Ecologist is to be physically present to re-locate any displaced fauna that may be disturbed during this activity.

All tree hollows proposed for clearing are to be inspected by the project ecologist prior to removal. Inspection of tree hollows is to be facilitated by a qualified and experienced tree climber or arborist with the use of an elevated work platform where necessary.

Details prepared by the project ecologist in writing demonstrating compliance are to be submitted to the Principal Certifying Authority prior to commencement of tree removals

Reason: To protect native wildlife in accordance with Section 2.1 of the NSW Biodiversity Conservation Act 2016 and relevant Natural Environment LEP/DCP controls.

38. **Compliance with Ecologist's Recommendations – During Construction**

All biodiversity-related measures are to be implemented during construction, as specified in the approved ecological report (BDAR GIS Environmental December 2018), Biodiversity Management Plan (GIS Environmental April 2019) and these conditions of consent.

Compliance with these measures is to be certified by the project ecologist in writing to the Principal Certifying Authority prior to issue of the Occupation Certificate.

Reason: To confirm compliance with wildlife and habitat protection/replacement measures in accordance with relevant

39. **Fencing for Wildlife Passage**

Any new fencing (with the exception of swimming pool fencing) is to be made passable to native wildlife. Hole dimensions are to be a minimum of 150mm wide x 100mm high at ground level spaced at 6 metre intervals.

Reason: Management of wildlife corridors

40. **Vegetation Clearing Protocols**

Clearing of native vegetation is to be undertaken in accordance with the protocols and recommendations specified in the approved Biodiversity Management Plan. Details confirming compliance are to be certified by the project ecologist and submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To protect native vegetation in accordance with relevant Natural Environment LEP/DCP controls. (DACNEE

41. **Aboriginal Heritage**

Should any Aboriginal sites be uncovered during earthworks, works should cease and Council, the NSW Office of Environment and Heritage (OEH) and the Metropolitan Local Aboriginal Land Council should be contacted.

Reason: Aboriginal Heritage Protection. (DACAHE01)

**CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE  
OCCUPATION CERTIFICATE**

42. **Landscape works**

Landscaping is to be implemented in accordance with the approved amended landscape plans.

Prior to the issue of an Occupation Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the landscape works have been completed in accordance with the approved amended landscape plans and inclusive of any conditions of consent.

Reason: to ensure that the landscape treatments are installed to provide landscape amenity.

43. **Condition of retained vegetation**

Prior to the issue of an Occupation Certificate, a report prepared by an Arborist with AQZ Level 5 qualification in horticulture, shall be submitted to the Certifying Authority, assessing the health and impact of trees and vegetation required to be retained as a result of the proposed development, including the following information:

- i) compliance to Arborist recommendations for tree protection and excavation works.
- ii) extent of damage sustained by vegetation as a result of the construction works.
- iii) any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: to ensure compliance with the requirement to retain and protect significant planting on development sites.

44. **Stormwater Disposal**

The stormwater drainage works shall be certified as compliant with all relevant Australian Standards and Codes by a suitably qualified person. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater arising from the development.

45. **Geotechnical Certification Prior to Occupation Certificate**

Prior to issue of the Occupation Certificate, Form 3 of the Geotechnical Risk Management Policy is to be completed and submitted to the Principal Certifying Authority.

Reason: To ensure geotechnical risk is mitigated appropriately.

46. **Weed Removal and Management**

No weeds are to be imported on to the site.

All invasive and priority weeds on the site are to be removed and managed continuously, in accordance with the Biosecurity Act 2015.

Details demonstrating the removal and management of weeds are to be prepared by the project ecologist in writing and submitted to the Principal Certifying Authority prior to occupation certificate.

Reason: Weed management and biosecurity

47. **Compliance with Ecologist's Recommendations – Post Construction**

All biodiversity-related measures are to be implemented at the appropriate stage of development, as specified in the approved ecological report, Biodiversity Management Plan Ongoing Maintenance Manual (GIS Environmental April 2019) and these conditions of consent.

Satisfactory establishment/initiation of post-construction measures is to be certified by the project ecologist prior to issue of any Occupation Certificate

Reason: To confirm compliance with wildlife and habitat protection/replacement measures in accordance with relevant Natural Environment LEP/DCP controls. (DACNEFPOC1

## ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

48. **Landscape maintenance**

All landscape components including existing vegetation are to be maintained for the life of the development.

A maintenance program is to be established. If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components and species.

Reason: to maintain local environmental amenity and ensure landscaping continues to soften the built form.

49. **Control of Weeds**

Prior to the completion of works, all priority weeds (as listed under the Biosecurity Act 2015) are to be removed/controlled within the subject site using an appropriately registered control method. Information on weeds of the Northern Beaches can be found at the NSW WeedWise website (<http://weeds.dpi.nsw.gov.au/>). All environmental weeds are to be removed and controlled. Refer to Council website [http://www.pittwater.nsw.gov.au/environment/noxious\\_weeds](http://www.pittwater.nsw.gov.au/environment/noxious_weeds)

Reason: Weed management.

50. **Maintenance of Stormwater Quality System**

The stormwater boundary pit and trash screen must be maintained at all times. The pit should be inspected annually, with sediment and organic matter removed as required and as necessary to achieve the required stormwater quality targets for the development.

Reason: Protection of the receiving environment (DACNEGOG1)

51. **No Planting Environmental Weeds**

DA2018/1996

No environmental weeds are to be planted on the site. Information on weeds of the Northern Beaches can be found at the NSW WeedWise website (<http://weeds.dpi.nsw.gov.au/>).

Reason: Weed management.

52. **Works to cease if item found**

If any Aboriginal Engravings or Relics are unearthed all work is to cease immediately and the Aboriginal Heritage Office (AHO) and Office of Environment and Heritage (OEH) are to be notified.

Reason: To protect Aboriginal Heritage.

53. **Domestic Animals Exclusion**

For the life of the development, cats are to be kept in a cat run and/or inside the dwelling such that they are prevented from entering wildlife habitat areas at all times. Dogs are to be kept in an enclosed area such that they cannot enter areas of bushland, unrestrained, on surrounding properties.

Reason: Wildlife protection

54. **Fencing for Wildlife Passage**

Any new fencing (with the exception of swimming pool fencing) is to be made passable to native wildlife. Hole dimensions are to be a minimum of 150mm wide x 100mm high at ground level spaced at 6 metre intervals.

Reason: Management of wildlife corridors

## Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application should be submitted to Council within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

*NOTE: A fee will apply for any request to review the determination.*

## Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

**Signed**                      On behalf of the Consent Authority

  
**Name**                      Renee Ezzy, Principal Planner


**Date**                        11/11/2019



## GENERAL ADVICE

### Advisory Notes (General)

Where are you in the development process?

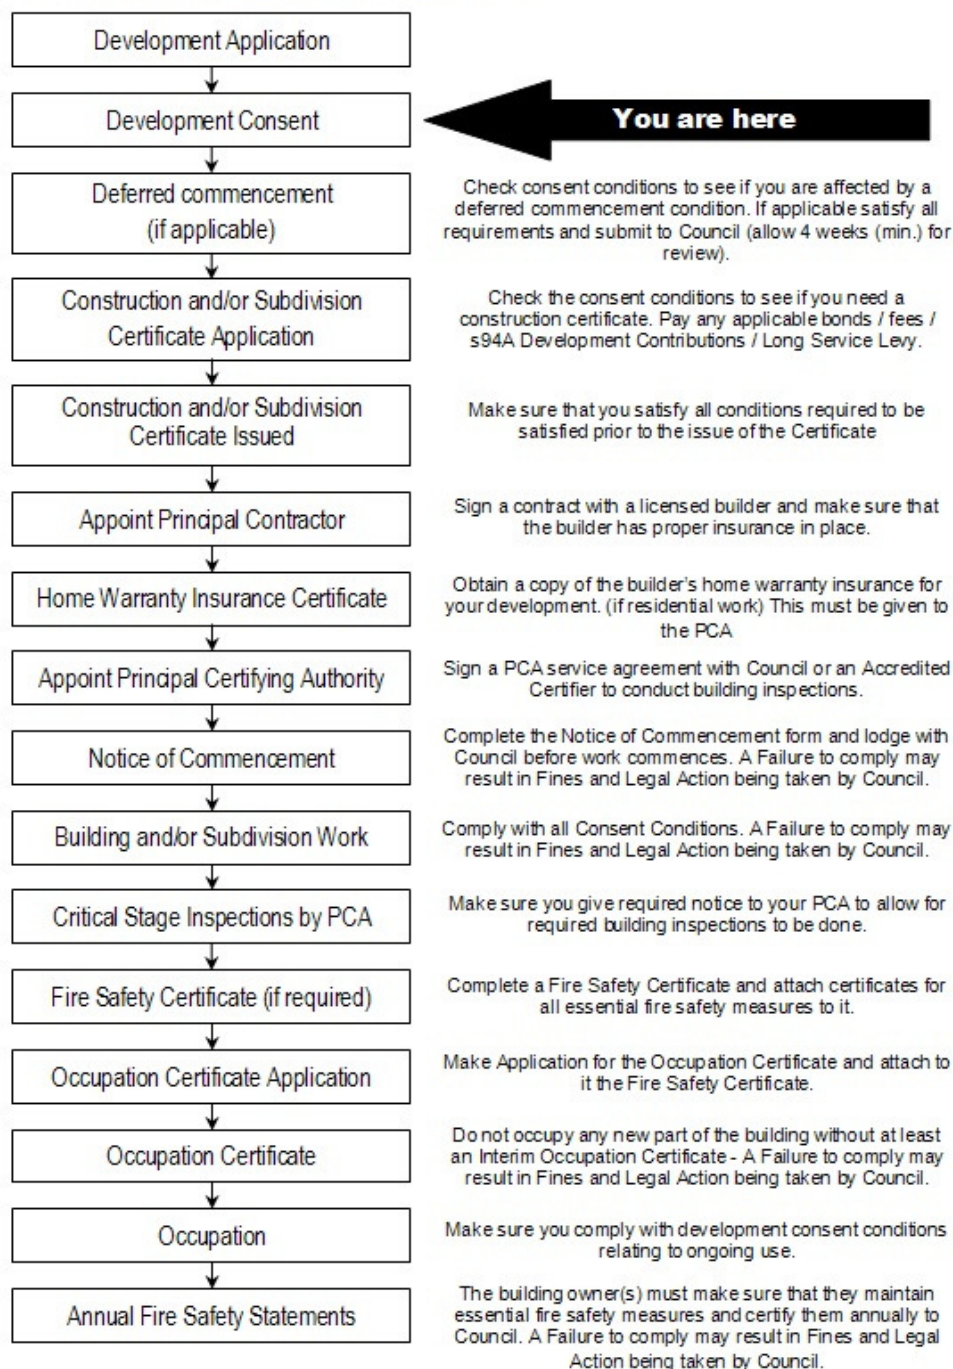

**Note:** The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)



## **Building Certification**

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

## **Certification Services**

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au) or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

## **Charges Associated with the Development Consent**

All bonds, fees, (s94A) Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

## **Bonds are released after:**

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
  - the development is complete
  - damage has not been caused to council assets during the works
  - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

## **Acceptable Form of Security Bonds**

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

## **Modifications to the consent**

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

### **Other Matters not detailed within the Notice of Determination**

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

### **Dial Before You Dig**

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at [www.1100.com.au](http://www.1100.com.au) or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

### **Telecommunications Act 1997 (Commonwealth)**

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

### **Model**

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

### **Trade waste agreement**

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

### **Waste collection**

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

### **Aboriginal Heritage**

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

### **On-Site Sewage Management System**

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

### **Cost of Works**

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

### **Relocation of stormwater drainage**

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

### **Tree preservation**

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

### **Storage bins on footpath and roadway**

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

### **Protection of Public Places**

(1) If the work involved in the erection or demolition of a building:

- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
- (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

(2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.

(3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.

(4) Any such hoarding, fence or awning is to be removed when the work has been completed.

(5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

### **Road Opening Permit**

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

### **Special Permits**

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone.

Other permits may include out of construction hours permits.

### **Licensing requirements for removal of bonded asbestos**

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

### **Pool Access**

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

### **Dewatering**

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

### **Requirement to Notify about New Contamination Evidence**

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

### **Flood Evacuation Plan**

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

### **Utility Service Requirements**

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

### **Plant & Equipment Kept Within Site**

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

### **Lighting**

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

### **Silt and Sediment Control**

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

**Maintenance of Sediment and Erosion Control** Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

### **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

### **Dividing Fences Act 1991**

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

### **OTHER MATTERS**



**Child Care Centres**

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

**Disability Access**

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

**Food Premises**

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at [www.foodnotify.nsw.gov.au](http://www.foodnotify.nsw.gov.au) or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

**Wheel washing facility**

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

**Monitoring State of Roadways**

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

**Storage of Dangerous Goods**

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

**Storage of Flammable and Combustible Liquids**

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

**Noise and Vibration**

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

**Hairdressing/Beauty Treatment/ Skin penetration Requirements**

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.



- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

### **Food Premises Construction Requirements**

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

### **Legionella Control**

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

### **Pool/Spa Safety**

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

### **Grease Trap**

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

### **Bandicoot/Penguin**

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.