

# BASIX<sup>®</sup>Certificate

Building Sustainability Index [www.basix.nsw.gov.au](http://www.basix.nsw.gov.au)

## Single Dwelling

Certificate number: 1350803S\_02

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at [www.basix.nsw.gov.au](http://www.basix.nsw.gov.au)

This certificate is a revision of certificate number 1350803S lodged with the consent authority or certifier on 24 November 2022 with application DA2022/2018.

It is the responsibility of the applicant to verify with the consent authority that the original, or any revised certificate, complies with the requirements of Schedule 1 Clause 2A, 4A or 6A of the Environmental Planning and Assessment Regulation 2000

Secretary

Date of issue: Friday, 26 May 2023

To be valid, this certificate must be lodged within 3 months of the date of issue.



Planning,  
Industry &  
Environment

### Project summary

Project name	Lot 9, 9 Raven Circuit_02
Street address	9 Raven Circuit Warriewood 2102
Local Government Area	Northern Beaches Council
Plan type and plan number	deposited 271326
Lot no.	9
Section no.	-
Project type	separate dwelling house
No. of bedrooms	4

### Project score

Water	✓ 41	Target 40
Thermal Comfort	✓ Pass	Target Pass
Energy	✓ 51	Target 50

### Certificate Prepared by

Name / Company Name: Building & Energy Consultants Australia

ABN (if applicable): 92122407783

# Description of project

## Project address

Project name	Lot 9, 9 Raven Circuit_02
Street address	9 Raven Circuit Warriewood 2102
Local Government Area	Northern Beaches Council
Plan type and plan number	Deposited Plan 271326
Lot no.	9
Section no.	-

## Project type

Project type	separate dwelling house
No. of bedrooms	4

## Site details

Site area (m <sup>2</sup> )	246
Roof area (m <sup>2</sup> )	125
Conditioned floor area (m2)	142.1
Unconditioned floor area (m2)	10.95
Total area of garden and lawn (m2)	91

## Assessor details and thermal loads

Assessor number	DMN/20/1999
Certificate number	0008221079
Climate zone	56
Area adjusted cooling load (MJ/m <sup>2</sup> .year)	24
Area adjusted heating load (MJ/m <sup>2</sup> .year)	38
Ceiling fan in at least one bedroom	No
Ceiling fan in at least one living room or other conditioned area	No

## Project score

Water	✓ 41	Target 40
Thermal Comfort	✓ Pass	Target Pass
Energy	✓ 51	Target 50

## Schedule of BASIX commitments
















The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

Water Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
<b>Fixtures</b>			
The applicant must install showerheads with a minimum rating of 4 star (> 6 but <= 7.5 L/min plus spray force and/or coverage tests) in all showers in the development.		✓	✓
The applicant must install a toilet flushing system with a minimum rating of 4 star in each toilet in the development.		✓	✓
The applicant must install taps with a minimum rating of 4 star in the kitchen in the development.		✓	
The applicant must install basin taps with a minimum rating of 4 star in each bathroom in the development.		✓	
<b>Alternative water</b>			
<b>Rainwater tank</b>			
The applicant must install a rainwater tank of at least 3000 litres on the site. This rainwater tank must meet, and be installed in accordance with, the requirements of all applicable regulatory authorities.	✓	✓	✓
The applicant must configure the rainwater tank to collect rain runoff from at least 50 square metres of the roof area of the development (excluding the area of the roof which drains to any stormwater tank or private dam).		✓	✓
The applicant must connect the rainwater tank to: <ul style="list-style-type: none"> <li>all toilets in the development</li> <li>at least one outdoor tap in the development (Note: NSW Health does not recommend that rainwater be used for human consumption in areas with potable water supply.)</li> </ul>		✓ ✓	✓ ✓

Thermal Comfort Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
<b>Simulation Method</b>			
The applicant must attach the certificate referred to under "Assessor Details" on the front page of this BASIX certificate (the "Assessor Certificate") to the development application and construction certificate application for the proposed development (or, if the applicant is applying for a complying development certificate for the proposed development, to that application). The applicant must also attach the Assessor Certificate to the application for an occupation certificate for the proposed development.			
The Assessor Certificate must have been issued by an Accredited Assessor in accordance with the Thermal Comfort Protocol.			
The details of the proposed development on the Assessor Certificate must be consistent with the details shown in this BASIX certificate, including the Cooling and Heating loads shown on the front page of this certificate.			
The applicant must show on the plans accompanying the development application for the proposed development, all matters which the Assessor Certificate requires to be shown on those plans. Those plans must bear a stamp of endorsement from the Accredited Assessor to certify that this is the case. The applicant must show on the plans accompanying the application for a construction certificate (or complying development certificate, if applicable), all thermal performance specifications set out in the Assessor Certificate, and all aspects of the proposed development which were used to calculate those specifications.	✓	✓	✓
The applicant must construct the development in accordance with all thermal performance specifications set out in the Assessor Certificate, and in accordance with those aspects of the development application or application for a complying development certificate which were used to calculate those specifications.		✓	✓
The applicant must construct the floors and walls of the dwelling in accordance with the specifications listed in the table below.	✓	✓	✓


Floor and wall construction	Area
floor - concrete slab on ground	All or part of floor area square metres
floor - suspended floor above garage	All or part of floor area


Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
<b>Hot water</b>			
The applicant must install the following hot water system in the development, or a system with a higher energy rating: gas instantaneous with a performance of 6 stars.	✓	✓	✓
<b>Cooling system</b>			
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 living area: 1-phase airconditioning; Energy rating: EER 3.0 - 3.5		✓	✓
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 bedroom: 1-phase airconditioning; Energy rating: EER 3.0 - 3.5		✓	✓
The cooling system must provide for day/night zoning between living areas and bedrooms.		✓	✓
<b>Heating system</b>			
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 living area: 1-phase airconditioning; Energy rating: EER 3.0 - 3.5		✓	✓
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 bedroom: 1-phase airconditioning; Energy rating: EER 3.0 - 3.5		✓	✓
The heating system must provide for day/night zoning between living areas and bedrooms.		✓	✓
<b>Ventilation</b>			
The applicant must install the following exhaust systems in the development:			
At least 1 Bathroom: individual fan, ducted to façade or roof; Operation control: manual switch on/off		✓	✓
Kitchen: individual fan, ducted to façade or roof; Operation control: manual switch on/off		✓	✓
Laundry: individual fan, ducted to façade or roof; Operation control: manual switch on/off		✓	✓
<b>Artificial lighting</b>			
The applicant must ensure that the "primary type of artificial lighting" is fluorescent or light emitting diode (LED) lighting in each of the following rooms, and where the word "dedicated" appears, the fittings for those lights must only be capable of accepting fluorescent or light emitting diode (LED) lamps:			
• at least 4 of the bedrooms / study;		✓	✓


Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
<ul style="list-style-type: none"> <li>• at least 1 of the living / dining rooms;</li> <li>• the kitchen;</li> <li>• all bathrooms/toilets;</li> <li>• the laundry;</li> <li>• all hallways;</li> </ul>		    	    
<b>Natural lighting</b>			
The applicant must install a window and/or skylight in 2 bathroom(s)/toilet(s) in the development for natural lighting.			
<b>Other</b>			
The applicant must install a gas cooktop & electric oven in the kitchen of the dwelling.			
The applicant must install a fixed outdoor clothes drying line as part of the development.			

## Legend

In these commitments, "applicant" means the person carrying out the development.

Commitments identified with a  in the "Show on DA plans" column must be shown on the plans accompanying the development application for the proposed development (if a development application is to be lodged for the proposed development).

Commitments identified with a  in the "Show on CC/CDC plans and specs" column must be shown in the plans and specifications accompanying the application for a construction certificate / complying development certificate for the proposed development.

Commitments identified with a  in the "Certifier check" column must be certified by a certifying authority as having been fulfilled, before a final occupation certificate (either interim or final) for the development may be issued.



## NatHERS - THERMAL COMFORT SUMMARY



<b>Address: Lot 9, 9 Raven Circuit, Warriewood NSW 2102</b>		<b>Date: 18/11/2022</b>
<b>Software: BERS Pro v4.4 (3.21)</b>	<b>Certificate No.: 0008221079</b>	<b>Star rating: 5.3</b>
Building Elements	Material	Detail
External walls	Hebel Power Panel	R2.5HD bulk insulation ( <i>excluding garage</i> )
	Light Weight Cladding on Battens	<i>Colours as per Colour Schedule</i>
Internal walls	Plasterboard on studs	R2.5HD bulk insulation to walls adjacent to garage
Ceiling	Plasterboard	R4.0 bulk insulation to ceilings with roof above ( <i>excluding garage</i> )
Floors	Concrete – ground floor	Waffle Pod (dwelling 225mm; garage 175mm)
	Timber – first floor	R4.0 bulk insulation to floor between garage and first floor
Roof	Metal Roof – Shale Grey	Foil + R1.3 (builders Blanket) to underside of roof
Windows / Doors	<b><u>Sliding windows/ Sliding Doors/ Fixed Windows:</u></b>	U value 6.70 or less and SHGC 0.70 +/- 10%
	Aluminium frame, Single Glazed Clear	
	<b><u>Awning windows:</u></b>	U value 6.70 or less and SHGC 0.57 +/- 10%
	Aluminium frame, Single Glazed Clear	
<b><u>Lighting:</u> This dwelling has been rated with non-ventilated LED downlights as per Lighting Plan</b>		
<b><u>Note:</u> Insulation specified must be installed in accordance with Part 3.12.1.1 of the BCA Volume Two.</b>		
<b><u>Note:</u> In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials.</b>		
<b><u>Note:</u> Self-closing dampers to WC, Bathroom, Laundry &amp; Ensuite exhaust fan.</b>		
<b><u>Note:</u> Additional insulation may be required to meet acoustic requirements</b>		
<b><u>Note:</u> If metal frames are used, a thermal break is required as per Section 3.12.1.1 – NSW Variation of the BCA Volume Two</b>		



# Nationwide House Energy Rating Scheme

## NatHERS Certificate No. 0008221079

Generated on 18 Nov 2022 using BERS Pro v4.4.1.5d (3.21)

### Property

**Address** 9 Raven Circuit , Warriewood , NSW , 2102  
**Lot/DP** 9/271326  
**NCC Class\*** 1A  
**Type** New Dwelling

### Plans

**Main Plan** Project ID: WAW0016  
**Prepared by** Macasa Homes

### Construction and environment

<b>Assessed floor area (m<sup>2</sup>)*</b>	<b>Exposure Type</b>
Conditioned* 142.0	Suburban
Unconditioned* 41.0	<b>NatHERS climate zone</b>
Total 183.0	56
Garage 31.0	



### Accredited assessor


**Name** Thomas Ruck  
**Business name** Building Energy Consultants Australia  
**Email** thomas@beca.net.au  
**Phone** 9533 2588  
**Accreditation No.** DMN/20/1999  
**Assessor Accrediting Organisation**  
Design Matters National  
**Declaration of interest** Declaration not completed

### National Construction Code (NCC) requirements

The NCC's requirements for NatHERS-rated houses are detailed in 3.12.0(a)(i) and 3.12.5 of the NCC Volume Two. For apartments the requirements are detailed in J0.2 and J5 to J8 of the NCC Volume One.

In NCC 2019, these requirements include minimum star ratings and separate heating and cooling load limits that need to be met by buildings and apartments through the NatHERS assessment. Requirements additional to the NatHERS assessment that must also be satisfied include, but are not limited to: insulation installation methods, thermal breaks, building sealing, water heating and pumping, and artificial lighting requirements. The NCC and NatHERS Heating and Cooling Load Limits (Australian Building Codes Board Standard) are available at [www.abcb.gov.au](http://www.abcb.gov.au).

State and territory variations and additions to the NCC may also apply.

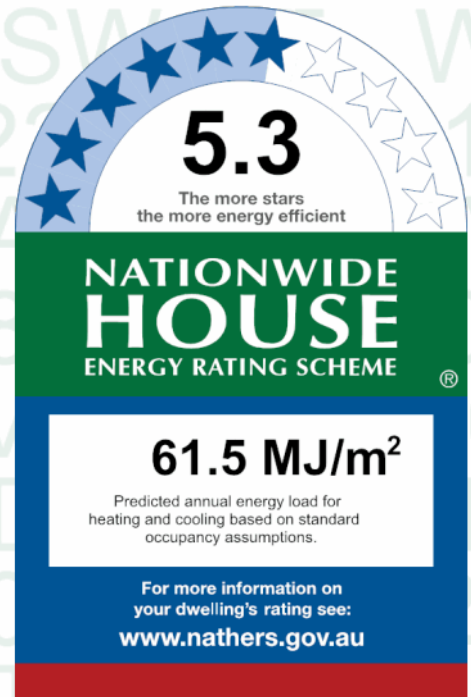

### Thermal performance

<b>Heating</b>	<b>Cooling</b>
<b>38.0</b>	<b>23.5</b>
<b>MJ/m<sup>2</sup></b>	<b>MJ/m<sup>2</sup></b>

### About the rating

NatHERS software models the expected thermal energy loads using information about the design and construction, climate and common patterns of household use. The software does not take into account appliances, apart from the airflow impacts from ceiling fans.

### Verification

To verify this certificate, scan the QR code or visit [hstar.com.au/QR/Generate?p=Amuhiklse](http://hstar.com.au/QR/Generate?p=Amuhiklse). When using either link, ensure you are visiting [hstar.com.au](http://hstar.com.au)



## Certificate check

Ensure the dwelling is designed and then built as per the NatHERS Certificate. While you need to check the accuracy of the whole Certificate, the following spot check covers some important items impacting the dwelling's rating.

### Genuine certificate

Does this Certificate match the one available at the web address or QR code in the verification box on the front page? Does the set of NatHERS-stamped plans for the dwelling have a Certificate number on the stamp that matches this Certificate?

### Ceiling penetrations\*

Does the 'number' and 'type' of ceiling penetrations (e.g. downlights, exhaust fans, etc) shown on the stamped plans or installed, match what is shown in this Certificate?

### Windows

Does the installed window meet the substitution tolerances (SHGC and U-value) and window type, of the window shown on this Certificate? Substituted values must be based on the Australian Fenestration Rating Council (AFRC) protocol.

### Apartment entrance doors

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

### Exposure\*

Has the appropriate exposure level (terrain) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

### Provisional\* values

Have provisional values been used in the assessment and, if so, noted in "additional notes" below?

## Additional notes

I have modeled the shading in accordance with NatHERS principles

## Window and glazed door *type and performance*

### Default\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-01 A	ALM-002-01 A Aluminium B SG Clear	6.7	0.70	0.66	0.73
ALM-001-01 A	ALM-001-01 A Aluminium A SG Clear	6.7	0.57	0.54	0.60

### Custom\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

## Window and glazed door *schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Entry/Stairs	ALM-002-01 A	n/a	1800	850	n/a	00	W	No

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-002-01 A	n/a	2400	2410	n/a	45	E	No
Kitchen/Living	ALM-002-01 A	n/a	1800	2410	n/a	30	E	No
Kitchen/Living	ALM-002-01 A	n/a	1800	1570	n/a	30	S	No
Kitchen/Living	ALM-002-01 A	n/a	1800	1570	n/a	30	S	No
Bedroom 1	ALM-001-01 A	n/a	1800	2650	n/a	30	W	No
Ensuite	ALM-001-01 A	n/a	860	610	n/a	90	N	No
Bedroom 2	ALM-001-01 A	n/a	860	2170	n/a	60	N	No
Bedroom 3	ALM-001-01 A	n/a	860	2410	n/a	60	E	No
Bedroom 4	ALM-001-01 A	n/a	860	2410	n/a	60	E	No
Bathroom	ALM-001-01 A	n/a	860	1570	n/a	45	S	No
Hallway/Stairs	ALM-002-01 A	n/a	900	1450	n/a	00	W	No
Hallway/Stairs	ALM-002-01 A	n/a	600	2400	n/a	00	S	No
Laundry	ALM-002-01 A	n/a	1030	850	n/a	45	E	No

## Roof window type and performance

### Default\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

### Custom\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

## Roof window schedule

Location	Window ID	Window no.	Opening %	Height (mm)	Width (mm)	Orientation	Outdoor shade	Indoor shade
No Data Available								

## Skylight type and performance

Skylight ID	Skylight description
No Data Available	

## Skylight schedule

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m <sup>2</sup> )	Orientation	Outdoor shade	Diffuser	Skylight shaft reflectance
No Data Available								

## External door *schedule*

Location	Height (mm)	Width (mm)	Opening %	Orientation
Garage	2100	3730	90	W
Entry/Stairs	2340	920	90	W

## External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade (colour)	Bulk insulation (R-value)	Reflective wall wrap*
EW-1	AAC Cavity Panel Direct Fix	0.30	Light	No insulation	No
EW-2	AAC Cavity Panel Direct Fix	0.30	Light	Bulk Insulation R2.5	No
EW-3	Fibro Cavity Panel on Battens	0.50	Medium	Bulk Insulation R2.5	No
EW-4	Fibro Cavity Panel on Battens	0.30	Light	Bulk Insulation R2.5	No
EW-5	AAC Cavity Panel Direct Fix	0.50	Medium	Bulk Insulation R2.5	No

## External wall *schedule*

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Garage	EW-1	2835	5500	W	100	NO
Garage	EW-1	2835	5695	N	100	NO
Garage	EW-1	2835	1200	S	2600	YES
Entry/Stairs	EW-2	2740	6195	S	100	NO
Entry/Stairs	EW-2	2740	2495	W	1300	YES
Kitchen/Living	EW-2	2740	5795	N	100	YES
Kitchen/Living	EW-2	2740	6700	E	100	NO
Kitchen/Living	EW-2	2740	6395	S	100	NO
Bedroom 1	EW-3	2740	4200	W	100	NO
Bedroom 1	EW-4	2740	3695	N	600	NO
Bedroom 1	EW-5	2740	2200	S	100	YES
Ensuite	EW-4	2740	3490	N	600	NO
Bedroom 2	EW-4	2740	3590	N	600	NO
Bedroom 3	EW-4	2740	3995	N	600	NO
Bedroom 3	EW-2	2740	3095	E	600	NO
Bedroom 4	EW-2	2740	3595	E	600	NO
Bedroom 4	EW-2	2740	3095	S	600	NO
Bathroom	EW-2	2740	2990	S	600	NO
Hallway/Stairs	EW-2	2740	2495	W	100	YES
Hallway/Stairs	EW-2	2740	6495	S	600	NO
Laundry	EW-2	2740	2295	N	100	NO
Laundry	EW-2	2740	1300	E	100	YES

## Internal wall type

Wall ID	Wall type	Area (m <sup>2</sup> )	Bulk insulation
IW-1 - Cavity wall, direct fix plasterboard, single gap		139.00	No insulation
IW-2 - Cavity wall, direct fix plasterboard, single gap		24.00	Bulk Insulation, No Air Gap R2.5

## Floor type

Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
Garage	Waffle pod slab 175 mm 100mm	30.90	None	Waffle Pod 175mm	Bare
WIP	Waffle pod slab 225 mm 100mm	4.70	None	Waffle Pod 225mm	Ceramic Tiles 8mm
WC	Waffle pod slab 225 mm 100mm	1.90	None	Waffle Pod 225mm	Ceramic Tiles 8mm
Entry/Stairs	Waffle pod slab 225 mm 100mm	15.10	None	Waffle Pod 225mm	Ceramic Tiles 8mm
Kitchen/Living	Waffle pod slab 225 mm 100mm	41.80	None	Waffle Pod 225mm	Ceramic Tiles 8mm
Bedroom 1/Garage	Timber Above Plasterboard 100mm	11.10		Bulk Insulation R4	Carpet+Rubber Underlay 18mm
Bedroom 1	Suspended Timber Floor 100mm	4.10	Totally Open	No Insulation	Carpet+Rubber Underlay 18mm
WIR/Garage	Timber Above Plasterboard 19mm	4.40		Bulk Insulation R4	Carpet+Rubber Underlay 18mm
WIR/WIP	Timber Above Plasterboard 19mm	0.60		No Insulation	Carpet+Rubber Underlay 18mm
Ensuite/Garage	Timber Above Plasterboard 19mm	4.20		Bulk Insulation R4	Ceramic Tiles 8mm
Ensuite/WIP	Timber Above Plasterboard 19mm	0.60		No Insulation	Ceramic Tiles 8mm
Bedroom 2/WIP	Timber Above Plasterboard 19mm	3.70		No Insulation	Carpet+Rubber Underlay 18mm
Bedroom 2/Kitchen/Living	Timber Above Plasterboard 19mm	5.40		No Insulation	Carpet+Rubber Underlay 18mm
Bedroom 3/Kitchen/Living	Timber Above Plasterboard 19mm	13.10		No Insulation	Carpet+Rubber Underlay 18mm
Bedroom 4/Kitchen/Living	Timber Above Plasterboard 19mm	11.50		No Insulation	Carpet+Rubber Underlay 18mm
Bathroom/Kitchen/Living	Timber Above Plasterboard 19mm	7.10		No Insulation	Ceramic Tiles 8mm
Hallway/Stairs/Garage	Timber Above Plasterboard 19mm	3.20		Bulk Insulation R4	Carpet+Rubber Underlay 18mm
Hallway/Stairs/WC	Timber Above Plasterboard 19mm	1.80		No Insulation	Carpet+Rubber Underlay 18mm
Hallway/Stairs/Entry/Stairs	Timber Above Plasterboard 19mm	15.00		No Insulation	Carpet+Rubber Underlay 18mm
Hallway/Stairs/Kitchen/Living	Timber Above Plasterboard 19mm	3.60		No Insulation	Carpet+Rubber Underlay 18mm
Laundry	Waffle pod slab 225 mm 19mm	3.30	None	Waffle Pod 225mm	Ceramic Tiles 8mm

## Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Garage	Plasterboard	No insulation	No
Garage	Timber Above Plasterboard	Bulk Insulation R4	No

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
WIP	Timber Above Plasterboard	No Insulation	No
WC	Timber Above Plasterboard	No Insulation	No
Entry/Stairs	Timber Above Plasterboard	No Insulation	No
Kitchen/Living	Timber Above Plasterboard	No Insulation	No
Bedroom 1	Plasterboard	Bulk Insulation R4	No
WIR	Plasterboard	Bulk Insulation R4	No
Ensuite	Plasterboard	Bulk Insulation R4	No
Bedroom 2	Plasterboard	Bulk Insulation R4	No
Bedroom 3	Plasterboard	Bulk Insulation R4	No
Bedroom 4	Plasterboard	Bulk Insulation R4	No
Bathroom	Plasterboard	Bulk Insulation R4	No
Hallway/Stairs	Plasterboard	Bulk Insulation R4	No
Laundry	Plasterboard	Bulk Insulation R4	No

## Ceiling penetrations\*

Location	Quantity	Type	Diameter (mm <sup>2</sup> )	Sealed/unsealed
WIP	2	Downlights - LED	150	Sealed
WIP	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Entry/Stairs	6	Downlights - LED	150	Sealed
Kitchen/Living	16	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
WIR	2	Downlights - LED	150	Sealed
Ensuite	2	Downlights - LED	150	Sealed
Ensuite	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Bedroom 4	5	Downlights - LED	150	Sealed
Bathroom	3	Downlights - LED	150	Sealed
Bathroom	1	Exhaust Fans	300	Sealed
Hallway/Stairs	10	Downlights - LED	150	Sealed
Laundry	1	Downlights - LED	150	Sealed
Laundry	1	Exhaust Fans	300	Sealed



## Ceiling fans

Location	Quantity	Diameter (mm)
No Data Available		

## Roof type

Construction	Added insulation (R-value)	Solar absorptance	Roof shade
Corrugated Iron	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.30	Light
Corrugated Iron	Bulk, Reflective Side Down, No Air Gap Above R1.3	0.30	Light

## Explanatory notes

### About this report

A NatHERS rating is a comprehensive, dynamic computer modelling evaluation of a home, using the floorplans, elevations and specifications to estimate an energy load. It addresses the building layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings), but does not cover the water or energy use of appliances or energy production of solar panels.

Ratings are based on a unique climate zone where the home is located and are generated using standard assumptions, including occupancy patterns and thermostat settings. The actual energy consumption of a home may vary significantly from the predicted energy load, as the assumptions used in the rating will not match actual usage patterns. For example, the number of occupants and personal heating or cooling preferences will vary.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparing different dwelling designs and to demonstrate that the design meets the energy efficiency requirements in the National Construction Code. Homes that are energy efficient use less energy, are warmer on cool days, cooler on hot days and cost less to run. The higher the star rating the more thermally efficient the dwelling is.

### Accredited assessors

To ensure the NatHERS Certificate is of a high quality, always use an accredited or licenced assessor. NatHERS accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

Australian Capital Territory (ACT) licensed assessors may only produce assessments for regulatory purposes using software for which they have a licence endorsement. Licence endorsements can be confirmed on the ACT licensing register

AAOs have specific quality assurance processes in place, and continuing professional development requirements, to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any ongoing training requirements.

Any questions or concerns about this report should be directed to the assessor in the first instance. If the assessor is unable to address these questions or concerns, the AAO specified on the front of this certificate should be contacted.

### Disclaimer

The format of the NatHERS Certificate was developed by the NatHERS Administrator. However the content of each individual certificate is entered and created by the assessor to create a NatHERS Certificate. It is the responsibility of the assessor who prepared this certificate to use NatHERS accredited software correctly and follow the NatHERS Technical Notes to produce a NatHERS Certificate.

The predicted annual energy load in this NatHERS Certificate is an estimate based on an assessment of the building by the assessor. It is not a prediction of actual energy use, but may be used to compare how other buildings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, indoor air temperature and local climate.

Not all assumptions that may have been made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.

## Glossary

<b>Annual energy load</b>	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
<b>Assessed floor area</b>	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
<b>Ceiling penetrations</b>	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, rangehoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
<b>Conditioned</b>	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
<b>Custom windows</b>	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
<b>Default windows</b>	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
<b>Entrance door</b>	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
<b>Exposure category – exposed</b>	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
<b>Exposure category – open</b>	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m; farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
<b>Exposure category – suburban</b>	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
<b>Exposure category – protected</b>	terrain with numerous, closely spaced obstructions over 10m e.g. city and industrial areas.
<b>Horizontal shading feature</b>	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
<b>National Construction Code (NCC) Class</b>	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at <a href="http://www.abcb.gov.au">www.abcb.gov.au</a> .
<b>Opening percentage</b>	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
<b>Provisional value</b>	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at <a href="http://www.nathers.gov.au">www.nathers.gov.au</a>
<b>Reflective wrap</b> (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
<b>Roof window</b>	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
<b>Shading device</b>	a device fixed to windows that provides shading e.g. window awnings or screens but excludes eaves.
<b>Shading features</b>	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
<b>Solar heat gain coefficient (SHGC)</b>	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
<b>Skylight</b> (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
<b>U-value</b>	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
<b>Unconditioned</b>	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
<b>Vertical shading features</b>	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).