

Arboricultural Assessment Report



Prepared 8th September 2015

Site Location

Dee Why Centre,
Dee Why, NSW 2099

Client

Meriton Group

DISCLAIMER

The author and Tree & Landscape Consultants take no responsibility for actions taken and their consequences, contrary to those expert and professional instructions given as recommendations pertaining to safety by way of exercising our responsibility to our client and the public as our duty of care commitment, to mitigate or prevent hazards from arising, from a failure moment in full or part, from a structurally deficient or unsound tree or a tree likely to be rendered thus by its retention and subsequent modification/s to its growing environment either above or below ground contrary to our advice.

Peter Richards

Tree & Landscape Consultants

Contents

| | Page |
|---------------------------------|-------------|
| 1. Introduction | 4 |
| 2. Aims & Objectives | 5 |
| 3. Methodology | 6 |
| 4. Tree Assessments | 7 |
| 5. Discussion | 11 |
| 6. Recommendations | 11 |

Tables

| | | |
|----|---|----|
| 1. | <i>Tree Assessments</i> | 7 |
| 2. | <i>Setbacks for Tree Protection Zones</i> | 10 |

Appendices

| | |
|------------|---|
| Appendix A | Sustainable Retention Index Value (S.R.I.V.)© (IACA 2009) |
| Appendix B | Definitions & Terminology |
| Appendix C | Extract from Australian Standard AS 4970-2009 . "Protection of Trees on development sites "Calculating the Structural Root Zone" |
| Appendix D | Tree Protection Guidelines |
| Appendix E | Tree Protection Zone Standard Procedure |
| Appendix F | Survey Plan /Tree Locations |
| Appendix G | Ground Level Plan/Trees Requiring Management |
| Appendix H | References |



TREE & LANDSCAPE CONSULTANTS

Site Analysis, Arboricultural Assessments



MEMBER OF
INSTITUTE OF AUSTRALIAN
CONSULTING ARBORICULTURISTS

Dip. Hort. (Arboriculture)
Assoc. Dip.Hort. (Park Management)
Hort. Cert.
Bush Regeneration. Cert.
Tree Surgery Cert.
Member IACA, Member LGTRA, Member ISA

P.O Box 50

Padstow 2211 N.S.W.

Telephone / Facsimile

Mobile

Email

02) 9785 2678

0418 277 379

talc2@optusnet.com.au

8th September 2015

Meriton Group

Level 11,528 Kent Street
Sydney NSW 2000

Our reference: 3741

Arboricultural Assessment Report:

Dee Why Centre,
Dee Why, NSW 2099

1. INTRODUCTION

This report has been prepared by Tree & Landscape Consultants for Meriton Group. The site was inspected by the author and the subject trees and their general growing environment evaluated on the 9th November 2014 & 6th September 2015. The site is to be subject to a Development Application and this report and any works recommended, that require approval from the consenting authority is provided to form part of that development application and its consent conditions where appropriate.

This report assesses 35 individual trees the location of which is indicated in Appendix F and details their current health & condition and determines from the assessment, recommendations for their retention or removal.

2.0 AIMS & OBJECTIVES

Aims

Detail the condition of the trees on the site or on adjoining sites where such trees may be affected by the proposed works, by assessment of individual specimens or stands, and indicate remedial works or protection measures for their retention in a safe and healthy condition, or a condition not less than that at the time of initial inspection for this report, or in a reduced but sustainable condition due to the impact of the development but ameliorated through tree protection measures able to be applied, and will consider the location and condition of the trees in relation to the proposed building works, or recommend removal and replacement where appropriate.

Provide as an outcome of the assessment, the following: a description of the trees, observations made, discussion of the effects the location of the proposed building works may have on the trees, and make recommendations required for remedial or other works to the trees, if and where appropriate.

Determine from the assessment a description of the works or measures required to ameliorate the impact upon the trees to be retained, by the proposed building works or future impacts the trees may have upon the new building works if and where appropriate, or the benefits of removal and replacement if appropriate for the medium to long term safety and amenity of the site.

Objectives

Assess the condition of the subject trees.

Determine impact of development on the subject trees.

Provide recommendations for removal or management of the subject trees.

3. METHODOLOGY

- 3.1 The method of assessment of tree/s is applied from the ongoing knowledge and development of the author and considers but is not confined to:
- Tree health and subsequent stability, both long and short term
 - Sustainable Retention Index Value (S.R.I.V.)© IACA 2009)
 - Amenity values
 - Significance
- 3.2 This assessment is undertaken using a standard tree assessment criteria for each tree based on the values above and is implemented as a result of at least one comprehensive and detailed site inspection.
- 3.3 In this report the dimensions of the tree recorded by the author for the trunk *diameter at breast height* (DBH) measurement is calculated at 1.4m above ground from the base of the tree. Where a tree is trunkless or branches at or near ground such as a mallee formed tree, an average diameter is determined by recording the radial extent of the stem mass at its narrowest and widest dimensions, adding the two dimensions together and dividing them by 2 to record an average.
- 3.4 Crown spreads are expressed as length by breadth measurements to accurately record their dimensions. Where appropriate, *crown spread orientation* is described along the length of the crown spread e.g. North/South, or as *radial* if the crown is distributed at an approximately even radius from the trunk e.g. 6x6m.
- 3.5 The Australian Standard AS 4970-2009 “Protection of trees on development sites, where applicable is applied to trees to be retained in this report as a point of reference and guide for the recommended minimum clearances from the centre of tree trunks to development works and is applied as a generalised benchmark and the distances may be increased or decreased by the author as a result of other factors providing mitigating circumstances or constraints as indicated by but not restricted to the following:
- *Tolerance of individual species to disturbance,*
 - *Geology e.g. physical barriers in soil, floaters, bedrock to surface*
 - *Topography e.g. slope, drainage,*
 - *Soil e.g. depth, drainage, fertility, structure,*
 - *Microclimate e.g. due to landform, exposure to dominant wind,*
 - *Engineering e.g. techniques to ameliorate impact on trees such as structural soil, lateral boring,*
 - *Construction e.g. techniques to ameliorate impact on trees such as pier and beam, bridge footings, suspended slabs*
 - *Arboriculture e.g. exploration trenches to map location of roots,*
 - *Physical limitations - existing modifications to the environment and any impact to tree/s by development e.g. property boundaries, road reserves, previous impact by excavation in other directions, soil level changes by cutting or filling, existing landscaping works within close proximity, modified drainage patterns.*

4. TREE ASSESSMENTS

Table 1

| Tree No. | Genus & species Common Name | Age S-Sapling Y-Young M-Mature O-Overmature | Condition D-Dead P-Poor F-Fair G-Good | Pest & Diseases N = No or Y = Yes (If yes see comments) | Branch Bark Included N = No or Y = Yes (If yes see comments) | Canopy Orientation A-Asymmetrical Sy-Symmetrical N,S,E,W - Orientation | DBH (mm) @ 1.4 metres from ground | Height/Spread (M) | Vigour L-Low G-Good A- Abnormal | Trunk Lean X-Straight or Slightly Leaning A - Acaulescent M-Moderate S-Severe C-Critical | SRIV Age,Vigour,Condition/ Index Rating (See Appendix A) |
|---|--|---|---|---|--|---|--------------------------------------|-------------------|--|---|---|
| 1 | Lagerstroemia indica <i>Crepe Myrtle</i> | M | F | N | N | Sy | 100 Ave | 9 4x4 | G | X | MGVF9 |
| Comments: Multi leadr specimen extending from ground in its deciduous state at the time of the inspection. | | | | | | | | | | | |
| 2 | Syagrus romanzoffiana <i>Cocos Palm</i> | M | F | N | N | Sy | 250 | 9 2x2 | G | X | MGVF9 |
| Comments: Exotic evergreen palm with trunk extending to 7 metres from ground before formation of the crown shaft. Foliage generally appeared free of insect predation or disease. | | | | | | | | | | | |
| 3 | Archontophoenix alexandrae <i>Alexandra Palm</i> | M | F | N | N | Sy | 200 | 9 2x2 | G | X | MGVF9 |
| Comments: Exotic evergreen palm with trunk extending to 7 metres from ground before formation of the crown shaft. Foliage generally appeared free of insect predation or disease. | | | | | | | | | | | |
| 4 | Lophostemon confertus <i>Brush Box/ Brisbane Box</i> | M | P | N | N | Sy | 400 | 12 6x6 | G | X | MGVP6 |
| Comments: Short trunk specimen with crown previously partially lopped to clear power pole. | | | | | | | | | | | |
| 5 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 17 8x8 | G | X | MGVF9 |
| Comments: Short trunk specimen appearing free on insect predation or disease. | | | | | | | | | | | |
| 6 | Cupressus sempervirens <i>Cupressus</i> | M | P | N | N | Sy | 400 | 16 4x4 | G | X | MGVP6 |
| Comments: Fastigate habit specimen appearing free on insect predation or disease. | | | | | | | | | | | |
| 7 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 600 | 14 9x9 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 8 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 600 | 14 9x9 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Failure of a leader to the west evident. | | | | | | | | | | | |
| 9 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 12 8x8 | G | X | MGVP6 |
| Comments: Distorted lower trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Failure of a leader to the west evident. | | | | | | | | | | | |
| 10 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 12 8x8 | G | X | MGVP6 |
| Comments: Distorted lower trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Failure of a leader to the west evident. | | | | | | | | | | | |
| 11 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 12 8x8 | G | X | MGVF9 |
| Comments: Distorted lower trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Failure of a leader to the west evident. | | | | | | | | | | | |

Table 1 cont.

| Tree No. | Genus & species Common Name | Age S-Sapling Y-Young M-Mature O-Overmature | Condition D-Dead P-Poor F-Fair G-Good | Pest & Diseases N = No or Y = Yes (If yes see comments) | Branch Bark Included N = No or Y = Yes (If yes see comments) | Canopy Orientation A-Asymmetrical Sy-Symmetrical N,S,E,W - Orientation | DBH (mm) @ 1.4 metres from ground | Height/Spread (M) | Vigour L-Low G-Good A-Abnormal | Trunk Lean X-Straight or Slightly Leaning A-Acaulescent M-Moderate S-Severe C-Critical | SRIV Age,Vigour,Condition/ Index Rating (See Appendix A) |
|--|---|---|---|---|--|---|--------------------------------------|-------------------|---|---|---|
| 12 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 12 8x8 | G | X | MGVF9 |
| Comments: Distorted lower trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Failure of a leader to the west evident. | | | | | | | | | | | |
| 13 | Platanus x hybrida <i>London Plane Tree</i> | M | F | N | N | A/N | 800 | 18 8x8 | G | X | MGVF9 |
| Comments: Tree appears structurally sound being in its deciduous state at the time of the inspection. | | | | | | | | | | | |
| 14 | Platanus x hybrida <i>London Plane Tree</i> | M | F | N | N | A/N | 800 | 18 8x8 | G | X | MGVF9 |
| Comments: Tree appears structurally sound being in its deciduous state at the time of the inspection. | | | | | | | | | | | |
| 15 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 500 | 17 8x8 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 16 | Platanus x hybrida <i>London Plane Tree</i> | M | F | N | N | A/S | 1000 | 18 8x8 | G | X | MGVF9 |
| Comments: Tree appears structurally sound being in its deciduous state at the time of the inspection. Roots grafting over the adjoining gutter. | | | | | | | | | | | |
| 17 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 800 | 15 12x12 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 18 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 700 | 14 9x9 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 19 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 700 | 14 9x9 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 20 | Lophostemon confertus <i>Brush Box</i> | M | P | N | N | Sy | 400 | 11 8x8 | G | X | MGVP6 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. Lower leaders previously removed | | | | | | | | | | | |
| 21 | Lophostemon confertus <i>Brush Box</i> | M | F | N | N | Sy | 600 | 14 9x9 | G | X | MGVF9 |
| Comments: Short trunk specimen supporting a spreading crown with foliage appearing free on insect predation or disease. | | | | | | | | | | | |
| 22 | Leptospermum petersonii <i>Lemon Scented Tea Tree</i> | M | F | N | N | Sy | 100 Ave | 2 2x2 | G | A | MGVF9 |
| Comments: Smaller indigenous evergreen tree.. | | | | | | | | | | | |
| 23 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 2 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |

Table 1 cont.

| Tree No. | Genus & species Common Name | Age S-Sapling Y-Young M-Mature O-Overmature | Condition D-Dead P-Poor F-Fair G-Good | Pest & Diseases N = No or Y = Yes (If yes see comments) | Branch Bark Included N = No or Y = Yes (If yes see comments) | Canopy Orientation A-Asymmetrical Sy-Symmetrical N,S,E,W - Orientation | DBH (mm) @ 1.4 metres from ground | Height/Spread (M) | Vigour L-Low G-Good A-Abnormal | Trunk Lean X-Straight or Slightly Leaning A-Acaulescent M-Moderate S-Severe C-Critical | SRIV Age, Vigour, Condition/ Index Rating (See Appendix A) |
|--|---|---|---|---|--|---|--------------------------------------|-------------------|---|---|---|
| 24 | Radermachera sinica <i>China Doll</i> | M | F | N | N | Sy | 300 Ave | 9 3x3 | G | A | MGVF9 |
| Comments: Smaller exotic multi leader evergreen tree. Splitting of vascular cambium evident. | | | | | | | | | | | |
| 25 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 26 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 27 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVP6 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 28 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 29 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 30 | Murraya paniculata <i>Murraya</i> | M | F | N | N | Sy | 100 Ave | 3 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 31 | Lophostemon confertus <i>Brush Box</i> | O | P | N | N | Sy | 300 | 9 4x4 | L | X | OLVP0 |
| Comments: Minimal active foliage present. Tree mostly dead. | | | | | | | | | | | |
| 32 | Pittosporum variegata <i>Variegated Pittosporum</i> | M | F | N | N | Sy | 100 Ave | 4 2x2 | G | A | MGVF9 |
| Comments: Smaller exotic evergreen tree. | | | | | | | | | | | |
| 33 | Lophostemon confertus <i>Brush Box</i> | M | P | N | N | Sy | 1000 | 18 9x9 | G | X | MGVP6 |
| Comments: Indigenous evergreen tree poor in condition having been subject to past lopping. Metal posts have grafted into the trunk structure. | | | | | | | | | | | |
| 34 | Lophostemon confertus <i>Brush Box</i> | M | P | N | N | A/S | 800 | 18 9x9 | G | X | MGVP6 |
| Comments: Indigenous evergreen tree poor in condition having been subject to past lopping with crown supporting smaller deadwood. Metal posts have grafted into the trunk structure. | | | | | | | | | | | |
| 35 | Lophostemon confertus <i>Brush Box</i> | M | P | N | N | Sy | 1000 | 18 9x9 | G | X | MGVP6 |
| Comments: Indigenous evergreen tree poor in condition having been subject to past lopping. Metal posts have grafted into the trunk structure. | | | | | | | | | | | |

Table 2 Setbacks for tree protection zones

This table only applies to trees being retained and potentially impacted upon by the proposed works to be included within a Tree Protection Zone. Tree Protection Zone fencing locations where required as measured from the centre of each tree and the recommended distances for the side closest to the building construction works e.g. excavation. (see explanatory notes below).

| A | B | C | D | E | F | G |
|----------|---|---|--|---|--|---|
| Tree No. | A=Trunk Diameter in millimetres at 1.4m above ground, B=Trunk Diameter in millimetres above root buttress . | Age of tree Y = Young M = Mature O = Over-mature (senescent) | Tree Vigour Good Vigour= GV Or Low Vigour= LV | Australian Standard AS 4970-2009 "Protection of trees on development sites (See appendix) Calculated Structural Root Zone (SRZ) in metres being Radius=(Dx50)0.42 x0.64 | Distance of Tree Protection Zone (TPZ) , in metres. Australian Standard AS 4970-2009 "Protection of trees on development sites" TPZ=DBH x 12 | Recommended distance of tree protection fence /zone on the side closest to building /construction in metres. (See explanatory notes below & report recommendations) |
| 15 | A=500 B=520 | M | GV | 2.6 | 6 | 5.4(1) |
| 17 | A=800 B=820 | M | GV | 3.1 | 9.6 | 8.64(1) |
| 18 | A=700 B=720 | M | GV | 2.9 | 8.4 | 7.56(1) |
| 19 | A=700 B=720 | M | GV | 2.9 | 8.4 | 7.56(1) |
| 20 | A=400 B=420 | M | GV | 2.3 | 4.8 | 4.32(1) |
| 21 | A=600 B=620 | M | GV | 2.8 | 7.2 | 6.48(1) |

Explanatory notes for Table 2.0.

This table is based upon Australian Standard AS 4970-2009 "Protection of trees on development sites." and identifies SRZ & TPZ near to trees to be retained when the age, and vigour of each tree is considered. However, if the prescribed setback from the trunk of the tree for the location of the Tree Protection Zone, is unable to accommodate the location of building works nearby in accordance with "Protection of trees on development sites section 3.3 of that Standard provides the following:

3.3.4 TPZ encroachment considerations When determining the potential impacts of encroachment into the TPZ, the project arborist should consider the following:(a) Location and distribution of the roots.(b) The potential loss of root mass resulting from the encroachment: number and size of roots.(c) Tree species and tolerance to root disturbance.(d) Age, vigour and size of the tree. (e) Lean and stability of the tree. (f) Soil characteristics and volume, topography and drainage. (g) The presence of existing or past structures or obstacles affecting root growth.(h) Design factors.

- * Average diameter.
- 1 Special conditions apply to protect the roots of trees generally, see recommendations
- 2 Additional protective fencing and works as detailed in appendix D & E.
- 3 Acceptable due to the good relative tolerance of the species to development impacts
- 4 Range of set backs for the trees at each end of a linear stand.
- 5 Acceptable as fence located at a substantial distance beyond dripline, or may also include the location of a smaller tree in proximity to a larger tree to be retained and the smaller tree being protected well within the protective fencing for that larger tree.
- 6 Acceptable due to additional special protection works, see appendix E & recommendations for this tree.
- 7 Acceptable as pre-existing site conditions were conducive to having restricted the development of root growth in this direction.
- 8 Street tree with protective fencing of minimal width to allow for pedestrian access along road reserve.
- 9 Acceptable as tree transplanted reducing the area of the root zone.
- 10 Acceptable as not effected by development.
- 11 Palm species or young tree not expected to have established a substantially expansive root system and able to re-establish or modify growth to be sustainable due to age and normal vigour.
- 12 Set back prescribed by the consent authority.
- 13 Acceptable as tree growing on a lean and encroachment on compression wood side where root growth is of reduced structural importance.
- 14 Acceptable as root mapping has indicated extent of structural woody roots with a diameter of 40mm or more.
- 15 Acceptable as pre-existing conditions would have aided in the deflection of roots away from the proposed development site.

5. DISCUSSION

Of the 35 trees assessed numbers 1, 2, 3, 4, 5, 6, 7, 8,9,10,11,12,13 & 14 are located clear of the proposed works and require no formal protection as these trees are not affected by the proposed development. Trees numbered 15,17,18,19,20 & 21 adjoin the site and require specific protection to ensure their safe protection. Tree 17,18,19,20 & 21 will require pruning to either avoid accidental damage occurring during construction or to provide clearance from the elevation of the proposed development. Table 2 provides prescribed setbacks under the Australian Standard AS4970-2009 "Protection of trees on development sites" to be applied with protection being modified to the protection of trunk and branches only so as to enable safe access along the public walkway. These trees are adjoined by multiple underground services, the footings of existing buildings, paved and kerb and gutter areas which would have all inhibited the development of root growth towards the proposed building envelope area which is located outside of most of the tree prescribed Tree Protection Zones (TPZs) be calculated as **T15**- 5.4 radius, **T17**-8.64 metres radius, **T18**-7.56 metres radius, **T19**- 7.56 metres radius, **T20**-4.32 metres radius & **T21**-6.48 metres radius. Retention of these trees will ensure continued amenity for the immediate area and combined with new plantings will provide for elements of continuous landscape.

Trees numbered 16, 22, 23, 24,25,26,27,28,29,30,31,32,33,34 & 35 are mostly declining specimens or trees of smaller dimensions with the exception of trees 16,33,34 & 35 and are larger trees to be removed as part of the development. Tree 16 (*Street Tree*) is directly affected by the proposed vehicle entry and numbers 33,34 & 35 are located centrally to the site but can be viewed by the greater area.

6. RECOMMENDATIONS

- a. That trees 16,22,23,24,25,26,27,28,29,30,31,32,33,34 & 35 be removed and replaced with alternate trees shrubs and ground covers as part of final Landscape Works.
- b. That removal works be undertaken by a qualified Arborist with appropriate competencies recognised within the Australian Qualification Framework, with a minimum of 5 years of continual experience within the industry of operational amenity arboriculture, and covered by appropriate and current types of insurance to undertake such works and in accordance with Work Cover NSW 2007, Code of Practice Tree
- c. That trees 1, 2, 3, 4, 5, 6, 7, 8,9,10,11,12,13 & 14 15,17,18,19,20 & 21 be retained.
- d. Protection for tree 15,17,18,19,20 & 21 to avoid accidental damage, is to be achieved by wrapping 2 layers of hessian or carpet underfelt around the trunk and branches for a minimum of 2 metres or as lower branches permit, then wire or rope secures 75x50x2000 mm hardwood battens together around the trunk and branches for the duration of site works.
- e. All excavation for landscape treatment with prescribed setbacks (*see table 2*) from trees 15,17,18,19,20 & 21 is to be undertaken utilising hand tools under supervision. No roots greater than 30mm diameter are to be removed. Any roots encountered 30mm or less that require severance are to be clean cut with final cuts to undamaged woody tissue.
- f. All services where possible are to be located outside the area of the dripline from trees 15,17,18,19,20 & 21. Any services to be located within the area of the dripline of these trees or within their Tree Protection Zones indicated within table 2 are to be installed by the use of lateral or thrust boring equipment or some other type of Trenchless Technology or technique considered appropriate by the Consulting

Arboriculturist. Tunnelling for such services should not occur less than 800mm in depth below existing ground level.

- g. That trees 17, 18, 19, 20 & 21 be subject to pruning to provide either clearance from the proposed development or to avoid accidental damage occurring (See Appendix B- Order of Branches). Any pruning on the southern aspects of the trees is to be confined to branchlets only if potentially in conflict with street traffic. All pruning works to be undertaken in accordance with AS4373-2007 " Pruning of Amenity Trees". All trees will be subject to removal of less than 5% of total crown area with the exception of tree 21 which will be subject to approximately 10% of total crown area.

T17-1 x 2nd order & 3 x 3rd order leaders from the crowns northern aspect (50-60mm diameter).

T18- 2 x 3rd order leaders from the crowns northern aspect. (50-60mm diameter).

T19- 5 x 4th order leaders from the crowns northern aspect(50-60mm diameter).

T20- 3 x 4th order leaders from the crowns northern aspect (50-60mm diameter).

T21- 7 x 4th order leaders (50-60mm diameter) from the crowns northern aspect & 1 x lowest 2nd order (300mm diameter).

- h. That an inspection schedule be introduced as part of construction works at key points as follows:

- Initial certification of the establishment of Tree Protection Zone measures for trees 15,17,18,19,20 & 21 to be undertaken prior to the start of any site works.
- Attend the site and supervise all excavation works near to the trees 15,17,18,19,20 & 21.
- Attend the site and supervise all pruning for trees 15,17,18,19,20 & 21.
- Attend the site following removal of pavement adjoining trees 15,17,18,19,20 & 21 to ascertain any impacts upon tree roots and to give direction as to any remedial actions required.
- Final inspection of trees 15,17,18,19,20 & 21 when all site works are completed.

- i. Following the above inspections or as otherwise directed following site inspections certification reports are to be provided within 2 weeks of the inspections.



Peter Richards

Tree & Landscape Consultants

Appendix A

Matrix - Sustainable Retention Index Value (S.R.I.V.)©

Developed by IACA – Institute of Australian Consulting Arboriculturists www.iaca.org.au (2009)

To be used with the values defined in the Glossary.
An Index value as indicated where ten (10) is the highest value.

| Age Class | Vigour Class and Condition Class | | | | | |
|-----------------|---|--|--|---|---|---|
| | Good Vigour & Good Condition (GVG) | Good Vigour & Fair Condition (GVF) | Good Vigour & Poor Condition (GVP) | Low Vigour & Good Condition (LVG) | Low Vigour & Fair Condition (LVF) | Low Vigour & Poor Condition (LVP) |
| | Able to be retained if sufficient space available above and below ground for future growth. No remedial work or improvement to growing environment required. May be subject to high vigour. Retention potential - Medium – Long Term. | Able to be retained if sufficient space available above and below ground for future growth. Remedial work may be required or improvement to growing environment may assist. Retention potential - Medium Term. Potential for longer with remediation or favourable environmental conditions. | Able to be retained if sufficient space available above and below ground for future growth. Remedial work unlikely to assist condition, improvement to growing environment may assist. Retention potential - Short Term. Potential for longer with remediation or favourable environmental conditions. | May be able to be retained if sufficient space available above and below ground for future growth. No remedial work required, but improvement to growing environment may assist vigour. Retention potential - Short Term. Potential for longer with remediation or favourable environmental conditions. | May be able to be retained if sufficient space available above and below ground for future growth. Remedial work or improvement to growing environment may assist condition and vigour. Retention potential - Short Term. Potential for longer with remediation or favourable environmental conditions. | Unlikely to be able to be retained if sufficient space available above and below ground for future growth. Remedial work or improvement to growing environment unlikely to assist condition or vigour. Retention potential - Likely to be removed immediately or retained for Short Term. Potential for longer with remediation or favourable environmental conditions. |
| Young (Y) | Index Value 9 Retention potential - Long Term. Likely to provide minimal contribution to local amenity if height <5m. High potential for future growth and adaptability. Retain, move or replace. | Index Value 8 Retention potential - Short – Medium Term. Potential for longer with improved growing conditions. Likely to provide minimal contribution to local amenity if height <5m. Medium-high potential for future growth and adaptability. Retain, move or replace. | Index Value 5 Retention potential - Short Term. Potential for longer with improved growing conditions. Likely to provide minimal contribution to local amenity if height <5m. Low-medium potential for future growth and adaptability. Retain, move or replace. | Index Value 4 Retention potential - Short Term. Potential for longer with improved growing conditions. Likely to provide minimal contribution to local amenity if height <5m. Medium potential for future growth and adaptability. Retain, move or replace. | Index Value 3 Retention potential - Short Term. Potential for longer with improved growing conditions. Likely to provide minimal contribution to local amenity if height <5m. Low-medium potential for future growth and adaptability. Retain, move or replace. | Index Value 1 Retention potential - Likely to be removed immediately or retained for Short Term. Likely to provide minimal contribution to local amenity if height <5m. Low potential for future growth and adaptability. |
| Mature (M) | Index Value 10 Retention potential - Medium - Long Term. | Index Value 9 Retention potential - Medium Term. Potential for longer with improved growing conditions. | Index Value 6 Retention potential - Short Term. Potential for longer with improved growing conditions. | Index Value 5 Retention potential - Short Term. Potential for longer with improved growing conditions. | Index Value 4 Retention potential - Short Term. Potential for longer with improved growing conditions. | Index Value 2 Retention potential - Likely to be removed immediately or retained for Short Term. |
| Over-mature (O) | Index Value 6 Retention potential - Medium - Long Term. | Index Value 5 Retention potential - Medium Term. | Index Value 4 Retention potential - Short Term. | Index Value 3 Retention potential - Short Term. Potential for longer with improved growing conditions. | Index Value 2 Retention potential - Short Term. | Index Value 0 Retention potential - Likely to be removed immediately or retained for Short Term. |

Appendix B

Definitions & Terminology

From
Dictionary for Managing Trees in Urban Environments
Institute of Australian Consulting Arboriculturists (IACA) 2009.

Condition of trees

Condition A tree's *crown form* and growth habit, as modified by its *environment* (aspect, suppression by other trees, soils), the *stability* and *viability* of the *root plate*, trunk and structural branches (first (1st) and possibly second (2nd) order branches), including structural defects such as wounds, cavities or hollows, *crooked* trunk or weak trunk/branch junctions and the effects of predation by pests and diseases. These may not be directly connected with *vigour* and it is possible for a tree to be of *normal vigour* but in *poor condition*. Condition can be categorized as *Good Condition*, *Fair Condition*, *Poor Condition* and *Dead*.

Good Condition Tree is of good habit, with *crown form* not severely restricted for space and light, physically free from the adverse effects of *predation* by pests and diseases, obvious instability or structural weaknesses, fungal, bacterial or insect infestation and is expected to continue to live in much the same condition as at the time of inspection provided conditions around it for its basic survival do not alter greatly. This may be independent from, or contributed to by *vigour*.

Fair Condition Tree is of good habit or *misshapen*, a form not severely restricted for space and light, has some physical indication of *decline* due to the early effects of *predation* by pests and diseases, fungal, bacterial, or insect infestation, or has suffered physical injury to itself that may be contributing to instability or structural weaknesses, or is faltering due to the modification of the *environment* essential for its basic survival. Such a tree may recover with remedial works where appropriate, or without intervention may stabilise or improve over time, or in response to the implementation of beneficial changes to its local environment. This may be independent from, or contributed to by *vigour*.

Poor Condition Tree is of good habit or *misshapen*, a form that may be severely restricted for space and light, exhibits symptoms of advanced and *irreversible decline* such as fungal, or bacterial infestation, major die-back in the branch and *foliage crown*, *structural deterioration* from insect damage e.g. termite infestation, or storm damage or lightning strike, ring barking from borer activity in the trunk, root damage or instability of the tree, or damage from physical wounding impacts or abrasion, or from altered local environmental conditions and has been unable to adapt to such changes and may decline further to death regardless of remedial works or other modifications to the local *environment* that would normally be sufficient to provide for its basic survival if in *good* to *fair* condition. Deterioration physically, often characterised by a gradual and continuous reduction in *vigour* but may be independent of a change in *vigour*, but characterised by a proportionate increase in susceptibility to, and *predation* by pests and diseases against which the tree cannot be sustained. Such conditions may also be evident in trees of advanced senescence due to normal phenological processes, without modifications to the growing environment or physical damage having been inflicted upon the tree. This may be independent from, or contributed to by *vigour*.

Dead Tree is no longer capable of performing any of the following processes or is exhibiting any of the following symptoms;

Processes

Photosynthesis via its foliage crown (as indicated by the presence of moist, green or other coloured leaves);

Osmosis (the ability of the root system to take up water);

Turgidity (the ability of the plant to sustain moisture pressure in its cells);

Epicormic shoots or *epicormic strands* in Eucalypts (the production of new shoots as a response to stress, generated from latent or adventitious buds or from a *lignotuber*);

Symptoms

Permanent leaf loss;

Permanent wilting (the loss of turgidity which is marked by desiccation of stems leaves and roots);

Abscission of the *epidermis* (bark desiccates and peels off to the beginning of the sapwood).

Removed No longer present, or tree not able to be located or having been cut down and retained on a site, or having been taken away from a site prior to site inspection.

Description of Tree Dimensions

Height The distance measured vertically between the horizontal plane at the lowest point at the base of a tree, which is immediately above ground, and the horizontal plane immediately above the uppermost point of a tree.

Spread The furthest expanse of the crown when measured horizontally from one side of the tree to the other, generally through the centre of the trunk. Where the crown is not circular a measurement should be an average of the narrowest and widest diameters and this is dependent upon crown form and to a lesser extent its symmetry.

Crown Cover Percent of the homogenous distribution of foliage across the entire crown based upon that expected for a specimen of that species in good condition and of normal *vigour*, depending on form in situ, e.g. this may be influenced by crown die-back, proximity to other trees or structures, moisture stress, or overshadowing.

Vigour

Vigour Ability of a tree to sustain its life processes. This is independent of the *condition* of a tree but may impact upon it. *Vigour* can appear to alter rapidly with change of seasons (seasonality) e.g. *dormant*, deciduous or semi-deciduous trees. *Vigour* can be categorized as *Normal Vigour*, *High Vigour*, *Low Vigour* and *Dormant Tree Vigour*.

Normal Vigour Ability of a tree to maintain and sustain its life processes. This may be evident by the typical growth of leaves, crown cover and crown density, branches, roots and trunk and resistance to predation. This is independent of the condition of a tree but may impact upon it, and especially the ability of a tree to sustain itself against predation.

High Vigour *Accelerated growth* of a tree due to incidental or deliberate artificial changes to its growing *environment* that are seemingly beneficial, but may result in *premature aging* or failure if the favourable conditions cease, or promote *prolonged senescence* if the favourable conditions remain, e.g. water from a leaking pipe; water and nutrients from a leaking or disrupted sewer pipe; nutrients from animal waste, a tree growing next to a chicken coop, or a stock feed lot, or a regularly used stockyard; a tree subject to a stringent watering and fertilising program; or some trees may achieve an extended lifespan from continuous *pollarding* practices over the life of the tree.

Low Vigour Reduced ability of a tree to sustain its life processes. This may be evident by the atypical growth of leaves, reduced crown cover and reduced crown density, branches, roots and trunk, and a deterioration of their functions with reduced resistance

to predation. This is independent of the condition of a tree but may impact upon it, and especially the ability of a tree to sustain itself against predation.

Dormant Tree Vigour Determined by existing turgidity in lowest order branches in the outer extremity of the crown, with good bud set and formation, and where the last extension growth is distinct from those most recently preceding it, evident by bud scale scars. Normal vigour during dormancy is achieved when such growth is evident on a majority of branches throughout the crown.

Poor Vigour See low vigour

Good Vigour See Normal Vigour

Age of Trees

Age of Trees Most trees have a stable biomass for the major proportion of their life. The estimation of the age of a tree is based on the knowledge of the expected lifespan of the taxa in situ divided into three distinct stages of measurable biomass, when the exact age of the tree from its date of cultivation or planting is unknown. These increments are Young, Mature and Overmature.

Young Tree aged less than 20% of life expectancy.

Mature Tree aged 20-80% of life expectancy.


Over-mature Tree aged greater than 80% of life expectancy tending to senescent with or without reduced vigour, and declining gradually or rapidly but irreversibly to death.

Sapling A young tree, early in its development with small dimensions.

Senescent Advanced old age, over-mature.

General Terms


Orders of Branches The marked divisions between successively smaller branches (James 2003, p. 168) commencing at the initial division where the trunk terminates on a *deliquescent* tree or from *lateral* branches on an *excurrent* tree. Successive branching is generally characterised by a gradual reduction in branch diameters at each division, and each gradation from the trunk can be categorized numerically, e.g. first order, second order, third order etc.

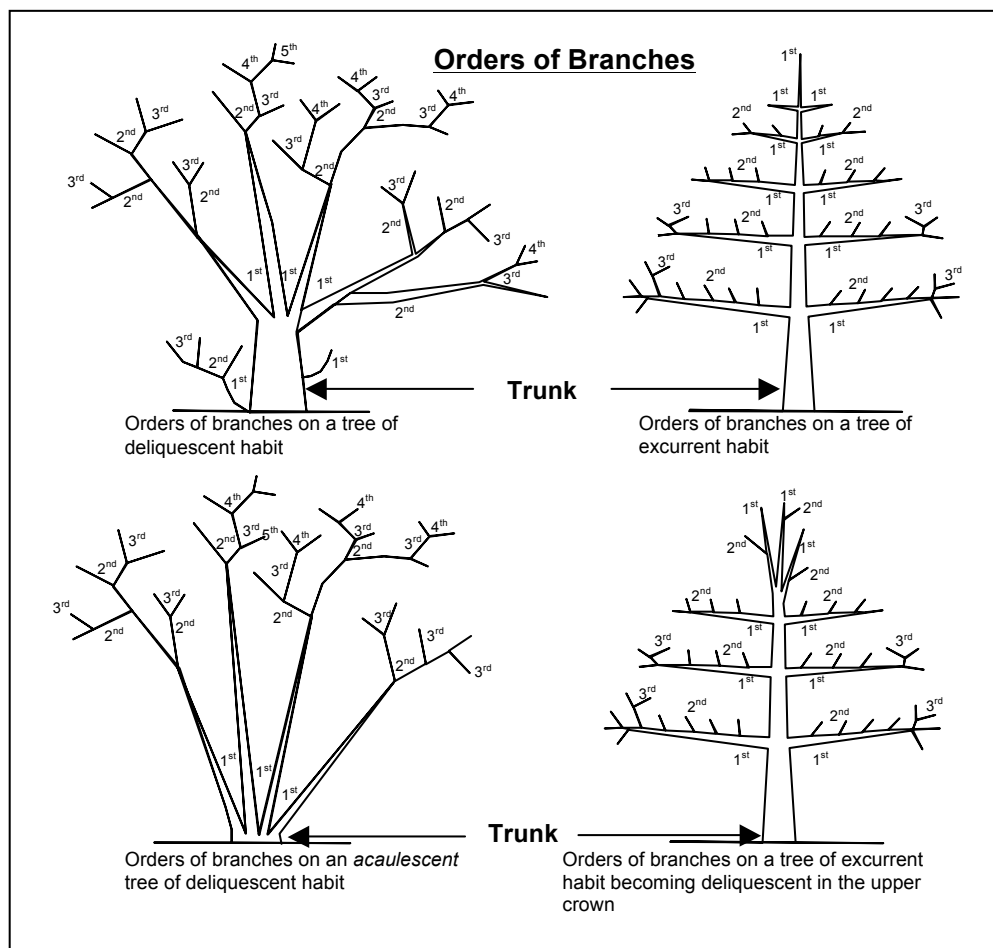

Appendix C **Extract from Australian Standard AS 4970-2009** **“Protection of trees on development sites** **“Calculating the Structural Root Zone”**

13

AS 4970—2009

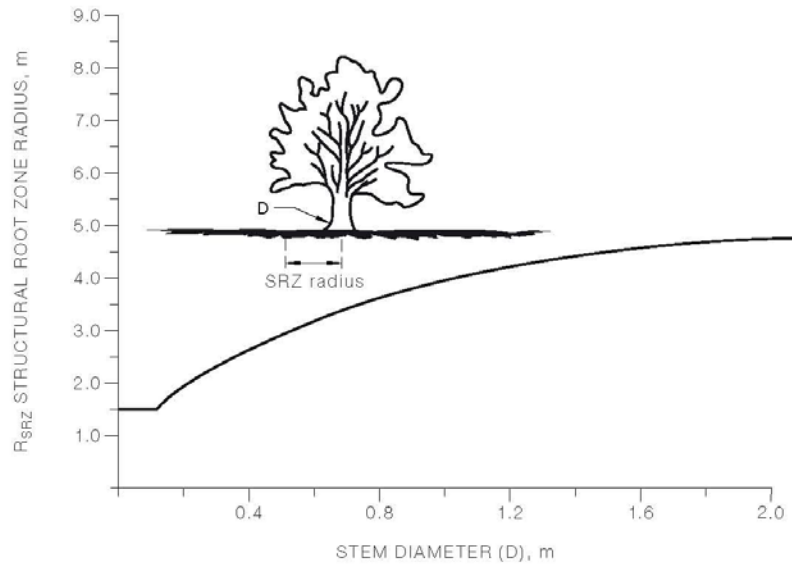

The curve can be expressed by the following formula:
 $R_{SRZ} = (D \times 50)^{0.42} \times 0.64$

NOTES:

- 1 R_{SRZ} is the structural root zone radius.
- 2 D is the stem diameter measured immediately above root buttress.
- 3 The SRZ for trees less than 0.15 m diameter is 1.5 m.
- 4 The SRZ formula and graph do not apply to palms, other monocots, cycads and tree ferns.
- 5 This does not apply to trees with an asymmetrical root plate.

FIGURE 1 STRUCTURAL ROOT ZONE

Appendix D

TREE PROTECTION GUIDELINES

1.1 GENERAL NOTES

- 1.1.1 The application of measures for the protection of trees on development sites is determined by the species characteristics, and the existing physical constraints of the growing environment on site both above and below ground.
- 1.1.2 This report considers where applicable, Australian Standard AS 4970-2009 "Protection of trees on development sites." as a guide for the management of trees on development sites.
- 1.1.3 This report applies the ***Tree Protection Zone - Standard Procedure*** as developed and continually improved by the Consultant Arboriculturist for the effective protection of trees on development sites over time. (See Appendix E) Additional or alternative conditions are applied where it is deemed appropriate by the author for the protection of trees. Such additional or alternative conditions may be founded upon professional judgement based on:
- the experience of the Consulting Arboriculturist
 - scientific research
 - new technology
 - industry best practice
 - consideration of the individual tree species and its relative tolerance to development impacts
 - the individual or cumulative factors present or proposed to impact upon the growing environment essential for the trees' survival

1.2 PRECAUTIONS TO PROTECT TREES

1.2.1 *Demolition of landscape structures*

The demolition of walls, driveways, paths etc. near trees to be retained should be undertaken manually using hand tools. Use of light machinery can occur by utilising the driveway or a paved area as a stable platform to prevent soil compaction. The volume of space previously occupied by the driveway or paved area must be replaced with local top soil from the site or otherwise a loamy sand, to replace the mass on the root plate which may be critical to the ballast and centre of mass for the stability of the tree. If the tree becomes unstable immediately contact the Consultant Arboriculturist.

1.2.2 *Demolition of existing buildings*

The demolition of the buildings should be undertaken with access restricted to the driveway and the building platform for each of the existing buildings, or to areas of the land where no trees are growing within 6m of any tree to be retained. Where access or space for a safe working environment is restricted, or where the area of the 6m set back must be compromised, a 100mm layer of Eucalyptus wood mulch must be laid over the area of encroachment. Where vehicular access is required across the mulch layer further root protection should be provided by laying a temporary pathway over the mulch. The temporary pathway should be constructed of a grated steel material capable of supporting the vehicles used during demolition e.g. similar to ramps used to load vehicles onto the backs of trucks. Trunks of trees are to be protected from vehicular damage as per appendix E section 4 of this report.

1.2.3 *Removal of trees near to trees to be retained*

Removal of a tree within 6m of a tree to be retained should be undertaken only by cutting down such a tree without damaging the trees to be retained, and by grinding out its stump. Where possible the structural roots of 20mm diameter or greater of the tree to be cut down should not be removed, to minimise soil disturbance and to reduce the impact on the roots of any tree to be retained nearby. Where structural roots are to be removed this should be undertaken manually by the use of non-motorized hand tools after the stump has been

ground out when such roots are often easier to locate from the site of the stump from which they have been severed.

1.2.4 **Structural Soil to accommodate compacted subgrade and root growth**

To further protect woody roots with a diameter of 40mm or greater outside the area of the tree protection zone (see table 2), structural soil as a fill material or a subgrade should be used where appropriate and as detailed in the report recommendations. Structural soil addresses the issue of how to increase soil rooting volume whilst maintaining structural support for pavement. Structural soil maximises rock to rock contact utilising durable rock. Pore spaces are on average 8mm in size of which approximately 60% is taken up by the filler soil - the horticultural component, depending on the product utilised. The product is used for new tree planting in pavements, courtyards, carparks and kerbsides, planter boxes and raising levels around existing trees providing increased available soil volume to trees in pavements, structural properties for pavement support, increased root depth and high permeability for both air and water.

1.2.5 **Root location and protection where structures are to be positioned near a retained tree**

A: If walls, driveways or other structures are to be constructed near a protected tree or within a tree protection zone (see table 2 column G), careful excavation is to be undertaken manually by using hand tools or light machinery to determine the location of structural woody roots with a diameter of 40mm or greater, without damaging them. These roots are to be protected from physical damage by utilising pier & beam type footings to reduce excessive disturbance of existing soil profile supporting tree roots. Placement of piers are to be positioned so as to clear any structural root by at least 100mm to allow for future radial expansion of the tree root within the soil profile. Any roots 40mm or less may be clean cut with final cuts to undamaged woody tissue.

B: Where structural woody roots outside of the Tree Protection Zone or as otherwise indicated are to be pruned they are to be excavated manually first by using hand tools to adequately expose the root. Once located those roots to be severed are to be cut cleanly with a final cut to undamaged woody tissue. This will prevent tearing damage to the roots from excavation equipment which can extend beyond the point of excavation back towards the tree. Severed roots are to be treated with a root growth hormone stimulant.

1.2.6 **Location of Services**

If a utility service is to be located within the area of the dripline of a protected tree or within the Tree Protection Zone, the Australian Standard AS 4970-2009 "Protection of trees on development sites" provides the following:

"4.5.5. If underground services must be routed within the TPZ, they should be installed by directional drilling or in manually excavated trenches. The direction drilling bore should be at least 600mm deep. The project arborist should assess the likely impacts of boring and bore pits on retained trees. For manual excavation of trenches the project arborist should advise on roots to be retained and should monitor the works. Manual excavation may include the use of pneumatic and hydraulic tools."

1.2.7 **Precautions in respect of temporary work**

For Precautions in respect of temporary work, Australian Standard AS 4970-2009 "Protection of trees on development sites." provides the following:

4.5.6 Scaffolding

Where scaffolding is required it should be erected outside the TPZ. Where it is essential for scaffolding to be erected within the TPZ, branch removal should be minimized. This can be achieved by designing scaffolding to avoid branches or tying back branches. Where pruning is unavoidable it must be specified by the project arborist in accordance with AS 4373. NOTE: Pruning works may require approval by determining authority. Ground below the scaffolding should be protected by boarding (e.g. scaffold board or plywood sheeting) as shown in Figure 5. Where access is required, a board walk or other surface material


should be installed to minimize soil compaction. Boarding should be placed over a layer of mulch and impervious sheeting to prevent soil contamination. The boarding should be left in place until the scaffolding is removed. NOTE: Excavation required for the insertion of support posts for tree protection fencing should not involve the severance of any roots greater than 20 mm in diameter, without the prior approval of the project arborist.

“4.5.3 Ground protection

If temporary access for machinery is required within the TPZ ground protection measures will be required. The purpose of ground protection is to prevent root damage and soil compaction within the TPZ. Measures may include a permeable membrane such as geotextile fabric beneath a layer of mulch or crushed rock below rumble boards. These measures may be applied to root zones beyond the TPZ.”

1.2.9 Water / Gaseous Exchange Vents

Watering / Gaseous exchange vents are to be installed in the area of the driveway that passes within the dripline of the tree or the prescribed Tree Protection Zone area and the number and location are to be determined by a Consultant Arboriculturist and the driveway design approved by a Certified Engineer. Exposed edges of the path are to be concealed with the finished level beside the path equivalent to the top of the path by minimal filling with a sandy soil and turf, or mulch, or a garden bed with minimal cultivation, or other landscape treatments as appropriate.

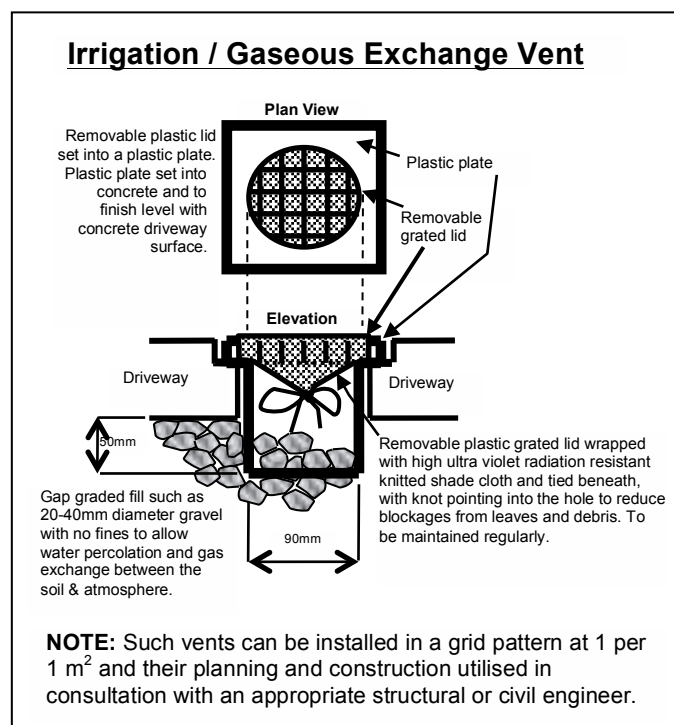

1.2.10 Pruning/Removal Guidelines

- Any pruning recommended in this report is to be to the Australian Standard® AS4373 'Pruning of amenity trees', and conducted in accordance with the NSW Work Cover Authority Code of Practice for the Amenity Tree Industry, 1998
- All pruning or removal works are to be in accordance with the appropriate Tree Management Policy where applicable, or Tree Management Order (TMO), or Tree Preservation Order (TPO), or applicable consent conditions.

- Tree maintenance work is specialised and in order to be undertaken safely and to ensure the works carried out are not detrimental to the survival of the tree or surrounding vegetation, all works should be undertaken by a qualified Arboriculturist with appropriate competencies recognised within the Australian Qualification Framework, with a minimum of 5 years of continual experience within the industry of operational amenity arboriculture, and covered by appropriate and current types of insurance to undertake such works.
- Any pruning near electricity wires should be undertaken in accordance with relative Electrical Safety Rules and be performed by persons individually authorised by Energy Australia


Appendix E

TREE PROTECTION ZONE STANDARD PROCEDURE

1. Each tree to be retained is to have its dripline fenced off, except where otherwise indicated, to create a Tree Protection Zone, and this may include one enclosure to protect a single or multiple tree/s, or multiple enclosures separated over the site. The area contained is the Tree Protection Zone, and is to exclude any activity, except where otherwise stated. The Tree Protection Zone is to exclude: modification of existing soil levels, storage of materials, site sheds and machinery; preparation of building materials e.g. concrete, or chemical treatments; the movement of pedestrian or vehicular traffic; or the temporary or permanent location of services, or the works required for their installation, e.g. trenches, holes or canals. The above list is not meant to be exhaustive, and is intended as a guide to the types of activities that are excluded from within the Tree Protection Zone, except where otherwise stated.
2. The Protective fencing where required may delineate the **TPZ** and should be located as determined by the project arborist in accordance with AS4970 *Protection of trees on development sites*, Section 4, 4.3. *"Fencing should be erected before any machinery or materials are brought onto the site and before the commencement of works including demolition. Once erected, protective fencing must not be removed or altered without approval by the project arborist. The TPZ must be secured to restrict access. AS4687 Temporary fencing and hoardings specifies applicable fencing requirements. Shade cloth or similar should be attached to reduce the transport of dust, other particulate matter and liquids into the protected area. Fence posts and supports should have a diameter greater than 20 mm and be located clear of roots. Existing perimeter fencing and other structures may be suitable as part of the protective fencing."*
3. Tree Protection signage is to be attached to each **Tree Protection Zone** and displayed from within the development site in accordance with AS4970 2009 *Protection of trees on development sites*, Section 4.4 and lettering to comply with AS1319.
4. Where a tree is to be retained and a **Tree Protection Zone** cannot be adequately established due to restricted access e.g. tree located along side an access way, the trunk and branches in the lower crown will be protected by wrapping 2 layers of hessian or carpet underfelt around the trunk and branches for a minimum of 2 m or as lower branches permit, then wire or rope secures 75x50x2000 mm hardwood battens together around the trunk (do not nail or screw to the trunk or branches). The number of battens to be used is as required to encircle the trunk and the planks are to extend to the base of the tree (AS4970 2009 *Protection of trees on development sites*, Figure 4).
5. If a tree is growing down slope from an excavation, a silt fence located along the contours of the site in the area immediately above the **Tree Protection Zone** fencing may need to be installed and regularly maintained to prevent burial and asphyxiation of the roots of the tree. To allow for the maintenance of both fences, the silt fence must be constructed separately to the tree protection fence and the 2 fences must be constructed independently of each other and standalone. To reduce competition with the tree the area within the **Tree Protection Zone** is to be kept free of weeds. These are best removed by the application of foliar herbicide with Glyphosate as the active constituent. This is the preferred method rather than removal by cultivation of the soil within the dripline, to minimise root disturbance to the tree. The removal of woody weeds such as Privet should use the cut and paint method of herbicide application. Weeds to be controlled within the **Tree Protection Zone**, for the duration of the project.

6. The area of the **Tree Protection Zone** to be mulched to a depth of 100 millimetres with organic material being 75% leaf litter and 25% wood, and this being composted material preferably from the same genus and species of tree as that to where the mulch is to be applied, i.e. species specific mulch. The depth of mulch and type as indicated, to be maintained for the duration of the project.
7. No services either temporary or permanent are to be located within the **Tree Protection Zone**. If services are to be located within the **Tree Protection Zone**, special details will need to be provided by a qualified Consulting Arboriculturist for the protection of the tree regarding the location of the service/s.
8. A tree will not be fertilised during its protection within the **Tree Protection Zone**, as this may hasten its decline if it were to decline. If a tree is to be fertilised this should be in consultation with a qualified Consulting Arboriculturist.
9. In the event of prolonged dry periods, or where a tree has been transplanted, or where excavation nearby, especially up slope, leads to drying out of soil profiles closest to the tree/s, the tree/s is to be deep root watered thoroughly at least twice a week. The need for such watering is determined readily by observing the dryness of the soil surface within the dripline of the tree by scraping back some mulch. Mulch to be reinstated afterwards. In the event of disrupted ground or surface water flows to the tree due to excavation, filling or construction, an irrigation system may be required to be installed within the **Tree Protection Zone**. If an irrigation system is to be installed, consideration must be given to volume, frequency, and drainage of water delivered, and this should be in consultation with a qualified Consulting Arboriculturist.

Survey Plan/Tree Locations

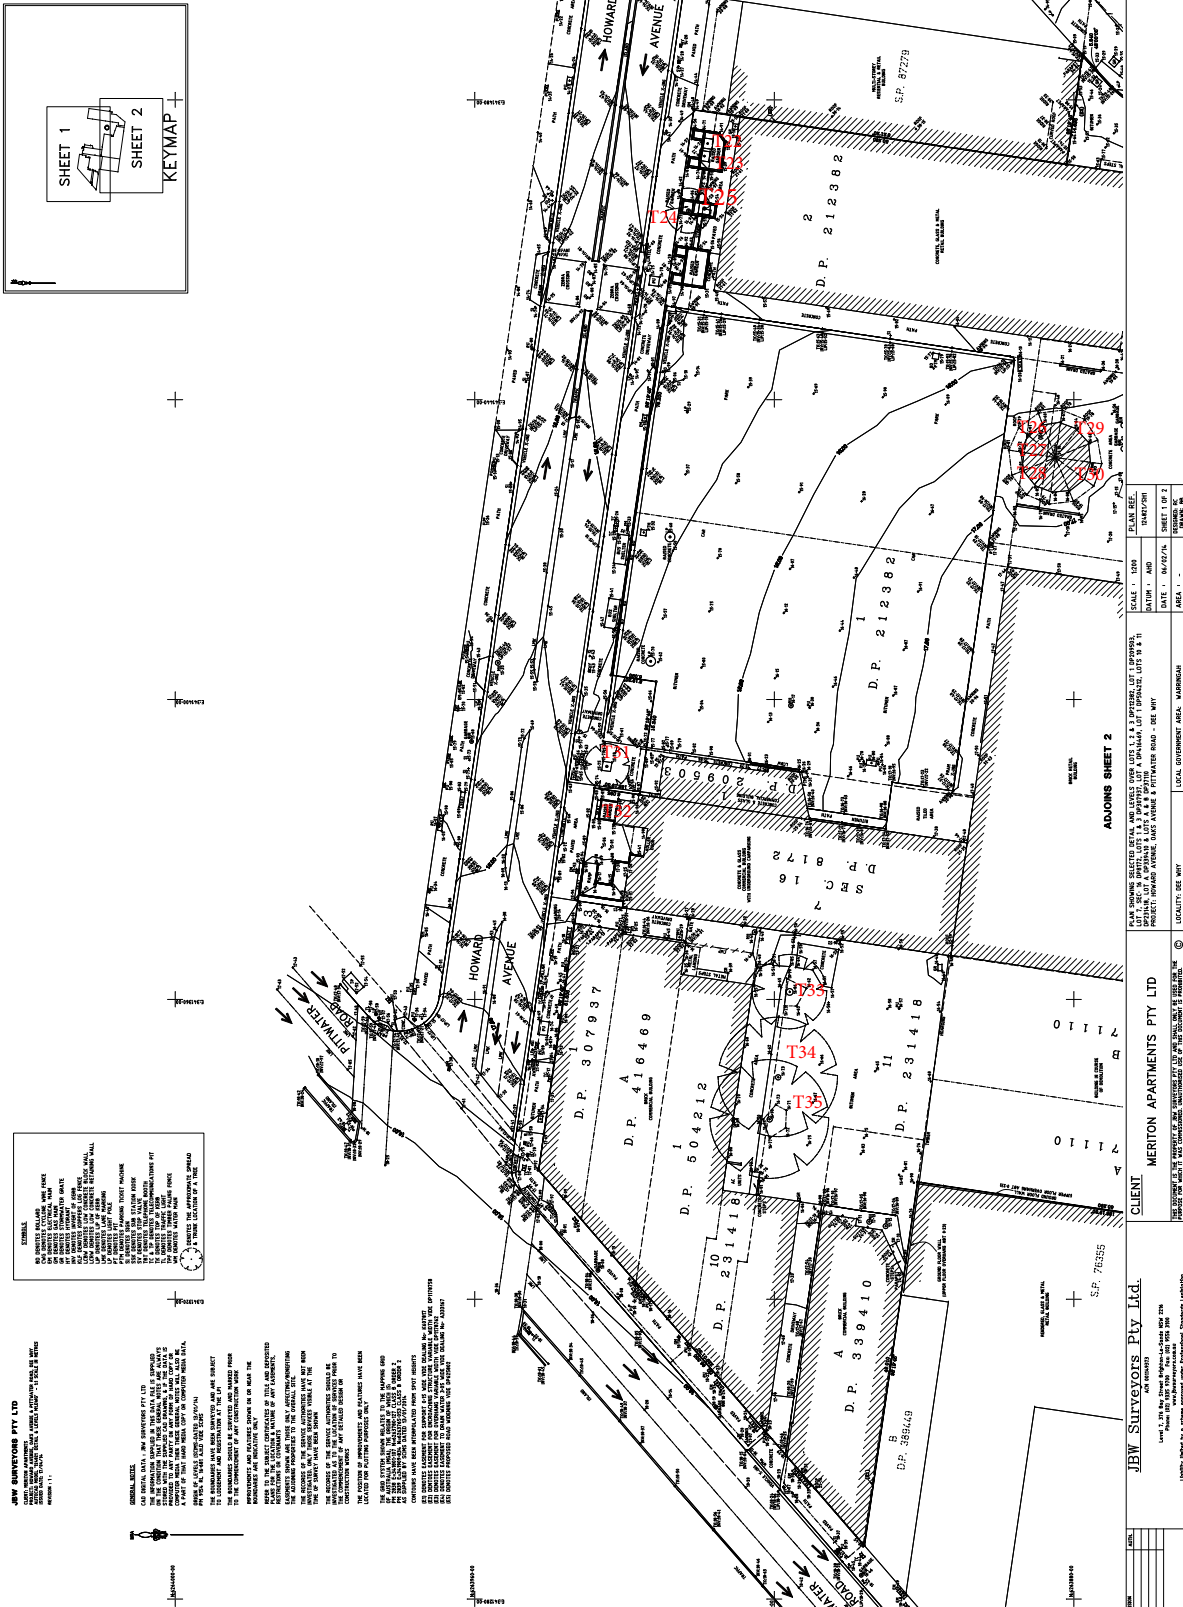

Appendix F- continued



[illegible]

Appendix H

References

REFERENCES

1. IACA (2009), Sustainable Retention Index Value, Institute of Australian Consulting Arboriculturists, www.iaca.org.au .
2. Australian Standard® AS 4373 – 2007 Pruning of amenity Trees.
3. Draper BD and Richards PA 2009, *Dictionary for Managing Trees in Urban Environments*, Institute of Australian Consulting Arboriculturists (IACA), CSIRO Publishing, Collingwood, Victoria, Australia.
4. Work Cover NSW 2007, *Code of Practice Tree Work*, New South Wales Government, Australia.