

29 May 2023

# երրդիկ|||||||||||||---եդլիի

St Augustine's College Sydney
C/- DFP Planning Pty Ltd PO Box 230
PENNANT HILLS NSW 1715

Dear Sir/Madam

Application Number: DA2021/2567

Address: Lot B DP 395193, 0 L Federal Parade, BROOKVALE NSW 2100

Lot 100 DP 1250521, 37 - 43 Federal Parade, BROOKVALE NSW

2100

Lot 13 DP 568333, 60 Federal Parade, BROOKVALE NSW 2100

Proposed Development: Demolition works, construction of two carparks and an increase in

student numbers at an educational establishment

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at www.northernbeaches.nsw.gov.au

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to council@northernbeaches.nsw.gov.au

Regards,

Daniel Milliken

**Manager Development Assessments** 

DA2021/2567 Page 1 of 34



## **NOTICE OF DETERMINATION**

Application Number:	DA2021/2567
Determination Type:	Development Application

#### **APPLICATION DETAILS**

Applicant:	St Augustine's College Sydney
Land to be developed (Address):	Lot B DP 395193, 0 L Federal Parade BROOKVALE NSW 2100 Lot 100 DP 1250521, 37 - 43 Federal Parade BROOKVALE NSW 2100 Lot 13 DP 568333, 60 Federal Parade BROOKVALE NSW 2100
Proposed Development:	Demolition works, construction of two carparks and an increase in student numbers at an educational establishment

## **DETERMINATION - APPROVED**

Made on (Date)	12/05/2023
Consent to operate from (Date):	12/05/2023
Consent to lapse on (Date):	12/05/2028

## **Detail of Conditions**

The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.

## Note:

If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.

DA2021/2567 Page 2 of 34



# **DEVELOPMENT CONSENT OPERATIONAL CONDITIONS**

## 1. Approved Plans and Supporting Documentation

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

## a) Approved Plans

Engineering Plans - Endorsed with Council's stamp			
Drawing No.	Dated	Prepared By	
C100 Rev 4 Demolition and Site Management Plan 60 Federal Parade	06.12.2021	Core Project Consulting	
C101 Rev 4 Demolition and Site Management Plan Alfred Road	06.12.2021	Core Project Consulting	
C200 Rev 4 Sediment and Erosion (SED) Control Plan and Details 60 Federal Parade	06.12.2021	Core Project Consulting	
C201 Rev 4 Sediment and Erosion (SED) Control Plan and Details Alfred Road	06.12.2021	Core Project Consulting	
C002 Rev 4 Area Analysis and SED Details	06.12.2021	Core Project Consulting	
C300 Rev 4 Stormwater Management Plan 60 Federal Parade	06.12.2021	Core Project Consulting	
C301 Rev 4 Stormwater Management Plan Alfred Road	06.12.2021	Core Project Consulting	
C302 Rev 4 OSD Details 60 Federal Parade	06.12.2021	Core Project Consulting	
C303 Rev 4 OSD Details Alfred Road	06.12.2021	Core Project Consulting	
C304 Rev 4 Footpath and SW Pit Detail	06.12.2021	Core Project Consulting	
C401 Rev 04 Car Park Layout Alfred Road	06.12.2021	Core Project Consulting	
C402 Rev 4 Standard Detail Car Park	06.12.2021	Core Project Consulting	
C501 Rev 4 Delineation and Line Marking Alfred Road	06.12.2021	Core Project Consulting	

Reports / Documentation – All recommendations and requirements contained within:			
Report No. / Page No. / Section No.	Dated	Prepared By	
Noise and Vibration Impact Assessment Project P00054 Rev 006	05.04.2021	E-LAB Consulting	
Preliminary Arboricultural Impact Assessment Report Ref No 11121	14.07.2021	Rain Tree Consulting	
Transport Impact Assessment Ref N19000 Issue C	12.12.2021	Stantec	
Traffic and Parking Management Plan Ref N190000 Issue G	06.04.2023	Stantec	

DA2021/2567 Page 3 of 34



Flood Impact Assessment Rev 1	28.07.2022	Core Project Consultants
Operational Plan of Management	06.04.2023	St St Augustine's College

- b) Any plans and / or documentation submitted to satisfy the Conditions of this consent.
- c) The development is to be undertaken generally in accordance with the following:

Landscape Plans			
Drawing No.	Dated	Prepared By	
L-01 Rev E Landscape Master Plan	10.11.2022	SPACE Landscape Design	
L-02 Rev E Landscape Plan Sheet 1	10.11.2022	SPACE Landscape Design	
L-03 Rev E Landscape Plan Sheet 2	10.11.2022	SPACE Landscape Design	
L-03 Rev E Landscape Details and Specifications	10.11.2022	SPACE Landscape Design	

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

#### 2. Maximum Student Numbers - construction of car parks

The maximum student numbers are limited to a maximum 1200. The maximum student numbers may be increased to 1600 on completion of both the Federal Parade and Alfred Road carparks.

On a trial basis the school can operate with a maximum number of 1560 students for period of up to 270 days from the date of this consent, subject to meeting the following criteria:

- (a) The construction of the Federal Parade and Alfred Road carparks are to be commenced within 90 days from the date the consent is granted, and
- (b) Both carparks are to be fully constructed and operational within 180 days from the date of the commencement of construction, and
- (c) During the period from the date of the consent to the date of completion of the carparks, the traffic safety measures contained in the approved Traffic and Parking Management Plan are to be fully implemented.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure there is sufficient carparking to support the increase in student enrolments and minimise impacts on the availability of on street carparking.

#### 3. Prescribed Conditions

(a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).

DA2021/2567 Page 4 of 34



- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
  - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.

- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
  - (i) in the case of work for which a principal contractor is required to be appointed:
    - A. the name and licence number of the principal contractor, and
    - B. the name of the insurer by which the work is insured under Part 6 of that Act,
  - (ii) in the case of work to be done by an owner-builder:
    - A. the name of the owner-builder, and
    - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.

- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
  - (i) protect and support the adjoining premises from possible damage from the excavation, and
  - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
  - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
  - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

DA2021/2567 Page 5 of 34



## 4. General Requirements

- (a) Unless authorised by Council:

  Building construction and delivery of material hours are restricted to:
  - 7.00 am to 5.00 pm inclusive Monday to Friday,
  - 8.00 am to 1.00 pm inclusive on Saturday,
  - No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

• 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) Should any asbestos be uncovered on site, its demolition and removal must be carried out in accordance with WorkCover requirements and the relevant Australian Standards.
- (c) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (d) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (e) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (f) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (g) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (h) No skip bins, building materials, demolition or excavation waste of any nature, and no hoist, plant or machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (i) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.
- (j) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.

DA2021/2567 Page 6 of 34



- (k) Prior to the commencement of any development onsite for:
  - i) Building/s that are to be erected
  - ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
  - iii) Building/s that are to be demolished
  - iv) For any work/s that is to be carried out
  - v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.

- (I) A "Road Opening Permit" must be obtained from Council, and all appropriate charges paid, prior to commencement of any work on Council property. The owner/applicant shall be responsible for all public utilities and services in the area of the work, shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.
- (m) The works must comply with the relevant Ausgrid Network Standards and SafeWork NSW Codes of Practice.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

## 5. Implementation of Traffic and Parking Management Plan

Traffic and Parking is to be managed in accordance with the approved final Traffic and Parking Management Plan (TPMP). All controls in the TPMP must be maintained at all times during school operational hours. Should the implementation or effectiveness of the TPMP be impacted by unforeseen changes in school operations or as a result of surrounding major development, the TPMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved TPMP is to be kept onsite at all times and made available to staff and students for their information and to the accredited certifier or Council on request.

Reason: To ensure compliance and Council's ability to modify the approved Traffic and Parking Management Plan where it is deemed unsuitable.

## A. Implementation of Acoustic Report and Operational Plan of Management

Acoustic and operational issues are to be managed in accordance with the approved final Acoustic Report and Operational Plan of Management. All recommendations / controls in the Acoustic Report and Operational Plan of Management must be maintained at all times during school operational hours. Any person making a complaint shall be advised within 7 days of the action taken by the school to address the complaint.

Should the implementation or effectiveness of the Acoustic Report and Operational Plan of Management be impacted by unforeseen changes in school operations, including the use of newly acquired sites, such 33 Consul Road, or as a result of surrounding major development, the measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved Acoustic Report is to be kept onsite at all times and made available to staff and students for their information and to the accredited certifier or Council on request.

Reason: To ensure compliance and Council's ability to modify the approved Acoustic Report

DA2021/2567 Page 7 of 34



and Operational Plan of Management where it is deemed unsuitable.

## FEES / CHARGES / CONTRIBUTIONS

## 6. **Policy Controls**

Northern Beaches Section 7.12 Contributions Plan 2022

A monetary contribution of \$6,710.00 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan (as amended).

The monetary contribution is based on a development cost of \$671,000.00.

The total amount payable will be adjusted at the time the payment is made, in accordance with the provisions of the Northern Beaches Section 7.12 Contributions Plan (as amended).

Details demonstrating compliance, by way of written receipts issued by Council, are to be submitted to the Certifier prior to issue of any Construction Certificate or, if relevant, the Subdivision Certificate (whichever occurs first).

A copy of the Contributions Plan is available for inspection at 725 Pittwater Road, Dee Why or on Council's website at Northern Beaches Council - Development Contributions.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

#### 7. Security Bond

A bond (determined from cost of works) of \$2,000 and an inspection fee in accordance with Council's Fees and Charges paid as security are required to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, and details demonstrating payment are to be submitted to the Certifier prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at www.northernbeaches.nsw.gov.au).

Reason: To ensure adequate protection of Council's infrastructure.

## 8. Construction, Excavation and Associated Works Bond (Drainage works)

The applicant is to lodge a bond of \$10000 as security against any damage or failure to complete the construction of stormwater drainage works in Gulliver Street as part of this consent.

DA2021/2567 Page 8 of 34



Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's infrastructure.

#### 9. Construction, Excavation and Associated Works (Security Bond)

A bond of \$10000 as security against damage to Council's roads fronting the site caused by the transport and disposal of materials and equipment to and from the site.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's infrastructure.

# CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

#### 10. Tree Root Investigation for T3 Brushbox

Prior to the issue of a Construction Certificate, a non-destructive root investigation within the development property shall be undertaken investigating the location of tree roots belonging to tree T3 - Bushbox located within 60 Federal Parade in accordance with clause 3.3.4 of AS 4970-2009 Protection of Trees on Development Sites.

An Arborist with minimum AQF Level 5 in arboriculture shall supervise the works to verify tree root locations. A Tree Root Map shall be documented that will be the basis for determining construction methodology near existing tree T3.

The root investigation shall map existing roots of significance that must not be impacted by construction works. The tree root investigation shall be conducted to confirm the following data to be used for the location/alignment of any new proposed works:

- i) confirmation of the location of any tree roots at or >25mm ( $\emptyset$ ) diameter to areas that require excavation for proposed works. Alternative alignment of proposed works shall be provided as necessary to avoid major roots, and
- ii) mapping of the suitable location/alignment of proposed works.

The Tree Root Map shall be issued to a qualified Structural Engineer as a basis for structural design, and for determining the final location/alignment and construction methodology of proposed works within the tree protection zone (TPZ).

Prior to the issue of a Construction Certificate, the Arborist shall provide certification to the Certifier that the tree root investigation and clear distance recommendations have been adequately addressed in the Construction Certificate plans.

Reason: To ensure protection of vegetation proposed for retention or adjacent to the site.

## 11. Stormwater Disposal

The applicant is to demonstrate how stormwater from the new development within this consent is disposed of to an existing approved system or in accordance with Northern Beaches Council's WATER MANAGEMENT POLICY PL850, MANLY SPECIFICATION FOR DEVELOPMENT. Details by an appropriately qualified and practicing Civil Engineer demonstrating that the existing approved stormwater system can accommodate the additional flows, or compliance with the Council's specification are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

DA2021/2567 Page 9 of 34



Reason: To ensure appropriate provision for disposal and stormwater management arising from development.

## 12. Car Parking Finishes

All driveways, car parking areas and pedestrian paths are to be surfaced and sealed. Details of treatment to these areas are to be submitted to the Certifying Authority prior to issue of the Construction Certificate.

Reason: To provide suitable stormwater disposal and to prevent soil erosion and runoff.

## 13. Construction Traffic Management Plan

As a result of the site constraints, limited vehicle access and parking, a Construction Traffic Management Plan (CTMP) and report shall be prepared by an RMS accredited person and submitted to and approved by the Northern Beaches Council Traffic Team prior to issue of any Construction Certificate.

Due to heavy traffic congestion throughout the town centre, truck movements will be restricted during the major commuter peak times being 8.00-9.30am and 4.30-6.00pm. Truck movements must be agreed with Council's Traffic and Development Engineer prior to submission of the CTMP.

The CTMP must address following:

- The proposed phases of construction works on the site, and the expected duration of each construction phase
- o The proposed order in which works on the site will be undertaken, and the method statements on how various stages of construction will be undertaken
- Make provision for all construction materials to be stored on site, at all times
- The proposed areas within the site to be used for the storage of excavated materials, construction materials and waste containers during the construction period
- The proposed method of access to and egress from the site for construction vehicles, including access routes and truck rates through the Council area and the location and type of temporary vehicular crossing for the purpose of minimising traffic congestion and noise in the area, with no access across public parks or reserves being allowed
- The proposed method of loading and unloading excavation and construction machinery, excavation and building materials, formwork and the erection of any part of the structure within the site. Wherever possible mobile cranes should be located wholly within the site
- Make provision for parking onsite. All Staff and Contractors are to use the basement parking once available
- Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site are not permitted unless approved by Council prior
- Specify that, due to the proximity of the site adjacent to St. Augustine's School, no heavy vehicle movements or construction activities effecting vehicle and pedestrian traffic are permitted in school zone hours (8:00am-9:30am and 2:30pm-4:00pm weekdays)
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for any activities involving the management of vehicle and pedestrian safety
- The proposed manner in which adjoining property owners will be kept advised of the timeframes for completion of each phase of development/construction process. It must also specify that a minimum Fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measure
- o Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes and concrete pumps, structures proposed on the

DA2021/2567 Page 10 of 34



footpath areas (hoardings, scaffolding or shoring) and any tree protection zones around Council street trees

- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the CTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities, such as (but not limited to) concrete pours, crane lifts and dump truck routes. These communications must be documented and submitted to Council prior to work commencing on site
- The proposed method/device to remove loose material from all vehicles and/or machinery before entering the road reserve, any run-off from the washing down of vehicles shall be directed to the sediment control system within the site
- Specify that the roadway (including footpath) must be kept in a serviceable condition for the duration of construction. At the direction of Council, undertake remedial treatments such as patching at no cost to Council
- The proposed method of support to any excavation adjacent to adjoining properties, or the road reserve. The proposed method of support is to be designed and certified by an appropriately qualified and practising Structural Engineer, or equivalent
- Proposed protection for Council and adjoining properties
- The location and operation of any on site crane

The CTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – "Manual of Uniform Traffic Control Devices", RMS' Manual – "Traffic Control at Work Sites".

All fees and charges associated with the review of this plan is to be in accordance with Council's Schedule of Fees and Charges and are to be paid at the time that the Construction Traffic Management Plan is submitted.

Reason: To ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems.

#### 14. On-site Stormwater Detention Details

The Applicant is to provide a certification of drainage plans detailing the provision of on-site stormwater detention in accordance with Northern Beaches Council's WATER MANAGEMENT POLICY FOR DEVELOPMENT, and generally in accordance with the concept drainage plans prepared by Core Project Consulting, drawing number C301 Rev4, C302 Rev 4, C303 Rev 4. Detailed drainage plans are to be prepared by a suitably qualified Civil Engineer, who has membership to the Institution of Engineers Australia, National Professional Engineers Register (NPER) and registered in the General Area of Practice for civil engineering.

The drainage plans must address the following: i. Detailed long sections of all stormwater outlet lines located within Council footpath area are to be provided in relation to all utility services. ii. Detailed drainage plans, including engineering certification, are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater and stormwater management arising from the development.

## 15. Vehicle Crossings Application

The Applicant is to submit an application for driveway levels with Council in accordance with Section 138 of the Roads Act 1993. The fee associated with the assessment and approval of the application is to be in accordance with Council's Fee and Charges.

DA2021/2567 Page 11 of 34



An approval is to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To facilitate suitable vehicular access to private property.

## 16. Stormwater Drainage Application

The applicant is to provide a stormwater drainage application under Section 68 of the Local Government Act 1993 to Council for approval. The submission is to include four (4) copies of Civil Engineering plans for the design of the Stormwater inlet Pit in Gulliver Street which is to be generally in accordance with the civil design approved with the Development Application and Council's specification for engineering works - AUS-SPEC #1. The form can be found on Council's website at www.northernbeaches.nsw.gov.au > Council Forms > Stormwater Drainage Application Form. The fee associated with the assessment and approval of the application is to be in accordance with Council's Fees and Charges. Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate. Reason: To ensure appropriate provision for disposal and maintenance stormwater management and compliance with the BASIX requirements, arising from the development.

## 17. Amendments to the Approved Plans:

The following amendments are to be made to the plans:

- (a) 60 Federal Parade car park The paved material finish is to be drivable grassed pavers within the 6.5m front setback, or two parking space widths; to coordinate with parking bays and the remaining paving is to be water permeable paving.
- (b) Alfred Street / Guliver Street car park The paved material finish is to be drivable grassed pavers within the front setback to Gulliver Street, or one parking space widths; to coordinate with parking bays and the remaining paving is to be water permeable paving.
- (c) The fence height and any gates to both car parks within the front building setback zone are to be a maximum 1.3m above footpath level.
- (d) A gated pedestrian entry separated from the vehicular entry is to be provided. The gate is to be the same height as the front fence. No gates are to encroach over the property boundary when opening, closing, or stationary.
- (e) A clear path of travel for pedestrians is to be provided from the public footpath.

The modifications are to be submitted to and approved by *the Certifying Authority* prior to the issue of a Construction Certificate.

Reason: To minimise the visual impact of development on and improve the visual quality of the streetscape and to aid water infiltration and protect the natural environment and to ensure that development maintains and enhances the security and safety of the community.

#### 18. **Pre-commencement Dilapidation Report**

The applicant must prepare and submit a pre-commencement dilapidation report providing an accurate record of the existing condition of adjoining public property and public infrastructure (including roads, gutter, footpaths, etc). A copy of the report must be provided to Council, any other owners of public infrastructure and the owners of adjoining and affected private properties.

The pre-construction / demolition dilapidation report must be submitted to Council for written

DA2021/2567 Page 12 of 34



approval and the written approval is then to be submitted to the Certifying Authority prior to the issue of the any Construction Certificate and the commencement of any works including demolition.

Reason: Protection of Council's infrastructure during construction.

#### 19. Compliance with standards (Demolition):

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to Council prior to the commencement of demolition works.

Reason: To ensure the development is constructed in accordance with appropriate standards.

## 20. Waste Management Plan

A Waste Management Plan must be prepared for this development. The Plan must be in accordance with the Development Control Plan.

Details demonstrating compliance must be provided to the Certifier prior to the issue of the Construction Certificate.

Reason: To ensure that any demolition and construction waste, including excavated material, is reused, recycled or disposed of in an environmentally friendly manner.

## CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

#### 21. **Project Arborist**

A Project Arborist with minimum AQF Level 5 in arboriculture shall be engaged to provide tree protection measures in accordance with Australian Standard 4970-2009 Protection of Trees on Development Sites, and the recommendations of the Arboricultural Impact Assessment.

The Project Arborist shall be in attendance and supervise all works as nominated in the Arboricultural Impact Assessment.

Existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by the Project Arborist.

All tree protection measures specified must:

- a) be in place before work commences on the site, and
- b) be maintained in good condition during the construction period, and
- c) remain in place for the duration of the construction works.

The Project Arborist shall provide certification to the Principal Certifier that all recommendations listed for the protection of the existing tree(s) have been carried out satisfactorily to ensure no impact to the health of the tree(s). Photographic documentation of the condition of all trees to be retained shall be recorded, including at commencement, during the works and at completion.

#### Note:

- i) A separate permit or development consent may be required if the branches or roots of a protected tree on the site or on an adjoining site are required to be pruned or removed.
- ii) Any potential impact to trees as assessed by the Project Arborist will require redesign of any approved component to ensure existing trees upon the subject site and adjoining properties are

DA2021/2567 Page 13 of 34



preserved and shall be the subject of a modification application where applicable.

Reason: Tree protection.

## 22. Tree Removal Within the Property

This consent approves the removal of the following tree(s) within the Federal Avenue property (as recommended in the Arboricultural Impact Assessment):

- i) tree numbers 5 and 6 Sydney Blue Gum, both assessed as structurally defective,
- ii) a qualified AQF level 5 Arborist shall identify these trees on site and tag or mark prior to removal.

Note: Exempt Species as listed in the Development Control Plan or the Arboricultural Impact Assessment do not require Council consent for removal. The existing Exempt Species within the property include tree numbers: 2, 4, 7, 8 and 9, and a qualified AQF level 5 Arborist shall identify these trees on site and tag or mark prior to removal.

Reason: To enable authorised development works.

#### 23. Work Zones and Permits

Prior to commencement of the associated works, the applicant shall obtain a Work Zone Permit where it is proposed to reserve an area of road pavement for the parking of vehicles associated with a construction site.

A separate application is required with a Traffic Management Plan for standing of construction vehicles in a trafficable lane

Reason: To ensure Work zones are monitored and installed correctly.

## 24. Public Liability Insurance - Works on Public Land

Any person or contractor undertaking works on public land must take out Public Risk Insurance with a minimum cover of \$20 million in relation to the occupation of, and approved works within Council's road reserve or public land, as approved in this consent. The Policy is to note, and provide protection for Northern Beaches Council, as an interested party and a copy of the Policy must be submitted to Council prior to commencement of the works. The Policy must be valid for the entire period that the works are being undertaken on public land.

Reason: To ensure the community is protected from the cost of any claim for damages arising from works on public land.

## CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

## 25. **Protection of Existing Street Trees**

All existing street trees in the vicinity of the works shall be retained during all construction stages and the street trees fronting the development sites shall be protected by tree protection fencing in accordance with Australian Standard 4687-2007 Temporary Fencing and Hoardings and in accordance with Section 4 of Australian Standard 4970-2009 Protection of Trees on Development Sites.

As a minimum, the tree protection fencing for street tree(s) fronting the development site shall consist of standard 2.4m panel length to four sides unless otherwise directed by an Arborist with minimum AQF Level 5 in arboriculture. All fencing shall be located to allow for unrestricted and safe pedestrian access upon the road verge.

DA2021/2567 Page 14 of 34



Reason: Street tree protection.

## 26. Tree and Vegetation Protection

- a) Existing trees and vegetation shall be retained and protected, including:
- i) all trees and vegetation within the site not approved for removal, excluding exempt trees and vegetation under the relevant planning instruments of legislation,
- ii) all trees and vegetation located on adjoining properties,
- iii) all road reserve trees and vegetation,
- iv) any exempt species tree(s) referred above in item i) that is removed at any time shall be replaced at a ratio of 1:1 with a locally native tree species.
- b) Tree protection shall be undertaken as follows:
- i) tree protection shall be in accordance with Australian Standard 4970-2009 Protection of Trees on Development Sites, including the provision of temporary fencing to protect existing trees within 5 metres of development,
- ii) existing ground levels shall be maintained within the tree protection zone of trees to be retained, unless authorised by an Arborist with minimum AQF Level 5 in arboriculture,
- iii) removal of existing tree roots at or >25mm ( $\emptyset$ ) diameter is not permitted without consultation with an Arborist with minimum AQF Level 5 in arboriculture,
- iv) no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained,
- v) structures are to bridge tree roots at or >25mm ( $\emptyset$ ) diameter unless directed by an Arborist with minimum AQF Level 5 in arboriculture on site,
- vi) excavation for stormwater lines and all other utility services is not permitted within the tree protection zone, without consultation with an Arborist with minimum AQF Level 5 in arboriculture including advice on root protection measures,
- vii) should either or all of v) or vi) occur during site establishment and construction works, an Arborist with minimum AQF Level 5 in arboriculture shall provide recommendations for tree protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist to the Principal Certifier,
- viii) any temporary access to, or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of Australian Standard 4970-2009 Protection of Trees on Development Sites,
- ix) tree pruning from within the site to enable approved works shall not exceed 10% of any tree canopy, and shall be in accordance with Australian Standard 4373-2007 Pruning of Amenity Trees, and should additional pruning be required an application to Council's Tree Services shall be submitted for approval or otherwise.

## The Principal Certifier must ensure that:

c) The activities listed in section 4.2 of Australian Standard 4970-2009 Protection of Trees on Development Sites, do not occur within the tree protection zone of any tree, and any temporary access to, or location of scaffolding within the tree protection zone of a protected tree, or any other tree to be retained on the site during the construction, is undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of that standard.

Reason: Tree and vegetation protection.

#### 27. Road Reserve

The applicant shall ensure the public footways and roadways adjacent to the site are maintained in a safe condition at all times during the course of the work.

Reason: Public safety.

DA2021/2567 Page 15 of 34



## 28. Implementation of Demolition Traffic Management Plan

All works and demolition activities are to be undertaken in accordance with the approved Demolition Traffic Management Plan (DTMP). All controls in the DTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the DTMP be impacted by surrounding major development not encompassed in the approved DTMP, the DTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved DTMP is to be kept onsite at all times and made available to the accredited certifier or Council on request.

Reason: To ensure compliance and Council's ability to modify the approved Construction Traffic Management Plan where it is deemed unsuitable during the course of the project.

#### 29. Implementation of Construction Traffic Management Plan

All works and construction activities are to be undertaken in accordance with the approved Construction Traffic Management Plan (CTMP). All controls in the CTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the CTMP be impacted by surrounding major development not encompassed in the approved CTMP, the CTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved CTMP is to be kept onsite at all times and made available to Council on request.

Reason: To ensure compliance of the developer/builder in adhering to the Construction Traffic Management procedures agreed and are held liable to the conditions of consent.

#### 30. Road reserve to remain serviceable

The applicant shall be responsible in ensuring that the road reserve remains in a serviceable state during the course of the demolition and building works.

Reason: To ensure public safety.

## 31. Removing, Handling and Disposing of Asbestos

Any asbestos material arising from the demolition process shall be removed and disposed of in accordance with the following requirements:

- Work Health and Safety Act;
- Work Health and Safety Regulation;
- Code of Practice for the Safe Removal of Asbestos [NOHSC:2002 (1998)];
- Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998);
- Clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005;
   and
- The demolition must be undertaken in accordance with Australian Standard AS2601 The Demolition of Structures.

Reason: For the protection of the environment and human health.

#### 32. Demolition Works - Asbestos

Demolition works must be carried out in compliance with WorkCover Short Guide to Working with Asbestos Cement and Australian Standard AS 2601 2001 The Demolition of Structures.

The site must be provided with a sign containing the words DANGER ASBESTOS REMOVAL

DA2021/2567 Page 16 of 34



IN PROGRESS measuring not less than 400 mm x 300 mm and be erected in a prominent visible position on the site. The sign is to be erected prior to demolition work commencing and is to remain in place until such time as all asbestos cement has been removed from the site and disposed to a lawful waste disposal facility.

All asbestos laden waste, including flat, corrugated or profiled asbestos cement sheets must be disposed of at a lawful waste disposal facility. Upon completion of tipping operations the applicant must lodge to the Principal Certifying Authority, all receipts issued by the receiving tip as evidence of proper disposal.

Adjoining property owners are to be given at least seven (7) days' notice in writing of the intention to disturb and remove asbestos from the development site.

Reason: To ensure the long term health of workers on site and occupants of the building is not put at risk unnecessarily.

## 33. Survey Certificate

A survey certificate prepared by a Registered Surveyor is to be provided demonstrating that the car parks, boundary fences and acoustic barriers are in accordance with the approved plans.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To demonstrate the proposal complies with the approved plans.

#### 34. Vehicle Crossings

The Applicant is to construct 3 vehicle crossing 3.5 metres wide in accordance with Northern Beaches Council Drawing No A4-3330/ Normal and the driveway levels application approval. An Authorised Vehicle Crossing Contractor shall construct the vehicle crossing and associated works within the road reserve in plain concrete. All redundant laybacks and crossings are to be restored to footpath/grass. Prior to the pouring of concrete, the vehicle crossing is to be inspected by Council and a satisfactory "Vehicle Crossing Inspection" card issued.

A copy of the vehicle crossing inspection form is to be submitted to the Principal Certifying Authority.

Reason: To facilitate suitable vehicular access to private property.

#### 35. Construction noise

All recommendations contained within the acoustic report by E-LAB Consulting, dated 5 April 2023 in regard to minimising construction noise shall be implemented during works.

Reason: To mimimise noise to adjacent receivers.

## 36. **Dust during works**

Dust dust to neighbouring residents and businesses and ensure any airborne substance is kept within the boundaries of the site

Measures may include but not be limited to:

Water sprays

DA2021/2567 Page 17 of 34



- Bunker storage
- Limiting size of stockpiles and covering stock piles
- Vertical barriers e.g. fencing with fine mesh attached

Reason: To minimise dust to neighbouring residents and businesses control measures including best practice, and in accordance with NSW Workplace Health and Safety Regulations and the Protection of the Environment Operations Act 1997, shall be implemented to minimise and avoid air pollution

# CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

#### 37. Landscape Completion

Landscaping is to be implemented in accordance with the approved Landscape Plans, and inclusive of the following conditions:

- i) all tree planting shall be pre-ordered for delivery at a minimum planting size of 200 litres, and shall meet the requirements of Natspec Specifying Trees,
- ii) all tree planting shall contain clear trunk heights of 1.8 metres, a caliper minimum of 60mm, and a height of at least 3.0 metres,
- iii) all trees shall be planted into a prepared planting hole 1m x 1m x 600mm depth within the garden beds, backfilled with a sandy loam mix or approved similar, mulched to 75mm depth minimum and maintained, and watered until established, and shall be located at least 3.0 metres from buildings, and at least 1.5 metres from common boundaries,
- iv) mass planting shall be installed at minimum 1 metre intervals for shrubs of a minimum 200mm container size at planting or as otherwise scheduled if greater in size, and at 4 plants per metre square for groundcovers of a minimum 140mm container size at planting or as otherwise scheduled if greater in size, and shall be in a garden bed prepared with a suitable free draining soil mix and minimum 50mm depth of mulch,
- v) all proposed tree planting shall be positioned in locations to minimise significant impacts on neighbours in terms of blocking winter sunlight to living rooms, private open space and where the proposed location of trees may otherwise be positioned to minimise any significant loss of views from neighbouring and nearby dwellings and from public spaces.

Prior to the issue of an Occupation Certificate, details (from a landscape architect or landscape designer) shall be submitted to the Principal Certifier, certifying that the landscape works have been completed in accordance with any conditions of consent.

Reason: Environmental amenity.

## 38. Condition of Retained Vegetation - Project Arborist

Prior to the issue of an Occupation Certificate, a report prepared by the project arborist shall be submitted to the Principal Certifier, assessing the health and impact on all existing trees required to be retained, including the following information:

- i) compliance to any Arborist recommendations for tree protection generally and during excavation works.
- ii) extent of damage sustained by vegetation as a result of the construction works,
- iii) any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: Tree protection

#### 39. Stormwater Disposal

DA2021/2567 Page 18 of 34



The stormwater drainage and on site detention works shall be certified as compliant with the approved Construction certificate drawings and Councils water management policy for development by the design engineer. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater arising from the development.

#### 40. Post-Construction Road Reserve Dilapidation Report (Major Development)

The applicant must bear the cost of all restoration works to Council's road, footpath and drainage assets damaged during the course of this development.

A Post Construction Dilapidation Report after the completion of all building works is to demonstrate that there is no damage to Council infrastructure prior to the refund of any security deposits.

Reason: To ensure security against possible damage to Council property.

41. **Positive Covenant and Restriction as to User for On-site Stormwater Disposal Structures**The Applicant shall lodge the Legal Documents Authorisation Application with the original completed request forms (NSW Land Registry standard forms 13PC and/or 13RPA) to Council and a copy of the Works-as-Executed plan (details overdrawn on a copy of the approved drainage plan), hydraulic engineers' certification.

The Applicant shall create on the Title a restriction on the use of land and a positive covenant in respect to the ongoing maintenance and restriction of the on-site stormwater disposal structures within this development consent. The terms of the positive covenant and restriction are to be prepared to Council's standard requirements at the applicant's expense and endorsed by Northern Beaches Council's delegate prior to lodgement with the NSW Land Registry Services. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction for on-site storm water detention as to user is to be submitted.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure the on-site stormwater disposal system is maintained to an appropriate operational standard.

## 42. Environmental Reports Certification

Written certification from a suitably qualified person(s) shall submit to the Principal Certifying Authority and Northern Beaches Council, stating that all the works/methods/procedures/control and measures/recommendations approved by Council in the following reports have been completed:

- (a) Noise and Vibration Impact Assessment Project Reference P00054 Rev 006, dated 05 April 2023, prepared by E-LAB Consulting
- (b) Operational Plan of Management dated 06 April 2023, prepared by St Augustine's College.
- (c) Traffic and Parking Management Plan Ref N190000 Issue G dated 6 April 2023, prepared by Stantec.
- (d) Preliminary Arboricultural Impact Assessment Report, Ref No 11121, dated 14.07.2021, prepared by Rain Tree Consulting.

DA2021/2567 Page 19 of 34



- (e) Transport Impact Assessment, Ref N19000 Issue C, dated 12.12.2021, prepared by Stantec.
- (f) Flood Impact Assessment Rev 1, dated 28.07.2022, prepared by Core Project Consultants.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of a the Final Occupation Certificate.

Reason: To ensure compliance with standards.

#### 43. Acoustic and operational compliance

Prior to the issues of an Occupation Certificate the acoustic recommendations contained the Noise and Vibration Impact Assessment Project Reference P00054, Rev 06, dated 05 April 2023, prepared by E-LAB Consulting and the Operational Plan of Management dated 06 April 2023, prepared by St Augustine's College shall be implemented.

Reason: To achieve acoustic compliance and reduce nuisance to residential receivers.

## 44. Removal of All Temporary Structures/Material and Construction Rubbish

Once construction has been completed all silt and sediment fences, silt, rubbish, building debris, straw bales and temporary fences are to be removed from the site.

Details demonstrating compliance are to be submitted to the Principal Certifier prior to the issue of an Occupation Certificate.

Reason: To ensure bushland management.

#### 45. Waste Management Confirmation

Prior to the issue of an Occupation Certificate, evidence / documentation must be submitted to the Principal Certifier that all waste material from the development site arising from demolition and/or construction works has been appropriately recycled, reused or disposed of generally in accordance with the approved Waste Management Plan.

Reason: To ensure demolition and construction waste is recycled or reused and to limit landfill.

## 46. **Sydney Water**

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation.

Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site www.sydneywater.com.au <a href="http://www.sydneywater.com.au">http://www.sydneywater.com.au</a> then refer to "Water Servicing Coordinator" under "Developing Your Land" or telephone 13 20 92 for assistance.

Following application a "Notice of Requirements" will advise of water and sewer infrastructure to be built and charges to be paid. Please make early contact with the Co-ordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

## ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

DA2021/2567 Page 20 of 34



## 47. Landscape Maintenance

If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components. Trees, shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilised as required at the time of planting.

If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan and any conditions of consent.

Reason: To maintain local environmental amenity.

#### 48. Noise - carparks

Section 6.1 of the Noise and Vibration Impact Assessment, Project P00054, Rev 06 dated 05 April 2023 prepared by E-LAB Consulting, which details carpark mitigation measures.

All other recommendations contained within Section 6.1 of the acoustic report with regard ongoing use of the carparking areas shall be implemented at all times.

Reason: To avoid future noise nuisances to residential receivers.

## 49. Hours of use of car parks

The use of the car parks are restricted to the following hours:

- (a) Alfred / Gulliver Street car park Base hours 7:00am and 6:00pm Monday to Friday and between 6:00pm and 10pm for Special Events as listed in the final approved OPM. The use of the car park is restricted to staff only.
- (b) 60 Federal Parade Base hours 6:30am and 6:00pm Monday to Friday and between 6:00pm and 10:00pm for Special Events as listed on the final approved OPM. The use of the car park is restricted to staff only.
- (c) Gulliver Street Base hours 6:30am and 6:00pm Monday to Friday and between 6:00pm and 10pm for Special Events as listed in the final approved OPM. The car park is restricted to staff and visitors.

Reason: To ensure that amenity of the surrounding locality is maintained.

## 50. Maximum Number of Student Enrolments - Operational

The maximum number of student enrollments for the entire St Augustine's College is to be restricted to 1,600 students, subject to compliance with Condition 3. There are to be strictly no increases beyond this maximum number of students without obtaining further development consent.

Furthermore, if the two new carparks are not constructed and made fully operational, as required by Condition 3, the maximum number of students will remain 1200, approved under DA2013/1336.

Reason: To ensure the capacity of the College/School is restricted to a set number which accords with the provision of carparking, limits the impacts on the surrounding road network and protects the amenity or surrounding residential properties.

## 51. Peer Review of Traffic Parking Management Plan

Parking impacts relating to school operations are to be reviewed annually for the first two years

DA2021/2567 Page 21 of 34



of the consent's operation by an independent traffic consultant at the applicant's expense. This is to evaluate the success of the Traffic Parking and Management Plan (TPMP). The peer review report, which shall include a review of on-street parking occupancies in streets within a 400m walking catchment of the school, shall be submitted to Council's Transport Network Manager annually for review.

Reason: To minimise parking impacts.

#### 52. Parking Enclosure

No parking spaces, or access thereto, shall be constrained or enclosed by any form of structure such as fencing, cages, walls, storage space, or the like, without prior consent from Council.

Reason: To ensure accessibility is maintained.

## 53. Stacked Parking Spaces

Stacked parking spaces are to be assigned to staff who will arrive early and leave late.

Reason: To minimize conflicts regarding parking areas.

## 54. Lighting

External lighting within the College campus shall comply with the following:

- (a) All bollard lighting is to be non-glaring and filtered to direct light directed downwards to comply with Warringah DCP Part D12.
- (b) Lighting on the main campus is to be sensor lighting on timers and operate from 5.00pm 10.00pm.
- (c) All outdoor lighting is to be designed and positioned to minimise any detrimental impact upon the amenity of other premises and adjacent dwellings and the outdoor lighting is to comply with the relevant provisions of Australian Standard 1158.3:2020 Pedestrian area (Category P) lighting Performance and design requirements and Australian Standard 4282:2019 Control of the obtrusive effects of outdoor lighting.

Reason: To minimise light spill on neighbouring residents while ensuring the safety and security of students and staff within the College campus.

## 55. Management of Federal Parade drop off / pick up

A staff member shall be allocated to manage students using of the Federal Parade drop off and pick up zone and/or crossing Federal Parade.

Reason: To protect the residential amenity of the surrounding area.

## 56. Amendment of Traffic Parking Management Plan

The TPMP shall be amended to reflect that:

- A staff member shall be allocated to manage students and drop off/pick up activity at the Federal Parade drop off and pick up zone and/or crossing Federal Parade.
- Appropriated trained RMS authorised traffic controllers will be used to manage student and driver behaviour including managing traffic congestion at the Gulliver Street, Federal

DA2021/2567 Page 22 of 34



Parade and Alfred Road drop off and pick up zones.

Reason: To ensure the school operation management measures are consistent between all documents and up-to-date in order to protect the residential amenity of the surrounding area.

#### 57. Acoustic Review

Within 60 days of the school being operated to maximum student capacity (1600 students) an acoustic review being carried out to determine whether findings, assumptions and recommendations contained within the Acoustic Assessment P00054, Rev 06, dated 5 April 2023 by E-LAB Consulting are still accurate. Any necessary actions taken to comply with original findings, and avoid any public nuisance to residential receivers as a result of the review, shall be implemented within a further 30 days and assessments reported to Council.

The acoustic review shall include but not be limited to:

- a) Morning oval use and training
- b) PA system (position, volume, frequency of use)
- c) Band practice
- d) Carpark noise including boom gates, and
- e) Open areas student noise

Reason: To protect neighbouring amenity

#### 58. PA System

The use of the PA system, where audible to adjoining residential receivers, is to be restricted to general school broadcasts necessary for the day to day operation of the school and shall not include broadcasts such as playing amplified music or the like.

Reason: To protect neighbouring amenity.

DA2021/2567 Page 23 of 34



# Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application must be lodged on the NSW Planning portal within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

NOTE: A fee will apply for any request to review the determination.

## Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

Signed On behalf of the Consent Authority

Name Daniel Milliken, Manager Development Assessments

Date 12/05/2023


DA2021/2567 Page 24 of 34



#### **GENERAL ADVICE**

# Advisory Notes (General)

#### Where are you in the development process?

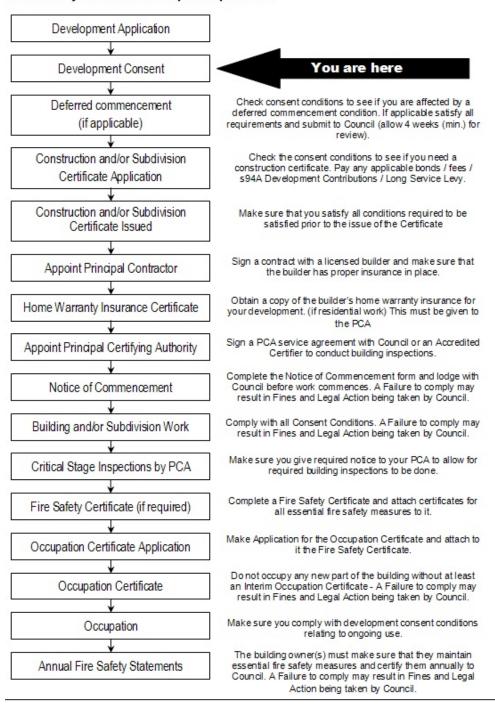

Note: The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

DA2021/2567 Page 25 of 34



## **Building Certification**

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

#### **Certification Services**

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site www.northernbeaches.nsw.gov.au or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

## **Charges Associated with the Development Consent**

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

### Bonds are released after:

- 1. 'Final Occupation Certificate' has been received by Council; and
- 2. Final inspection by a Council Officer where:
  - o the development is complete
  - damage has not been caused to council assets during the works
  - o conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

## **Acceptable Form of Security Bonds**

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

#### Modifications to the consent

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

DA2021/2567 Page 26 of 34



carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

#### Other Matters not detailed within the Notice of Determination

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

#### Dial Before You Dig

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at www.1100.com.au or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

#### **Telecommunications Act 1997 (Commonwealth)**

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

DA2021/2567 Page 27 of 34



to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

#### Model

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

#### Trade waste agreement

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

#### Waste collection

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

## **Aboriginal Heritage**

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

#### **On-Site Sewage Management System**

This approval does not authorise the installation or operation of a new or modification of an existing onsite wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

#### **Cost of Works**

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

## Relocation of stormwater drainage

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

## Tree preservation

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

#### Storage bins on footpath and roadway

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

DA2021/2567 Page 28 of 34



#### **Protection of Public Places**

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
- (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

## **Road Opening Permit**

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

#### **Special Permits**

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

• Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

DA2021/2567 Page 29 of 34



Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone.

Other permits may include out of construction hours permits.

#### Licensing requirements for removal of bonded asbestos

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

#### **Pool Access**

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

#### Dewatering

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

## **Requirement to Notify about New Contamination Evidence**

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

## Flood Evacuation Plan

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

## **Utility Service Requirements**

DA2021/2567 Page 30 of 34



Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

#### **Plant & Equipment Kept Within Site**

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

## Lighting

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

#### Silt and Sediment Control

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

**Maintenance of Sediment and Erosion Control** Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

#### **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

## **Dividing Fences Act 1991**

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

#### OTHER MATTERS

DA2021/2567 Page 31 of 34



#### **Child Care Centres**

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

#### **Disability Access**

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

#### **Food Premises**

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at www.foodnotify.nsw.gov.au or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

#### Wheel washing facility

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

## **Monitoring State of Roadways**

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

## **Storage of Dangerous Goods**

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

## Storage of Flammable and Combustible Liquids

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

#### **Noise and Vibration**

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

## Hairdressing/Beauty Treatment/ Skin penetration Requirements

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.

iv) The floor coverings must be smooth and impervious.

DA2021/2567 Page 32 of 34



- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

## **Food Premises Construction Requirements**

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

#### Legionella Control

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

## Pool/Spa Safety

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

## **Grease Trap**

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

## Bandicoot/Penguin

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as
  rubbish bins without lids or pet food bowls, as these animals present a significant threat to Longnosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

DA2021/2567 Page 33 of 34



- Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.
- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.

DA2021/2567 Page 34 of 34