

Over View - Main Pedestrian Entry



ARTERRA DESIGN PTY LTD

ABN 40 069 552 610

SUITE 602 / 51 RAWSON STREET,

EPPING, NSW 2121

P 02 9957 2466 **F** 02 9957 3977 **W** ARTERRA.COM.AU

PROJECT & CLIENT

Warringah Mall Stage 2

Stage 2

Lot 100, DP1015283, 145 Old Pitwater Rd Brookvale NSW 2100

Prepared for

DRAWING INDEX

ART-LSD-06

ART-LSD-07

ART-LSD-08

Scentre Design & Construction Pty Ltd

Landscape Concept Plans

Drawing No:Drawing NameCurrent Rev.ART-LSD-00Cover SheetAART-LSD-01Overall Landscape Plan - Ground LevelAART-LSD-02Northern Entry Landscape PlanAART-LSD-03Southern Entry Landscape PlanAART-LSD-04Typical SectionsAART-LSD-05Typical SectionsA

Planting Palette

Character Imagery


Perspective Imagery

DATE:

ISSUE:

12 July 2018

FOR DEVELOPMENT APPLICATION

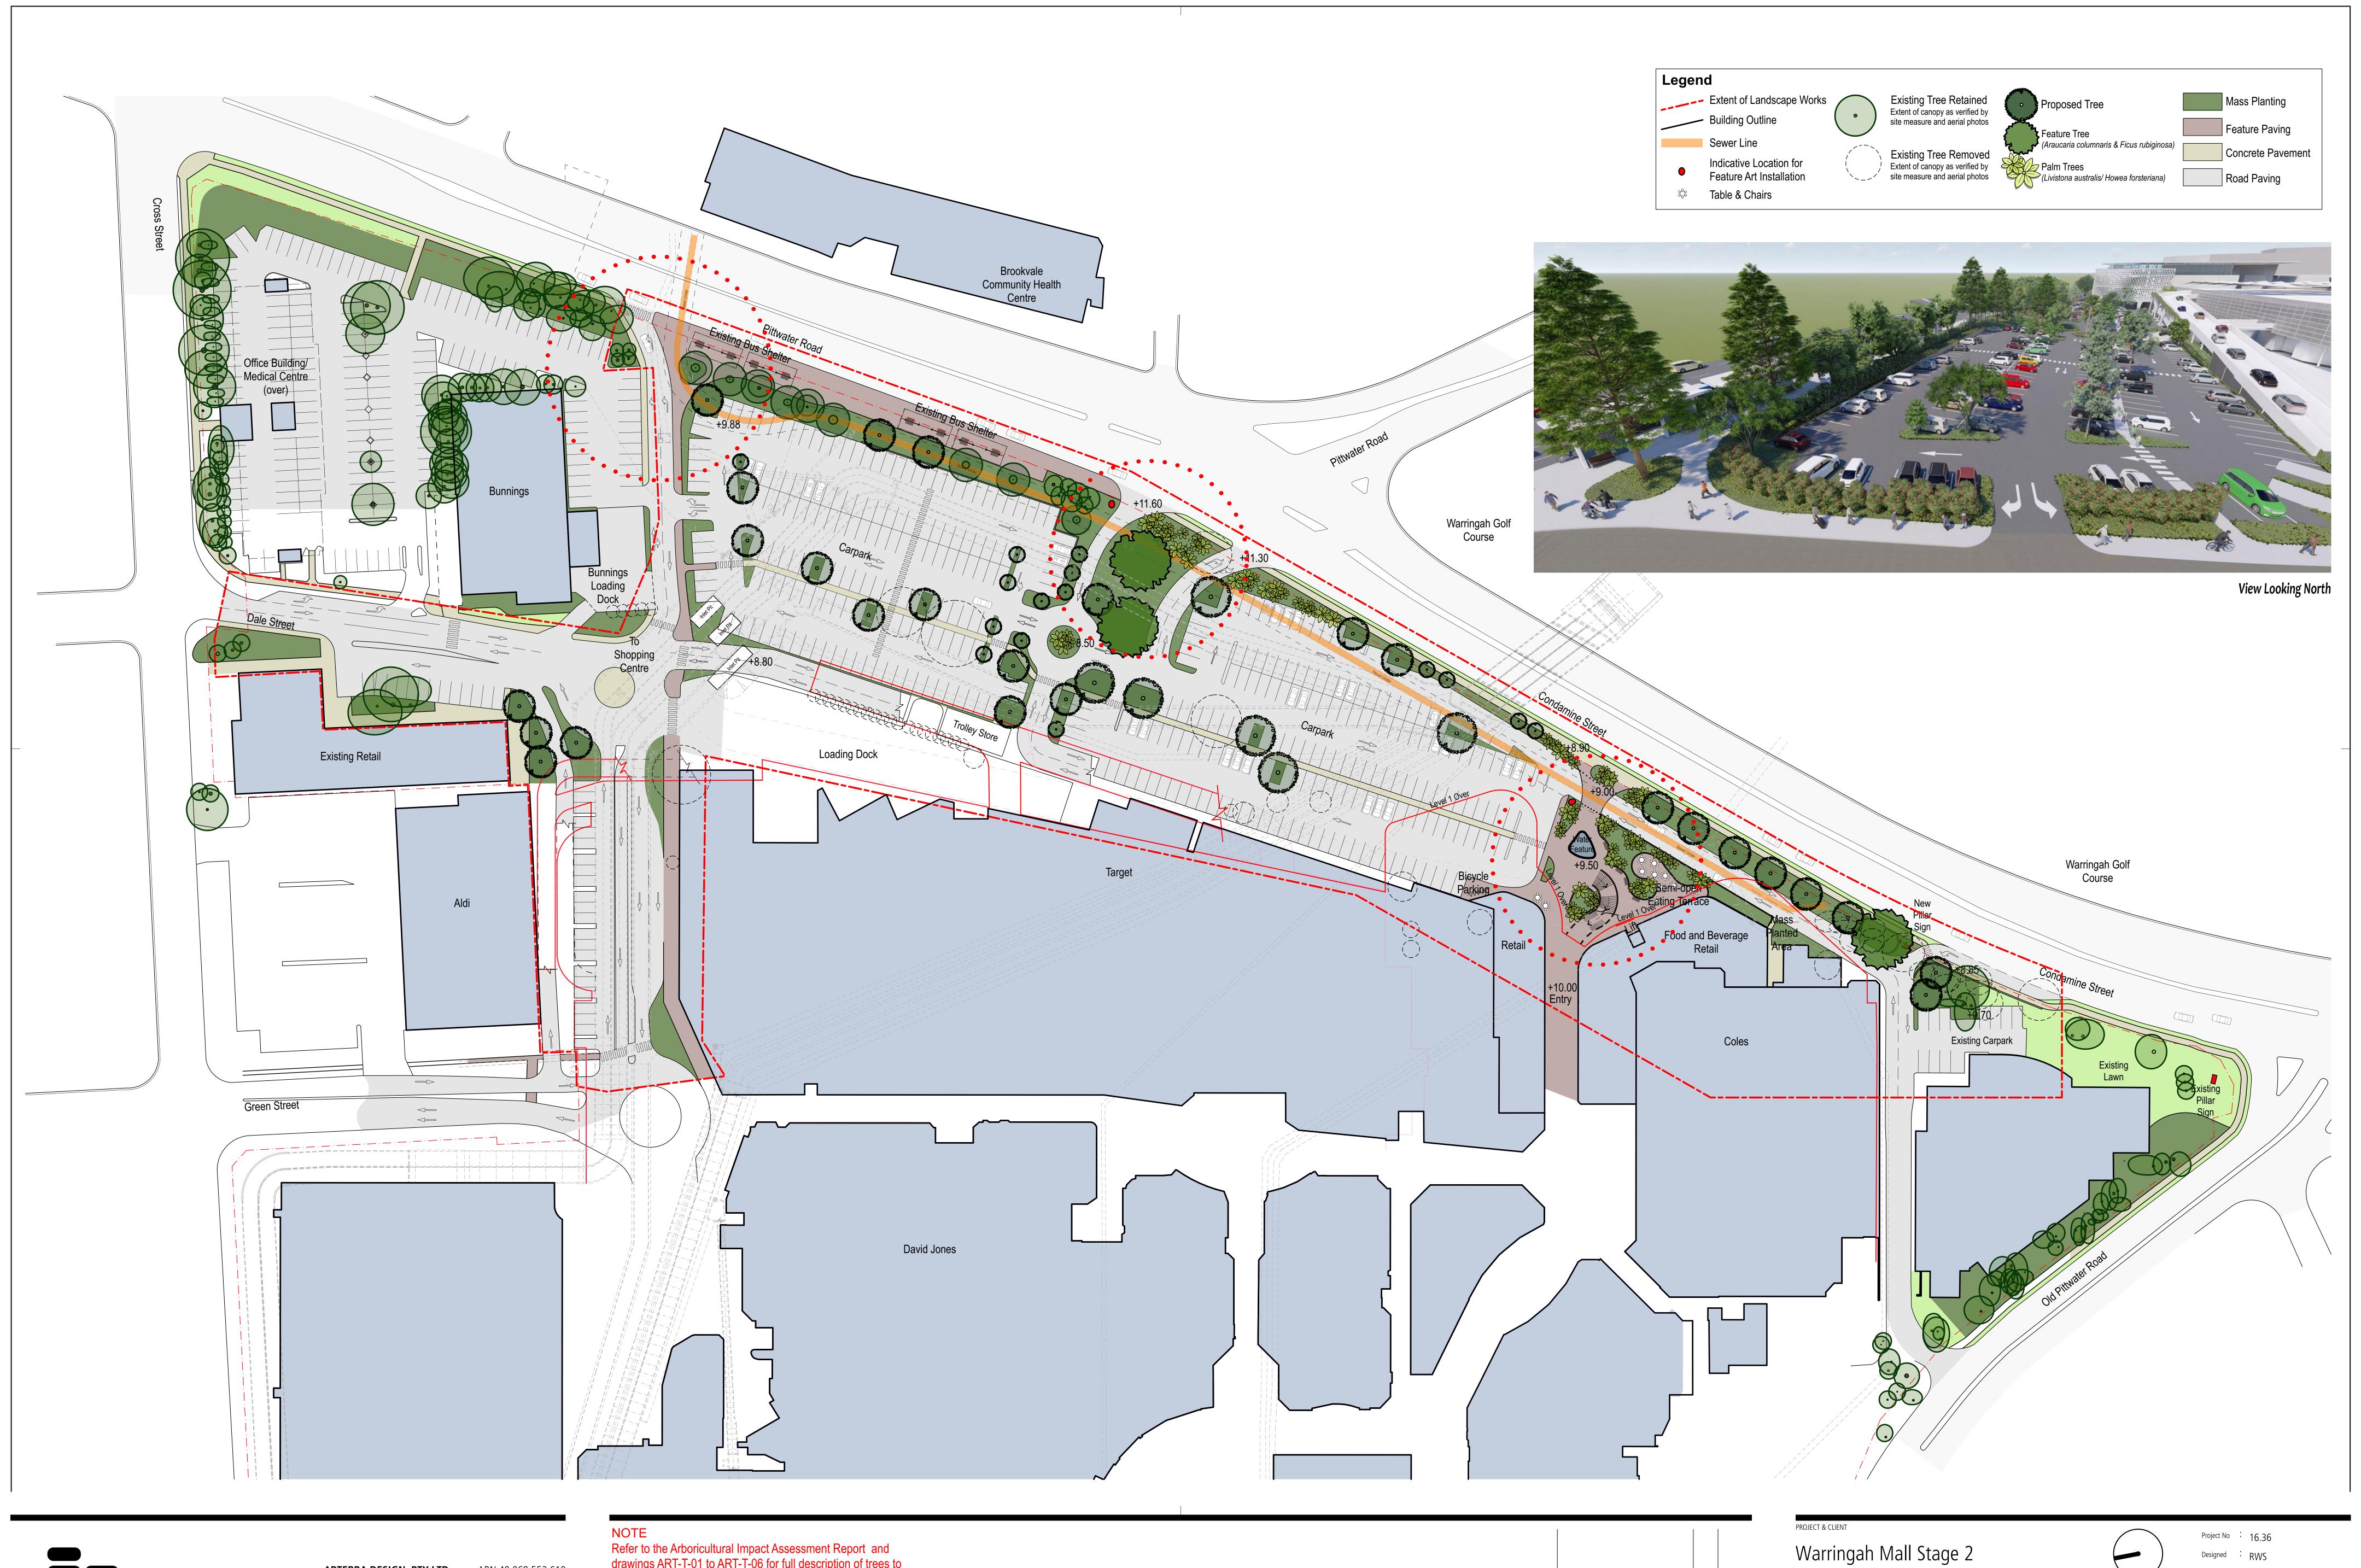






ARTERRA DESIGN PTY LTD ABN 40 069 552 610 **P** 02 9957 2466 **F** 02 9957 3977 **W** ARTERRA.COM.AU

NOTE
Refer to the Arboricultural Impact Assessment Report and drawings ART-T-01 to ART-T-06 for full description of trees to be retained and removed. A For Development Application
REVISION DESCRIPTION

Drawn : RWS/CB Scentre Design & Construction Pty Ltd DRAWING NUMBER Overall Landscape Plan - Ground Level ART-LSD-01

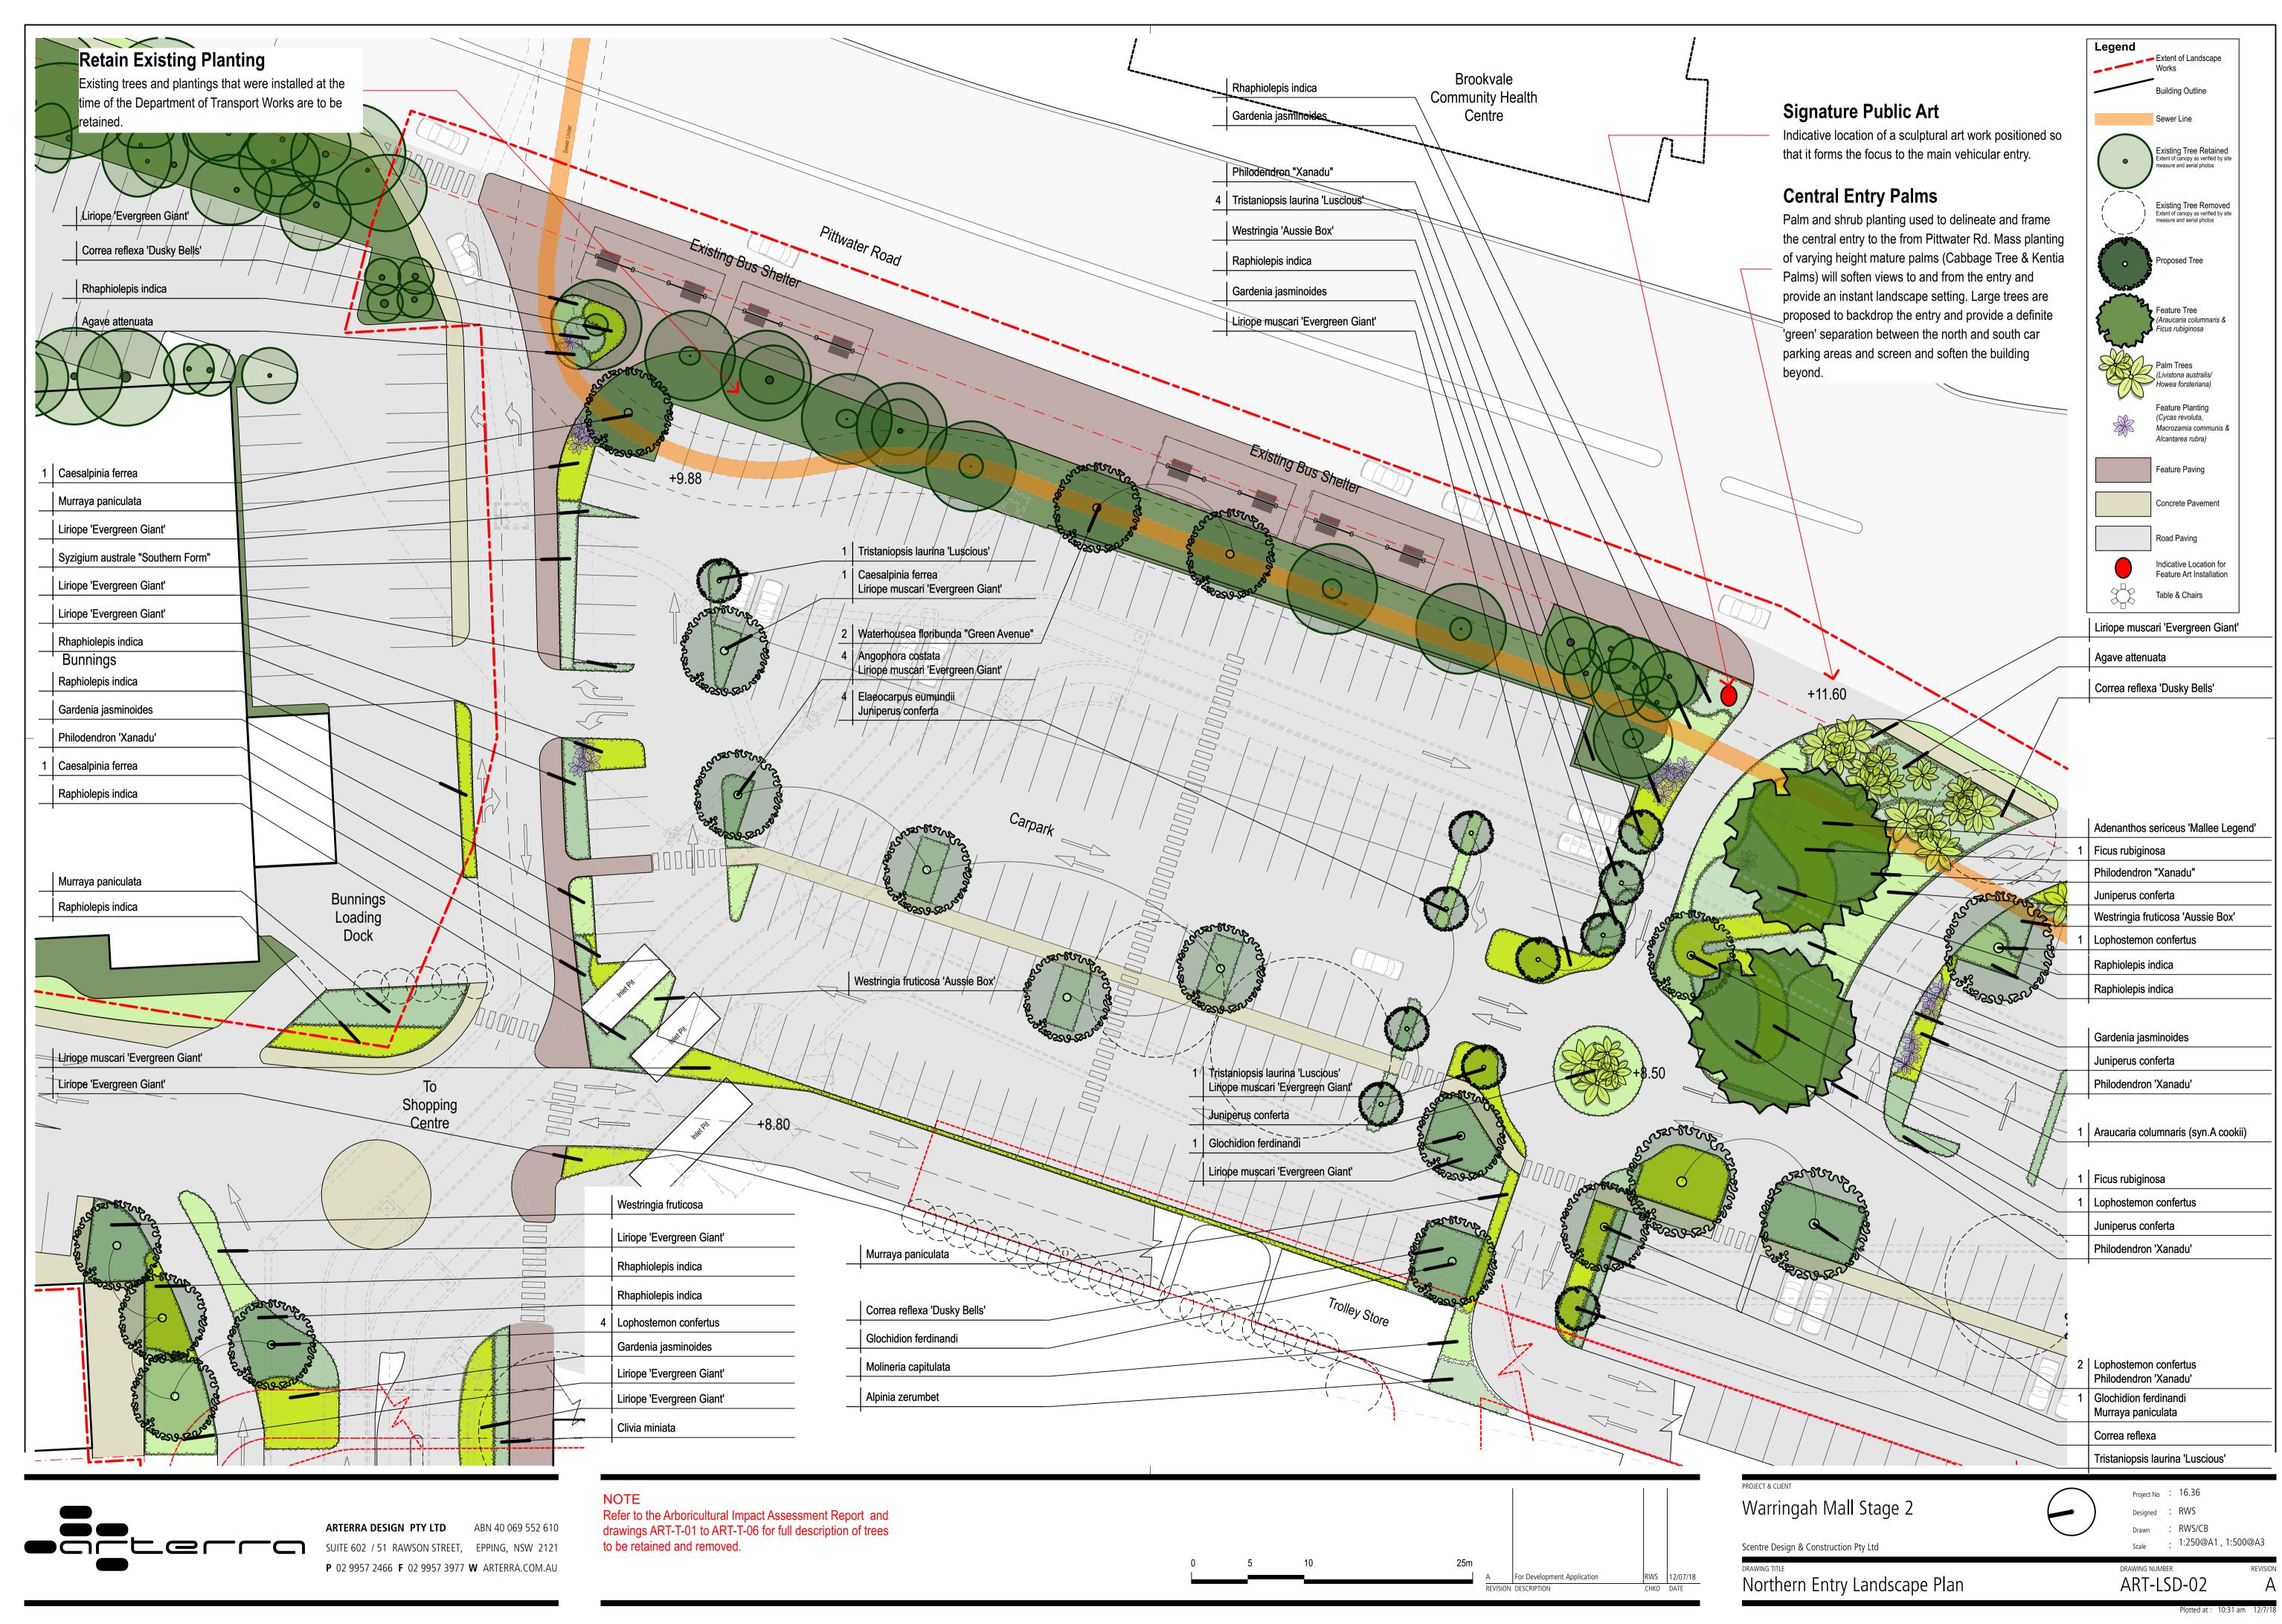

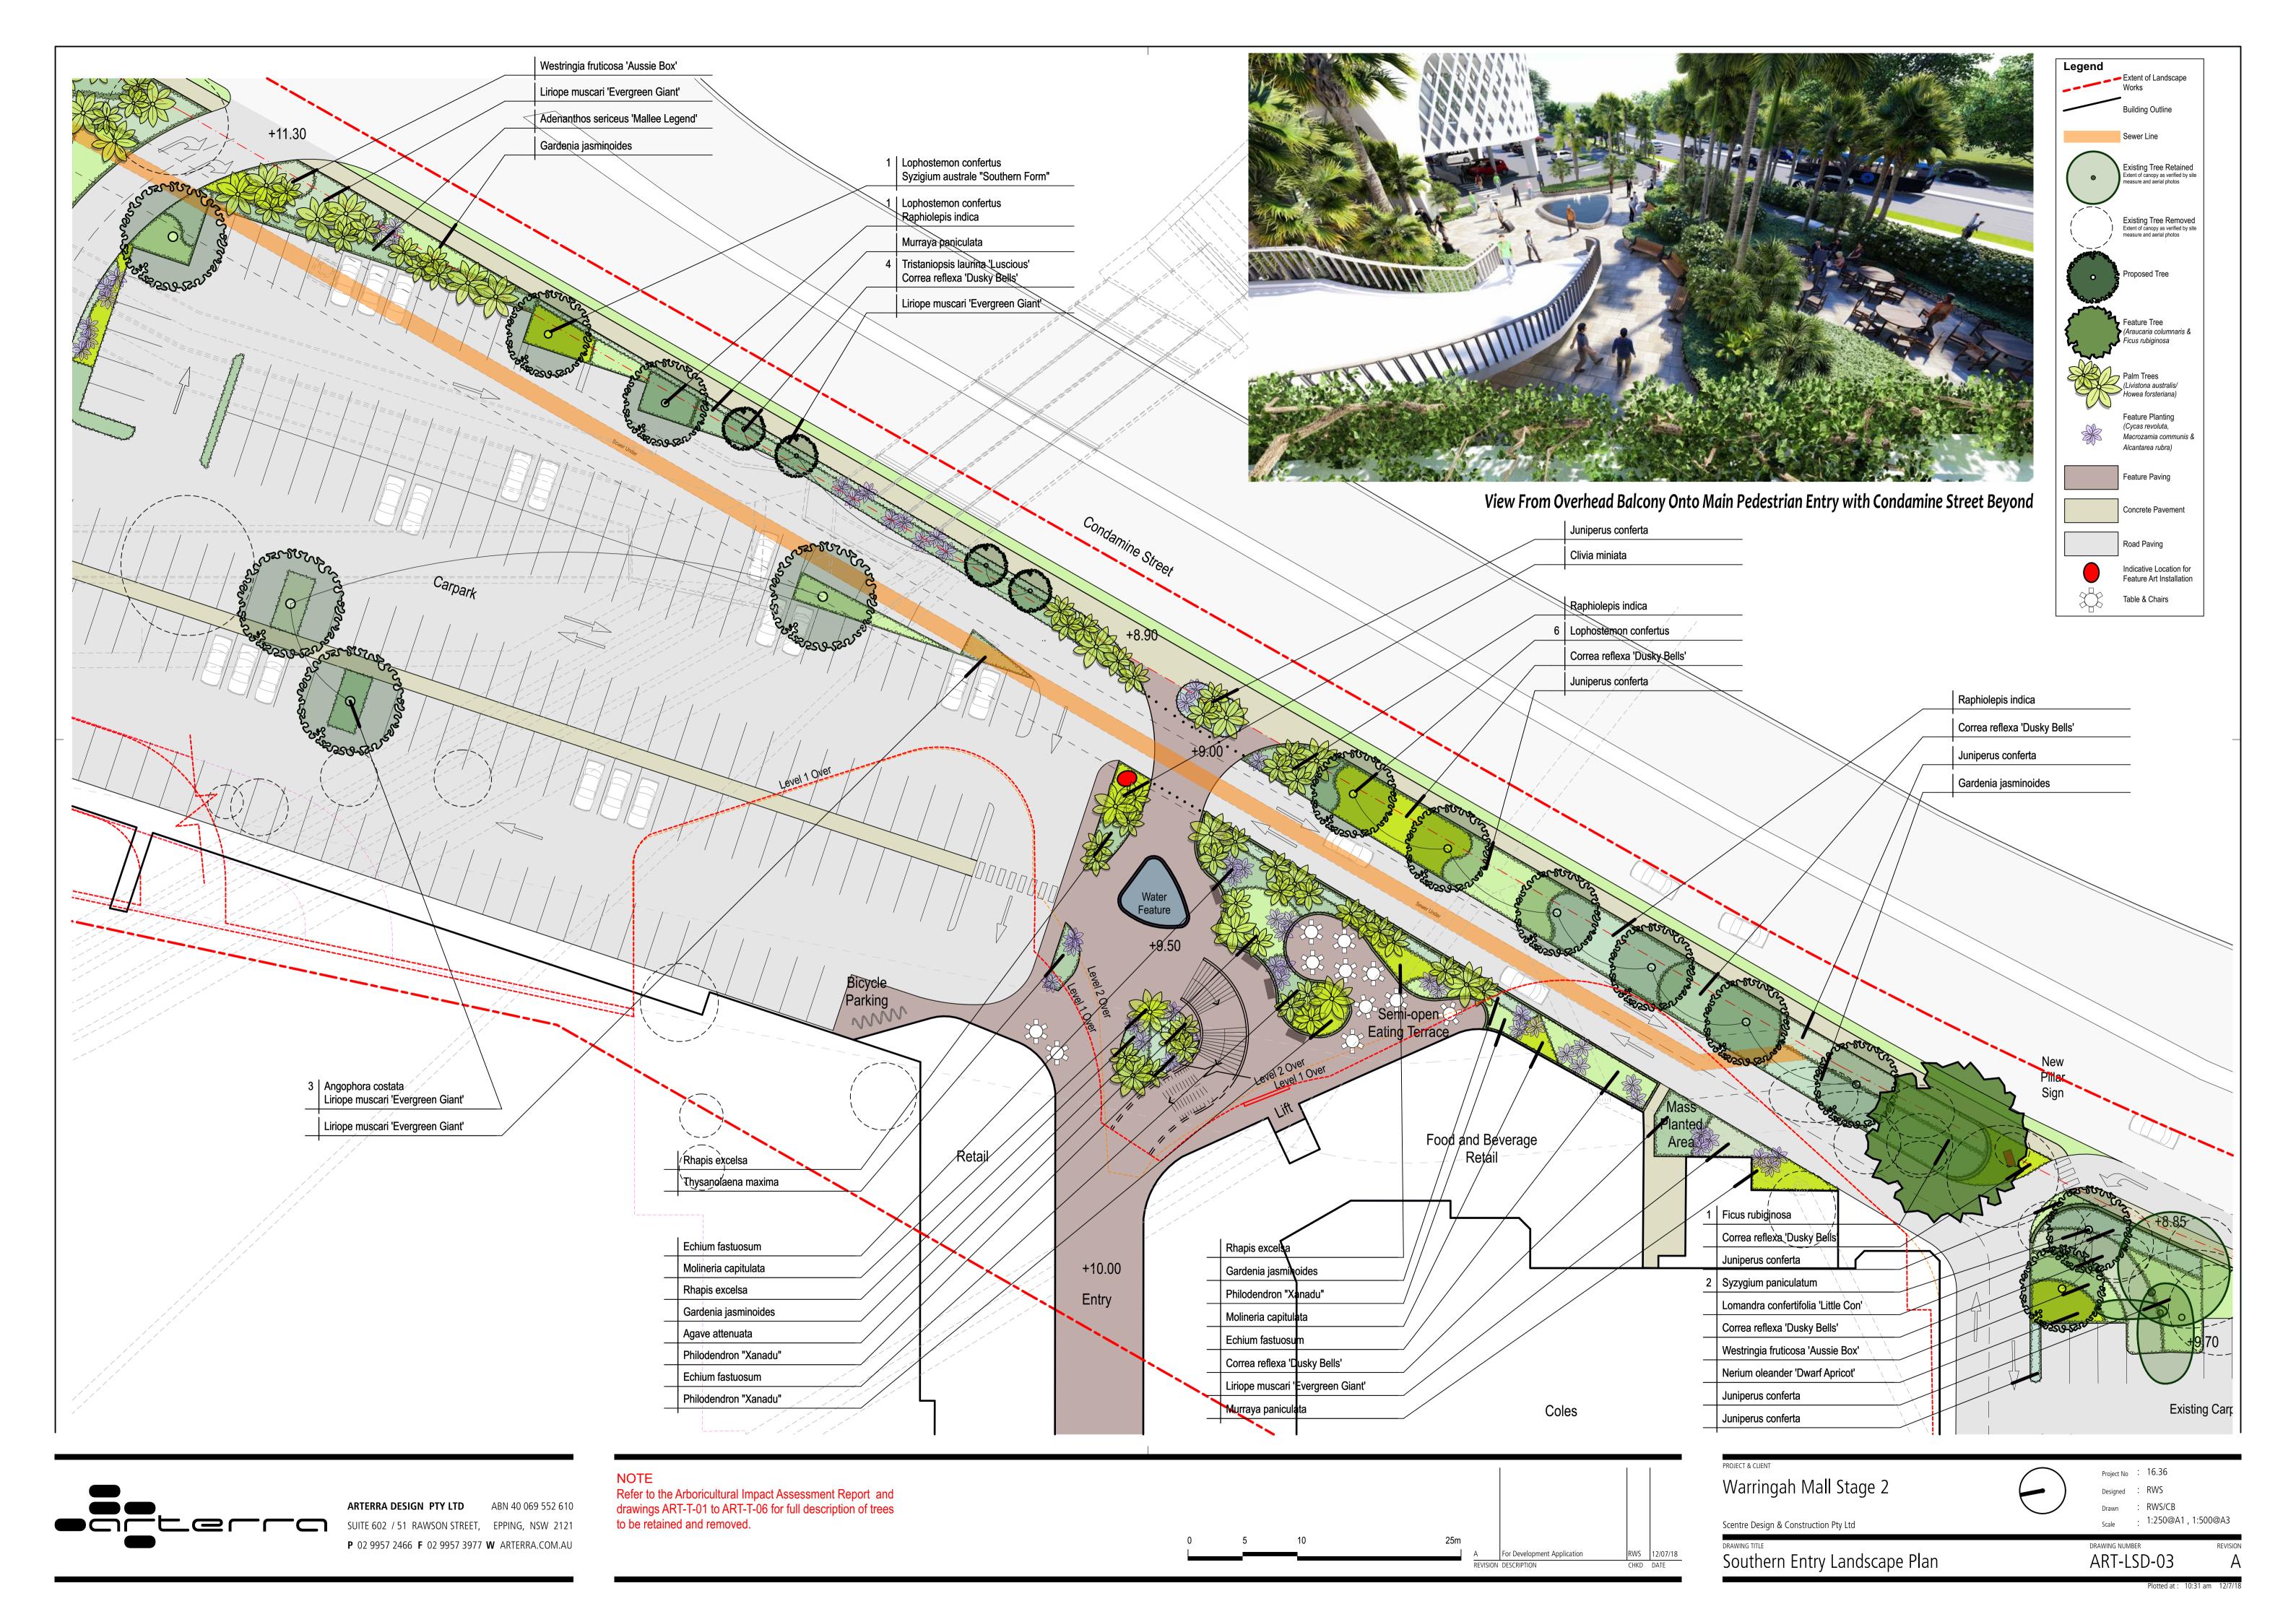

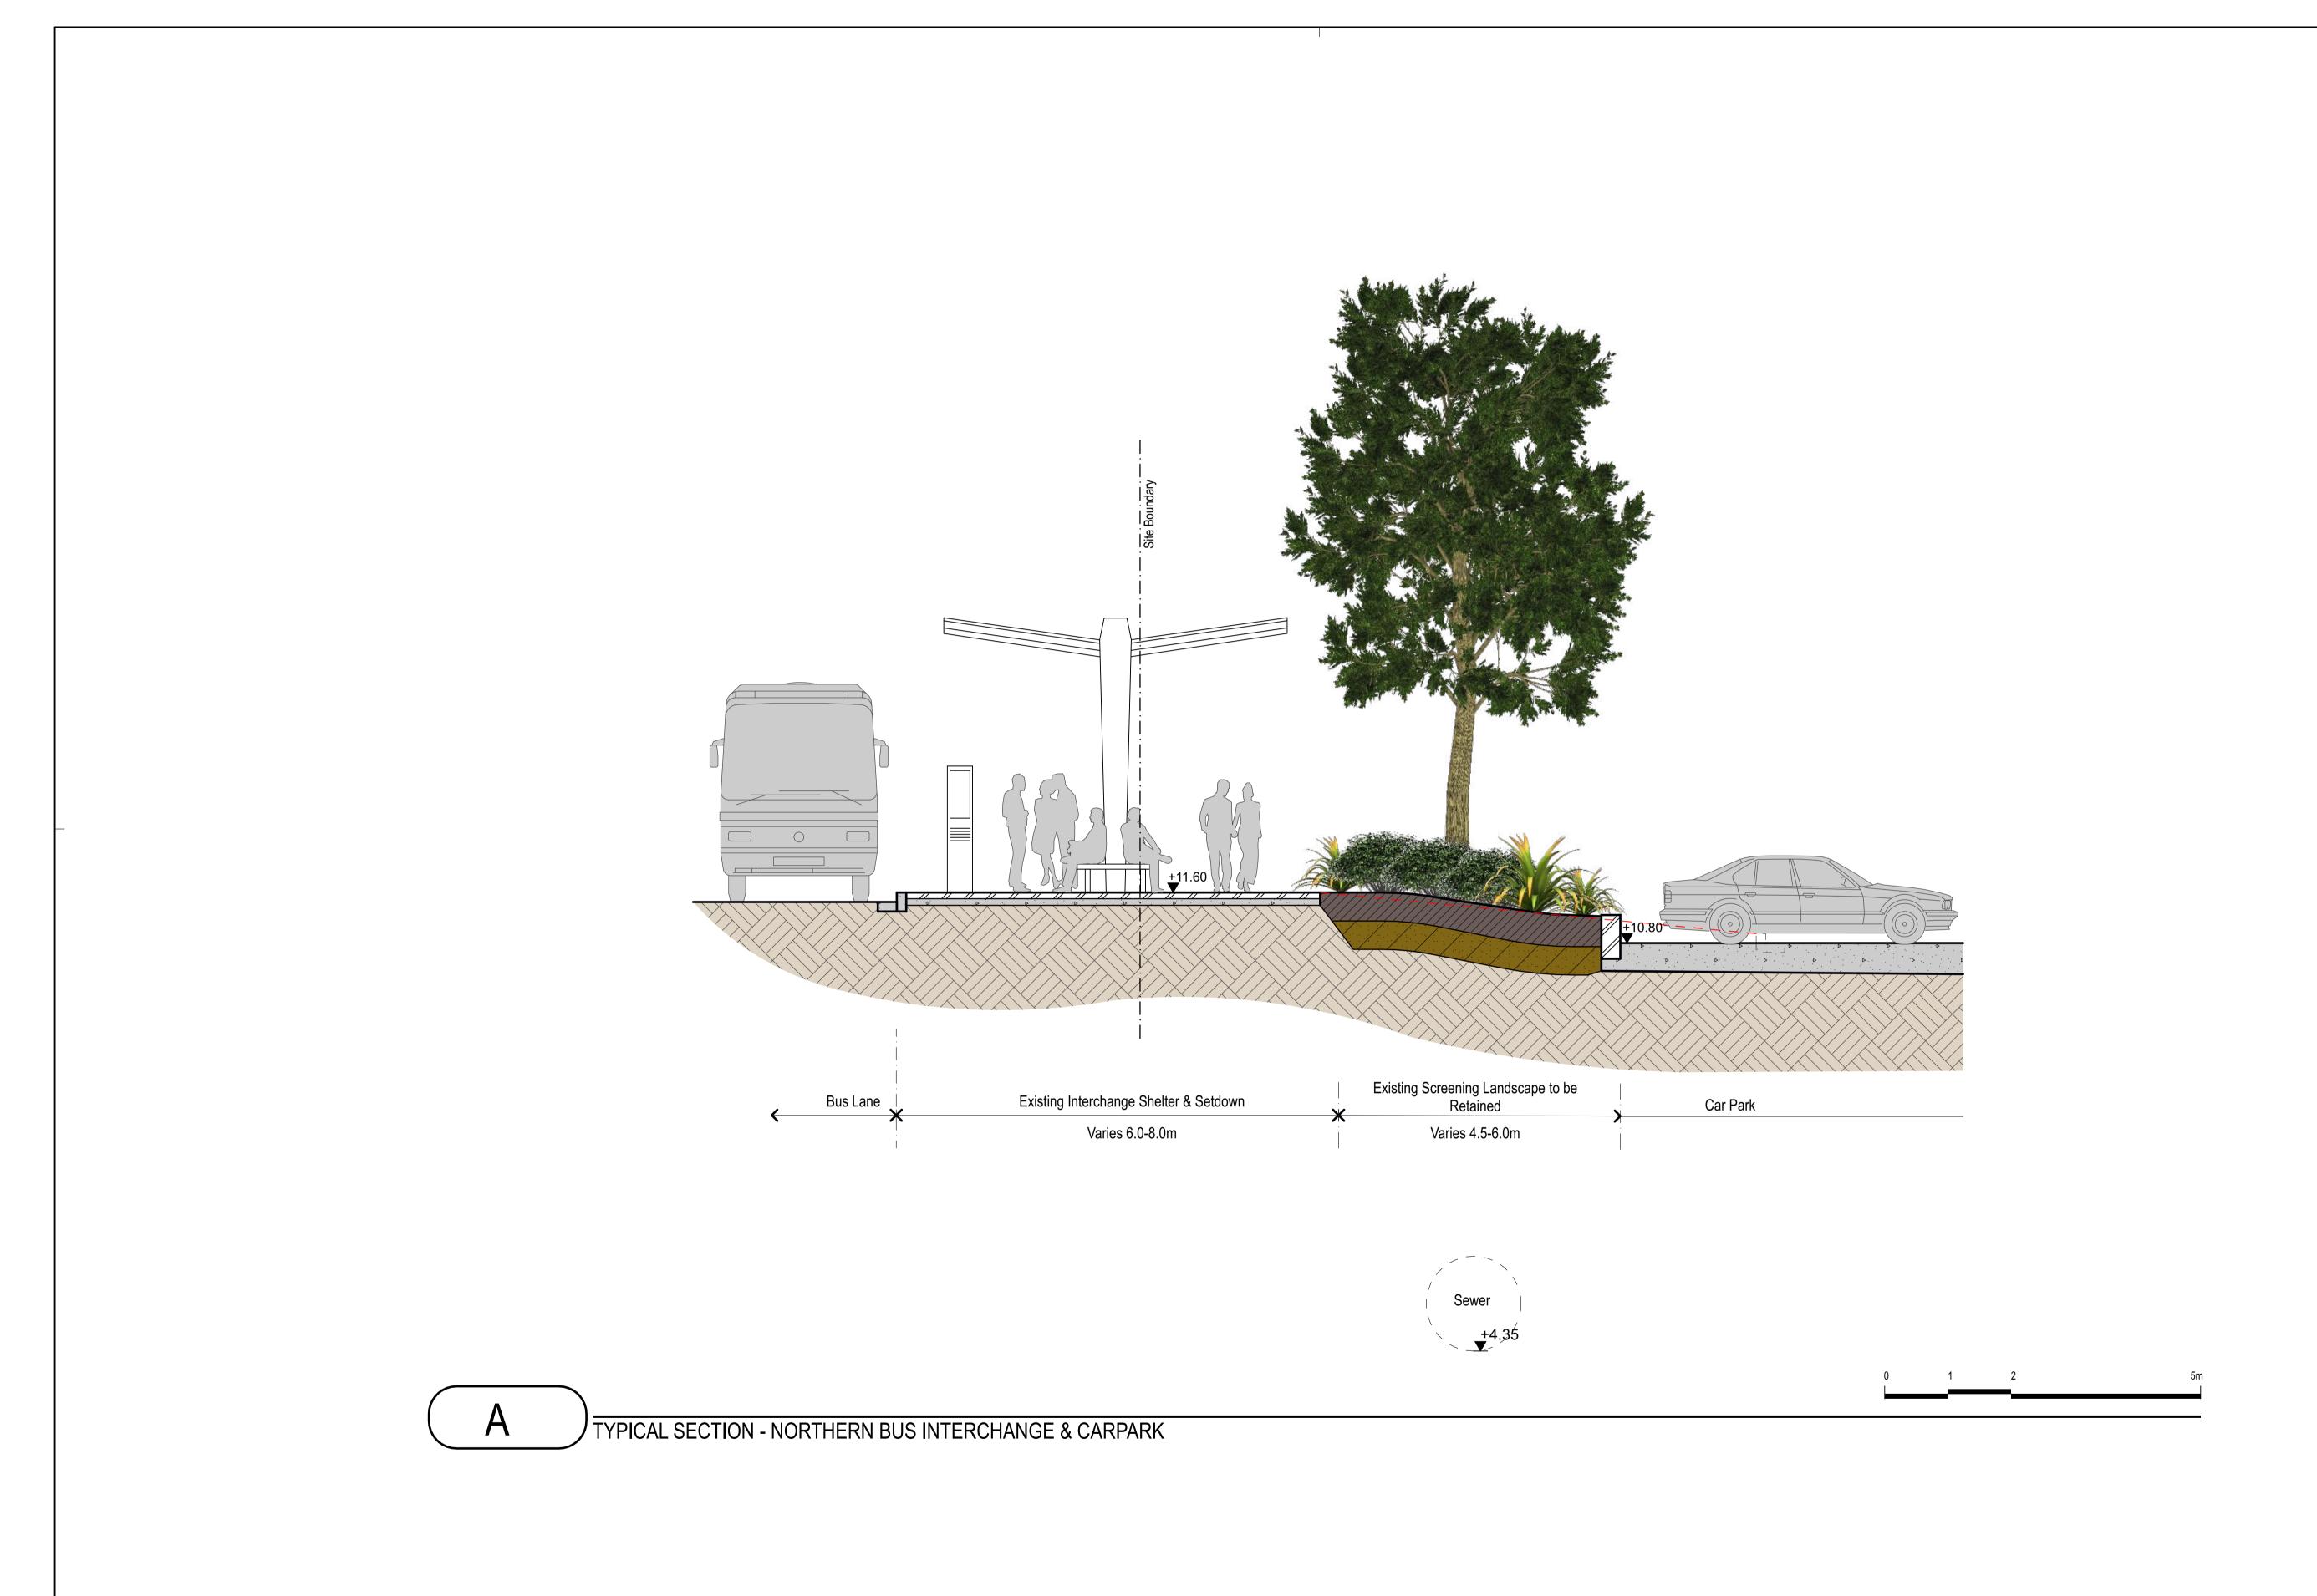

SUITE 602 / 51 RAWSON STREET, EPPING, NSW 2121


ARTERRA DESIGN PTY LTD ABN 40 069 552 610 **P** 02 9957 2466 **F** 02 9957 3977 **W** ARTERRA.COM.AU

Note:

Architectural representations are indicative only for scale and massing only. Information provided by Scentre Group should be referred in preference for all architectural elements.

A For Development Application
REVISION DESCRIPTION


PROJECT & CLIENT	16.26	
Warringah Mall Stage 2	Project No : 16.36 Designed : RWS Drawn : RWS/CB	
Scentre Design & Construction Pty Ltd	Scale : As Shown	
Typical Sections	ART-LSD-04	REVISI

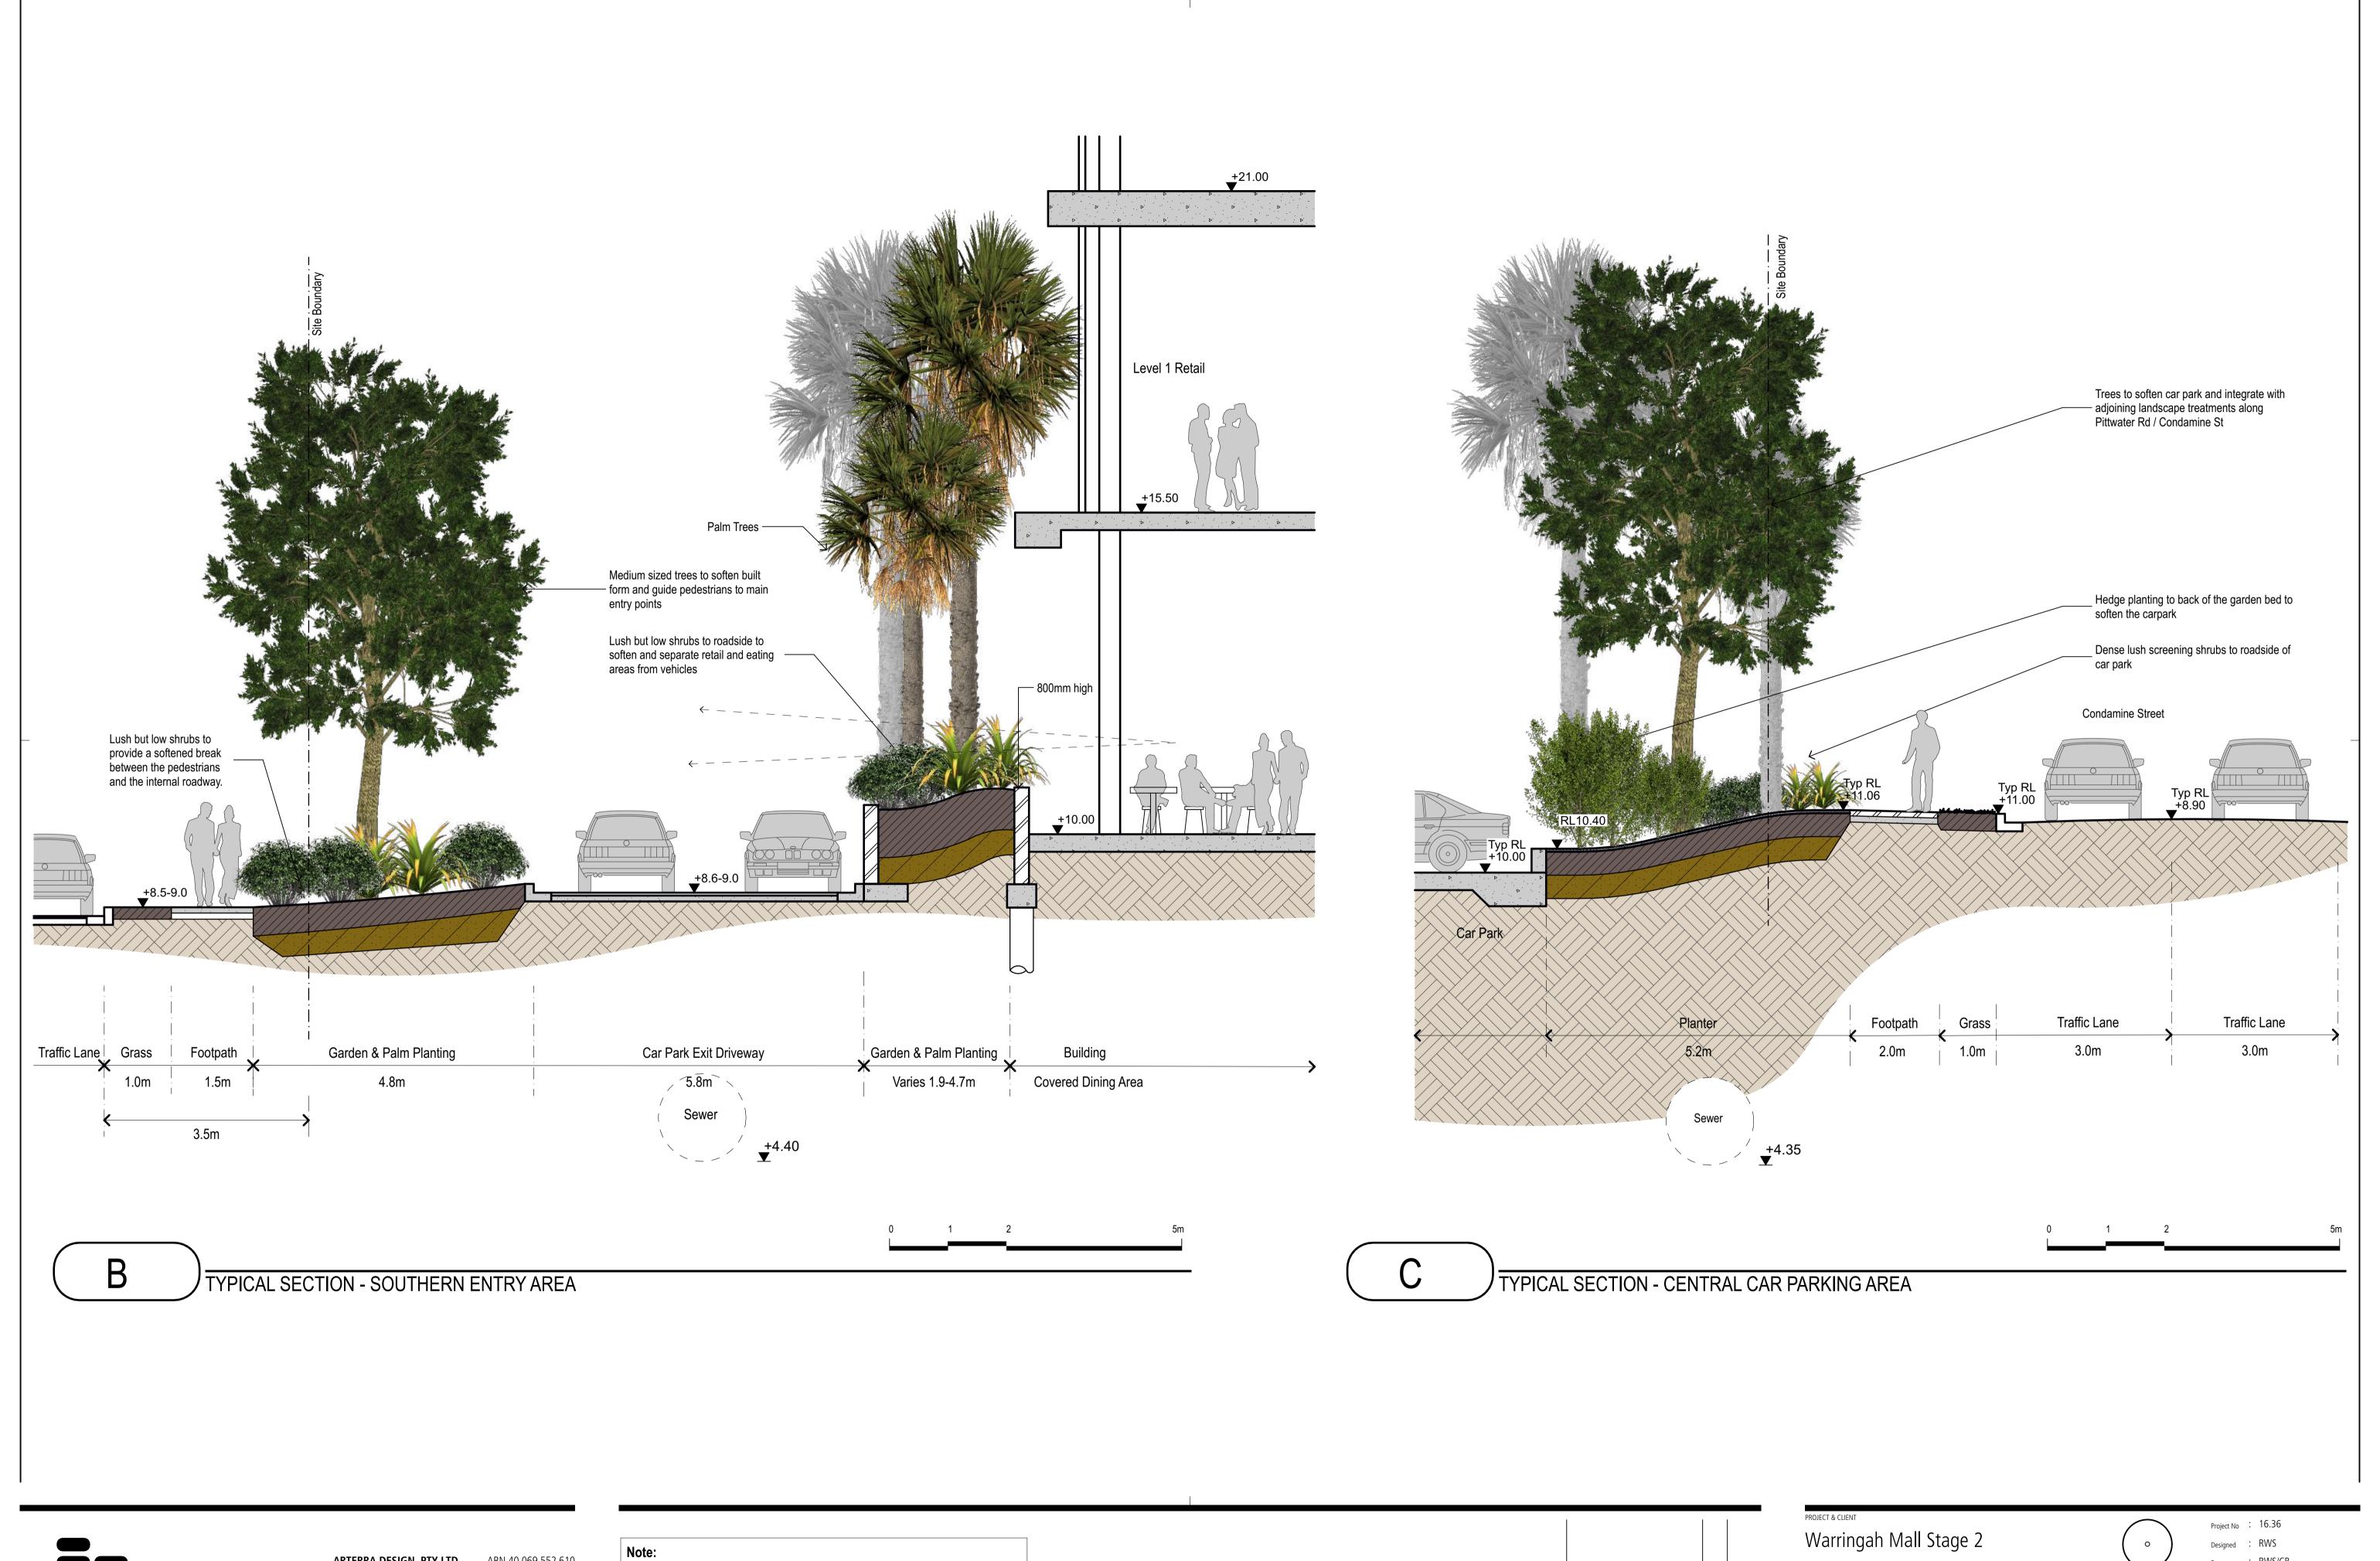




ARTERRA DESIGN PTY LTD ABN 40 069 552 610 **P** 02 9957 2466 **F** 02 9957 3977 **W** ARTERRA.COM.AU

Architectural representations are indicative only for scale and massing only. Information provided by Scentre Group should be referred in preference for all architectural elements.

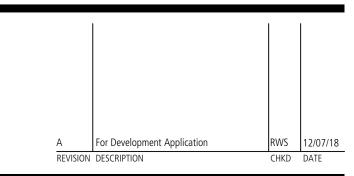


Drawn : RWS/CB Scale : As Shown Scentre Design & Construction Pty Ltd DRAWING NUMBER
ART-LSD-05 Typical Sections

Palms

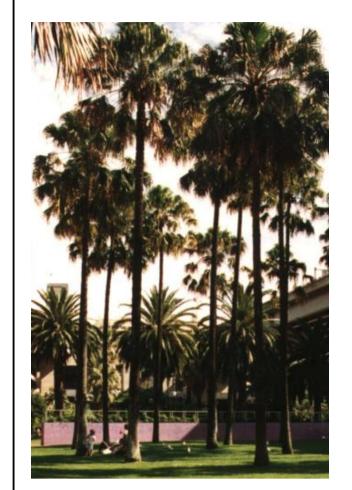

Cabbage Tree Palm Livistona australis

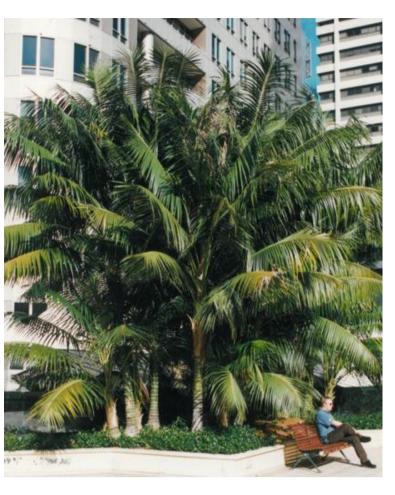

Kentia Palm Howea forsteriana

Trees



Water Gum
Tristaniopsis laurina
'Luscious'



Angophora costata Sydney Red Gum



Brush Box
Lophostemon confertus



Green Avenue Weeping Lilly Pilly Waterhousea floribunda 'Green Avenue'



Cook Pine Araucaria columnaris



Ficus rubiginosa Port Jackson Fig

Groundcovers



Giant Lilyturf
Liriope 'Evergreen Giant'



Century Plant Agave attenuata



Palm Grass Molineria capitulata



Shore Juniper Juniperus conferta



Clivia miniata Kaffir Lily



Lomandra confertifolia 'Little Con'
Mat Rush

Climbers/Trailers



Bower of Beauty

Pandorea jasminoides



Flame Vine Pyrostegia venusta

Shrubs




Lady Palm

Raphis excelsa



Sago Palm Cycas revoluta



Xanadu Philodendron

Philodendron 'Xanadu'



Common Gardenia

Gardenia jasminoides



Lilly Pilly Syzygium australe cultivars



Dusky Bells Correa reflexa' Dusky Bells'



Indian Hawthorn

Rhaphiolepis indica




Burrawang

Macrozamia communis



SUITE 602 / 51 RAWSON STREET, EPPING, NSW 2121

P 02 9957 2466 F 02 9957 3977 W ARTERRA.COM.AU



Warringah Mall Stage 2

Scentre Design & Construction Pty Ltd

Planting Palette

 o

Project No : 16.36

Designed : RWS

Drawn : RWS/CB

DRAWING NUMBER ART-LSD-06

J-00 /

Proposed Plant Schedule

Botanical Name	Common Name	Potential Height Reached	Container Size
TREES			
Angophora costata	Sydney Red Gum	10-18m	100L
Araucaria columnaris (syn.A cookii)	Captain Cook's Pine	25-35m	400L
Caesalpinia ferrea	Leopard Tree	10-15m	100L
Corymbia maculata	Spotted Gum	15-25m	200L
Elaeocarpus eumundii	Eumundi Quandong	10-15m	200L
Ficus rubiginosa	Port Jackson Fig	10-20m	400L
Glochidion ferdinandi	Cheese Tree	10-15m	100L
Lophostemon confertus	Brush Box	18-20m	200L
Syzygium paniculatum	Brush Cherry/Magenta Cherry	8-12m	200L
Tristaniopsis laurina 'Luscious'	Water Gum	5-8m	100L
Waterhousea floribunda "Green Avenue"	Green Avenue Lilly Pilly	15-20m	200L

5L
OL
)L + olanted
5L
5L
00L DL + plante

SHRUBS			
Adenanthos sericeus 'Mallee Legend'	Coastal Woollybush	1.5-2m	5L
Alcantarea imperialis 'Rubra'	Imperial Bromeliad	1 - 1.5m	45L
Alpinia zerumbet / speciosa	Shell Ginger	3m	5L
Correa reflexa 'Dusky Bells'	Native Fuchsia, Common Correa	1-2m	5L
Echium fastuosum	Pride of Madeira	2-3m	5L
Gardenia jasminoides	Gardenia	1-2m	25L
Murraya paniculata	Orange Jessamine	3m	25L
Nerium oleander 'Dwarf Apricot'	Dwarf Oleander	1-2m	5L
Philodendron "Xanadu"	Dwarf Philodendron	1m	25L
Raphiolepis indica	Indian Hawthorn	2-3m	5L
Syzigium australe "Southern Form"	Southern Form Syzygium	2-3m	25L
Thysanolaena maxima	Tiger Grass	2-3m	5L
Westringia fruticosa 'Aussie Box'	Dwarf Coastal Rosemary	0.8m	5L

Westringia fruticosa 'Aussie Box'	Dwarf Coastal Rosemary	0.8m	5L
GROUNDCOVERS/CLIMBERS			
Agave attenuata	Century Plant	0.5m	25L
Cissus rhombifolia	Grape Ivy	0.5m	150mm
Clivia miniata	Kaffir Lily	0.45m	5L
Hedera canariensis	lvy	0.3m	150mm
Juniperus conferta	Shore Juniper	0.3m	150mm
Liriope muscari 'Evergreen Giant'	Turf Lily	0.5m	150mm
Lomandra confertifolia 'Little Con'	Mat Rush	0.2m	150mm
Molineria capitulata	Palm Grass	1.2m	5L
Pandorea jasminoides	Pink Bower Vine	0.5m	150mm
Pyrostegia venusta	Orange Trumpet Vine	0.5m	150mm

Character Imagery





Cascading Plants

Planting on the upper roof level to provide cascading climbers and hardy trailing plants to further soften the building edges





Raised garden beds filled with hardy and low maintenance shrubs and groundcovers that provide a lush tropical character

Landscape Establishment & Maintenance

LANDSCAPE ESTABLISHMENT & MAINTENANCE

Extent & Tasks

Monitor and maintain all planting and associated landscaping works for the duration of the maintenance period. This shall generally include watering, failed plant replacements, pest and disease control, weed control and monitoring. Maintenance is to be carried out to all areas where new planting, is installed. Weeding shall extend around and in between individual plants and up to path, kerbs or other defining edges. Carry out all maintenance activities for all new garden and lawn areas as required to ensure the plants and turf become established within the maintenance period and are kept in a healthy and tidy state in accordance with best horticultural practices.

Watering

Plants are to be watered upon completion of planting and then monitored for water stress. Watering requirements will be subject to season and prevailing weather conditions. Plants that fail due to wilting and water stress shall be replaced.

Pests and Diseases

All trees are to be visually inspected for the presence of persistent and damaging insect pests or diseases at least once every 4 weeks, or upon written notification from the Contract Manager of a potential problem. The pest and / or disease and its extent and prevalence is to be identified and recorded along with the recommended control and action to be taken.

Weeding

All areas are to be visually inspected for the presence of woody and herbaceous weed species once every 4 weeks. All occurrences of weeds are to be spot sprayed using a glyphosate based herbicide no later than 7 days after being identified. Weeds are to be re-inspected 7 days after spraying and retreated if required. Weeds higher than 200mm in height shall be removed by hand before general herbicide treatment. Smaller weeds shall be allowed to wither and rot in place.

Plant Replacements

Plants that have failed due to inadequate maintenance, or implementing inappropriate handling procedures or planting operations shall be replaced. Replacements shall be undertaken within 7 days of the plant being identified as failed or unacceptably damaged. Note, severe wilting or water logging leading to death of foliage, breakage or wounding of main stem, damage to apical leaders or damage to significant second order branches shall be deemed to constitute failure.

The cost of plants that are damaged or killed by environmental factors outside the normal control such as severe storms, high winds, hail, flooding, vehicular accident, or are stolen or maliciously damaged shall be born by the Contractor if prior to Practical Completion. The Contractor is advised to take out all necessary Construction Insurance to cover all the costs associated with re-supply, delivery and replanting prior to this time. The costs of replacing damaged, stolen or maliciously damaged plants shall be covered by the Principal after Practical Completion has been granted.



Stone Paving

Character Imagery


Paving is to have a high level of finish utilising a natural stone or stone-like surface and non-slip characteristics that easily meets and matches the adjoining concrete footpaths and roads.



ARTERRA DESIGN PTY LTD ABN 40 069 552 610

SUITE 602 / 51 RAWSON STREET, EPPING, NSW 2121


P 02 9957 2466 F 02 9957 3977 W ARTERRA.COM.AU

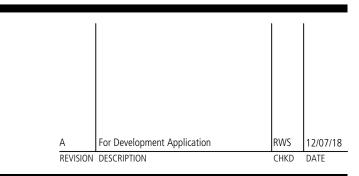

PROJECT & CLIENT	Project No : 16.36		
Warringah Mall Stage 2	Designed : RWS		
	Drawn : RWS/CB		
Scentre Design & Construction Pty Ltd	Scale : NTS		
DRAWING TITLE	DRAWING NUMBER		

ART-LSD-07

Character Imagery

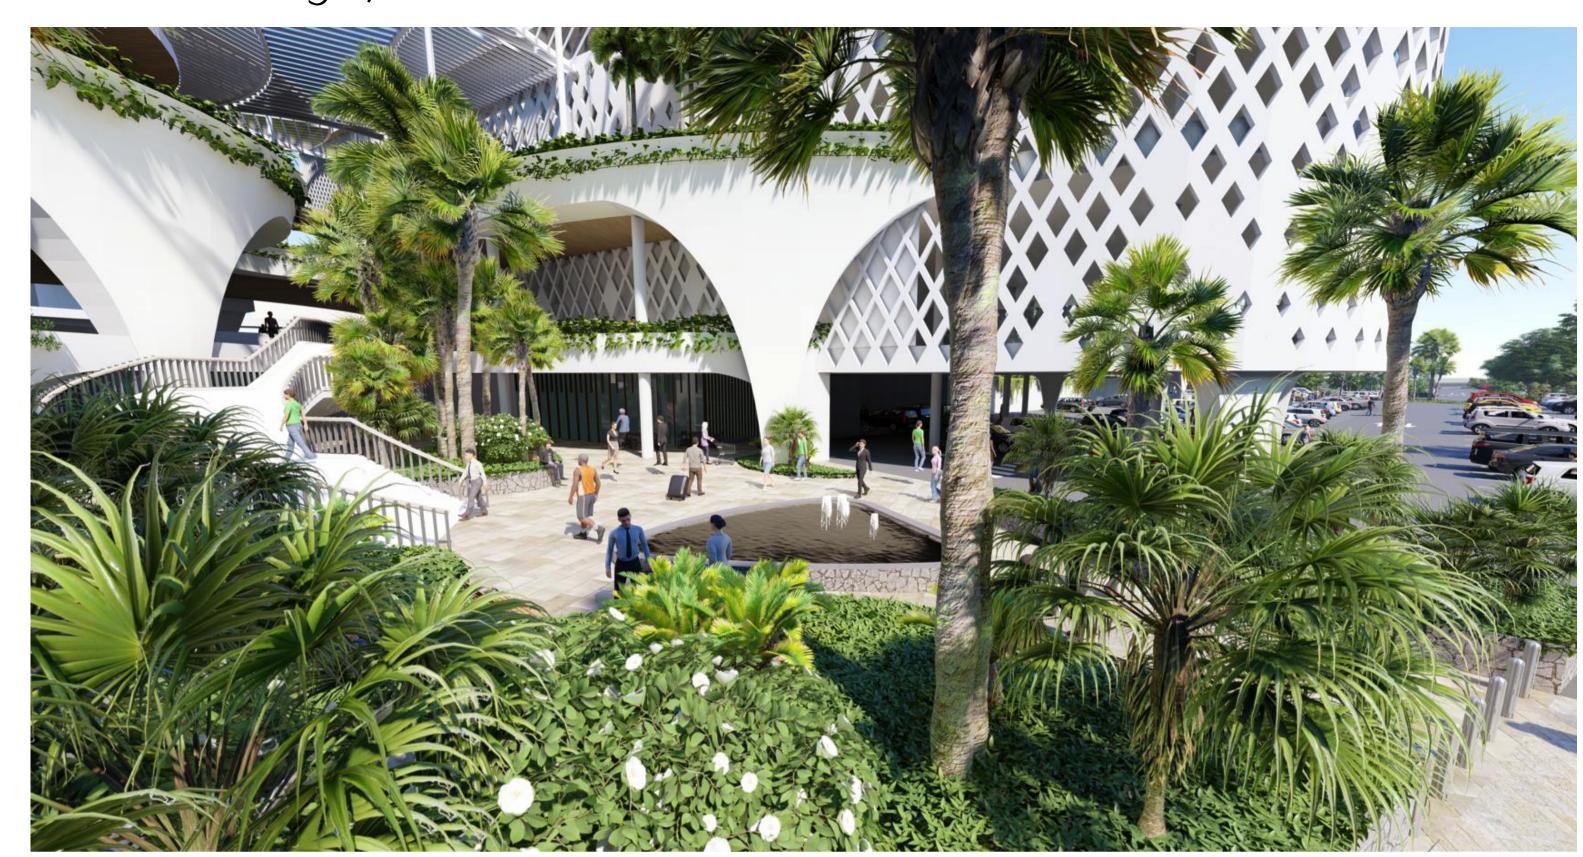

Main Pedestrian Entry with Palm Planting



Over View of Northern Carpark Looking South



Over View - Looking North Along Condamine Street



Main Pedestrian Entry from Condamine Street



Main Vehicular Entry



Warringah Mall Stage 2 Scentre Design & Construction Pty Ltd

Perspective Imagery

DRAWING NUMBER
ART-LSD-08