STORMWATER MANAGEMENT 9 GREENWOOD AVENUE, NARRAWEENA **DEVELOPMENT APPLICATION**

SCHEDULE OF DRAWINGS				
DRAWING No. DESCRIPTION				
SW00	COVER SHEET			
SW01	STORMWATER PLAN SHEET 1			
SW02	STORMWATER PLAN SHEET 2			
SW03	STORMWATER DETAILS			
SW04	SEDIMENT AND EROSION CONTROL PLAN			



SITE LOCALITY PLAN



1	ISSUED FOR DA	AE	05.05.2025
REVISION	DESCRIPTION	ISSUED	DATE

GENERAL

- ALL WORK TO BE CARRIED OUT IN ACCORDANCE WITH THE LOCAL COUNCIL ENGINEERING SPECIFICATIONS.
- FINAL LOCATION OF NEW DOWNPIPES TO BE DETERMINED BY BUILDER/ARCHITECT AT TIME OF CONSTRUCTION.
- THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ARCHITECTS AND OTHER CONSULTANT DRAWINGS. ANY DISCREPANCIES MUST BE REFEREED TO THE ENGINEER BEFORE PROCEEDING.
- INSPECTIONS BY THE CERTIFIEING AUTHORITY SHALL BE CARRIED OUT FOR ALL THE CIVIL WORKS PRIOR TO RELEASE OF THE HOLD POINTS INCLUDING THE FOLLOWING STAGES: 4.1. PRIOR TO INSTALLATION OF EROSION AND SEDIMENT CONTROL STRUCTURES
- 4.2. FINAL INSPECTION AFTER ALL WORKS ARE COMPLETED AND 'WORK AS EXECUTED' PLANS HAVE BEEN SUBMITTED TO COUNCIL
- MAKE SMOOTH JUNCTIONS WITH EXISTING WORKS.
- NO WORK TO BE CARRIED OUT ON COUNCIL PROPERTY OR ADJOINING PROPERTIES WITHOUT THE WRITTEN PERMISSION FROM THE OWNER/S.
- VEHICULAR ACCESS AND ALL SERVICES TO BE MAINTAINED AT ALL TIMES TO ADJOINING PROPERTIES AFFECTED BY CONSTRUCTION.
- ALL RUBBISH, BUILDINGS, SHEDS AND FENCES TO BE REMOVED TO SATISFACTION OF COUNCIL'S ENGINEER.
- THE CONTRACTOR SHALL OBTAIN ALL LEVELS FROM ESTABLISHED BENCH MARKS ONLY.

WARNING BEWARE OF UNDERGROUND SERVICES

The locations of underground services are approximate only and their exact position should be proven on site. No guarantee is given that all existing services are shown. ocate all underground services before commencement of works DIAL 1100 BEFORE YOU DIG www.**1100**.com.au

				TABLE MINIMUM PI (from finished surfa	PE COVER	
					Cast iron, ductile	millimetr Other authorized
				Location	iron, galvanized steel	products
					Minimum	cover
1	Not	subje	ect to v	ehicular loading:		
	(a)	with	out pa	vement—		
		(i)	for si	ngle dwellings	Nil	100
		(ii)	for of	ther than Item (i)	Nil	300
	(b)	with conc	1	nent of brick or unreinforced	Nil†	50†
2	Subj	ect to	vehic	ular loading:		
	(a)	othe	r than	roads—		
		(i)	witho	out pavement	300	450
		(ii)	with	pavement of-		
			(A)	reinforced concrete for heavy vehicular loading	Nil†‡	100†‡
			(B)	brick or unreinforced concrete for light vehicular loading	Nil†‡	75†‡
	(b)	road	s—			
		(i)	seale	d	300	500‡
		(ii)	unsea	lled	300	500‡
3				struction equipment loading or at conditions	300	500‡

Below the underside of the pavemen Subject to compliance with AS 1762, AS 2033, AS/NZS 2566.1, AS 3725 or AS 4060.

<u>AS3500.3</u>

EXISTING UNDERGROUND SERVICES NOTES

CONTRACTORS SHALL TAKE DUE CARE WHEN EXCAVATING ONSITE NCLUDING HAND EXCAVATION WHERE NECESSARY. CONTRACTORS ARE TO CONTACT THE RELEVANT SERVICE AUTHORITY PRIOR TO COMMENCEMENT OF EXCAVATION WORKS. CONTRACTORS ARE TO UNDERTAKE A SERVICES SEARCH, PRIOR TO COMMENCEMENT OF WORKS ON SITE. SEARCH RESULTS ARE TO BE KEPT ON SITE AT ALL TIMES.

SITEWORKS NOTES

1. ORIGIN OF LEVELS:- REFER SURVEY NOTES.

2. CONTRACTOR MUST VERIFY ALL DIMENSIONS AND EXISTING LEVELS ON SITE PRIOR TO COMMENCEMENT OF WORK. A

- 3. MAKE SMOOTH CONNECTION WITH EXISTING WORKS.
- 4. ALL TRENCH BACKFILL MATERIAL SHALL BE COMPACTED TO THE SAME DENSITY AS THE ADJACENT MATERIAL.

5. BASE AND SUB-BASE LAYERS ARE TO BE INSPECTED AND TESTED BY AN INDEPENDENT GEOTECHNICAL TESTING AUTHORITY TO LEVEL 1 RESPONSIBILITY AS DEFINED IN AS3798.

6. ALL BASECOURSE MATERIAL SHALL BE IGNEOUS ROCK QUARRIED MATERIAL TO COMPLY WITH RMS FORM 3051, COMPACTED TO MINIMUM 98% MODIFIED DENSITY IN ACCORDANCE WITH AS 1289 5.2.1 FREQUENCY OF COMPACTION TESTING SHALL NOT BE LESS THAN 1 TEST PER 50m³ OF BASECOURSE MATERIAL PLACED.

7. ALL SUB-BASE COURSE MATERIAL SHALL BE IGNEOUS ROCK QUARRIED MATERIAL TO COMPLY WITH RMS FORM 3051, AND COMPACTED TO MINIMUM 95% MODIFIED DENSITY IN ACCORDANCE WITH A.S 1289 5.2.1 FREQUENCY OF COMPACTION TESTING SHALL NOT BE LESS THAN 1 TEST PER 50m³ OF SUB-BASE COURSE MATERIAL PLACED.

8. SHOULD THE CONTRACTOR WISH TO USE A RECYCLED PRODUCT THIS SHALL BE CLEARLY INDICATED IN THEIR TENDER AND THE PRICE DIFFERENCE BETWEEN AN IGNEOUS PRODUCT AND A RECYCLED PRODUCT SHALL BE CLEARLY INDICATED.

9. WHERE NOTED ON THE DRAWINGS THAT WORKS ARE TO BE CARRIED BY OTHERS, (eq. ADJUSTMENT OF SERVICES), THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CO-ORDINATION OF THESE WORKS.

MINIMUM GRADIENT OF SITE STORMWATER DRAINS							
Nominal size Minimum		Minimum gradient Nominal size					
DN	Aust.	NZ	DN	Aust.	NZ		
90 100 150	1:100 1:100 1:100	1:90 1:120 1:200	225 300 375	1:200 1:250 1:300	1:350 1:350 1:350		

<u>AS3500.3</u> MINIMUM INTERNAL DIMENSIONS FOR STORMWATER AND INLET PITS Minimum internal dimensions Depth to inver of outlet Rectangula Circula 450 <6**0**0 ≤900 600 >600 >900 ≤1200 900 1 000 600 900

AS3500.3

- OTHERWISE.
- - WITH SOLVENT WELDED JOINTS.

 - THEIR SOCKETS.

SUPPORT TYPE.

- HEIGHT.
- (OR A DENSITY INDEX OF NOT LESS THAN 75).
- APPROPRIATE PIPE CLASS.
- (2018).
- FITTINGS WHERE PIPES ARE LESS THAN 300 DIA.

- FURTHER DIRECTIONS.

DRAWN BY	AE	PROJECT	9 GREENWOOD AVENUE, NARRAW
DRAWN DATE	MAY'25		
COORDINATE SYSTEM	MGA-56	DRAWING TITLE	COVER SHEET
HEIGHT DATUM	AHD		

STORMWATER DRAINAGE NOTES

ALL PIPES ON DRAWINGS TO BE MIN 1% GRADE UNLESS NOTED

. ALL DOWNPIPES TO BE 1000 PVC UNLESS NOTED OTHERWISE.

PIPES 375 DIA. AND LARGER TO BE REINFORCED CONCRETE CLASS '2' APPROVED SPIGOT AND SOCKET WITH RUBBER RING JOINTS. U.N.O.

PIPES 300 DIA AND LESS SHALL BE DWV GRADE (CLASS SN8) uPVC

5. EQUIVALENT STRENGTH FRC PIPES MAY BE USED.

ALL PIPES ARE TO BE UNIFORMLY SUPPORTED ALONG THE LENGTH OF THE BARREL BY SUITABLE FILL MATERIAL. REFER TO BEDDING

PIPES WITH SOCKETS SHALL BE LAID IN BEDDING WHERE SUITABLE RECESSES HAVE BEEN PROVIDED TO ENSURE PIPES DO NOT BEAR ON

. ALL STORMWATER DRAINAGE LINES UNDER PROPOSED BUILDING SLABS TO BE UPVC PRESSURE PIPE GRADE 6. ENSURE ALL VERTICALS AND DOWNPIPES ARE UPVC PRESSURE PIPE, GRADE 6 FOR A MIN OF 3.0m IN

PIPES TO BE INSTALLED TO TYPE HS1 SUPPORT IN ACCORDANCE WITH AS 3725 (2007) IN ALL CASES BACKFILL TRENCH WITH SAND TO 300mm ABOVE PIPE, WHERE PIPE IS UNDER PAVEMENTS BACKFILL REMAINDER OF TRENCH TO UNDERSIDE OF PAVEMENT WITH SAND OR APPROVED GRANULAR MATERIAL COMPACTED IN 150mm LAYERS TO MINIMUM 98% STANDARD MAXIMUM DRY DENSITY IN ACCORDANCE WITH AS 1289 5.2.

10. REFER TO AS/NRS 3725:2007 TABLE B1 FOR REQUIRED FILL DEPTHS ABOVE PIPE BARREL PRIOR TO USE OF COMPACTION MACHINERY OR TRAVERSING OF PIPES BY GENERAL SITE EQUIPMENT.

. WHERE WORKING METHODS REQUIRE HIGHER CLASS PIPE, THE CONTRACTOR SHALL REFER TO AS 3725 (2007) TO DETERMINE THE

12. ALL INTERNAL WORKS WITHIN PROPERTY BOUNDARIES ARE TO COMPLY WITH THE REQUIREMENTS OF AS 3500 3.1 (2018) AND AS/NZS 3500 3.2

3. ENLARGERS, CONNECTIONS AND JUNCTIONS TO BE PREFABRICATED

14. WHERE SUBSOIL DRAINS PASS UNDER FLOOR SLABS AND VEHICULAR PAVEMENTS, UNSLOTTED uPVC SEWER GRADE PIPE IS TO BE USED.

15. CARE IS TO BE TAKEN WITH LEVELS OF STORMWATER LINES. GRADES SHOWN ARE NOT TO BE REDUCED WITHOUT APPROVAL.


16. GRATES AND COVERS SHALL CONFORM TO AS 3996.

17. ALL BOX CULVERTS SHALL BE STRUCTURALLY DESIGNED BY THE MANUFACTURER AND DELIVERED TO SITE AS FIT FOR PURPOSE.

18. AT ALL TIMES DURING CONSTRUCTION OF STORMWATER PITS, ADEQUATE SAFETY PROCEDURES SHALL BE TAKEN TO ENSURE AGAINST THE POSSIBILITY OF PERSONNEL FALLING DOWN PITS.

19. ALL EXISTING STORMWATER DRAINAGE LINES AND PITS THAT ARE TO REMAIN ARE TO BE INSPECTED AND CLEANED. DURING THIS PROCESS ANY PART OF THE STORMWATER DRAINAGE SYSTEM THAT WARRANTS REPAIR SHALL BE REPORTED TO THE SUPERINTENDENT/ENGINEER FOR


WEENA	project number 25039	FOR APPROVAL NOT TO BE USED FOR CONSTRUCT	
	SHEET SIZE: A1	drawing number $SW00$	REV: 1

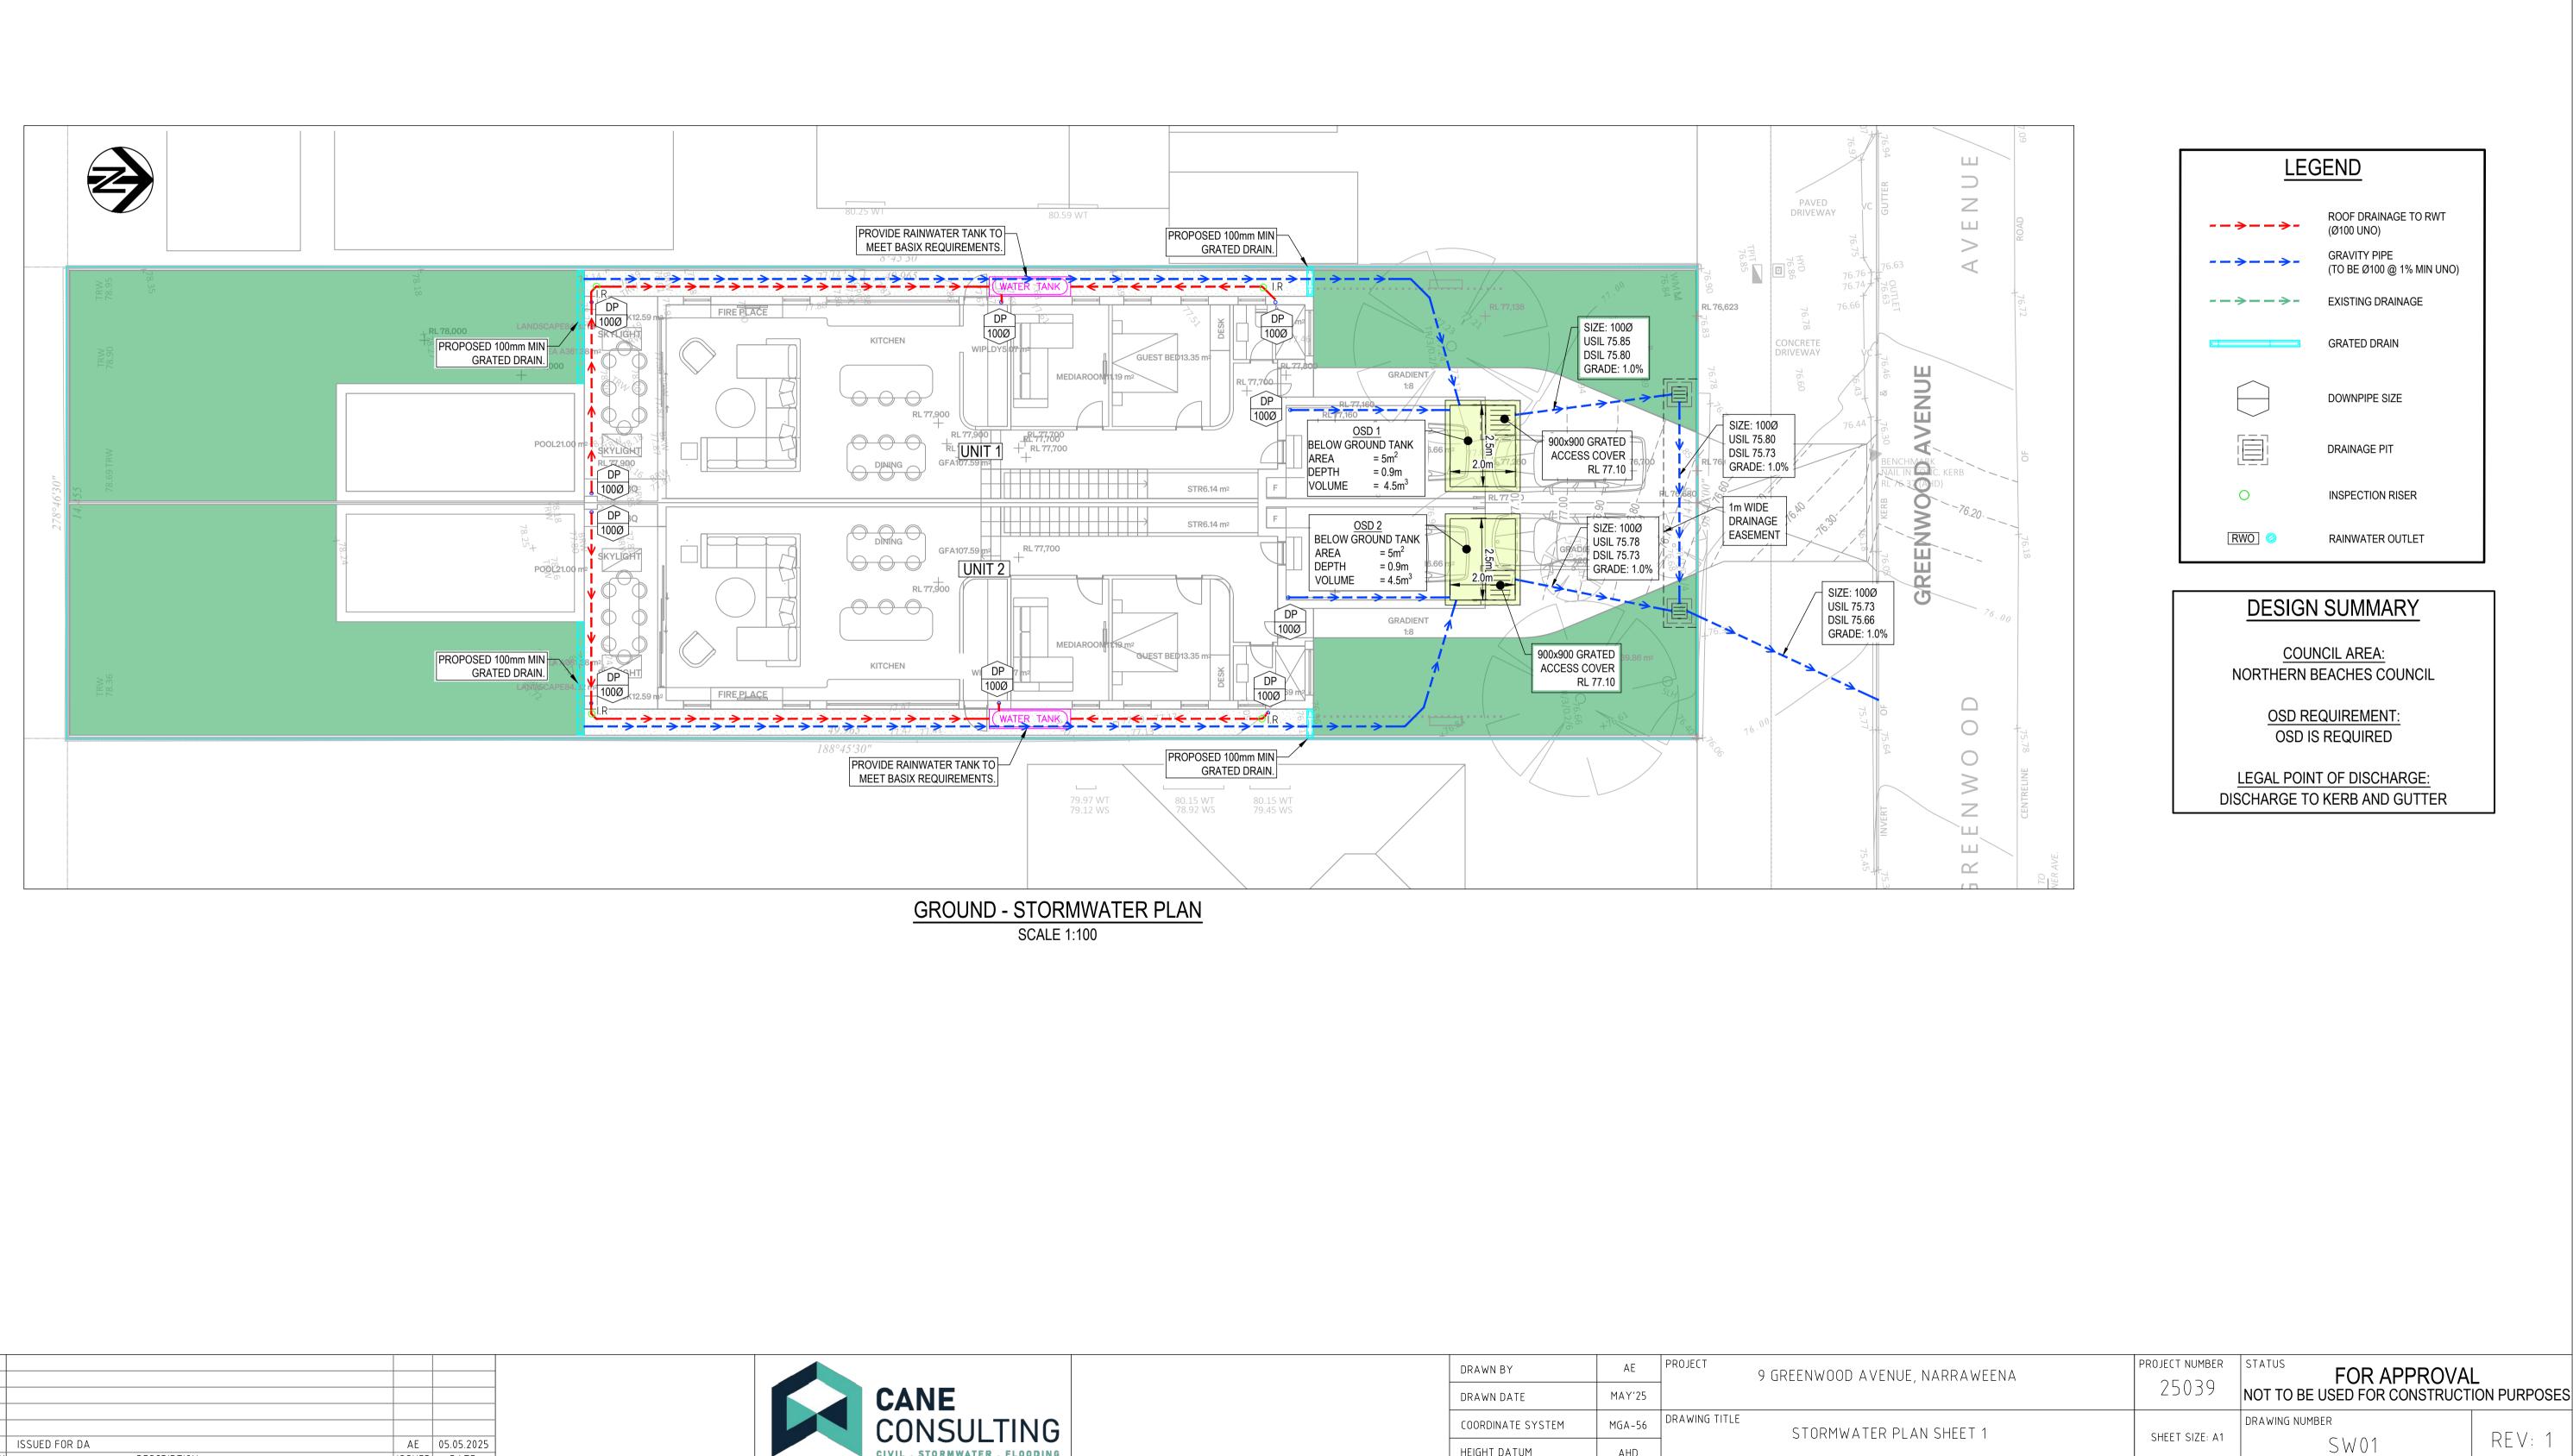


1 ISSUED FOR DA DESCRIPTION ISSUED DATE

REVISION

	DRAWN BY	AE	PROJECT	9 GREENWOOD AVENUE, NARRAV
CANE	DRAWN DATE	MAY'25		
CONSULTING	COORDINATE SYSTEM	MGA-56	DRAWING TITLE	STORMWATER PLAN SHEET
CIVIL . STORMWATER . FLOODING	HEIGHT DATUM	AHD		

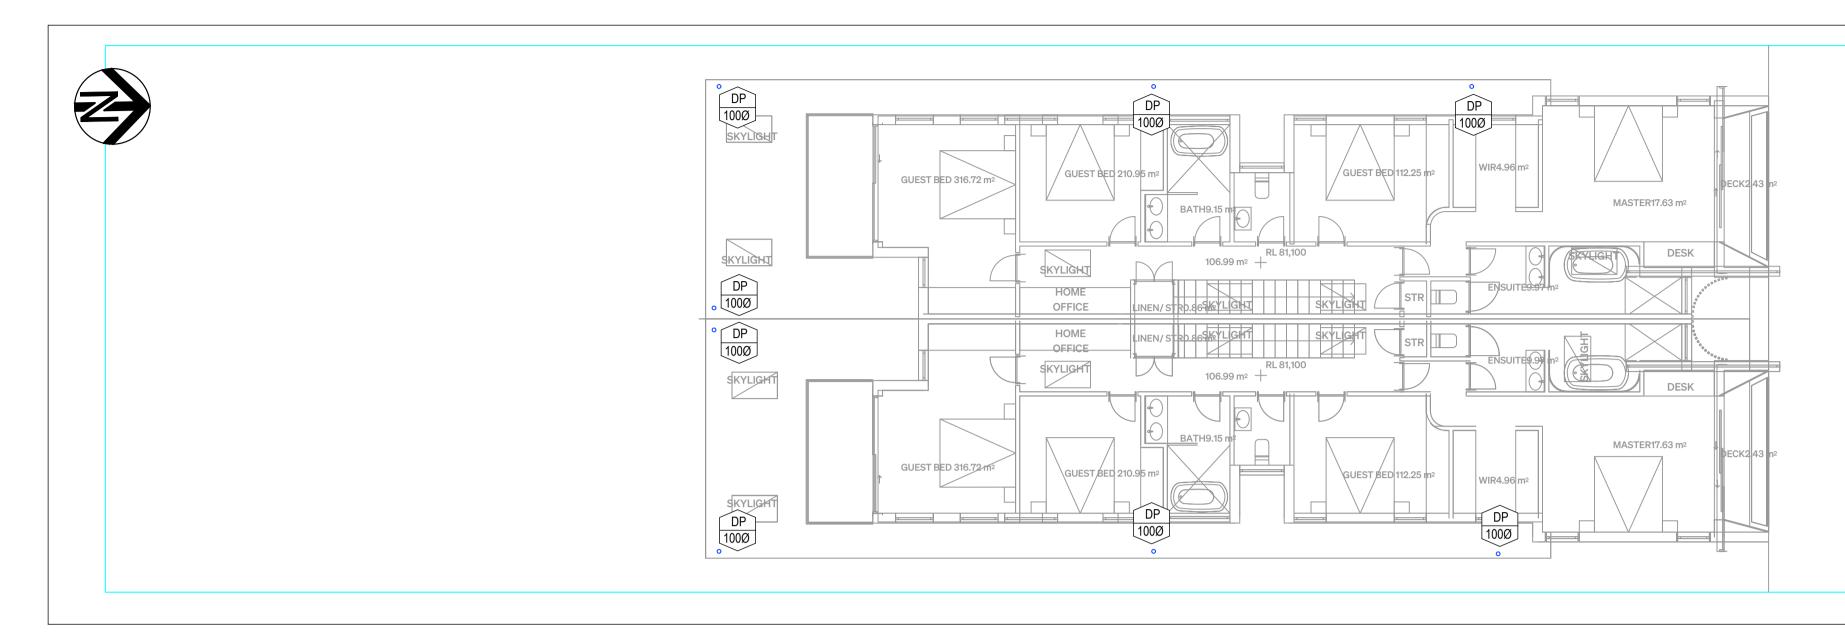

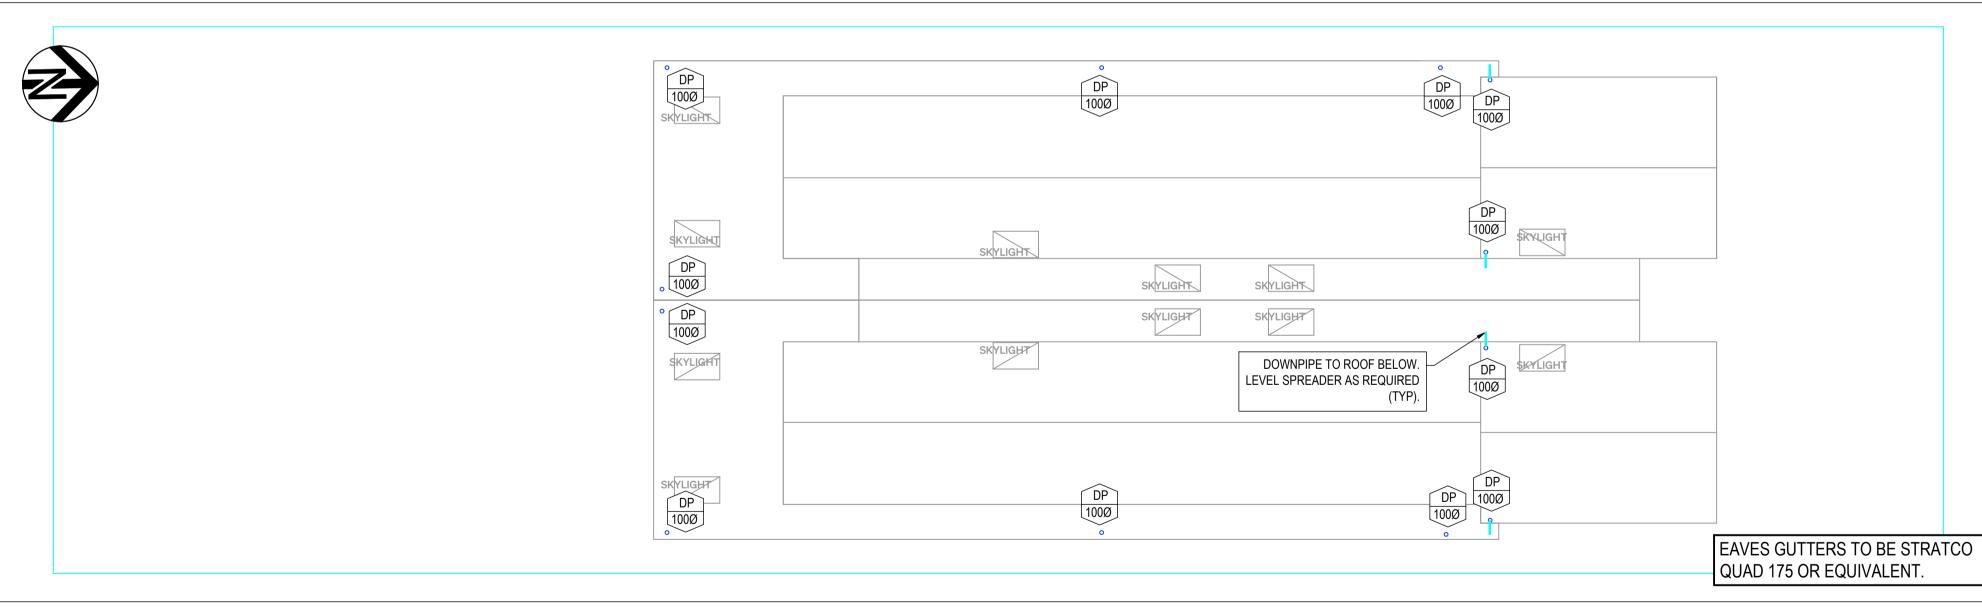


				1
				1
1	ISSUED FOR DA	AE	05.05.2025	1
REVISION	DESCRIPTION	ISSUED	DATE	



FIRST FLOOR - STORMWATER PLAN SCALE 1:100



DRAWN BY AE PROJECT 9 GREENWOOD AVENUE, NA	ARRAWEENA
DRAWN DATE MAY'25	
NSULTING MGA-56 DRAWING TITLE STORMWATER PLAN	SHEET 2
HEIGHT DATUM AHD	

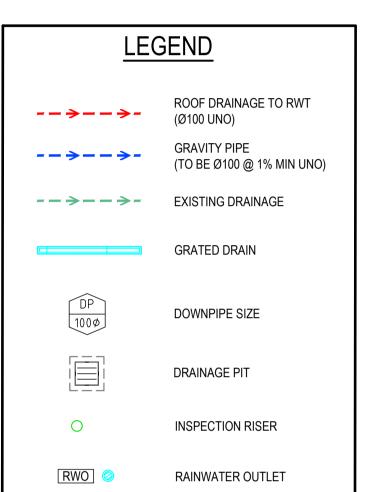

DESIGN SUMMARY

COUNCIL AREA: NORTHERN BEACHES COUNCIL

OSD REQUIREMENT: OSD IS REQUIRED


LEGAL POINT OF DISCHARGE: DISCHARGE TO KERB AND GUTTER

AWEENA	project number 25039	STATUS FOR APPROVA NOT TO BE USED FOR CONSTRUCT	
T 2	SHEET SIZE: A1	drawing number SW02	REV: 1

EVENTS 20% TO 1% AEP IN ACCORDANCE WITH NORTHERN BEACHES COUNCIL.

THE PRE DEVELOPMENT FLOW AREA WAS MODELLED AS 0% IMPERVIOUS.

THE BYPASS OF THE OSD WAS ALSO MODELLED

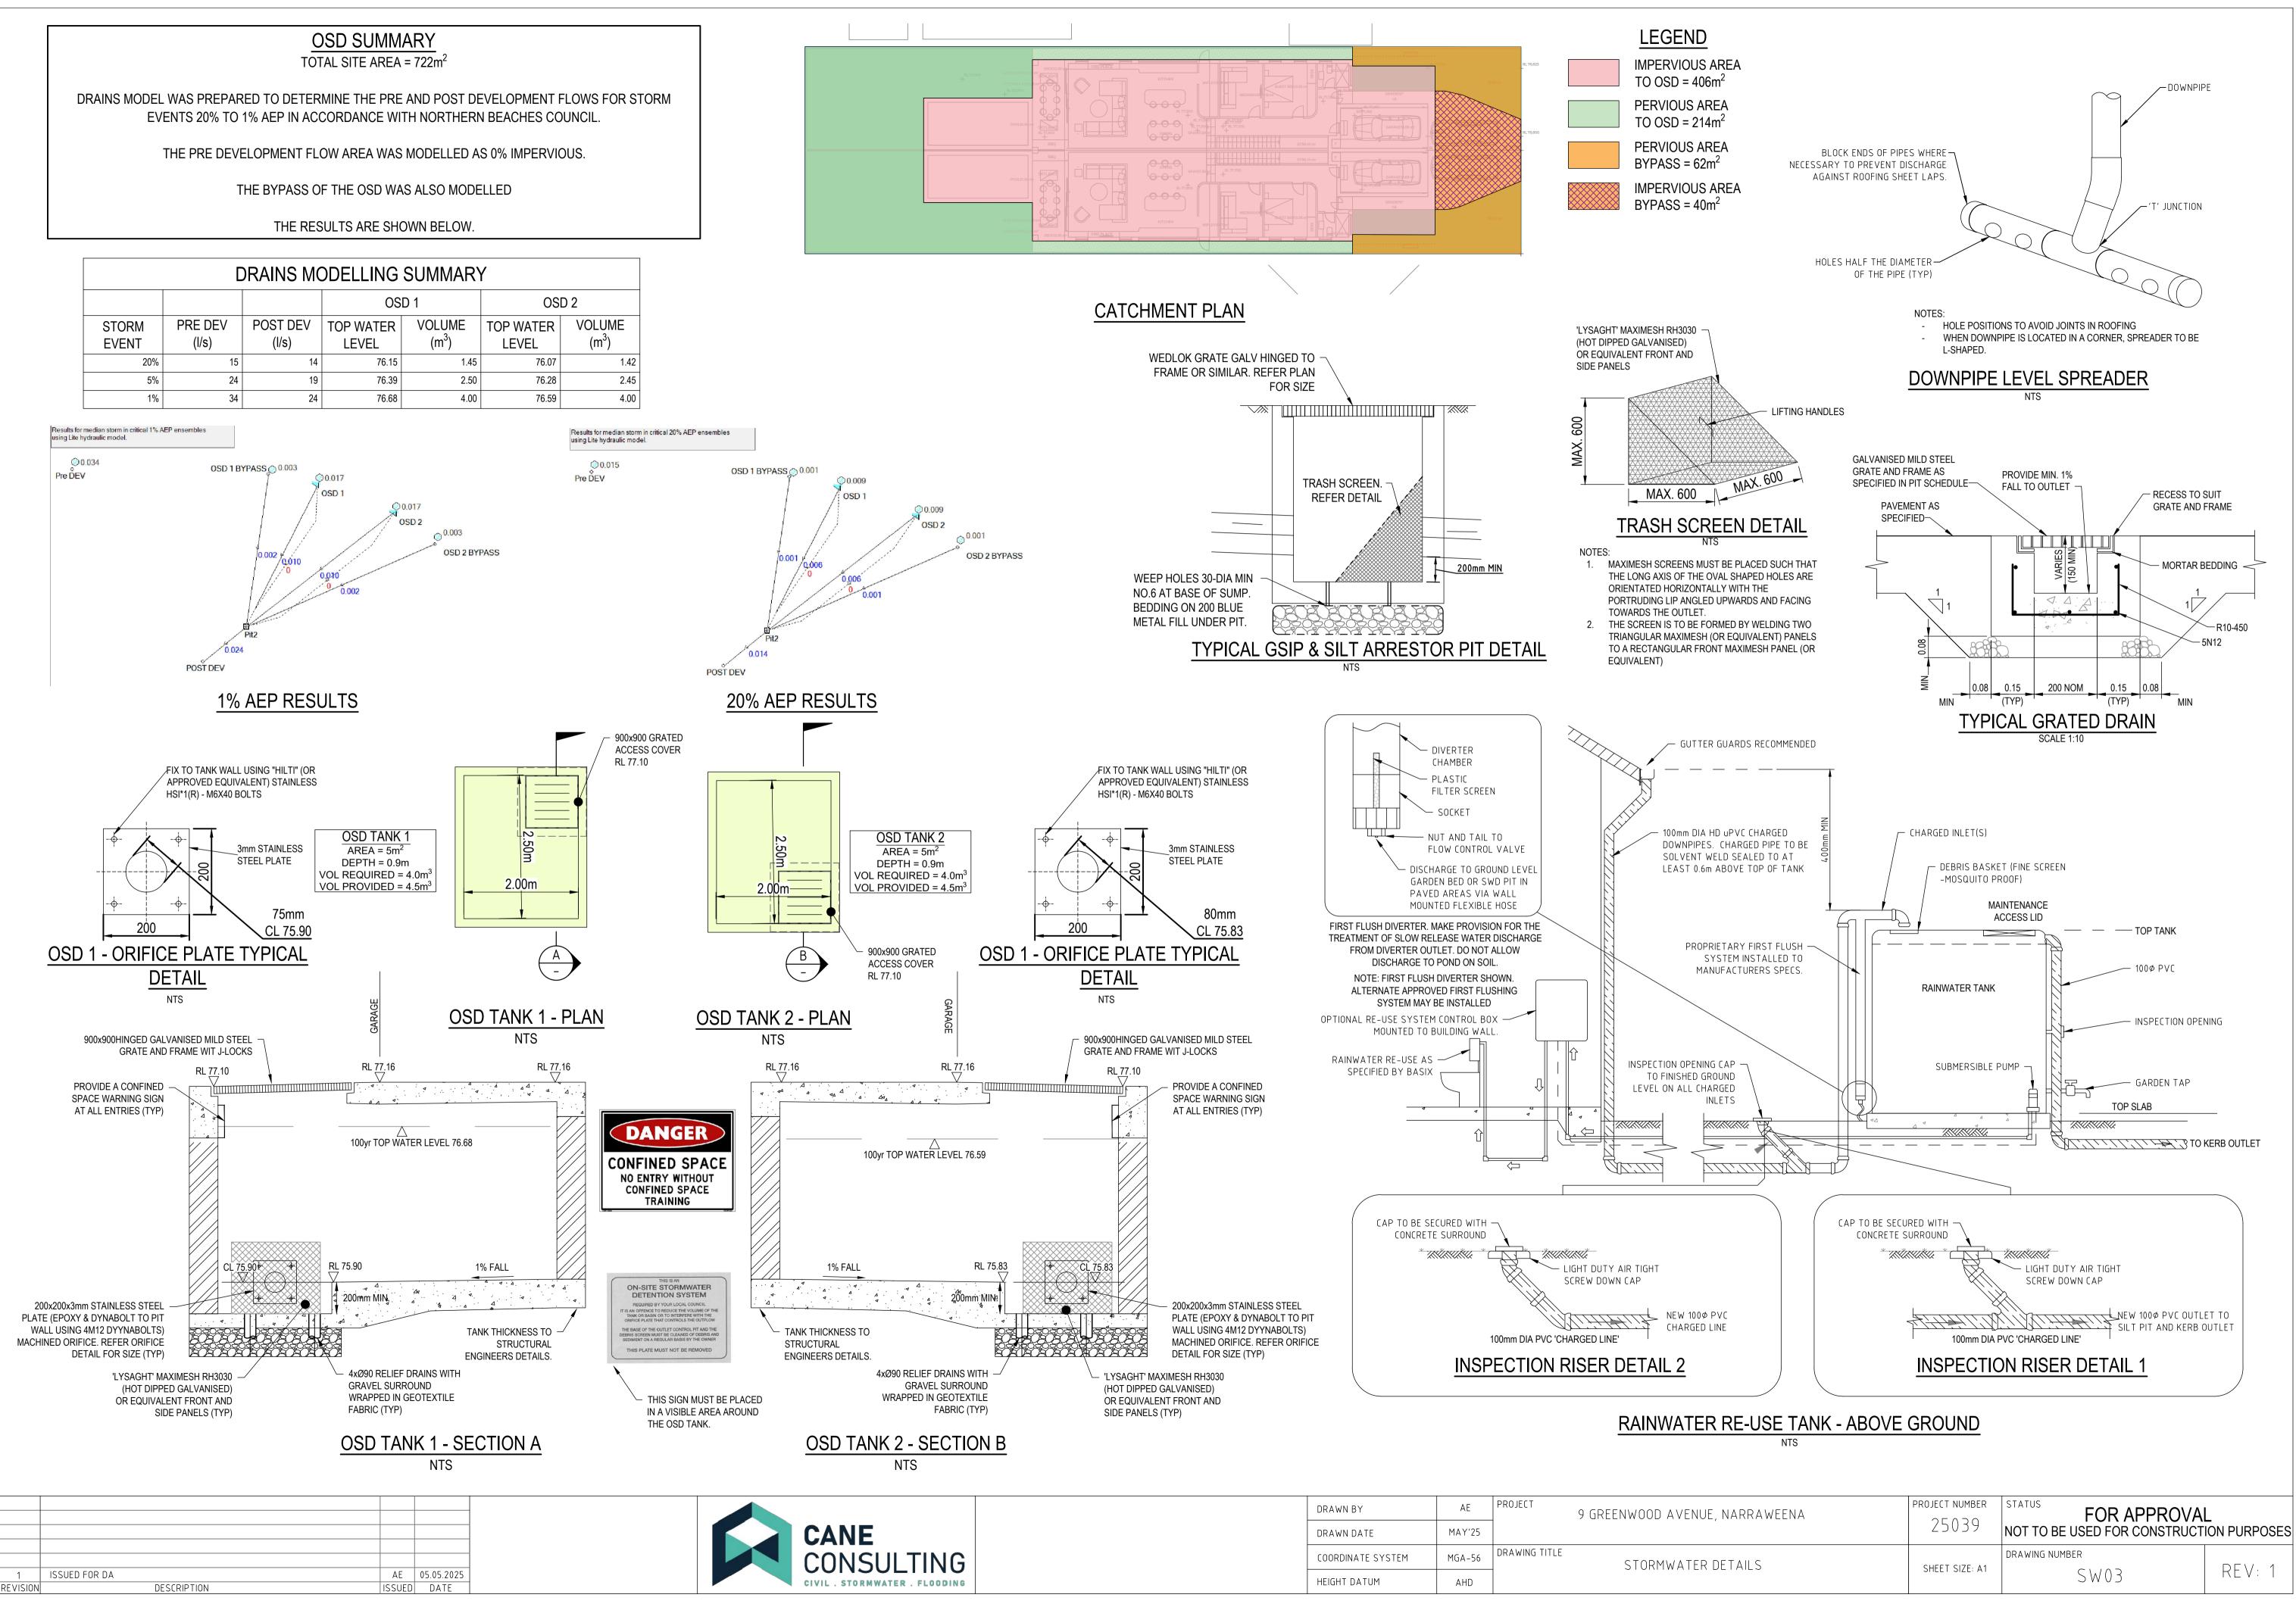

//	/////////			
	PROVIDE 1.8m HIGH SECURITY FENCE			
	SURROUNDING PROJECT WORKS	LANDSCAPE84.32 m ² SKYLIGHT	FIRE PLACE	
	+	SITE AREA A361.38 m ² RL 78,000		
		$ \phi_{\phi} \phi$		
		POOL21.00 m2		
		RL 77,900		
		BBQ]	
		BBQ		
		POOL21.00 m ²		
				(
		SITE AREA A361.38 m ² SKYLIGHT LANDSCAPE84.32 m ²		,
//	////	///////	<u> </u>	0

SEDIMENT AND EROSION CONTROL NOTES

- GENERAL INSTRUCTION THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR THE CONTROL OF EROSION AND SEDIMENTATION TO THE SATISFACTION OF COUNCIL, NSW OFFICE OF WATER, OFFICE OF ENVIRONMENT AND HERITAGE, THE EROSION AND SEDIMENTATION CONTROLS SHOWN ON THE DRAWINGS SHALL ONLY BE USED AS A GUIDE BY THE CONTRACTOR, AND SHALL REPRESENT THE MINIMUM REQUIREMENT ONLY. 2. THE CONTRACTOR SHALL ENSURE THAT ALL SOIL AND WATER MANAGEMENT WORKS ARE LOCATED AS DOCUMENTED OR AS OTHERWISE DIRECTED BY THE SUPERINTENDENT.
- ALL WORK SHALL BE GENERALLY CARRIED OUT IN ACCORDANCE WITH a. LOCAL AUTHORITY REQUIREMENTS EPA REQUIREMENTS
- NSW DEPARTMENT OF HOUSING MANUAL "MANAGING URBAN STORMWATER, SOILS AND CONSTRUCTION", 4th EDITION, MARCH 2004.
- 3. MAINTAIN THE EROSION CONTROL DEVICES TO THE SATISFACTION OF
- THE SUPERINTENDENT AND THE LOCAL AUTHORITY. . WHEN STORMWATER PITS ARE CONSTRUCTED, PREVENT SITE RUNOFF ENTERING UNLESS SEDIMENT FENCES ARE ERECTED AROUND PITS.
- 5. CONTRACTOR IS TO ENSURE ALL EROSION & SEDIMENT CONTROL DEVICES ARE MAINTAINED IN GOOD WORKING ORDER AND OPERATE EFFECTIVELY. REPAIRS AND OR MAINTENANCE SHALL BE UNDERTAKEN AS REQUIRED, PARTICULARLY FOLLOWING STORM EVENTS.
- LAND DISTURBANCE
- 6. WHERE PRACTICAL, THE SOIL EROSION HAZARD ON THE SITE WILL BE KEPT AS LOW AS POSSIBLE. TO THIS END, WORKS SHOULD BE UNDERTAKEN IN THE FOLLOWING SEQUENCE:

- INSTALL A SEDIMENT FENCE ALONG THE BOUNDARIES AS SHOWN а. ON PLAN. REFER DETAIL.
- CONSTRUCT STABILISED CONSTRUCTION ENTRANCE TO LOCATION
- AS DETERMINED BY SUPERINTENDENT/ENGINEER. REFER DETAIL. UNDERTAKE SITE DEVELOPMENT WORKS IN ACCORDANCE WITH
- THE ENGINEERING PLANS. WHERE POSSIBLE, PHASE DEVELOPMENT SO THAT LAND DISTURBANCE IS CONFINED TO AREAS OF WORKABLE SIZE.

EROSION CONTROL

- 7. DURING WINDY WEATHER, LARGE, UNPROTECTED AREAS WILL BE KEPT MOIST (NOT WET) BY SPRINKLING WITH WATER TO KEEP DUST UNDER CONTROL.
- 8. FINAL SITE LANDSCAPING WILL BE UNDERTAKEN AS SOON AS POSSIBLE AND WITHIN 20 WORKING DAYS FROM COMPLETION OF CONSTRUCTION ACTIVITIES. SEDIMENT CONTROL
- 9. STOCKPILES WILL NOT BE LOCATED WITHIN 2 METRES OF HAZARD AREAS, INCLUDING LIKELY AREAS OF CONCENTRATED OR HIGH VELOCITY FLOWS SUCH AS WATERWAYS. WHERE THEY ARE BETWEEN 2 AND 5 METRES FROM SUCH AREAS, SPECIAL SEDIMENT CONTROL MEASURES SHOULD BE TAKEN TO MINIMISE POSSIBLE POLLUTION TO DOWNSLOPE WATERS, E.G. THROUGH INSTALLATION OF SEDIMENT FENCING.
- 10. ANY SAND USED IN THE CONCRETE CURING PROCESS (SPREAD OVER THE SURFACE) WILL BE REMOVED AS SOON AS POSSIBLE AND WITHIN 10 WORKING DAYS FROM PLACEMENT.
- 1. WATER WILL BE PREVENTED FROM ENTERING THE PERMANENT DRAINAGE SYSTEM UNLESS IT IS RELATIVELY SEDIMENT FREE, I.E. THE CATCHMENT AREA HAS BEEN PERMANENTLY LANDSCAPED AND/OR ANY LIKELY SEDIMENT HAS BEEN FILTERED THROUGH AN APPROVED




- REHABILITATED.
- MATERIALS AND LITTER.


OTHER MATTERS

- INSTALLED OUTSIDE THE DRIP LINE
- CONDITIONS.
- WHICH EVER IS THE GREATER

- COMPACT THE SOIL AROUND THEM.





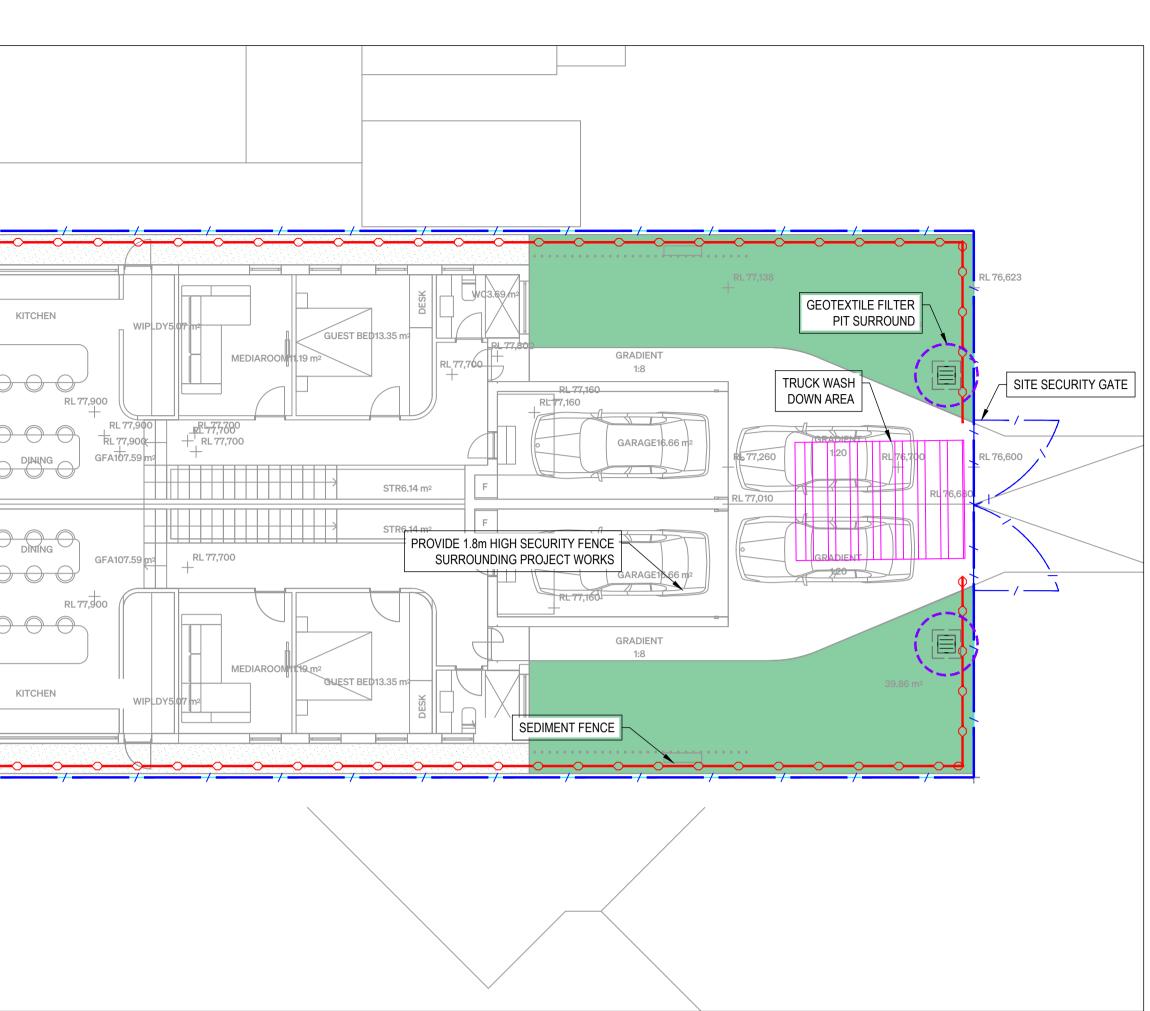

SEDIMENT & EROSION PLAN SCALE 1:100

12. TEMPORARY SOIL AND WATER MANAGEMENT STRUCTURES WILL BE REMOVED ONLY AFTER THE LANDS THEY ARE PROTECTING ARE

13. ACCEPTABLE RECEPTORS WILL BE PROVIDED FOR CONCRETE AND MORTAR SLURRIES, PAINTS, ACID WASHINGS, LIGHT-WEIGHT WASTE


14. ANY EXISTING TREES WHICH FORM PART OF THE FINAL LANDSCAPING PLAN WILL BE PROTECTED FROM CONSTRUCTION ACTIVITIES BY:


PROTECTING THEM WITH BARRIER FENCING OR SIMILAR MATERIALS

ENSURING THAT NOTHING IS NAILED TO THEM PROHIBITING PAVING, GRADING, SEDIMENT WASH OR PLACING OF STOCKPILES WITHIN THE DRIP LINE EXCEPT UNDER THE FOLLOWING

ENCROACHMENT ONLY OCCURS ON ONE SIDE AND NO CLOSER TO THE TRUNK THAN EITHER 1.5 METRES OR HALF THE DISTANCE BETWEEN THE OUTER EDGE OF THE DRIP LINE AND THE TRUNK,

(II) A DRAINAGE SYSTEM THAT ALLOWS AIR AND WATER TO CIRCULATE THROUGH THE ROOT ZONE (E.G. A GRAVEL BED) IS PLACED UNDER ALL FILL LAYERS OF MORE THAN 300 MILLIMETRES DEPTH (III) CARE IS TAKEN NOT TO CUT ROOTS UNNECESSARILY NOR TO



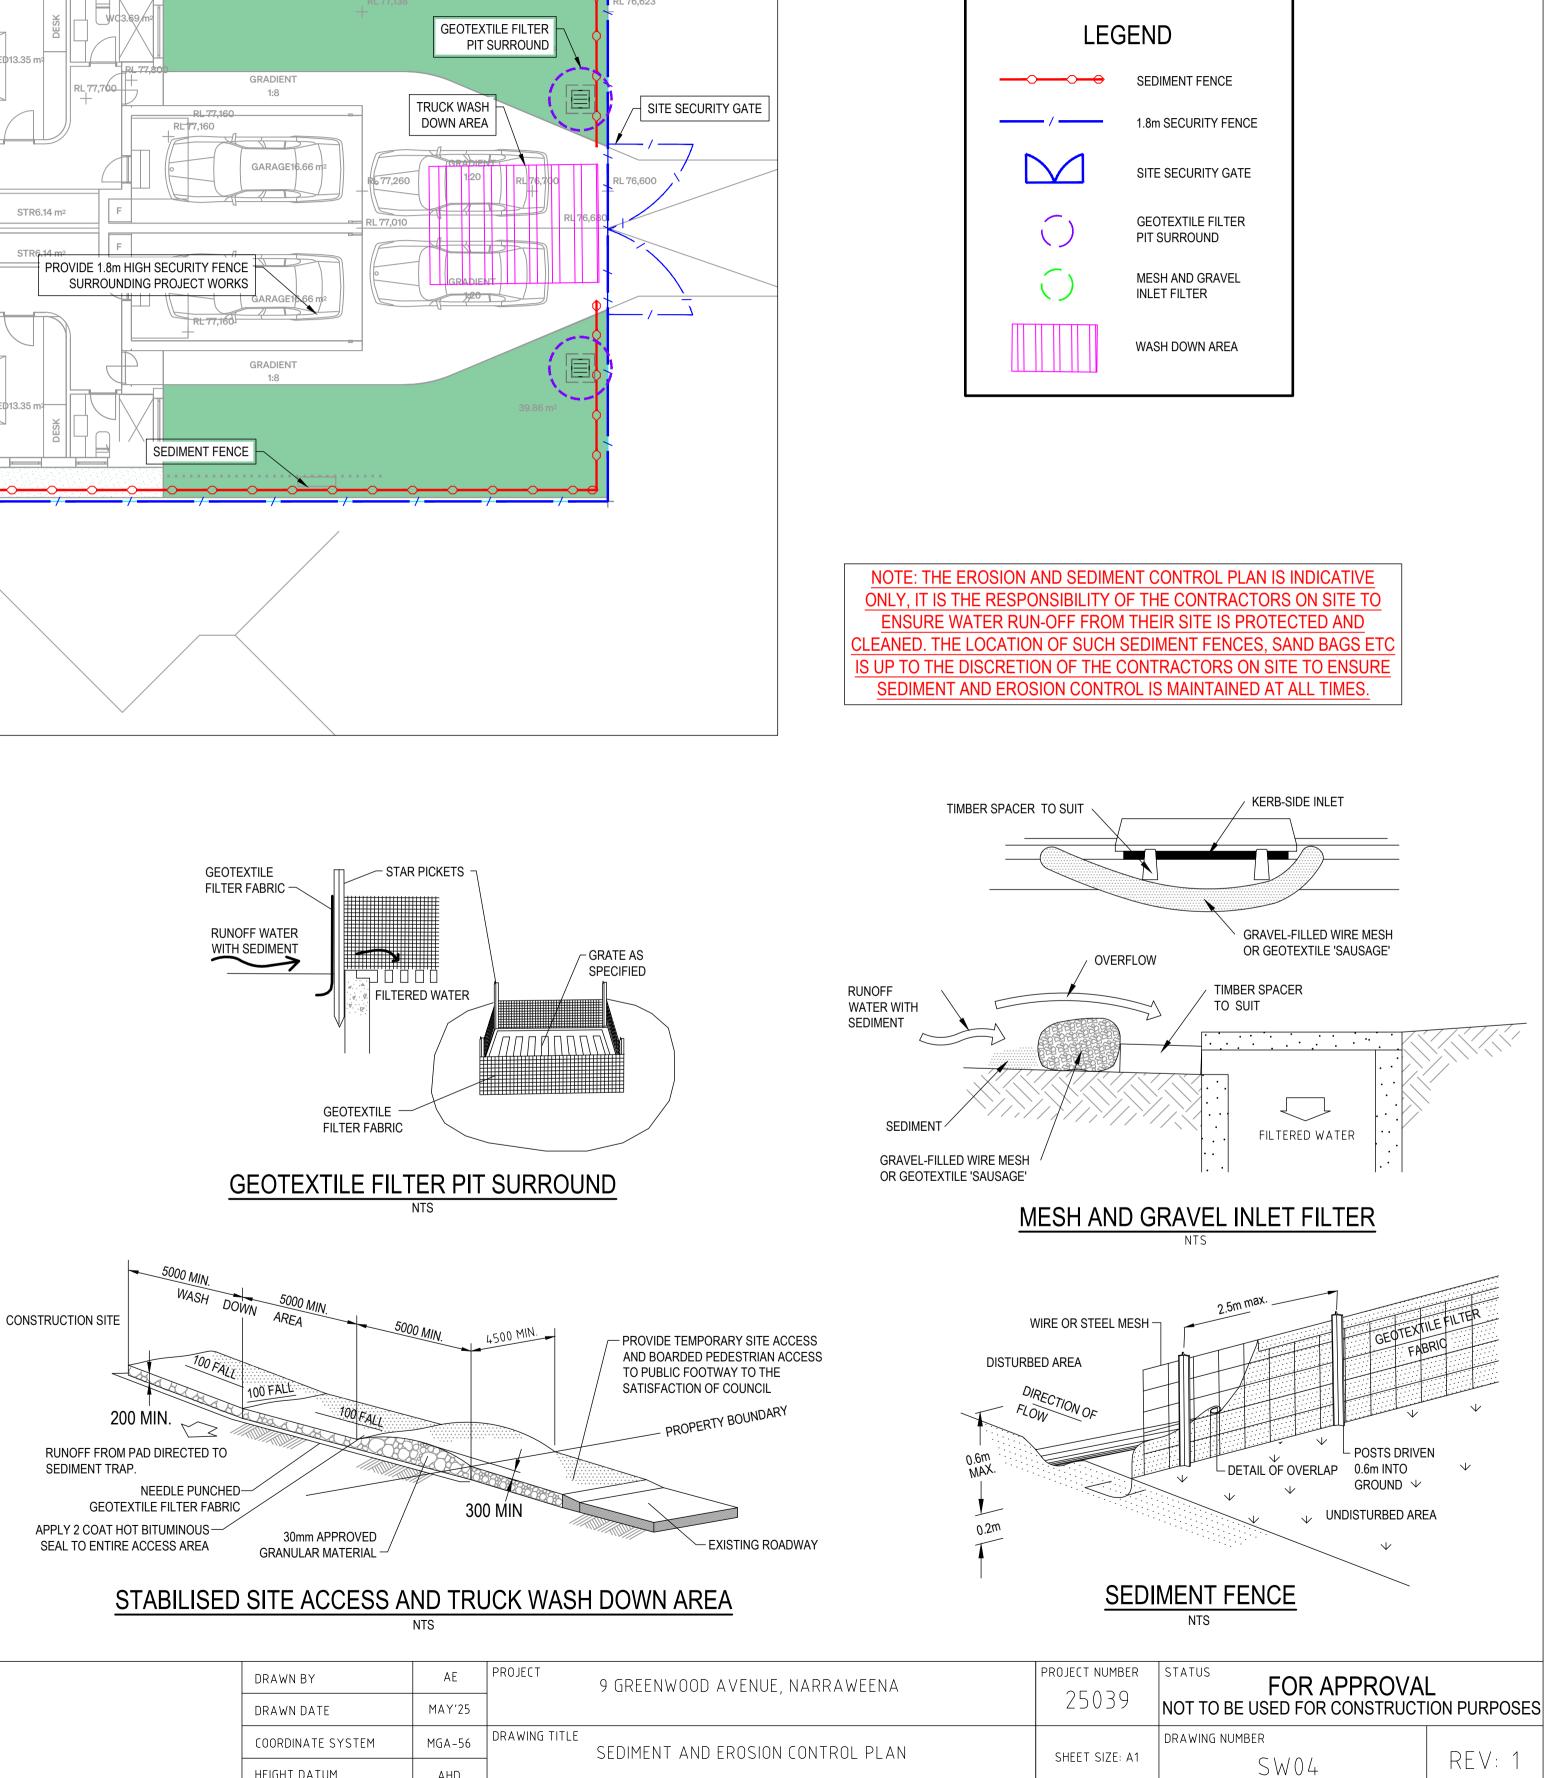

	DRAWN BY	AE	PROJECT	9 GREENWOOD AVENUE, NARRAW
NE	DRAWN DATE	MAY'25		
NSULTING	COORDINATE SYSTEM	MGA-56	DRAWING TITLE	SEDIMENT AND EROSION CONTROL
TORMWATER . FLOODING	HEIGHT DATUM	AHD		