



MULTI PURPOSE FILTER SCREEN
scale 1:10

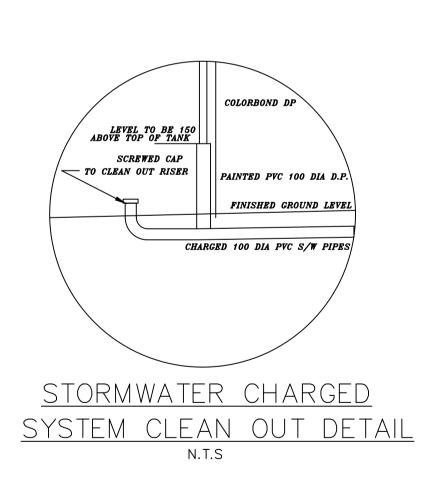

For external levels refer to architectural plans.
Provide MIN. 150mm between internal FFL's and external RL's.
Refer to future issued council boundary levels.

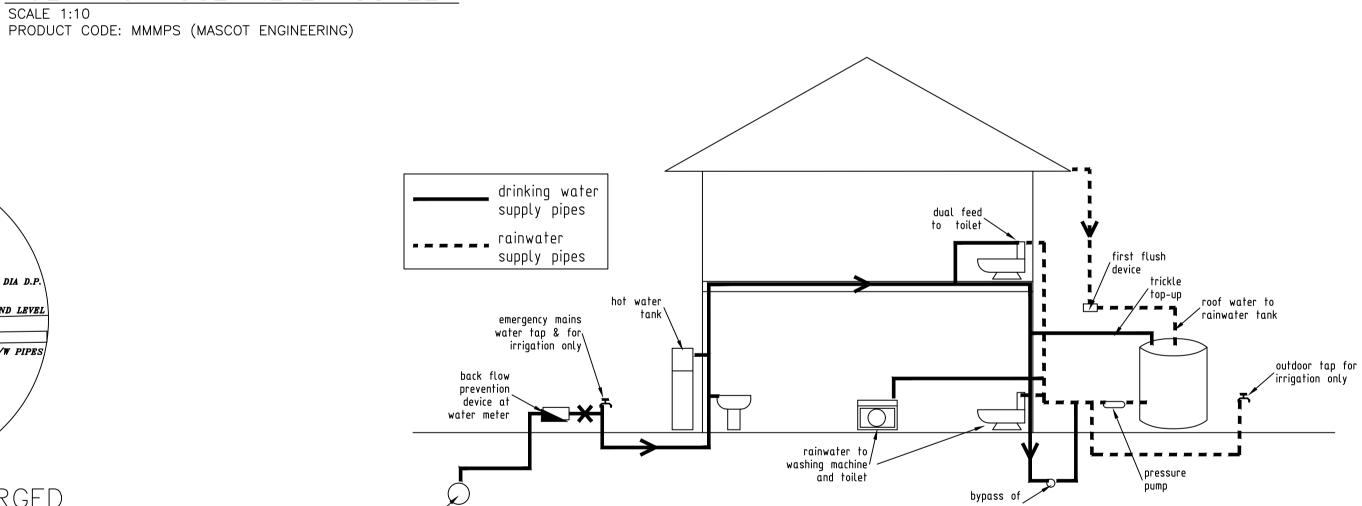

NOTES

WORKS.

CONTRACTORS EXPENSE.

1. THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE

2. PRIOR TO COMMENCEMENT OF WORKS THE CONTRACTOR SHALL

ARCHITECTURAL DRAWINGS, STRUCTURAL DRAWINGS AND THE

SATISFY HIMSELF OF THE CORRECT LOCATION OF EXISTING SERVICES WHETHER INDICATED OR NOT ON THE PLANS. ANY

DAMAGE TO EXISTING SERVICES SHALL BE RECTIFIED AT THE

3. TRAFFIC MANAGEMENT MEASURES HAVE TO BE IMPLEMENTED AND MAINTAINED DURING CONSTRUCTON, ALL IN ACCORDANCE

WITH COUNCIL'S REQUIREMENTS. THE CONTRACTOR SHALL MAINTAIN SAFE PEDESTRIAN ACCESS ALONG THE FOOTPATH.

AND RETAINING WALL TYPES ADN LOCATIONS.

AND EXTENT OF ALL LANDSCAPED AREAS.

450mm SQ. UP TO 600mm DEEP

600mm SQ. UP TO 1000mm DEEP

4. THE CONTRACTOR SHALL EFFECT TEMPORARY DRAINAGE

MEASURES TO AVOID LOCALISED PONDING OF SURFACE RUN-OFF.

5. REFER TO ARCHITECT'S DRAWINGS FOR ALL DETAILS (LEVELS, GRADING ETC.) OF DRIVEWAYS, CONCRETE AND PAVED AREAS,

6. REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR DETAILS

7. ALL SWD PIPES ARE UPVC AT 1.0% MINIMUM GRADE (UNO).

9. ALL PITS LOCATED IN TRAFFICABLE AREAS, (IE, DRIVEWAYS)

10. PROVIDE STEP IRONS TO ALL PITS GREATER THAN 1.2m DEEP.

11. THE CONTRACTOR SHALL IMPLEMENT ALL SOIL EROSION AND SEDIMENT CONTROL MEASURES PRIOR TO COMMENCEMENT OF

HAZARD AREAS SUCH AS DRAINAGE LINES. THIS TOPSOIL IS TO

13. THE CONTRACTOR SHALL REGULARLY MAINTAIN ALL SEDIMENT

AND EROSION CONTROL DEVICES AND REMOVE ACCUMULATED SILT

FROM SUCH DEVICES. ALL SILT REMOVED SHALL BE DISPOSED OF

DISTURBED AREAS ARE REVEGETATED AND FURTHER AS MAY BE

8. SWD PITS CAN BE PRE-CAST SIZED AS FOLLOWS:

TO HAVE MEDIUM DUTY GRATED COVERS SUITABLE FOR

WITHSTANDING LOADS ASSOCIATED WITH SMALL TRUCKS.

12. TOPSOIL SHALL BE STRIPPED DN STOCKPILED OUTSIDE

BE RESPREAD LATER ON AREAS TO BE REVEGETATED.

AS DIRECTED BY THE SUPERINTENDENT. THE PERIOD FOR

DIRECTED BY THE SUPERINTENDENT OR COUNCIL.

FINAL COMPLETION OF WORKS

MAINTAINING THESE DEVICES SHALL BE AT LEAST UNTIL ALL

14. THE CONTRACTOR SHALL MAINTAIN DUST CONTROL UNTIL

RAINWATER TANK EXPLANATORY DIAGRAM (not to scale)

DETAIL 2 - FOR ALL TOILETS, AND AT LEAST ONE OUTDOOR TAP

(NOT FOR HUMAN CONSUMPTION).

