

J2221. 29th May, 2019. Page 1.

PRELIMINARY GEOTECHNICAL ASSESSMENT:

7 Kens Road, Frenchs Forest

1.0	LANDSLIP RISK CLASS (Highlight indicates Landslip Risk Class of property)
	A - Geotechnical Report not normally required
	B - Geotechnical Engineer (Under Council Guidelines) to decide if Geotechnical Report is required
	C - Geotechnical Report is required
	D - Geotechnical Engineer (Under Council Guidelines) to decide if Geotechnical Report is required
	E - Geotechnical Report required

2.0 Proposed Development

- **2.1** Construct a new carport on the uphill side of the house.
- **2.2** Apart from those for footings, no excavations are required. No fills are shown on the plans.
- 2.3 Details of the proposed development are shown on 2 drawings by Custom Construction, Project number 2019019, drawings numbered A101 and 102, Issue 1, dated 11/4/19.

3.0 Site Location

- **3.1** The site was inspected on the 27th May, 2019.
- 3.2 This residential property is on the low side of the road and has a S aspect. It is located on the gently graded upper middle reaches of a hillslope. Medium Strength Hawkesbury Sandstone bedrock outcrops on the downhill side of the property. Where sandstone is not exposed, it is expected to underlie the surface at relatively shallow depths. The natural surface of the block has been altered with an excavation for a pool



J2221.

29th May, 2019.

Page 2.

on the uphill side of the property. The proposed development will not alter the surface

further for the proposed works.

3.3 The site shows no indications of historical movement in the natural surface

that could have occurred since the property was developed. We are aware of no

history of instability on the property.

4.0 Site Description

The natural slope falls across the site at gentle angles. At the road frontage, a concrete

driveway runs to a concrete parking area on the uphill side of the house. An excavation has

been made in the slope between the road frontage and the house for a pool. The water level

of the pool indicates no ground movement has occurred in the shell of the pool since its

construction. A fill has been placed on the downhill side of the pool to level the pool area. The

fill is supported by a stable ~0.9m high keystone block retaining wall. The two-storey brick

house is supported on brick walls and brick piers. The supporting walls display no significant

signs of movement and the supporting piers stand vertical. A gently sloping lawn and garden

area extends off the downhill side of the house to the lower common boundary. Competent

Medium Strength Sandstone outcrops through the slope in this location. The area

surrounding the house and driveway is mostly lawn-covered with some paved areas. No signs

of movement associated with slope instability were observed on the grounds. No cliffs or

large rock faces were observed on the property or in the near vicinity. The adjoining

neighbouring properties were observed to be in good order as seen from the road and the

subject property.

6.0 Recommendations

The proposed development and site conditions were considered and applied to the Council

Flow Chart.

Provided good engineering and building practice are followed, no further Geotechnical

assessment is recommended for the proposed development.



J2221. 29th May, 2019. Page 3.

White Geotechnical Group Pty Ltd.

Ben White M.Sc. Geol., AuslMM., CP GEOL.

Bulut


No. 222757

Engineering Geologist.



J2221. 29th May, 2019. Page 4.

Preliminary Assessment Flow Chart – Northern Beaches Council (Warringah)

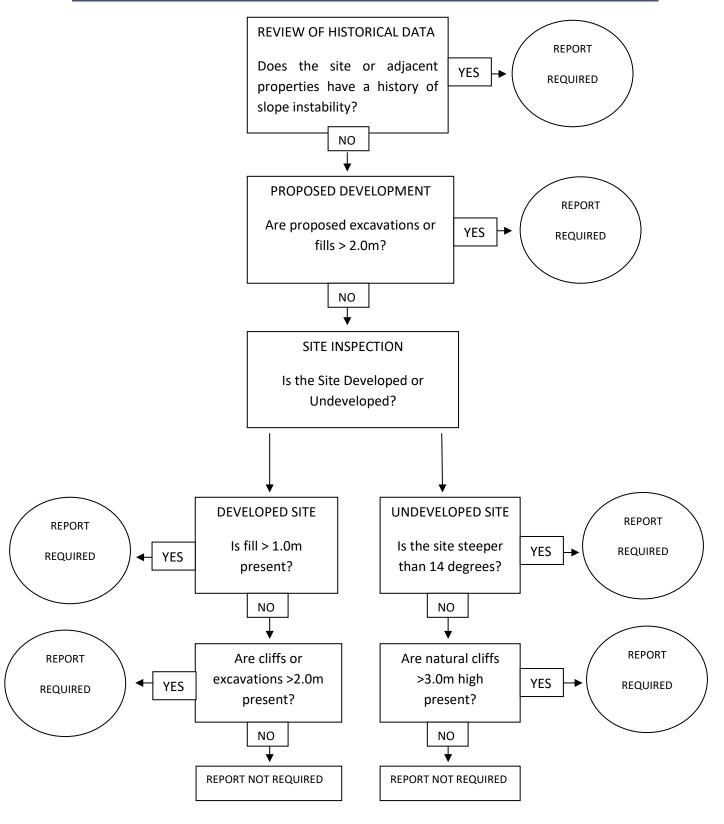



J2221. 29th May, 2019. Page 5.

Information about your Preliminary Assessment

This Preliminary Assessment relies on visual observations of the surface features observed during the site inspection. Where reference is made to subsurface features (e.g. the depth to rock) these are interpretations based on the surface features present and previous experience in the area. No ground testing was conducted as part of this assessment and it is possible subsurface conditions will vary from those interpreted in the assessment.

In some cases, we will recommend no further geotechnical assessment is necessary despite the presence of existing fill or a rock face on the property that exceed the heights that would normally trigger a full geotechnical report, according to the Preliminary Assessment Flow Chart. Where this is the case, if it is an existing fill, it is either supported by a retaining wall that we consider stable, or is battered at a stable angle and situated in a suitable position on the slope. If it is a rock face that exceeds the flow chart limit height, the face has been deemed to be competent rock that is considered stable. These judgements are backed by the inspection of over 5000 properties on Geotechnical related matters.

The proposed excavation heights referred to in section 2.0 of this assessment are estimated by review of the plans we have been given for the job. Although we make every reasonable effort to provide accurate information excavation heights should be checked by the owner or person lodging the DA. If the excavation heights referred to in in section 2.0 of this assessment are incorrect we are to be informed immediately and before this assessment is lodged with the DA.