

6 December 2021



Leslie Anthony Cassar
3/231 Whale Beach Road
WHALE BEACH NSW 2107

Dear Sir/Madam

Application Number: REV2021/0034
Address: Lot B DP 316404 , 231 Whale Beach Road, WHALE BEACH NSW 2107
Proposed Development: Review of Determination of Application DA2020/0442 for demolition works and construction of a Mixed Use Development comprising Shop Top Housing and retail premises, with associated carparking, landscaping and strata subdivision

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at www.northernbeaches.nsw.gov.au

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to council@northernbeaches.nsw.gov.au

Regards,



Rodney Piggott
Manager Development Assessments

NOTICE OF DETERMINATION

Application Number:	REV2021/0034
Determination Type:	Review of Determination

APPLICATION DETAILS

Applicant:	Leslie Anthony Cassar
Land to be developed (Address):	Lot B DP 316404 , 231 Whale Beach Road WHALE BEACH NSW 2107
Proposed Development:	Review of Determination of Application DA2020/0442 for demolition works and construction of a Mixed Use Development comprising Shop Top Housing and retail premises, with associated carparking, landscaping and strata subdivision

DETERMINATION - APPROVED

Made on (Date)	01/12/2021
Consent to operate from (Date):	01/12/2021
Consent to lapse on (Date):	01/12/2026

Detail of Conditions

The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.

Note:

If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.

DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

1. **Approved Plans and Supporting Documentation**

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

a) Approved Plans

Architectural Plans - Endorsed with Council's stamp		
Drawing No.	Dated	Prepared By
DA01 Site Plan, Revision W	8 November 2021	Richard Cole Architecture
DA03 Basement Plan, Revision V	7 October 2021	Richard Cole Architecture
DA04 Ground Floor Plan, Revision V	7 October 2021	Richard Cole Architecture
DA05 Level 1 Plan, Revision V	7 October 2021	Richard Cole Architecture
DA06 Level 2 Plan, Revision V	7 October 2021	Richard Cole Architecture
DA07 Level 3 Plan, Revision V	7 October 2021	Richard Cole Architecture
DA08 Level 4 Plan, Revision V	7 October 2021	Richard Cole Architecture
DA09 Roof Plan, Revision W	8 November 2021	Richard Cole Architecture
DA10 Elevations, Revision V	7 October 2021	Richard Cole Architecture
DA11 Elevations, Revision W	8 November 2021	Richard Cole Architecture
DA12 Boundary Elevations, Revision V	7 October 2021	Richard Cole Architecture
DA13 Section, Revision V	7 October 2021	Richard Cole Architecture
DA14 Section, Revision V	7 October 2021	Richard Cole Architecture
DA35 Finishes Board - Surf Road, Revision V	7 October 2021	Richard Cole Architecture
DA36 Finishes Board - Whale Beach Road, Revision V	7 October 2021	Richard Cole Architecture

Engineering Plans		
Drawing No.	Dated	Prepared By
21078/01 Proposed Car Park Layout, Revision D	10 November 2021	TEF Consulting

Reports / Documentation – All recommendations and requirements contained

within:		
Report No. / Page No. / Section No.	Dated	Prepared By
Access Report, Issue B	28 July 2021	Accessible Building Solutions
Acoustic Report, Revision B	5 February 2020	JHA Services
Acoustic Report Addendum Letter	26 July 2021	JHA Services
Geotechnical Report	27 September 2019	Douglas Partners Pty Ltd
Geotechnical Forms 1 and 1a	28 October 2021	Douglas Partners Pty Ltd
Coastline Risk Management Report	7 October 2021	Cardno (NSW/ACT) Pty Ltd
Coastline Risk Management Form 1	7 October 2021	Cardno (NSW/ACT) Pty Ltd
Arboricultural Impact Assessment	July 2021	Urban Forestry Australia
BCA Design Compliance Report	2 August 2021	MBC Modern Building Certifiers
Stormwater Asset Relocation Investigation & Report	October 2020	Barrenjoey Consulting Engineers Pty Ltd

- b) Any plans and / or documentation submitted to satisfy the Conditions of this consent.
- c) The development is to be undertaken generally in accordance with the following:

Landscape Plans		
Drawing No.	Dated	Prepared By
DA-L01C Landscape Site Plan	9 August 2021	Trish Dobson
DA-L02C Site Planting Plan	9 August 2021	Trish Dobson
DA-L07C Planting Schedule	9 August 2021	Trish Dobson
DA-L08C Tree Retention Plan + Details	9 August 2021	Trish Dobson
DA-L09C Street Elevations	9 August 2021	Trish Dobson

Waste Management Plan		
Drawing No/Title.	Dated	Prepared By
Waste Management Plan	23 April 2020	Diane Cassar and Leslie Cassar

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

2. **Compliance with Other Department, Authority or Service Requirements**

The development must be carried out in compliance with all recommendations and

requirements, excluding general advice, within the following:

Other Department, Authority or Service	EDMS Reference	Dated
Ausgrid	Response Ausgrid Referral	[undated]

(NOTE: For a copy of the above referenced document/s, please see Application Tracking on Council's website www.northernbeaches.nsw.gov.au)

Reason: To ensure the work is carried out in accordance with the determination and the statutory requirements of other departments, authorities or bodies.

3. **Approved Land Use**

This consent authorises a mixed-use development, comprising shop top housing and additional retail premises.

shop top housing means one or more dwellings located above ground floor retail premises or business premises.

retail premises means a building or place used for the purpose of selling items by retail, or hiring or displaying items for the purpose of selling them or hiring them out, whether the items are goods or materials (or whether also sold by wholesale), and includes any of the following—

- (a) *(Repealed)*
 - (b) *cellar door premises,*
 - (c) *food and drink premises,*
 - (d) *garden centres,*
 - (e) *hardware and building supplies,*
 - (f) *kiosks,*
 - (g) *landscaping material supplies,*
 - (h) *markets,*
 - (i) *plant nurseries,*
 - (j) *roadside stalls,*
 - (k) *rural supplies,*
 - (l) *shops,*
 - (la) *specialised retail premises,*
 - (m) *timber yards,*
 - (n) *vehicle sales or hire premises,*
- but does not include highway service centres, service stations, industrial retail outlets or restricted premises.*

This consent authorises the first use of the Ground Floor and Level 3 retail premises. Retail 1 is specifically approved for the purpose of a restaurant or cafe.

restaurant or cafe means a building or place the principal purpose of which is the preparation and serving, on a retail basis, of food and drink to people for consumption on the premises, whether or not liquor, takeaway meals and drinks or entertainment are also provided.

Any variation to the approved land use and/occupancy of the building or any part of the building beyond the scope of the above definitions will require separate development consent.

Reason: To ensure compliance with the terms of this consent.

4. Prescribed Conditions

- (a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
 - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
 - (i) in the case of work for which a principal contractor is required to be appointed:
 - A. the name and licence number of the principal contractor, and
 - B. the name of the insurer by which the work is insured under Part 6 of that Act,
 - (ii) in the case of work to be done by an owner-builder:
 - A. the name of the owner-builder, and
 - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.
- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
 - (i) protect and support the adjoining premises from possible damage from the excavation, and
 - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
 - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
 - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost of work carried out for the purposes of this clause, whether carried out on the

allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

5. General Requirements

(a) Unless authorised by Council:

Building construction and delivery of material hours are restricted to:

- 7.00 am to 5.00 pm inclusive Monday to Friday,
- 8.00 am to 1.00 pm inclusive on Saturday,
- No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) Should any asbestos be uncovered on site, its demolition and removal must be carried out in accordance with WorkCover requirements and the relevant Australian Standards.
- (c) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (d) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (e) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (f) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (g) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (h) No skip bins, building materials, demolition or excavation waste of any nature, and no hoist, plant or machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (i) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.

- (j) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.
- (k) Prior to the commencement of any development onsite for:
 - i) Building/s that are to be erected
 - ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
 - iii) Building/s that are to be demolished
 - iv) For any work/s that is to be carried out
 - v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.
- (l) A "Road Opening Permit" must be obtained from Council, and all appropriate charges paid, prior to commencement of any work on Council property. The owner/applicant shall be responsible for all public utilities and services in the area of the work, shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.
- (m) The works must comply with the relevant Ausgrid Network Standards and SafeWork NSW Codes of Practice.
- (n) Requirements for new swimming pools/spas or existing swimming pools/spas affected by building works.
 - (1) Child resistant fencing is to be provided to any swimming pool or lockable cover to any spa containing water and is to be consistent with the following;

Relevant legislative requirements and relevant Australian Standards (including but not limited) to:

 - (i) Swimming Pools Act 1992
 - (ii) Swimming Pools Amendment Act 2009
 - (iii) Swimming Pools Regulation 2018
 - (iv) Australian Standard AS1926 Swimming Pool Safety
 - (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
 - (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools.
 - (2) A 'KEEP WATCH' pool safety and aquatic based emergency sign, issued by Royal Life Saving is to be displayed in a prominent position within the pool/spa area.
 - (3) Filter backwash waters shall be conveyed to the Sydney Water sewerage system in sewered areas or managed on-site in unsewered areas in a manner that does not cause pollution, erosion or run off, is separate from the irrigation area for any wastewater system and is separate from any onsite stormwater management system.
 - (4) Swimming pools and spas must be registered with the Division of Local

Government.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

FEES / CHARGES / CONTRIBUTIONS

6. **Policy Controls**

Northern Beaches 7.12 Contributions Plan 2021

A monetary contribution of \$164,929.61 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan 2021. The monetary contribution is based on a development cost of \$16,492,961.00.

The monetary contribution is to be paid prior to the issue of the first Construction Certificate or Subdivision Certificate whichever occurs first, or prior to the issue of the Subdivision Certificate where no Construction Certificate is required. If the monetary contribution (total or in part) remains unpaid after the financial quarter that the development consent is issued, the amount unpaid (whether it be the full cash contribution or part thereof) will be adjusted on a quarterly basis in accordance with the applicable Consumer Price Index. If this situation applies, the cash contribution payable for this development will be the total unpaid monetary contribution as adjusted.

The proponent shall provide to the Certifying Authority written evidence (receipt/s) from Council that the total monetary contribution has been paid.

The Northern Beaches Section 7.12 Contributions Plan 2021 may be inspected at 725 Pittwater Rd, Dee Why and at Council's Customer Service Centres or alternatively, on Council's website at www.northernbeaches.nsw.gov.au

This fee must be paid prior to the issue of the Construction Certificate. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

7. **Security Bond**

A bond (determined from cost of works) of \$10,000 and an inspection fee in accordance with Council's Fees and Charges paid as security are required to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, and details demonstrating payment are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at www.northernbeaches.nsw.gov.au).

Reason: To ensure adequate protection of Council's infrastructure.

8. **Construction, Excavation and Associated Works Bond (Drainage works)**

The applicant is to lodge a bond of \$150,000 as security against any damage or failure to complete the construction of stormwater drainage works as part of this consent.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's infrastructure.

9. **Construction, Excavation and Associated Works Security Bond (Crossing / Kerb)**

The applicant is to lodge a Bond of \$100,000 as security against any damage or failure to complete the construction of any vehicular crossings, kerb and gutter, any footpath works and removal of any redundant driveways required as part of this consent.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's infrastructure.

10. **Construction, Excavation and Associated Works Bond (Maintenance for civil works)**

The developer/applicant must lodge with Council a maintenance bond of \$25,000 for the construction of public domain works. The maintenance bond will only be refunded upon completion of the six month maintenance period, if work has been completed in accordance with the approved plans and to the satisfaction of Council. The maintenance bond is to be paid prior to Council issuing practical completion.

Reason: To ensure adequate protection of Council infrastructure.

CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

11. **Public Domain Plan**

A Public Domain Plan for works within the Whale Beach Road and Surf Road public road reserve, generally in accordance with the approved plans, and in compliance with Council's *Northern Beaches Public Spaces Vision & Design Guidelines*, shall be submitted as part of a Infrastructure Works on Council Roadway application under Section 138 of the Roads Act, for approval by Council, with sufficient detail design information including the following development requirements:

- a. all civil works shall be accompanied by Engineering drawings including existing and proposed levels, long and cross sections, proposed design layout and materials, for the works proposed within the road reserve,
- b. proposed stormwater diversions works as required by the Development Engineer Referral response,
- c. reinstatement of the existing driveway crossing along Whale Beach Road to kerb and footpath, including details plans and sections, and selection of materials, with proposed

- gradients no more than a 2.5% fall from building openings to top of kerb, and to match existing levels along adjoining properties,
- d. footpath material shall comply with the Northern Beaches Public Spaces Vision & Design Guidelines applicable to the 'Beach' Character Area Map, requiring: insitu concrete, off-white cement, and broom finish,
 - e. tactile ground surface indicators at kerb ramps crossings and crossovers in accordance with Australian Standard 1428.4.1-2009 - Design for Access and Mobility,
 - f. details of any utility alignment and level changes,
 - g. existing street trees retained or removed, and any street tree replacement planting,
 - h. any proposed street tree planting within pavement shall be in accordance with Northern Beaches Council's Standard Drawing 1300 - Tree Pit Details, and the tree species shall be at a pre-ordered 200 litre container,

The following works shall also be documented:

- i. any public seating in accordance with Council's *Northern Beaches Public Spaces Vision & Design Guidelines*,
- j. any bicycle racks in accordance with Council's *Northern Beaches Public Spaces Vision & Design Guidelines*,
- k. kerb ramps in accordance with Council's *Northern Beaches Public Spaces Vision & Design Guidelines*,
- l. any other additional relevant works within the road reserve.

Any work carried out upon public land shall have all the necessary prior approvals and permits from Council and utility authorities in place prior to commencement to conduct such works.

Reason: compliance with Council standards for works on public land.

12. **On Slab Landscape Works**

Details shall be submitted to the Certifying Authority prior to the issue of the Construction Certificate indicating the proposed method of waterproofing and drainage to all planters over slab, over which soil and planting is being provided.

Landscape treatment details shall also be submitted to the Certifying Authority prior to the issue of the Construction Certificate indicating the proposed soil type, planting, automatic irrigation, services connections, and maintenance activity schedule.

The following soil depths are required to support landscaping as proposed:

- i) 300mm for lawn
- ii) 600mm for shrubs
- iii) 1m for small trees

Design certification shall be submitted to the Certifying Authority by a qualified Structural Engineer that the planters are designed structurally to support the 'wet' weight of landscaping (soil, materials and established planting).

For all new residential works with two or more dwellings and mixed use developments the maintenance activity schedule shall incorporate an on-going maintenance plan that shall be submitted to the Certifying Authority outlining a program to monitor and replenish soil levels as a result of soil shrinkage over time.

Reason: To ensure appropriate soil depth for planting and secure waterproofing and drainage is installed.

13. **Stormwater Disposal**

The applicant is to submit Stormwater Engineering Plans for the new development within this development consent, prepared by an appropriately qualified and practicing Civil Engineer, indicating all details relevant to the collection and disposal of stormwater from the site, buildings, paved areas and where appropriate adjacent catchments. Stormwater shall be conveyed from the site to the proposed Council piped drainage system in Surf Road. The plans are to include an overland flow path a minimum of 600mm wide along the southern boundary of the site.

Details demonstrating compliance are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for disposal and stormwater management arising from the development.

14. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in the Geotechnical Report prepared by Douglas Partners dated September 2019 are to be incorporated into the construction plans. Prior to issue of the Construction Certificate, Form 2 of the Geotechnical Risk Management Policy for Pittwater (Appendix 5 of P21 DCP) is to be completed and submitted to the Accredited Certifier.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

15. **Car Parking Standards**

The driveway/access ramp grades, access and car parking facilities must comply with the Australian/New Zealand Standard AS/NZS 2890.1:2004 - Parking facilities - Off-street car parking. The dimensions of car parking bays and aisle widths in the car park are to comply with Australian/New Zealand Standard for Off-Street Parking AS/NZS 2890.1-2004.

Details demonstrating compliance with this condition are to be submitted to the Certifying Authority prior to the issue of a construction certificate.

Reason: To ensure compliance with Australian Standards relating to manoeuvring, access and parking of vehicles.

16. **Vehicular Swept Paths**

Vehicular manoeuvring paths must be provided to demonstrate all vehicles can enter or depart the site in a forward direction without encroaching on required car parking spaces. The drawings must be compliant with Australian/New Zealand Standard AS/NZS 2890.1:2004 - Parking facilities - Off-street car parking.

Details demonstrating compliance with this condition must be submitted to the Certifying Authority prior to the issue of the construction Certificate.

Reason: To ensure compliance with Australian Standards relating to manoeuvring, access and parking of vehicles.

17. **Construction Traffic Management Plan**

As a result of the site constraints, limited vehicle access and parking, a Construction Traffic Management Plan (CTMP) and report shall be prepared by an RMS accredited person and submitted to and approved by the Northern Beaches Council Traffic Team prior to issue of any Construction Certificate.

Truck movements must be agreed with Council's Traffic Engineer prior to submission of the CTMP.

The CTMP must address following:

- The proposed phases of construction works on the site, and the expected duration of each construction phase
- The proposed order in which works on the site will be undertaken, and the method statements on how various stages of construction will be undertaken
- Make provision for all construction materials to be stored on site, at all times
- The proposed areas within the site to be used for the storage of excavated materials, construction materials and waste containers during the construction period
- The proposed method of access to and egress from the site for construction vehicles, including access routes and truck routes through the Council area and the location and type of temporary vehicular crossing for the purpose of minimising traffic congestion and noise in the area, with no access across public parks or reserves being allowed
- The proposed method of loading and unloading excavation and construction machinery, excavation and building materials, formwork and the erection of any part of the structure within the site. Wherever possible mobile cranes should be located wholly within the site
- Make provision for parking onsite. All Staff and Contractors are to use the basement parking once available
- Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site are not permitted unless approved by Council prior
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for any activities involving the management of vehicle and pedestrian traffic
- The proposed manner in which adjoining property owners will be kept advised of the timeframes for completion of each phase of development/construction process. It must also specify that a minimum Fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measure
- Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes and concrete pumps, structures proposed on the footpath areas (hoardings, scaffolding or shoring) and any tree protection zones around Council street trees
- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the CTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities, such as (but not limited to) concrete pours, crane lifts and dump truck routes. These communications must be documented and submitted to Council prior to work commencing on site
- The proposed method/device to remove loose material from all vehicles and/or machinery before entering the road reserve, any run-off from the washing down of vehicles shall be directed to the sediment control system within the site
- Specify that the roadway (including footpath) must be kept in a serviceable condition for

the duration of construction. At the direction of Council, undertake remedial treatments such as patching at no cost to Council

- The proposed method of support to any excavation adjacent to adjoining properties, or the road reserve. The proposed method of support is to be designed and certified by an appropriately qualified and practising Structural Engineer, or equivalent
- Proposed protection for Council and adjoining properties
- The location and operation of any on site crane

The CTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – “Manual of Uniform Traffic Control Devices”, RMS’ Manual – “Traffic Control at Work Sites”.

All fees and charges associated with the review of this plan is to be in accordance with Council’s Schedule of Fees and Charges and are to be paid at the time that the Construction Traffic Management Plan is submitted.

Reason: To ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems.

18. **Removal of Redundant Driveways**

All redundant driveways shall be removed and reinstated to Council standard kerb and gutter. Suitably prepared plans shall be submitted to for an approval under and approved by Council prior to the issue of the Construction Certificate. All costs associated with the works shall be borne by the applicant.

A plan checking fee (amount to be advised) and lodgement of a performance bond may be required from the applicant prior to the release of the approval.

Reason: To maximise on street car parking by removing driveways that are no longer needed in accordance with Council policy.

19. **Amendments to the Approved Plans**

The following amendments are to be made to the Approved Plans:

- Excavation: The proposed area of excavation adjacent to the bedrooms of Apartment 1 is to be continued through to the east, extending to the point where the proposed excavated level meets existing ground level.
- Overland flow path: The 1.0m wide overland flow path along the Southern Boundary is to be reduced in width to 0.6m. Conversely, the setback between the overland flow path and the southern elevation is to be increased by 0.4m.
- Apartment 3 terrace: The planter box proposed on the southern elevation of the terrace associated with Apartment 3 is to continue the entire length of the terrace. A fixed privacy screen to a height of 1.7m above the FFL of the terrace is to be incorporated on the inside edge of the planter, for a minimum distance of 3m measured from the eastern facade of the external wall. The privacy screen can be constructed of translucent glazing or timber screens (TS), of the same detail of those proposed on Level 4.
- Apartment 4 Terrace: The planter box proposed on the southern elevation of the terrace associated with Apartment 4 is to continue the entire length of the terrace. A fixed privacy screen to a height of 1.7m above the FFL of the terrace is to be incorporated on the inside edge of the planter, for a minimum distance of 3m measured from the eastern facade of the external wall. The privacy screen can be constructed of translucent glazing or timber screens (TS), of the same detail of those proposed on Level 4.
- Spa: The spa on the Level 4 terrace is to be deleted from the plans and is not authorised by this consent.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the construction certificate.

Reason: To ensure the development achieves appropriate internal amenity.

20. **Boundary Identification Survey**

A boundary identification survey, prepared by a Registered Surveyor, is to be prepared in respect of the subject site.

The plans submitted for the Construction Certificate are to accurately reflect the property boundaries as shown on the boundary identification survey, with setbacks between the property boundaries and the approved works consistent with those nominated on the Approved Plans of this consent.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Construction Certificate.

Reason: To ensure all approved works are constructed within the subject site and in a manner anticipated by the development consent.

21. **Submission Roads Act Application for Civil Works in the Public Road**

The Applicant is to submit an application for approval for infrastructure works on Council's roadway. Engineering plans for the new development works within the road reserve and this development consent are to be submitted to Council for approval under the provisions of Sections 138 and 139 of the Roads Act 1993.

The application is to include four (4) copies of Civil Engineering plans for the design of the public domain works which are to be generally in accordance with the Council's specification for engineering works - AUS-SPEC #1. The plans shall be prepared by a qualified civil engineer.

The design must include the following information:

1. The diversion of the existing Council stormwater pipeline from Whale Beach Road to Surf Rd. The kerb and gutter is to be reconstructed under the path of the pipeline.
2. Stormwater pits must be provided at each bend in the pipeline, including a lintel with a minimum size of 1.8 metres.
3. The pits are to be designed in accordance with Council's standard details.
4. Reinstatement of all redundant crossings to kerb, footpath and grass.
5. Reconstruction of the kerb and gutter along Surf Road.
6. Provision of a 4 metre wide driveway crossing off Surf Rd generally in accordance with Council standard drawing A4/3330/3 NL.
7. Details of the service bay and associated footpath and retaining walls in Surf Road.
8. Details of the parking bays and footpath to the east of the site in Surf Road to The Strand.
9. Details of all works proposed in the Public Domain Plan condition of this consent.

The fee associated with the assessment and approval of the application is to be in accordance with Council's Fee and Charges.

An approval is to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure engineering works are constructed in accordance with relevant standards and Council's specification.

22. **Utilities Services**

Prior to the issue of the Construction Certificate, the Applicant is to obtain the following:

- (a) A letter from the utility provider confirming that satisfactory arrangements have been made for the approved development have been made; and
- (b) Evidence that notification has been received from a utility authority that, requirements for the development can be provided.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that services have been provided as required by this Consent.

23. **Structural Adequacy and Excavation Work**

Excavation work is to ensure the stability of the soil material of adjoining properties, the protection of adjoining buildings, services, structures and / or public infrastructure from damage using underpinning, shoring, retaining walls and support where required. All retaining walls are to be structurally adequate for the intended purpose, designed and certified by a Structural Engineer, except where site conditions permit the following:

- (a) maximum height of 900mm above or below ground level and at least 900mm from any property boundary, and
- (b) Comply with AS3700, AS3600 and AS1170 and timber walls with AS1720 and AS1170.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To provide public and private safety.

24. **Sub-Soil Seepage**

The Applicant is to submit plans demonstrating that all sub-soil seepage drainage is discharged via a suitable silt arrester pit, directly to Council's nearest stormwater drainage line being in Surf Road and is to be carried out in accordance with relevant Australian Standards. (Note: At the time of determination the following (but not limited to) Standards applied:

- o Australian/New Zealand Standard AS/NZS 3500.3 - 2003 Plumbing and drainage - Stormwater drainage
- o Australian/New Zealand Standard AS/NZS 3500.3 - 2003 / Amdt 1 - 2006 Plumbing and drainage - Stormwater drainage.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure appropriate drainage and Stormwater management on site to protect amenity of residents.

25. **Shoring of Council's Road Reserve (Temporary road anchors)**

Should the proposal require shoring to support an adjoining property or Council land, the Applicant shall provide the adjoining properties with engineering drawings, detailing the proposed shoring works for their consideration and approval.

Written approval from Council under Section 138 of the Roads Act 1993 is required if temporary ground anchors are to be used within Council's road reserve. The Owner's approval is to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that owners consent is obtained for ancillary works, and to ensure the protection of adjoining properties and Council land.

26. **Stormwater Drainage Application**

The applicant is to provide a stormwater drainage application under Section 68 of the Local Government Act 1993 to Council for approval. The submission is to include four (4) copies of Civil Engineering plans for the design of the overland flow path along the southern boundary of the site which is to be generally in accordance with the civil design approved with the Development Application and Council's specification for engineering works - AUS-SPEC #1. The form can be found on Council's website at www.northernbeaches.nsw.gov.au > Council Forms > Stormwater Drainage Application Form.

The design must include the following information.

1. The perimeter walls are to be watertight to ensure no flows enter the site or adjoining property.
2. The overland flow path is to be clear of any vegetation that will impede the flow.
3. Turf is to be provided between the rear of the public footpath in Whale Beach Road and the opening of the overland flow path at the boundary of the site, graded to ensure all flows enter the channel.
4. Details of the removal of the existing 450 mm pipeline traversing the site.

The fee associated with the assessment and approval of the application is to be in accordance with Council's Fees and Charges.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for disposal and maintenance stormwater management and compliance with the BASIX requirements, arising from the development.

27. **Plans of Kitchen Design, construction and fit out**

Prior to any Construction Certificate (CC) being issued, detailed plans that demonstrate compliance with Standard 3.2.3 of the Australian and New Zealand Food Standards Code, the Food Act 2003 and Australian Standard AS 4674 'Design, construction and fit out of food premises', must be submitted to and approved by the Certifying Authority. These plans are to be prepared by a suitably qualified person.

The plans must detail adequate provision for storage including separate storage of food, equipment, chemicals and personal belongings.

Reason: To ensure that the food premises complies with the design construction and fit-out requirements.

28. **Mechanical Ventilation Plans**

Detailed plans of mechanical ventilation that demonstrate compliance with Australian Standard (AS) 1668.2 "The use of ventilation and air-conditioning in buildings - Mechanical ventilation in buildings", must be submitted to and approved by the Certifying Authority. Any external exhaust discharge must also be above the roofline and discharged in a manner that is not likely to cause

an amenity impact. These plans are to be prepared by a suitably qualified person.

Reason: To ensure that the design, construction and installation requirement for mechanical ventilation complies with the Australian Standard 1668.2.

29. **Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

30. **External Finishes to Roof**

With the exception of the copper detailing, the upper floor membrane roof is to be a natural tone, in the medium to dark range (BCA classification M and D) in order to minimise solar reflections to neighbouring properties.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the construction certificate.

Reason: To ensure that excessive glare or reflectivity nuisance does not occur as a result of the development.

31. **Sydney Water "Tap In"**

The approved plans must be submitted to the Sydney Water Tap in service, prior to works commencing, to determine whether the development will affect any Sydney Water assets and/or easements. The appropriately stamped plans must then be submitted to the Certifying Authority demonstrating the works are in compliance with Sydney Water requirements.

Please refer to the website www.sydneywater.com.au for:

- "Tap in" details - see <http://www.sydneywater.com.au/tapin>
- Guidelines for Building Over/Adjacent to Sydney Water Assets.

Or telephone 13 000 TAP IN (1300 082 746).

Reason: To ensure compliance with the statutory requirements of Sydney Water.

32. **Internalised Services**

Service ducts, drainage, plumbing, pipes, cables and conduits are to be internalised and must not be visible from the public domain. All service, communication and electricity connections must be provided underground.

Provision must also be made for any future ventilation or exhaust system required for the retail tenancies throughout the development.

Details demonstrating compliance with this requirement must be provided to the certifying authority prior to the issuance of the construction certificate.

Reason: To remove visual clutter and ensure a high-quality finish to the development.

33. **Acoustic Report Recommendations have been Incorporated into Designs and Structural**

Plans

The recommendations of the Acoustic Report referenced in Condition 1 of this consent are to be incorporated into the construction plans.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure appropriate amenity.

34. **Access Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the Access Report referenced in Condition 1 of this consent are to be incorporated into the construction plans.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is accessible.

35. **Waste and Recycling Requirements**

Details demonstrating compliance with Northern Beaches Waste Management Guidelines, are to be submitted to and approved by the Certifying Authority prior to the issue of any Construction Certificate.

Note: If the proposal, when compliant with the Northern Beaches Waste Management Guidelines, causes inconsistencies with other parts of the approval i.e. architectural or landscaped plans, a modification(s) to the development may be required.

Reason: To ensure adequate and appropriate waste and recycling facilities are provided.

CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

36. **Project Arborist**

a) A Project Arborist, with minimum AQF Level 5 in arboriculture, shall be engaged to provide tree protection measures in accordance with the Arboricultural Impact Assessment dated July 2021 prepared by Urban Forestry Australia and Australian Standard 4970-2009 Protection of Trees on Development Sites. The Project Arborist is to specify and oversee all tree protection measures such as tree protection fencing, trunk and branch protection and ground protection.

b) The Project Arborist is to supervise all demolition, excavation and construction works near all trees to be retained including construction methods near the existing trees to protect tree roots, trunks, branches and canopy. Where required, manual excavation is to occur ensuring no tree root at or >25mm (Ø) is damaged by works unless approved by the Project Arborist.

c) Existing ground levels shall be maintained within the tree protection zone of trees to be retained unless authorised by the Project Arborist.

d) All tree protection measures specified must:

- i) be in place before work commences on the site, and
- ii) be maintained in good condition during the construction period, and
- ii) remain in place for the duration of the construction works.

e) The Project Arborist shall provide certification to the Certifying Authority that all recommendations listed for the protection of the existing tree(s) have been carried out satisfactorily to ensure no impact to the health of the tree(s). Photographic documentation of the condition of all trees to be retained shall be recorded including at commencement, during the works and at completion.

- Note:
- i) A separate permit or development consent may be required if the branches or roots of a protected tree on the site or on an adjoining site are required to be pruned or removed.
 - ii) Any potential impact to trees as assessed by the Project Arborist will require redesign of any approved component to ensure existing trees upon the subject site and adjoining properties are preserved and shall be the subject of a modification application where applicable.

Reason: Tree protection.

37. **No Access Through Adjoining Park/Reserves**

Access to the site through an adjoining park/reserve is prohibited without the written approval of the Council.

Reason: To ensure protection of council parks/reserves.

38. **Works on Land Owned or Managed By Council**

No works are to be carried out on Land owned or managed by Council.

Note: Separate approval from Council is required for access driveways, paths, stairs, connections to underground utilities (stormwater, gas, sewer, electricity, telecommunications etc.), and landscaping works on Land owned or managed by Council.

Reason: To protect the land owned and managed by Council.

39. **Installation and Maintenance of Sediment and Erosion Control**

Prior to commencement of works on site, sediment and erosion controls must be installed along the immediate downslope of the works area, in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004). The erosion controls shall be maintained in an operational condition until the development activities have been completed and the site fully stabilised. Sediment shall be removed from the sediment controls following each heavy or prolonged rainfall period.

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site.

40. **Work Zones and Permits**

Prior to commencement of the associated works, the applicant shall obtain a Work Zone Permit where it is proposed to reserve an area of road pavement for the parking of vehicles associated with a construction site.

A separate application is required with a Traffic Management Plan for standing of construction vehicles in a trafficable lane and a Roads and Maritime Services Work Zone Permit shall be obtained for State Roads.

Reason: To ensure Work zones are monitored and installed correctly.

41. **Pre-Construction Dilapidation Report**

Dilapidation reports, including photographic surveys, of the following adjoining properties must be provided to the Principal Certifying Authority prior to any works commencing on the site (including demolition or excavation). The reports must detail the physical condition of those properties listed below, both internally and externally, including walls, ceilings, roof, structural members and other similar items.

1. 229 Whale Beach Road, Whale Beach
2. 233 Whale Beach Road, Whale Beach

The dilapidation reports are to be prepared by a suitably qualified person. A copy of the reports must be provided to Council, the Principal Certifying Authority and the owners of the affected properties prior to any works commencing.

In the event that access for undertaking the dilapidation report is denied by an adjoining owner, the applicant must demonstrate, in writing that all reasonable steps have been taken to obtain access. The Principal Certifying Authority must be satisfied that the requirements of this condition have been met prior to commencement of any works.

Note: This documentation is for record keeping purposes and may be used by an applicant or affected property owner to assist in any action required to resolve any civil dispute over damage rising from the works.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the commencement of any works on site.

Reason: To maintain proper records in relation to the proposed development.

42. **Public Liability Insurance - Works on Public Land**

Any person or contractor undertaking works on public land must take out Public Risk Insurance with a minimum cover of \$20 million in relation to the occupation of, and approved works within Council's road reserve or public land, as approved in this consent. The Policy is to note, and provide protection for Northern Beaches Council, as an interested party and a copy of the Policy must be submitted to Council prior to commencement of the works. The Policy must be valid for the entire period that the works are being undertaken on public land.

Reason: To ensure the community is protected from the cost of any claim for damages arising from works on public land.

CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

43. **Protection of Sites of Significance**

a) Should any Aboriginal Cultural Heritage items be uncovered during earthworks, works should cease in the area and the Aboriginal Heritage Office contacted to assess the finds.

b) Under Section 89a of the NPW Act should the objects be found to be Aboriginal, NSW Biodiversity and Conservation Division, Heritage NSW and the Metropolitan Local Aboriginal

Land Council (MLALC) should be contacted.

Reason: Preservation of significant environmental features.

44. **Protection of Existing Street Trees**

a) All existing street trees in the vicinity of the works shall be retained during all construction stages and the street trees fronting the development site shall be protected by tree protection fencing in accordance with Australian Standard 4687-2007 Temporary Fencing and Hoardings and in accordance with the Arboricultural Impact Assessment dated July 2021 prepared by Urban Forestry Australia and Section 4 of Australian Standard 4970-2009 Protection of Trees on Development Sites.

b) As a minimum, the tree protection fencing for street tree(s) fronting the development site shall consist of standard 2.4m panel length to four sides unless otherwise directed by an Arborist with minimum AQF Level 5 in arboriculture.

c) All fencing shall be located to allow for unrestricted and safe pedestrian access upon the road verge.

d) Should any problems arise with regard to the existing or proposed trees on public land during construction, Council's Tree Services section is to be contacted immediately to resolve the matter to Council's satisfaction and at the cost of the applicant.

Reason: Tree protection.

45. **Tree and Vegetation Protection**

- a) Existing trees and vegetation shall be retained and protected including:
- i) all trees and vegetation within the site not indicated for removal on Tree Retention Plan Dwg No. DA L08C dated 24.4.20 Prepared by Trish Dobson, excluding exempt trees and vegetation under the relevant planning instruments of legislation,
 - ii) all trees and vegetation located on adjoining properties,
 - iii) all road reserve trees and vegetation.
- b) Tree protection shall be undertaken as follows:
- i) tree protection shall be in accordance with the Arboricultural Impact Assessment dated July 2021 prepared by Urban Forestry Australia and Australian Standard 4970-2009 Protection of Trees on Development Sites including the provision of temporary fencing to protect existing trees within 5 metres of development,
 - ii) existing ground levels shall be maintained within the tree protection zone of trees to be retained unless authorised by the Project Arborist,
 - iii) removal of existing tree roots at or >25mm (Ø) diameter is not permitted without consultation with the Project Arborist,
 - iv) no excavated material, building material storage, site facilities, nor landscape materials are to be placed within the canopy dripline of trees and other vegetation required to be retained,
 - v) structures are to bridge tree roots at or >25mm (Ø) diameter unless directed by the Project Arborist on site,
 - vi) excavation for stormwater lines and all other utility services is not permitted within the tree protection zone without consultation with the Project Arborist

- including advice on root protection measures,
- vii) should either or all of v), vi) and vii) occur during site establishment and construction works, the Project Arborist shall provide recommendations for tree protection measures. Details including photographic evidence of works undertaken shall be submitted by the Arborist to the Certifying Authority,
 - viii) any temporary access to or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained during the construction works is to be undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of Australian Standard 4970-2009 Protection of Trees on Development Sites,
 - ix) the activities listed in section 4.2 of Australian Standard 4970-2009 Protection of Trees on Development Sites shall not occur within the tree protection zone of any tree on the lot or any tree on an adjoining site,
 - x) tree pruning from within the site to enable approved works shall not exceed 10% of any tree canopy and shall be in accordance with Australian Standard 4373-2007 Pruning of Amenity Trees,
 - xi) the tree protection measures specified in this clause must: i) be in place before work commences on the site, and ii) be maintained in good condition during the construction period, and iii) remain in place for the duration of the construction works.

The Certifying Authority must ensure that:

- c) The activities listed in section 4.2 of Australian Standard 4970-2009 Protection of Trees on Development Sites do not occur within the tree protection zone of any tree and any temporary access to or location of scaffolding within the tree protection zone of a protected tree or any other tree to be retained on the site during the construction is undertaken using the protection measures specified in sections 4.5.3 and 4.5.6 of that standard.

Note: All street trees within the road verge and trees within private property are protected under Northern Beaches Council development control plans except where Council's written consent for removal has been obtained. The felling, lopping, topping, ringbarking or removal of any tree(s) is prohibited.

Reason: Tree and vegetation protection.

46. **Road Reserve**

The applicant shall ensure the public footways and roadways adjacent to the site are maintained in a safe condition at all times during the course of the work.

Reason: Public safety.

47. **No Access Through Land Owned or Managed by Council**

Site access is not approved for delivery of materials nor construction of the development through adjacent Land owned or managed by Council, without the written approval of Council.

Reason: Public safety, landscape amenity and tree protection.

48. **Protection of Council's Public Assets**

Any damage to Council's public assets shall be made good by the applicant and/or the contractor, to the satisfaction of Council.

Council's public assets include, but is not limited to the following: road, kerb and gutters, crossovers, crossings, paths, grass verge, open space and associated elements such as furniture, recreational facilities and the like, within the meaning of the Local Government Act 1993.

The dumping or storage of building materials, spoil, vegetation, green waste, or any other material in Land owned or managed by Council is prohibited.

Asset Protection Zones as defined within Planning for Bush Fire Protection 2019, shall be contained wholly within development sites, and shall be managed by the development site owner in perpetuity.

Existing trees shall be protected in accordance with AS4970-2009 Protection of Trees on Development Sites, with particular reference to Section 4, with no ground intrusion into the tree protection zone and no trunk, branch nor canopy disturbance. Should any problems arise with regard to the existing trees on public land during the construction period, the applicant is to immediately Contact Council's Tree Services section and resolve the matter to Council's satisfaction.

Reason: To protect and/or restore any damaged public asset.

49. **Staff and Contractor Parking**

The applicant is to make provision for parking for all construction staff and contractors for the duration of the project. All Staff and Contractors are to use the basement parking once available. All necessary facilities are to be provided to accommodate this requirement including lighting in the basement, security cameras, etc.

Reason: To ensure minimum impact of construction activity on local parking amenity.

50. **Implementation of Construction Traffic Management Plan**

All works and construction activities are to be undertaken in accordance with the approved Construction Traffic Management Plan (CTMP). All controls in the CTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the CTMP be impacted by surrounding major development not encompassed in the approved CTMP, the CTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved CTMP is to be kept onsite at all times and made available to Council on request.

Reason: To ensure compliance of the developer/builder in adhering to the Construction Traffic Management procedures agreed and are held liable to the conditions of consent.

51. **Ongoing Management**

The applicant shall be responsible in ensuring that the road reserve remains in a serviceable state during the course of the demolition and building works.

Reason: To ensure public safety.

52. **Removing, Handling and Disposing of Asbestos**

Any asbestos material arising from the demolition process shall be removed and disposed of in

accordance with the following requirements:

- Work Health and Safety Act;
- Work Health and Safety Regulation;
- Code of Practice for the Safe Removal of Asbestos [NOHSC:2002 (1998)];
- Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)];
- Clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005; and
- The demolition must be undertaken in accordance with Australian Standard AS2601 – The Demolition of Structures.

Reason: For the protection of the environment and human health.

53. **Demolition Works - Asbestos**

Demolition works must be carried out in compliance with WorkCover Short Guide to Working with Asbestos Cement and Australian Standard AS 2601 2001 The Demolition of Structures.

The site must be provided with a sign containing the words DANGER ASBESTOS REMOVAL IN PROGRESS measuring not less than 400 mm x 300 mm and be erected in a prominent visible position on the site. The sign is to be erected prior to demolition work commencing and is to remain in place until such time as all asbestos cement has been removed from the site and disposed to a lawful waste disposal facility.

All asbestos laden waste, including flat, corrugated or profiled asbestos cement sheets must be disposed of at a lawful waste disposal facility. Upon completion of tipping operations the applicant must lodge to the Principal Certifying Authority, all receipts issued by the receiving tip as evidence of proper disposal.

Adjoining property owners are to be given at least seven (7) days' notice in writing of the intention to disturb and remove asbestos from the development site.

Reason: To ensure the long term health of workers on site and occupants of the building is not put at risk unnecessarily.

54. **Survey Certificate**

A survey certificate prepared by a Registered Surveyor at the following stages of construction:

(a) Commencement of perimeter walls columns and or other structural elements to ensure the wall or structure, to boundary setbacks are in accordance with the approved details.

(b) At ground level to ensure the finished floor levels are in accordance with the approved levels, prior to concrete slab being poured/flooring being laid.

(c) At completion of the roof frame confirming the finished roof/ridge height is in accordance with levels indicated on the approved plans.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To determine the height of buildings under construction comply with levels shown on approved plans.

55. Progress Certification (Road & Subdivision)

The applicant shall provide written certification is to be provided by a suitably qualified engineer upon completion and/or as and when requested by the Roads Authority for the following stages of works:

- (a) Silt and sediment control facilities
 - (b) Laying of stormwater pipes and construction of pits
 - (c) Proof Roll
 - (d) Sub-grade trimmed and compacted **
 - (e) Base-course laid and compacted **
 - (f) Kerb and gutter construction
 - (g) Pavement
 - (h) Landscaping and vegetation
 - (i) Clean-up of site, and of adjoining Council roadway and drainage system.
- (**To be tested by a recognised N.A.T.A. approved laboratory).

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To ensure compliance of civil works with Council's specification for engineering works.

56. Civil Works Supervision

The Applicant shall ensure all civil works approved in the Section 138 and Section 68 application approvals are supervised by an appropriately qualified and practicing Civil Engineer.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority and/or Roads Authority.

Reason: To ensure compliance of civil works with Council's specification for engineering works.

57. Public Domain Construction

The applicant shall construct the public domain works in accordance with the following:

- (a) All works are to be constructed in accordance with the Section 138 Road Act approval
- (b) Council is to inspect the the works to ensure compliance with Section 138 Road Act approval.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To ensure compliance of Public Domain works with Council's specification for engineering works.

58. Notification of Inspections (infrastructure works to be handed over to Council)

Council's Development Engineer is to be given 48 hours notice when the works reach the following stages:

- (a) Installation of Silt and Sediment control devices
- (b) Prior to backfilling of pipelines
- (c) Prior to pouring of stormwater gully pits
- (d) Prior to pouring of kerb and gutter, footpath and driveway crossing
- (e) Subgrade level / basecourse level / subbase
- (f) Sealing road pavement

NOTE: Any inspections carried out by Council do not imply Council approval or acceptance of the work, and do not relieve the developer/applicant from the requirement to provide an

engineer's certification.

Reason: To ensure new Council infrastructure is constructed in accordance with Auspec 1 Council's design and specification standards.

59. **Vehicle Crossing**

The Applicant is to construct one vehicle crossing 4 metres wide in accordance with Northern Beaches Council Drawing No A4-3330/3 NL and the Section 138 Roads Act application approval. An Authorised Vehicle Crossing Contractor shall construct the vehicle crossing and associated works within the road reserve in plain concrete. All redundant laybacks and crossings are to be restored to kerb, footpath and grass. Prior to the pouring of concrete, the vehicle crossing is to be inspected by Council and a satisfactory "Vehicle Crossing Inspection" card issued.

A copy of the vehicle crossing inspection form is to be submitted to the Principal Certifying Authority.

Reason: To facilitate suitable vehicular access to private property.

60. **Kerb and Gutter Construction**

The Applicant is to construct kerb and gutter and associated works along the entire frontage of the site in accordance with Northern Beaches Council Drawing No. A4 2276/A. Prior to the pouring of concrete, the works are to be inspected by Council and an approval issued.

The approval is to be submitted to the Principal Certifying Authority.

Reason: To facilitate the preservation of on street parking spaces.

61. **Waste/Recycling Requirements (Waste Plan Submitted)**

During demolition and/or construction the proposal/works shall be generally consistent with the Approved Waste Management Plan referenced in Condition 1 of this consent.

Reason: To ensure waste is minimised and adequate and appropriate waste and recycling facilities are provided.

**CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE
OCCUPATION CERTIFICATE**

62. **Required Planting**

a) Trees shrubs and groundcovers shall be planted in accordance with the Site Planting Plan Dwg No. DA-L02C dated 9.8.21 and Planting Schedule Dwg No. DA-L07C 24.4.20 Prepared by Trish Dobson

b) Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Note: Please consider registering your new tree through the link below to be counted as part of the NSW State Government's 5 Million trees initiative

<https://5milliontrees.nsw.gov.au/>

Reason: To maintain environmental amenity.

63. **Landscape Completion**

a) Landscaping is to be implemented in accordance with the approved Landscape Plans.

b) Prior to the issue of any Occupation Certificate details (from a qualified horticulturalist, landscape architect or landscape designer) shall be submitted to the Principal Certifying Authority certifying that the landscape works have been completed in accordance with any conditions of consent.

Reason: Environmental amenity.

64. **Condition of Retained Vegetation - Project Arborist**

Prior to the issue of any Occupation Certificate a report prepared by the project arborist shall be submitted to the Certifying Authority assessing the health and impact on all existing trees required to be retained including the following information:

- a) compliance to any Arborist recommendations for tree protection generally and during excavation works,
- b) extent of damage sustained by vegetation as a result of the construction works,
- c) any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: Tree protection.

65. **Stormwater Disposal**

The stormwater drainage works shall be certified as compliant with all relevant Australian Standards and Codes by a suitably qualified person. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater arising from the development.

66. **Removal of All Temporary Structures/Materials and Construction Rubbish**

Once construction has been completed all silt and sediment fences, silt, rubbish, building debris, straw bales and temporary fences/bunds are to be removed from the site.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To protect reserve amenity and public safety.

67. **Signage and Linemarking – Implementation**

The applicant is to install all signage and linemarking, as per any Roads Act approval. These works are to be completed prior to the issue of any Occupation Certificate.

Reason: To ensure compliance with the Road Act.

68. **Basement Garage Traffic Signal System**

To prevent conflicting vehicle flows on the internal basement garage ramp and avoid vehicles having to reverse up/ down the ramp, a traffic signal system must be installed at each ramp entry, designed to warn drivers about to enter the road of any conflicting vehicle approaching.

The signal system must;

- o be clearly visible from ramp entrances,

- is to clearly indicate to an approaching driver, by way of red light or wording, that an opposing vehicle has entered the ramp,
- Incorporate linemarking to delineate traffic flow and nominate waiting bay locations to allow vehicles to overtake another.

Details of the system, including the system operation, components and placement within the development, must be specified by a practising Traffic Engineer. This engineer is to submit a compliance certificate to the Principal Certifying Authority that the system has been installed and operating as designed, in accordance with the requirements of this condition, prior to the issue of any Occupation Certificate issued for the development.

Reason: To ensure no vehicle conflicts within the basement carpark.

69. **Allocation of parking spaces**

All residential units must be assigned two parking spaces, and each retail tenancy must be assigned one parking space. The visitor/disabled parking space is to remain common property.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any occupation certificate.

Reason: To ensure parking availability for residents.

70. **Disabled Parking Spaces**

Where disabled parking spaces are provided they must be in accordance with AS2890.6:2009.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To ensure compliance with Australian Standards.

71. **Shared Zone Bollard**

A bollard is to be provided at the shared zone between disabled spaces in accordance to Australian Standards AS2890.6:2009.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To ensure compliance with Australian Standards.

72. **Post-Construction Dilapidation Report**

Post-Construction Dilapidation Reports, including photos of any damage evident at the time of inspection, must be submitted after the completion of works. The reports must:

- Compare the post-construction report with the pre-construction report,
- Clearly identify any recent damage and whether or not it is likely to be the result of the development works,
- Should any damage have occurred, suggested remediation methods.

Copies of the reports must be given to the property owners referred to in the Pre-Construction Dilapidation Report Condition. Copies must also be lodged with Council.

Details demonstrating compliance with this condition are to be submitted to the Principal

Certifying Authority prior to the issuing of any occupation certificate.

Reason: To maintain proper records in relation to the proposed development.

73. **Acoustic Certification Prior to Occupation Certificate**

A suitably qualified Acoustic Consultant is to confirm that the development was constructed in accordance with the recommendations of the Acoustic Report reference in Condition 1 of this consent.

Written certification is to be provided to the Principal Certifying Authority prior to the issuance of any occupation certificate.

Reason: To ensure appropriate amenity.

74. **Plan of Management**

A Plan of Management is to be produced for the management of the site and adjacent road reserves identifying:

- a. Consistency with all 'on-going' conditions of consent over the life of the development
- b. Outlining all required maintenance responsibilities for private infrastructure, including water management infrastructure and landscaping, and
- c. Space management strategies including activity coordination, site cleanliness, rapid repair of vandalism and graffiti, and the maintenance of lighting and landscaping.

The Plan of Management is to be submitted to the Principal Certifying Authority prior to the issuance of the occupation certificate.

Reason: To ensure the on-going management of the site over the life of the development.

75. **Driveway and Parking Facility Work**

The Applicant shall submit a Traffic Engineers' certificate certifying that the driveway and parking facility was constructed in accordance with this development consent and the provisions of Australian/New Zealand Standard AS/NZS 2890.1:2004 parking facilities - Off-street car parking.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Occupation Certificate.

Reason: Compliance with this consent.

76. **Retaining Wall in Public Domain**

The retaining wall works shall be certified as compliant with all relevant Australian Standards and Codes by a Structural Engineer.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any occupation certificate.

Reason: Public and private safety

77. **Geotechnical Certification Prior to Occupation Certificate**

The Applicant is to submit the completed Form 3 of the Geotechnical Risk Management Policy (Appendix 5 of P21 DCP) to the Principal Certifying Authority prior to issue of the Occupation Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

78. **Certification of Civil Works and Works as Executed Data within the Public Domain**

The Applicant shall submit a suitably qualified Civil Engineer's certification that the completed works have been constructed in accordance with this consent and the approved Section 138 and Section 68 approvals. Works as Executed data certified by a registered surveyor in relation to boundaries and/or relevant easements, prepared in accordance with Council's 'Guideline for preparing Works as Executed data for Council Assets' in an approved format shall be submitted to Council for acceptance and the acceptance issued to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure compliance of works with Council's specification for engineering works.

79. **Restriction as to User (Stormwater Overland Flow Path)**

The Applicant shall create lodge a Legal Documents Authorisation Application with Council to create a restriction as to user on the title over the area affected by the 100 year ARI stormwater overland flow path in order to:

1. Prohibit the alteration of the final stormwater overland flow path. (A copy of the Works-as-Executed plan details overdrawn on a copy of the approved drainage plan of the overland flow path and Hydraulic Engineers certification must be submitted to Council).
2. Prohibit the erection of any structure (including fencing) within the overland flow path without the written permission of Northern Beaches Council.

Northern Beaches Council shall be nominated as a party to release, vary or modify such restriction.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Occupation Certificate.

Reason: To ensure no modification of the stormwater overland flow path and the building platform without Council's approval.

80. **Kitchen Design, Construction and Fit-out of Food Premises Certification**

Prior to the issuing of the occupation certificate, certification is to be provided to the Principal Certifying Authority by a suitably qualified person demonstrating that the design, construction and fit out of food premises kitchen is compliant with the requirements of AS 4674 Design, construction and fit out of food premises.

Reason: To ensure that the kitchen complies with Australian Standard design requirements.

81. **Mechanical Ventilation Certification**

Mechanical ventilation must comply with Australian Standard (AS) 1668.2 "The use of ventilation and air-conditioning in buildings - Mechanical ventilation in buildings" prior to any Occupation Certificate (OC) being issued.

Certification is to be provided to the Principal Certifying Authority by a suitably qualified person that the mechanical ventilation complies with the above requirements.

Reason: To ensure that the installed mechanical ventilation complies with the requirements of the Australian Standard 1668.2.

82. **Garbage and Recycling Facilities**

All internal walls of the waste rooms shall be rendered to a smooth surface, coved at the floor/wall intersection, graded and appropriately drained to the sewer with a tap in close proximity to facilitate cleaning.

Waste room floors shall be graded and drained to an approved Sydney Water drainage system.

Waste rooms shall be clear of any other services or utilities infrastructure such as gas, electricity air-conditioning, plumbing, piping ducting or equipment.

Reason: To prevent pollution of the environment, provide a safe workplace for contractors and residents and to protect the amenity of the area.

83. **Unit Numbering for Multi Unit Developments (Residential, Commercial and Industrial)**

The units within the development are to be numbered in accordance with the Australia Post Address Guidelines

(https://auspost.com.au/content/dam/auspost_corp/media/documents/Appendix-01.pdf).

In this regard, the numbering is to be as per the Unit Numbering for Multi Unit Development Table available on Council's website Unit Numbering for Multi-Unit Developments Form

External directional signage is to be erected on site at driveway entry points and on buildings and is to reflect the numbering in the table provided. Unit numbering signage is also required on stairway access doors and lobby entry doors.

It is essential that all signage throughout the complex is clear to assist emergency service providers in locating a destination within the development with ease and speed, in the event of an emergency.

Details are to be submitted with any Interim/Final Occupation Certificate or Strata Subdivision Certificate certifying that the numbering has been implemented in accordance with this condition and the Unit Numbering for Multi Unit Development Table.

Reason: To ensure consistent numbering for emergency services access.

84. **Sydney Water**

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation.

Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site www.sydneywater.com.au <<http://www.sydneywater.com.au>> then refer to "Water Servicing Coordinator" under "Developing Your Land" or telephone 13 20 92 for assistance.

Following application a "Notice of Requirements" will advise of water and sewer infrastructure to be built and charges to be paid. Please make early contact with the Co-ordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

85. Access Certification Prior to Occupation Certificate

A suitably qualified Access Consultant is to confirm that the development has been constructed in accordance with the recommendations of the Access Report reference in Condition 1 of this consent.

Written certification is to be provided to the Principal Certifying Authority prior to the issuance of any occupation certificate.

Reason: To ensure appropriate accessibility.

86. Waste and Recycling Facilities Certificate of Compliance

The proposal shall be constructed in accordance with the Northern Beaches Waste Management Guidelines.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste and recycling facilities are provided.

87. Waste/Recycling Compliance Documentation

Evidence of disposal for recycling from the construction/demolition works shall be submitted to the Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste is minimised and recycled.

88. Positive Covenant for Council and Contractor Indemnity

A positive covenant shall be created on the title of the land prior to the issue of an Interim/Final Occupation Certificate requiring the proprietor of the land to provide access to the waste storage facilities. The terms of the positive covenant are to be prepared to Council's requirements, (Appendix E of the Waste Management Guidelines), at the applicant's expense and endorsed by Council prior to lodgement with NSW Land Registry Services. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

Reason: To ensure ongoing access for servicing of waste facilities.

89. Authorisation of Legal Documentation Required for Waste Services

The original completed request form (NSW Land Registry Services form 13PC) must be submitted to Council for authorisation prior to the issue of the Interim/Final Occupation Certificate. A copy of the work-as-executed plan (details overdrawn on a copy of the approved plan) must be included with the above submission. Where required by Council or the Certifying Authority, a Compliance Certificate shall also be provided in the submission to Council.

If Council is to issue the Compliance Certificate for these works, the fee is to be in accordance with Council's Fees and Charges.

Reason: To create encumbrances on the land.

ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

90. Landscape Maintenance

a) If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components. Trees, shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilised as required at the time of

planting.

b) If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan and any conditions of consent.

c) All weeds are to be removed and controlled in accordance with the NSW Biosecurity Act 2015.

Reason: To maintain local environmental amenity.

91. **Sight lines within carparks**

The required sight lines to pedestrians and other vehicles in and around the carpark and entrance(s) are not to be obstructed by landscaping or signage.

Reason: To maintain unobstructed sight distance for motorists.

92. **Hours of Operation**

The hours of operation of the retail premises and restaurant or cafe are to be restricted to 7:00am to 10:00pm, seven days.

Upon expiration of the permitted hours, all service (and entertainment) shall immediately cease, no patrons shall be permitted entry and all customers on the premises shall be required to leave within the following 30 minutes.

Deliveries of goods and waste collection associated with the retail premises and restaurant or cafe must not occur between 7:00pm and 7:00am.

Reason: Information to ensure that amenity of the surrounding locality is maintained.

93. **Commercial Waste and Recycling Storage**

Commercial waste and recycling material/storage bins must be stored in a separate area to the residential waste and recycling material/storage bins as shown on the approved plans.

Reason: To ensure that commercial waste and residential waste is not mixed and is properly managed.

94. **Odour Control for Ventilation Systems to Commercial Kitchens**

Ventilation systems for any commercial kitchen must be designed, operated and maintained to prevent odour being smelt within any nearby habitable rooms, including when windows and doors are open.

Reason: To prevent a negative impact on residents both within the complex and surrounding properties.

95. **Music or Amplified Noise**

No background music is permitted in the Ground Floor restaurant/cafe space or the associated outdoor dining area. No speakers are to be placed in any outside areas of retail premises.

No music or amplified noise is to be audible within habitable rooms of residents within the complex or surrounding premises, including when windows and doors are open.

Reason: To ensure no negative impact on residents within the complex or surrounding

premises.

96. **Plant Equipment - Noise and Vibration**

Noise from all plant equipment including roof top mechanical plant rooms/equipment, mechanical ventilation for car parks or commercial premises, extraction units and exhaust fans, air conditioning units and any motors of other equipment associated with the building must not generate noise above 5dBA at the property boundary and must not be audible within habitable rooms of units within complex and surrounding premises including when doors and windows to those rooms are open.

Above equipment must not create vibrations that can be detected within habitable rooms of units within complex and surrounding premises.

Reason: To ensure no ongoing negative impacts on persons living within the complex and surrounding premises.

97. **Consistency with Plan of Management**

The development is to be maintained in accordance with the Plan of Management required by this consent.

Reason: To ensure that the site is maintained in accordance with the standards required by this consent.

98. **Parking**

The development is to maintain the following parking allocation for the life of the development:

- 10 x residential parking spaces, with 2 spaces per unit,
- 1 x disabled visitor space
- 3 x retail parking spaces

All spaces must be line-marked and identified accordingly.

Manoeuvring areas must be kept clear of obstructions at all times. Vehicles must not be required to queue on public roads at any time.

Reason: To ensure the appropriate management of parking on site.

99. **Capacity of Ground Floor Cafe or Restaurant**

The capacity of the Ground Floor cafe/restaurant premises is limited to 44 indoor patrons, 20 outdoor patrons and 6 staff members.

Reason: To ensure residential amenity is protected and maintained.

00. **Plant Equipment**

With the exception of flush-mounted solar panels, and the plant equipment shown within the portion of the upper floor roof bound in copper sheeting, no plant equipment is permitted on the roof or in a location that is visible from the public domain.

The plant equipment shown on the upper roof must not protrude above the height of the copper roof depicted on the Approved Plans.

The solar panels must not be elevated/angled more than 250mm above the height of the membrane roof depicted on the Approved Plans.

Reason: To minimise visual clutter.

CONDITIONS THAT MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF ANY STRATA SUBDIVISION OR SUBDIVISION CERTIFICATE

01. Subdivision Certificate Application

The Applicant shall submit a Subdivision Certificate Application to Council, which is to include a completed Subdivision Certificate form and checklist, a final plan of subdivision prepared in accordance with the requirements of the Conveyancing Act 1919, four copies of the final plan of subdivision and all relevant documents including electronic copies. This documentation is to be submitted to Council prior to the issue of the Subdivision Certificate. All plans of survey are to show connections to at least two Survey Co-ordination Permanent Marks. The fee payable is to be in accordance with Council's fees and charges.

Reason: Statutory requirement of the Conveyancing Act 1919.

02. Strata Subdivision Plans

Strata Subdivision Plans are to be prepared, consistent with the Approved Plans.

The Strata Subdivision Plans are to specifically nominate:

- a. two parking spaces for each residential unit
- b. one parking space for each retail tenancy
- c. one visitor/disabled parking space as common property
- d. the landscaped terrace adjacent to Apartment 1 as common property
- e. gardens/landscaping around the perimeter of the building as common property

Details demonstrating compliance with these requirements are to be submitted to the Principal Certifying Authority prior to the release of the Strata Subdivision Plan.

Reason: To ensure the appropriate allocation and maintenance of space.

Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

Signed On behalf of the Consent Authority




Name Rodney Piggott, Manager Development Assessments

Date 01/12/2021

GENERAL ADVICE

Advisory Notes (General)

Where are you in the development process?

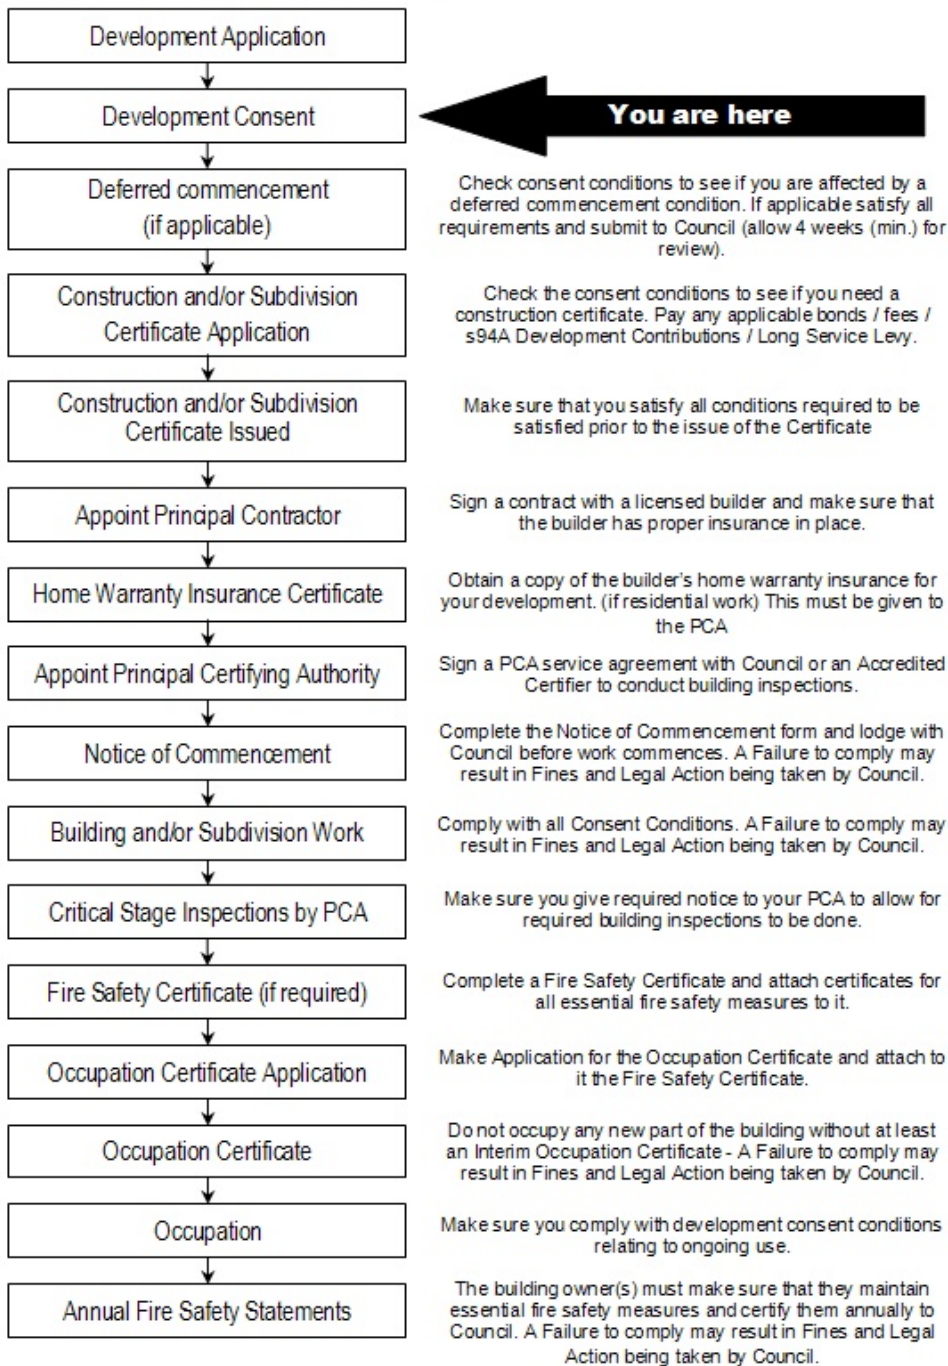

Note: The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Building Certification

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Certification Services

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site www.northernbeaches.nsw.gov.au or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

Charges Associated with the Development Consent

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

Bonds are released after:

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
 - the development is complete
 - damage has not been caused to council assets during the works
 - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

Acceptable Form of Security Bonds

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

Modifications to the consent

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Other Matters not detailed within the Notice of Determination

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

Dial Before You Dig

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at www.1100.com.au or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

Telecommunications Act 1997 (Commonwealth)

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

Model

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

Trade waste agreement

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

Waste collection

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

Aboriginal Heritage

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

On-Site Sewage Management System

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

Cost of Works

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

Relocation of stormwater drainage

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

Tree preservation

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

Storage bins on footpath and roadway

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

Protection of Public Places

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
 - (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

Road Opening Permit

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

Special Permits

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone. Other permits may include out of construction hours permits.

Licensing requirements for removal of bonded asbestos

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

Pool Access

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

Dewatering

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

Requirement to Notify about New Contamination Evidence

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

Flood Evacuation Plan

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

Utility Service Requirements

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

Plant & Equipment Kept Within Site

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

Lighting

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

Silt and Sediment Control

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

Maintenance of Sediment and Erosion Control Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

Installation and Maintenance of Sediment and Erosion Control

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

Dividing Fences Act 1991

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

OTHER MATTERS

Child Care Centres

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

Disability Access

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

Food Premises

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at www.foodnotify.nsw.gov.au or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

Wheel washing facility

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

Monitoring State of Roadways

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

Storage of Dangerous Goods

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

Storage of Flammable and Combustible Liquids

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

Noise and Vibration

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

Hairdressing/Beauty Treatment/ Skin penetration Requirements

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.

- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

Food Premises Construction Requirements

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

Legionella Control

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

Pool/Spa Safety

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

Grease Trap

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

Bandicoot/Penguin

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.