



- NOTES:
1. ALL EROSION AND SEDIMENT CONTROL DEVICES TO BE INSPECTED AND MAINTAINED DAILY BY THE SITE MANAGER.
 2. MINIMISE DISTURBED AREAS.
 3. ALL LOOSE MATERIAL STOCKPILES TO BE COVERED AND CLEAR OF ALL DRAINS, NATURAL WATER COURSES, GUTTERS AND FOOTPATHS.
 4. ROAD AND FOOTPATH TO BE SWEEPED DAILY.
 5. STABILIZE AND REVEGETATE SITE BEFORE REMOVING EROSION AND SEDIMENT DEVICES.
 6. DRAINAGE TO BE CONNECTED TO STORMWATER SYSTEM AS SOON AS POSSIBLE.
 7. EXCESS MATERIALS (CEMENT, CONCRETE SLURRY, WATER AND SOLVENT FOR CLEANING PAINT BRUSHES & TOOLS) MUST NOT BE WASHED INTO STORMWATER SYSTEM.

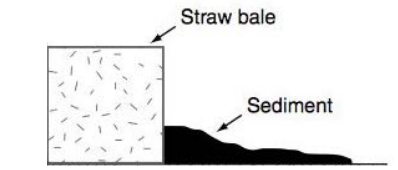


SEDIMENT CONTROL FENCE

 AREA OF PROPOSED NEW WORK

PROPOSED NEW ROOF & RAISED ROOF LIGHT TO BE ADDED EXISTING PERGOLA

PROPOSED RAISED ROOF LIGHT TO BE ADDED TO APPROVED ROOF



TIM ROBERTS PTY LTD
 0438 741 812 tim@timrobertsdesign.com.au
 QBCC licence 15067074
 © Copyright - these drawings may not be used or re-produced without written consent from Tim Roberts Pty Ltd
 Contractor to confirm all dimensions on site prior to works.
 Contractor to use figured dimensions over scaled dimensions

Issue	A	Date	4/5/21	Revision	SECTION 4.55 SUBMISSION FOR DA2020/1160
Title	SEDIMENT CONTROL & WASTE MANAGEMENT PLAN				
Project	SUSANS RESIDENCE 4 MONASH CRESCENT LOT 100 DP 545245 CLONTARF NSW 2093				
Scale	1:200 @ A3	Date	MAY 2021	Dwg No. DA 901	