

PROPOSED FIRST FLOOR PLAN

1:100

TRUE NORTH:

- NOTES (E & OE)

 All structures including stormwater & drainage to engineer's details.
 Do not obtain dimensions by scaling drawings.
 All dimensions are to be checked on site prior to starting work.
 These drawings are to be read in conjunction with all other consultant's drawings and specifications.
 All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local council requirements.
 New materials are to be used throughout unless otherwise noted.
 Concrete footings, slab, structural beams or any other structural members are to be designed by a practicing engineer. by a practicing engineer.


II Draftina

JJ Drugting
Division of JJ DRAFTING AUSTRALIA PTY LTD
26/90 Mona Vale Road, Mona Vale, NSW, 2103
PO Box 687, Dee Why, NSW, 2099
Mob. 0414 717 541 Email. jjdraft@tpg.com.au
www.jjdrafting.com.au
ACN 651 603 346

	REV:	DATE:	DESCRIPTION:	PR0
	Α	11.03.21	CHANGE LEVEL OF POOL	PR
	AB	15.12.21	POOL REDESIGN	13
03				ا
				DRA
.au				\square PR
				۱
- 1				71

╛	PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3
┑	DRAWING TITLE: PROPOSED FIRST FLOOR PLAN	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.05



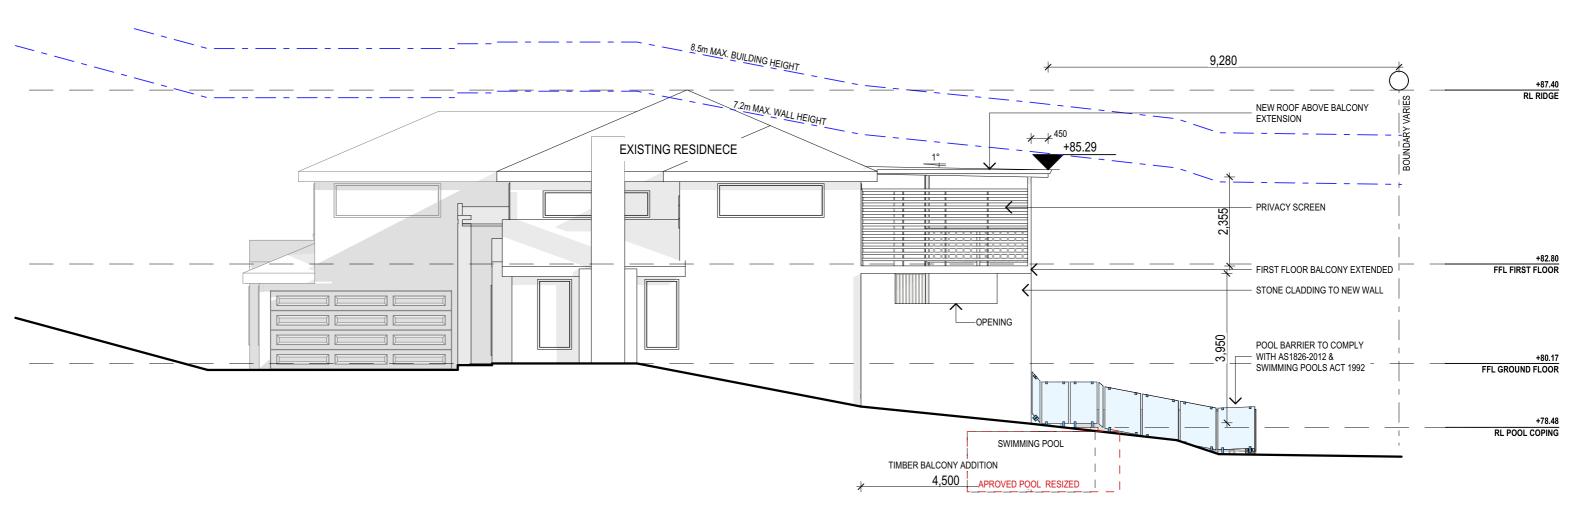

NORTH ELEVATION

1:100

- NOTES (E & OE)

 All structures including stormwater & drainage to engineer's details.

 Do not obtain dimensions by scaling drawings.

 All dimensions are to be checked on site prior to starting work.

 These drawings are to be read in conjunction with all other consultant's drawings and specifications.
- These drawings are to be read in conjunction with all other consultant's drawings and specifications.
 All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local council requirements.
 New materials are to be used throughout unless otherwise noted.
 Concrete footings, slab, structural beams or any other structural members are to be designed by a practicing engineer.


JJ Drafting

174 Garden St, North Narrabeen, NSW, 2101 PO Box 687, Dee Why, NSW, 2099 Mob. 0414 717 541 Email. jjdraft@tpg.com.au www.jjdrafting.com.au

	REV:	DATE:	DESCRIPTION:
	Α	11.03.21	CHANGE LEVEL OF POOL
	AB	15.12.21	POOL REDESIGN
1			

PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3
DRAWING TITLE: NORTH ELEVATION	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.06



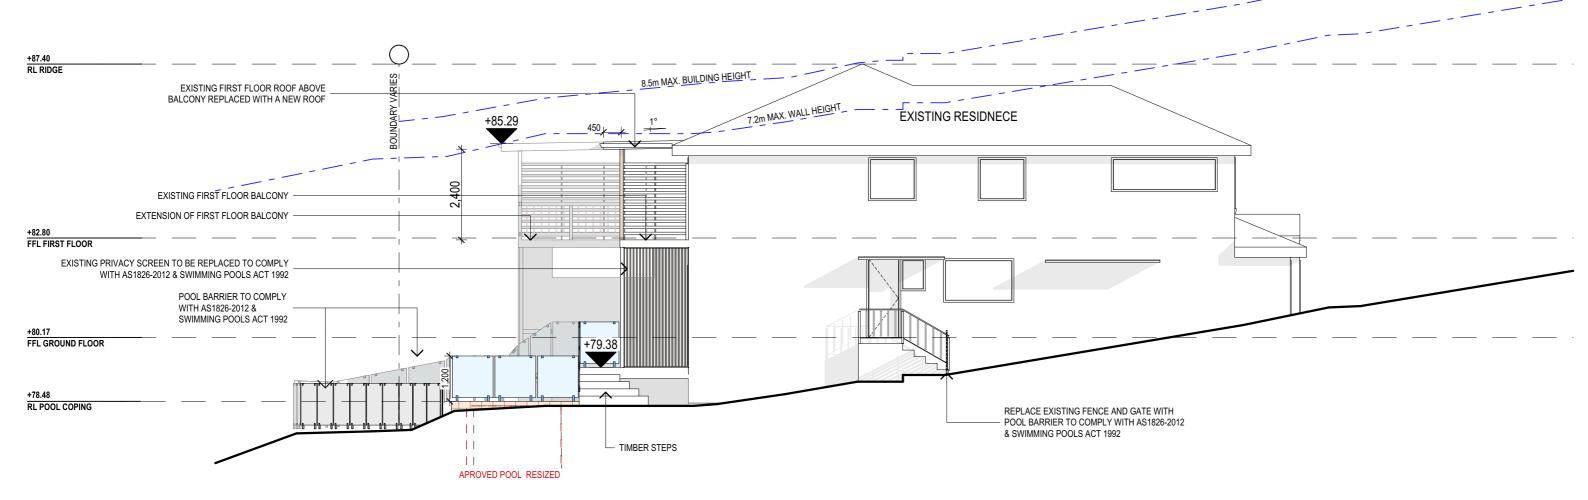

SOUTH ELEVATION 1:100

- NOTES (E & OE)

 All structures including stormwater & drainage to engineer's details.

 Do not obtain dimensions by scaling drawings.

 All dimensions are to be checked on site prior to starting work.

 These drawings are to be read in conjunction with all other consultant's drawings and specifications.
- These drawings are to be read in conjunction with all other consultant's drawings and specifications.
 All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local council requirements.
 New materials are to be used throughout unless otherwise noted.
 Concrete footings, slab, structural beams or any other structural members are to be designed by a practicing engineer.

JJ Drafting 174 Garden St, North Narrabeen, NSW, 2101

PO Box 687, Dee Why, NSW, 2099 Mob. 0414 717 541 Email. jjdraft@tpg.com.au www.jjdrafting.com.au

	REV:	DATE:	DESCRIPTION:
	Α	11.03.21	CHANGE LEVEL OF POOL
	AB	15.12.21	POOL REDESIGN
ı			

PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3
DRAWING TITLE: SOUTH ELEVATION	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.07



2,870 +87.40 RL RIDGE 8.5m MAX. BUILDING HEIGHT ARY VARIES EXISTING RESIDNECE EXISTING FIRST FLOOR ROOF ABOVE 7.2m MAX. WALL HEIGHT NEW COLORBOND ROOF ABOVE BALCONY EXTENSION BALCONY REPLACED WITH A NEW COLORBOND ROOF PRIVACY SCREEN WINDOW REPLACED WITH SLIDING DOOR (D01) 8 NEW TIMBER POSTS SELECTED BALUSTRADE TO NCC EXTENSION TO FIRST FLOOR BALCONY +82.80 FFL FIRST FLOOR BEAM TO ENG. STONE CLADDING TO NEW WALL POOL BARRIER TO COMPLY WITH AS1826-2012 & SWIMMING POOLS ACT 1992 3,170 3,890 BALUSTRADE TO NCC ,000° +80.17 FFL GROUND FLOOR ENCLOSED POOL PUMP UNDER DECK TIMBER POSTS POOL BARRIER TO COMPLY WITH AS1826-2012 & +78.48 SWIMMING POOLS ACT 1992 RL POOL COPING GROUND LINE AT HOUSE APROVED POOL RESIZED TIMBER BALCONY EXTENSION 4,200 6,000 SWIMMING POOL

WEST ELEVATION

1:100

<u>NOTES</u>	(E & OE)
--------------	----------

All structures including stormwater & drainage to engineer's details.
 Do not obtain dimensions by scaling drawings.
 All dimensions are to be checked on site prior to starting work.

specifications.
• All workmanship & materials shall be in accordance with the requirements of current editions

 New materials are to be used throughout unless otherwise noted.
 Concrete footings, slab, structural beams or any other structural members are to be designed. by a practicing engineer.

JJ Drafting

174 Garden St, North Narrabeen, NSW, 2101 PO Box 687, Dee Why, NSW, 2099 Mob. 0414 717 541 Email. jjdraft@tpg.com.au www.jjdrafting.com.au

	REV:	DATE:	DESCRIPTION:
	Α	11.03.21	CHANGE LEVEL OF POOL
	AB	15.12.21	POOL REDESIGN
1			

PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3
DRAWING TITLE: WEST ELELVATION	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.08

BASIX REQUIREMENT:

BASIX INCLUSIONS FOR 13 KINSDALE CLOSE, KILLARNEY **HEIGHTS**

OUTDOOR SWIMMING POOL

THE SWIMMING POOL MUST BE OUTDOORS

THE SWIMMING POOL MUST NOT HAVE A CAPACITY GREATER THAN 24.4KL THE SWIMMING POOL MUST HAVE A POOL COVER


THE APPLICANT MUST INSTALL A POOL PUMP TIMER FOR THE SWIMMING POOL THE APPLICANT MUST NOT INCORPORATE ANY HEATING SYSTEM FOR THE SWIMMING POOL THAT IS PART OF THIS DEVELOPMENT

GLAZING - DOORS & WINDOWS

Standard aluminium, single clear, (or U-value: 7.63, SHGC: 0.75)



MOD2021/1007

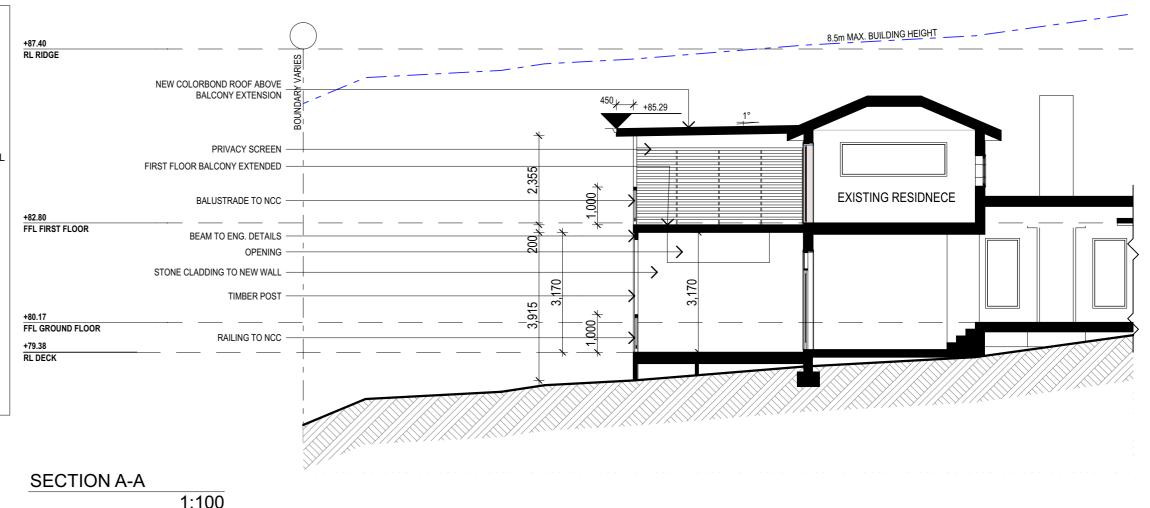

SPECIFICATION NOTES

BEARERS AND JOISTS:

- SHALL BE INSTALLED TO COMPLY WITH AS1684 AS AMENDED FOR TIMBER COMPONENTS OR AS3620 FOR LIGTHWEIGHT STEEL FRAMING SECTIONS OR AS PER THE NASH ALTERNATIVES TO AS 3623.

- SHALL BE INSTALLED IN ACCORDANCE WITH AS3660.

PROFILED STEEL ROOF:

- NCC VOL.2 PART 3.5.1. - DESIGN AND INSTALLATION SHALL BE IN ACCORDANCE WITH AS/NZS 1562.

- COLORBOND ROOF CLADDING

- SHALL BE IN ACCORDANCE WITH NCC VOL.1 PART B1.4 OR VOL.2 PART 3.2.3. - ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH CURRENT EDITIONS OF THE

CONCRETE BLOCKS OR BRICKS:

TO COMPLY WITH TO AS4455 MANSORY BUILDING BLOCKS/PAVER.

- -FOOTINGS TO BE IN ACCORDANCE WITH AS1480.
 FOOTINGS TO BE IN ACCORDANCE WITH NCC VOL.2 PARTS 3.2.3, 3.2.4 AND 3.2.5
- ALL REINFORCEMENTS SHALL CONFORM TO AS1302, AS1303 AND AS1304

BRICK AND BLOCKWORK:
- CONSTRUCTION OF MASONRY BUILDINGS SHALL BE AS PER AS3700 OR AS4773.

- TIMBER TO COMPLY WITH AS1170.2 OR AS4055.
- ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS1684 AND 1720 AS APPLICABLE.

- TO COMPLY WITH NCC VOL.2 PART 3.4
- GROUND FLOOR TIMBERS SHALL BE ONLY OF HARDWOOD, CYPRESS PINE OR PRESSURE TREATED RADIATA OR CANADA PINE BELOW A HEIGHT OF 300mm ABOVE FINISHED GROUND LEVEL AND MUST NOT BE BUILT INTO BRICKWORK.
- SUBFLOOR VENTILATION SHALL CONFORM TO NCC VOL.2 PART 3.4.1.
- IN BUSHFIRE PRONE AREAS SPECIAL CONDITIONS APPLY.
- WHERE TERMITE BARRIERS NEED TO BE INSPECTED, 400mm CLEARANCE IS REQUIRED BETWEEN THE UNDERSIDE OF BEARER AND GROUND SURFACE.
- USE TREATED TIMBER WHERE REQUIRED FOR DURABILITY.
- DO NOT USE TIMBER UNSUITABLE FOR EXPOSURE TO MOISTURE IN EXPOSED LOCATION. PROVIDE STRUCTURE BRACING IN ACCORDANCE WITH AS1684
- PROVIDE STRUCTURE TIEDOWN IN ACCORDANCE WITH AS1684
- USE GALVANISED FIXINGS WHERE EXPOSED TO WEATHER.

TERMITE CONTROL:

- TO BE IN ACCORDANCE WITH TO AS3660.1
- SHALL BE IN ACCORDANCE WITH NCC VOL.2 PART 3.1.3 OR VOL.1 PART B1.4.

FLASHING AND CAPPINGS:

- SELECTION AND INSTALLATION OF METAL RAINWATER GOODS REFER TO AS2180
- FLASH PROJECTIONS ABOVE THE ROOF WITH TWO PART FLASHINGS CONSISTING OF AN APRON FLASHING AND OVER FLASHING, WITH AT LEAST 100mm OVERLAP.

REV: DATE:

- PROVIDE FOR INDEPENDENT MOVEMENT BETWEEN ROOF AND PROJECTION.

- 40% OF NEW OR ALTERED LIGHT FIXTURES TO BE FITTED WITH FLUORESCENT, COMPACT FLUORESCENT, OR LIGHT-EMITTING-DIODE (LED) LAMPS

DOOR & WINDOWS:

- ALL FRAMED WINDOWS SHALL BE INSTALLED IN ACCORDANCE WITH AS2047-48 FOR ALUMINIUM WINDOWS AND AS2047 FOR TIMBER WINDOWS.
- WINDOWS AND ASJUST FOR TIMBER YINGOTTO.

 ALUMINIUM FRAMED WINDOWS AND DOORS.

 WEATHER STRIPPING IS TO BE PROVIDED TO ALL EXTERNAL WINDOWS AND DOORS.

STAIRS, HANDRAILS AND BALUSTRADES:

- SOLID COLORBOND BALUSTRADE.
- NCC VOL.2 PARTS 3.9.1 AND 3.9.2
- RELATIONSHIP OF RISER TO GOING SHALL BE BETWEEN 1:2 AND 1:1.35 UNLESS OTHERWISE DIRECTED TO GOING SHALL BE BETWEEN 1:2 AND 1:1.35 UNLESS OTHERWISE DIRECTED OR AS PERMITTED IN
- -BALUSTRADES SHALL BE PROVIDED TO ALL LANDINGS, RAMPS, DECKS, ROOFS AND OTHER ELEVATED PLATFORMS WHERE THE VERTICAL DISTANCE FROM THAT LEVEL IS MORE THAN 1m ABOVE THE ADJOINING FLOOR OR FINISHED GROUND LEVEL.
- THE HEIGHT OF BALUSTRADE MUST BE A MINIMUM OF 1m HIGH ABOVE LANDING AND NOT LESS THAN 865mm ABOVE THE NOSINGS OF ANY STAIR TREADS OR FLOOR RAMP AND HAVE NO OPENING GREATER
- THE HEIGHT OF BALLISTRADE TO THE NEW STAIR CASES IS TO BE MEASURED A MINIMUM 865mm ABOVE THE NOSING LINE AND HAVE NO OPENING GREATER NO OPENING GREATER THAN 125mm.

- MATERIALS TO BE USED FOR SURFACES OF FLOORS, STAIR LANDING, STEPS AND NOSINGS SHALL BE IN ACCORDANCE WITH THE CLASSIFICATIONS FOR SLIP RESISTANCE AS APPLY IN AS4586 AND HB198

STORMWATER:

DESCRIPTION:

EAVES GUTTERS, VALLEY GUTTERS AND DOWPIPES

- TO COMPLY WITH AS/NZS 2179 FOR METAL AND AS1273 FOR UPVC COMPONENTS.
- NEW DOWNPIPES TO BE CONNECTED INTO EXISTING STORMWATER LINE
- COLORBOND GUTTERS AND DOWNPIPES
- MINIMUM SLOPE OF EAVES AND GUTTERS 1:200

- NCC VOL.1 PARTS B 1.4, D 3.12, F1.13 OR NCC VOL.2 PART 3.6

SMOKE DETECTORS/ALARMS:

- ONCE VOL 2 PART 3.7.2, FIRE/SMOKE DETECTORS COMPLYING WITH THE REQUIREMENTS OF THE LOCAL GOVERNMENT ACT AND/OR STATE OR TERRITORY REGULATIONS MUST BE FITTED IN THE LOCATIONS REQUIRED AND APPROVED BY THE AUTHORITY AND SHALL BE INSTALLED IN ACCORDANCE WITH AS3786. - INSTALLATIONS IN BUILDINGS OTHER THAN CLASS 1 AND 10 MUST BE INSTALLED AND MANAGED TO COMPLY WITH NCC SPEC. E2.2a.
- MULTIPLE ALARMS WITHIN HOUSES AND SOLE OCCUPANCY UNITS MUST BE HARD WIRED AND INTERCONNECTED.

WASTE MANAGEMENT:

- ALL WASTE SHALL BE TAKEN AWAY BY TRUCKS TO A SUITABLE LANDFILL OR RECYCLE DEPOT. - ALL WASTE SHALL BE COVERED DURING TRANSPORTATION.
- WASTE GENERATED DURING CONSTRUCTION SHALL BE PLACED IN STEEL BINS AND TAKEN AWAY BY AN APPROVED CONTRACTOR TO A APPROVED LANDFILL SITE.

SEDIMENT CONTROL:

- A FILTER CLOTH SYSTEM SHALL BE INSTALLED TO STOP ANY SEDIMENT ENTERING COUNCILS STORMWATER SYSTEM

NOTE:

ALL PLANS ARE TO BE READ IN CONJUNCTION AND COMPLY WITH THE BASIX CERTIFICATE, BUSHFIRE AND GEOTECH REPORTS.

NOTES (E & OE)

- All structures including stormwater & drainage to engineer's details
 Do not obtain dimensions by scaling drawings.
 All dimensions are to be checked on site prior to starting work.
- All workmanship & materials shall be in accordance with the requirements of current editions cluding amendments of the National Construction Code, relevant Australian Sta
- Tolluting anientements.

 New materials are to be used throughout unless otherwise noted.

 Concrete footings, slab, structural beams or any other structural members are to be designed.

These drawings are to be read in conjunction with all other consultant's drawings and


by a practicing engineer


JJ Drafting 174 Garden St, North Narrabeen, NSW, 2101

PO Box 687, Dee Why, NSW, 2099 Mob 0414 717 541 Email. jjdraft@tpg.com.au www.iidrafting.com.au

н			2200
l	Α	11.03.21	CHANGE LEVEL OF POOL
l	AB	15.12.21	POOL REDESIGN
ı			
ı			
l			
ı			
ı			

1	PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3
1	DRAWING TITLE: SECTION / BASIX	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.09

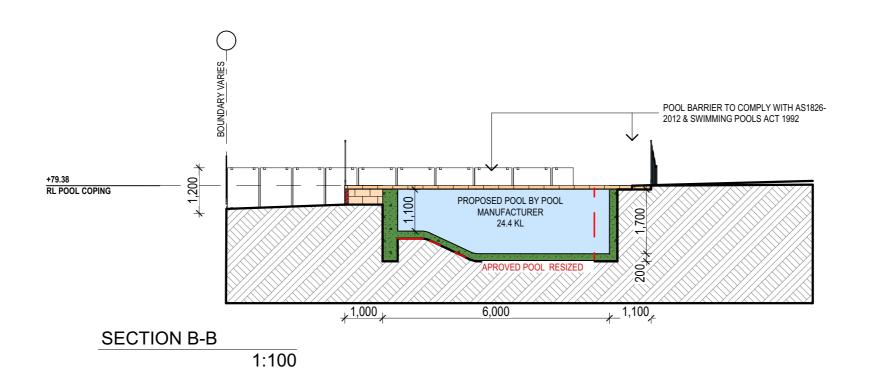

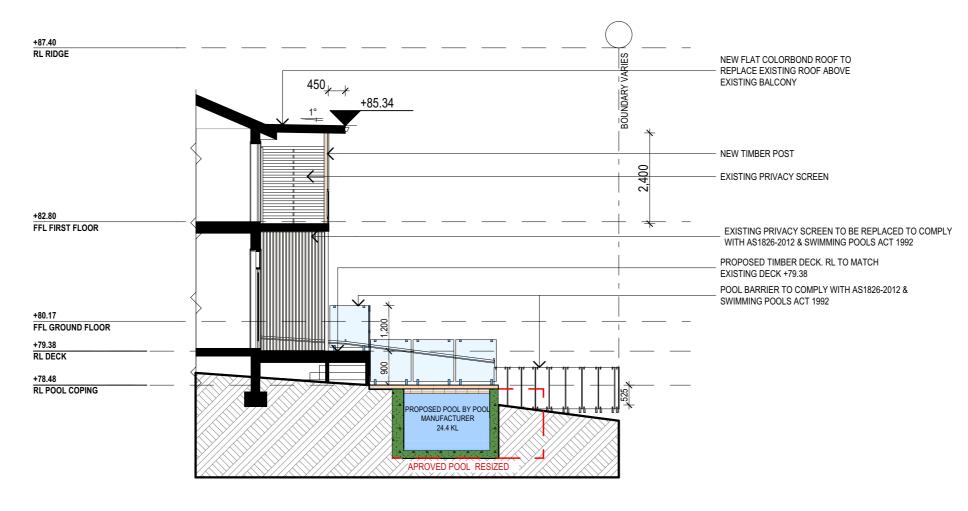



SECTION C-C

1:100

- NOTES (E & OE)

 All structures including stormwater & drainage to engineer's details.

 Do not obtain dimensions by scaling drawings.

 All dimensions are to be checked on site prior to starting work.

 These drawings are to be read in conjunction with all other consultant's drawings and experiencies.
- Interest of courings are to be read in Conjunction with an other consumers a reasonings and specifications.
 All workmanship & materials shall be in accordance with the requirements of current editions including amendments of the National Construction Code, relevant Australian Standards & local council requirements.
 New materials are to be used throughout unless otherwise noted.
 Concrete footings, slab, structural beams or any other structural members are to be designed by a credition panipage.
- by a practicing engineer.
- JJ Drafting 174 Garden St, North Narrabeen, NSW, 210

PO Box 687, Dee Why, NSW, 2099 Mob. 0414 717 541 Email. jjdraft@tpg.com.au www.jjdrafting.com.au

	REV:	DATE:	DESCRIPTION:	
'	Α	11.03.21	CHANGE LEVEL OF POOL	
	AB	15.12.21	POOL REDESIGN	
01				

DRAWING TITLE: POOL SECTIONS	JOB No: 823/20	CHECKED BY:	DRAWING No: DA.10
PROJECT DETAILS: # SECTION 4.55 PROPOSED ALTERATIONS AND ADDITIONS 13 KINSDALE CLOSE KILLARNEY HEIGHTS	DATE: 08/20	DRAWN BY:	SCALE: 1:100 @ A3