

## RE: H&G adjustments to accommodate fencing solutions



Matthew Furlong <matthewfurlong@pulseacoustics.com.au>

To 'Joanne MacGregor'; 'Geoff MacGregor'

Cc 'Vaughan Milligan'

Reply

Reply All

Forward


Tue 20/10/2020 10:38

Hi Geoff,

As discussed, in addition to below:

### Option 5 – Boundary Fence either 1.8m or 2.4m with Perspex Panelling on the rear of the Racking

- Fence location along the boundary line of the property.
- Fence along the boundary can either be 1.8m high or 2.4m high
- On the rear of the racking, the a solid Perspex backing is installed to a height of 3.3m as shown in the drawing below.
- No changes to the management controls (number vehicles and their locations etc.).
- Compliance is achieved at the neighbouring property (i.e. 61-63 Myoora Road).

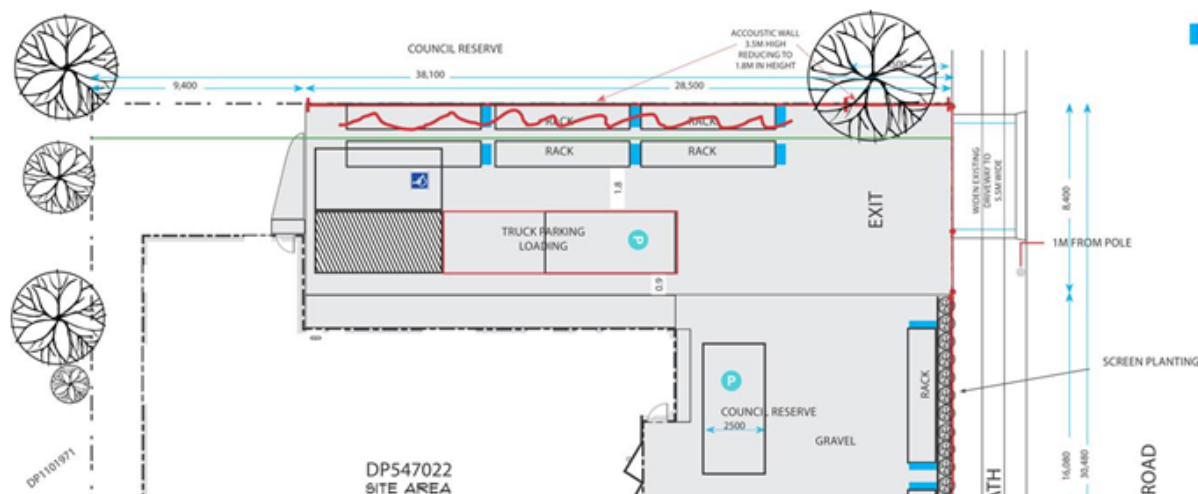

Kindest regards,

Matthew Furlong  
Senior Acoustic Engineer



A: Level 4, 73 Walker Street,  
North Sydney NSW 2060  
E: [matthewfurlong@pulseacoustics.com.au](mailto:matthewfurlong@pulseacoustics.com.au)  
M: +61 452 414 785