
























PROPOSED DEVELOPMENT
(No.116-120) FRENCHS FOREST RD, (No.11) GLADYS AVE, FRENCHS FOREST
STORMWATER MANAGEMENT PLANS

LEGEND	
	DENOTES ON-SITE DETENTION TANK
	DENOTES ON-SITE RETENTION TANK
	DENOTES DWELLING FOOTPRINT
	DENOTES 100mm DIA. STORMWATER/SURFACE WATER SYSTEM PIPE AT 1% MIN. GRADE U.N.O.
	DENOTES 100mm DIA. FULLY SEALED RAINWATER SYSTEM PIPE U.N.O.
	DENOTES RAINWATER PIPE AND DIA. WHEN PIPE EXCEEDS 100mm DIA.
	DENOTES STORMWATER/SURFACE WATER PIPE AND DIA. WHEN PIPE EXCEEDS 100mm DIA.
	DENOTES RISING MAIN AND PIPE DIA. U.N.O.
	DENOTES SUBSOIL DRAINAGE LINE AND DIA. WRAPPED IN GEOFABRIC U.N.O.
	DENOTES DOWNPIPE
	DENOTES INSPECTION OPENING WITH SCREW DOWN LID AT FINISHED SURFACE LEVEL
	DENOTES INSPECTION OPENING WITH SCREW DOWN LID AT FINISHED SURFACE LEVEL FOR SYSTEM FLUSHING PURPOSES
	STORMWATER PIT - SOLID COVER
	STORMWATER PIT - GRATED INLET
	STORMWATER PIT - SOLID COVER
	STORMWATER PIT - GRATED INLET
	DENOTES GRATED DRAIN
	DENOTES ABSORPTION TRENCH
	NON RETURN VALVE
	PUMP
	STOP VALVE (ISOLATION VALVE)
	240v REQUIRED
	DENOTES LEVEL OF INLET /OUTLET OF STORMWATER PIPE. NOTE: UNLESS NOTED OTHERWISE, THE BASE OF THE PIT IS THE SAME AS THE PIPE INLET/OUTLET.

DIAL BEFORE YOU DIG



IMPORTANT: THE CONTRACTOR IS TO MAINTAIN A CURRENT SET OF "DIAL BEFORE YOU DIG" DRAWINGS ON SITE AT ALL TIMES.

GENERAL NOTES	
1.	THESE PLANS SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT CONSULTANTS' PLANS, SPECIFICATIONS, CONDITIONS OF DEVELOPMENT CONSENT AND CONSTRUCTION CERTIFICATE REQUIREMENTS. WHERE DISCREPANCIES ARE FOUND ACOR CONSULTANTS (CC) MUST BE CONTACTED IMMEDIATELY FOR VERIFICATION
2.	WHERE THESE PLANS ARE NOTED FOR DEVELOPMENT APPLICATION PURPOSES ONLY, THEY SHALL NOT BE USED FOR OBTAINING A CONSTRUCTION CERTIFICATE NOR USED FOR CONSTRUCTION PURPOSES
3.	SUBSOIL DRAINAGE SHALL BE DESIGNED AND DETAILED BY THE STRUCTURAL ENGINEER. SUBSOIL DRAINAGE SHALL NOT BE CONNECTED INTO THE STORMWATER SYSTEM IDENTIFIED ON THESE PLANS UNLESS APPROVED BY ACOR CONSULTANTS (CC)

STORMWATER CONSTRUCTION NOTES	
1.	ALL WORK SHALL BE CARRIED OUT IN ACCORDANCE WITH AS/NZS 3500 (CURRENT EDITION) AND THE REQUIREMENTS OF THE LOCAL COUNCIL'S POLICIES AND CODES
2.	THE MINIMUM SIZES OF THE STORMWATER DRAINS SHALL NOT BE LESS THAN DN90 FOR CLASS 1 BUILDINGS AND DN100 FOR OTHER CLASSES OF BUILDING OR AS REQUIRED BY THE REGULATORY AUTHORITY
3.	THE MINIMUM GRADIENT OF STORMWATER DRAINS SHALL BE 1%, UNLESS NOTED OTHERWISE
4.	COUNCIL'S TREE PRESERVATION ORDER IS TO BE STRICTLY ADHERED TO. NO TREES SHALL BE REMOVED UNTIL PERMIT IS OBTAINED
5.	PUBLIC UTILITY SERVICES ARE TO BE ADJUSTED AS NECESSARY AT THE CLIENT'S EXPENSE
6.	ALL PITS TO BE BENCHED AND STREAMLINED. PROVIDE STEP IRONS FOR ALL PITS OVER 1.2m DEEP
7.	MAKE SMOOTH JUNCTION WITH ALL EXISTING WORK
8.	VEHICULAR ACCESS AND ALL SERVICES TO BE MAINTAINED AT ALL TIMES TO ADJOINING PROPERTIES AFFECTED BY CONSTRUCTION
9.	SERVICES SHOWN ON THESE PLANS HAVE BEEN LOCATED FROM INFORMATION SUPPLIED BY THE RELEVANT AUTHORITIES AND FIELD INVESTIGATIONS AND ARE NOT GUARANTEED COMPLETE NOR CORRECT. IT IS THE CLIENT & CONTRACTOR'S RESPONSIBILITY TO LOCATE ALL PRIOR TO CONSTRUCTION
10.	ANY VARIATION TO THE WORKS AS SHOWN ON THE APPROVED DRAWINGS ARE TO BE CONFIRMED BY ACOR CONSULTANTS (CC) PRIOR TO THEIR COMMENCEMENT

RAINWATER RE-USE SYSTEM NOTES	
1.	RAINWATER SUPPLY PLUMBING TO BE CONNECTED TO OUTLETS WHERE REQUIRED BY BASIX CERTIFICATE (BY OTHERS)
2.	TOWN WATER CONNECTION TO RAINWATER TANK TO BE TO THE SATISFACTION OF THE REGULATORY AUTHORITY. THIS MAY REQUIRE PROVISION OF: 2.1. PERMANENT AIR GAP 2.2. BACKFLOW PREVENTION DEVICE
3.	NO DIRECT CONNECTION BETWEEN TOWN WATER SUPPLY AND THE RAIN WATER SUPPLY
4.	AN APPROVED STOP VALVE AND/OR PRESSURE LIMITING VALVE AT THE RAINWATER TANK
5.	PROVIDE APPROPRIATE FLOAT VALVES AND/OR SOLENOID VALVES TO CONTROL TOWN WATER SUPPLY INLET TO TANK IN ORDER TO ACHIEVE THE TOP-UP INDICATED ON THE TYPICAL DETAIL
6.	ALL PLUMBING WORKS ARE TO BE CARRIED OUT BY LICENSED PLUMBERS IN ACCORDANCE WITH AS/NZS3500.1 NATIONAL PLUMBING AND DRAINAGE CODE
7.	PRESSURE PUMP ELECTRICAL CONNECTION TO BE CARRIED OUT BY A LICENSED ELECTRICIAN
8.	ONLY ROOF RUN-OFF IS TO BE DIRECTED TO THE RAINWATER TANK . SURFACE WATER INLETS ARE NOT TO BE CONNECTED
9.	PIPE MATERIALS FOR RAINWATER SUPPLY PLUMBING ARE TO BE APPROVED MATERIALS TO AS/NZS3500 PART 1 SECTION 2 AND TO BE CLEARLY AND PERMANENTLY IDENTIFIED AS 'RAINWATER'. THIS MAY BE ACHIEVED FOR BELOW GROUND PIPES USING IDENTIFICATION TAPE (MADE IN ACCORDANCE WITH AS2648) OR FOR ABOVE GROUND PIPES BY USING ADHESIVE PIPE MARKERS (MADE IN ACCORDANCE WITH AS1345)
10.	EVERY RAINWATER SUPPLY OUTLET POINT AND THE RAINWATER TANK ARE TO BE LABELED 'RAINWATER' ON A METALLIC SIGN IN ACCORDANCE WITH AS1319
11.	ALL INLETS AND OUTLETS TO THE RAINWATER TANK ARE TO HAVE SUITABLE MEASURES PROVIDED TO PREVENT MOSQUITO AND VERMIN ENTRY

SHEET INDEX	
COVER SHEET & NOTES	SHEET SW1
STORMWATER MANAGEMENT PLAN - BASEMENT 2 SHEET No.1	SHEET SW2
STORMWATER MANAGEMENT PLAN - BASEMENT 2 SHEET No.2	SHEET SW3
STORMWATER MANAGEMENT PLAN - BASEMENT 2 SHEET No.3	SHEET SW4
STORMWATER MANAGEMENT PLAN - BASEMENT 1 SHEET No.1	SHEET SW5
STORMWATER MANAGEMENT PLAN - BASEMENT 1 SHEET No.2	SHEET SW6
STORMWATER MANAGEMENT PLAN - MEZZANINE	SHEET SW7
STORMWATER MANAGEMENT PLAN - GROUND FLOOR SHEET No.1	SHEET SW8
STORMWATER MANAGEMENT PLAN - GROUND FLOOR SHEET No.2	SHEET SW9
STORMWATER MANAGEMENT PLAN - GROUND FLOOR SHEET No.3	SHEET SW10
STORMWATER MANAGEMENT PLAN - ONSITE DETENTION LAYOUT	SHEET SW11
STORMWATER MANAGEMENT DETAILS SHEET No.1	SHEET SW12
STORMWATER MANAGEMENT DETAILS SHEET No.2	SHEET SW13
STORMWATER QUALITY REPORT SHEET No.1	SHEET SW14
STORMWATER QUALITY REPORT SHEET No.2	SHEET SW15
EROSION & SEDIMENT CONTROL NOTES	SHEET SW16
EROSION & SEDIMENT CONTROL PLAN	SHEET SW17
EROSION & SEDIMENT CONTROL DETAIL SHEET	SHEET SW18
ON-SITE DETENTION CHECK LIST	SHEET SW19


NORTHERN BEACHES COUNCIL REQUIREMENTS					
SITE AREA (m²) 5740					
SITE LOCATION REGION 2					
PRE-DEVELOPED IMPERVIOUS AREA (m²) 1825 (32%)					
POST DEVELOPED IMPERVIOUS AREA (m²) 3354 (58%)					
1. FULL COMPUTATIONAL METHOD ADOPTED USING DRAINS PROGRAM. REFER TO DRAINS MODEL CC230124.dm					
2. DRAINS SUMMARY					
SITE AREA (m²) 5740					
IMPERVIOUS PRE-DEVELOPED FOR CALCULATIONS 0 (0%)					
PRE-DEVELOPED DISCHARGE FLOW RATES					
		POST-DEVELOPED FLOW RATES			
ARI (YEARS)	PRE-DEVELOPED FLOW RATE (L/sec)	OSD PIPED OUTFLOW (L/sec)	OVERFLOW (L/sec)	TOTAL OUTFLOW (L/sec)	OSD STORAGE VOLUME (m³)
5	190	180	0	180	35
100	330	218	105	323	50
POST DEVELOPED SUMMARY					
ROOF AREA (m²).....					2440
DRIVEWAY AREA					112
MISC. IMP AREA(m²).....					802
TOTAL IMPERVIOUS AREA (m²).....					3354
FOR CALCULATION					
OSD CATCHMENT = 5740m² (roof area , driveway, paths, landscape)					
OSD BYPASS = 0m²					
STORAGE VOLUME REQUIRED = 50m³					
MAXIMUM HEADWATER = 1.35m					
TOP STORED WATER LEVEL = RL 152.70					
C/L OF ORIFICE = RL 151.35					
THEREFORE: ADOPT = 297mm ORIFICE					
DESIGN HAS BEEN PREPARED IN ACCORDANCE WITH NORTHERN BEACHES COUNCIL'S WATER MANAGEMENT POLICY, AR&R AND AS/ANZS 3500.					

DEVELOPMENT APPLICATION ISSUE
NOT FOR CONSTRUCTION

DRAWINGS MUST BE PRINTED IN COLOUR

© COPYRIGHT of this design and plan is the property of ACOR Consultants (CC) Pty Ltd, ACN 127 012 104 ATF The ACOR (CC) Unit Trust ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from ACOR Consultants (CC) Pty Ltd. ACOR Consultants is a trademark licensed to ACOR Consultants (CC) Pty Ltd by ACOR Consultants Pty Ltd.

Client				Architect				Project				Drawing Title			
BREWSTER MURRAY ARCHITECTS				ACOR Consultants (CC) Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499				PROPOSED RESIDENTIAL DEVELOPMENT No.116 - 120 FRENCHS FOREST ROAD No.11 GLADYS AVENUE FRENCHS FOREST				COVER SHEET & NOTES			
C RE-ISSUED FOR DEVELOPMENT APPROVAL				12.11.24 LW BK				Drawn				Date			
B ISSUED FOR DEVELOPMENT APPROVAL				07.11.24 RH BK				LW				NOV 2024			
A DRAFT ISSUE FOR REVIEW				05.11.24 LW BK				Scale				A1			
Issue				Description				AS NOTED				Q.A. Check			
Date				Drawn				-				Date			
Approved				Issue				Designed				Project No.			
0				10m at full size				BK				CC230124			
												Dwg. No.			
												SW1			
												C			

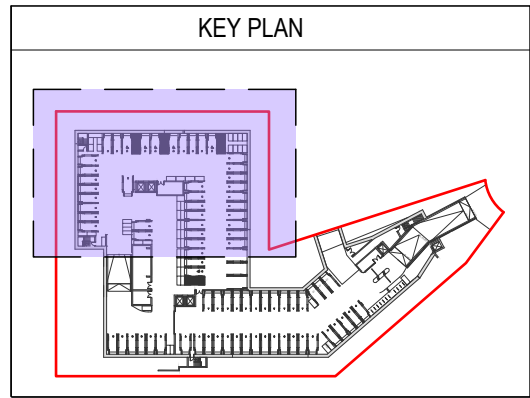

LEGEND

- DENOTES TREE TO BE REMOVED
- DENOTES TREE PROTECTION ZONE ON EXISTING TREES TO REMAIN. NOTE: PROVIDE APPROPRIATE PROTECTION MEASURES DURING CONSTRUCTION IN ACCORDANCE WITH ARBORISTS REQUIREMENTS
- DENOTES STRUCTURAL ROOT ZONES ON EXISTING TREES TO REMAIN

PIT BP1
450 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.95

PIT BP2
450 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.80

PIT BP3
600 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.65

DP
150

DP
150

DP
150

DP
150

PIT BP4
600 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.50

DP
150

PIT BP13
450 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.95

DP
150

DP
150

PIT BP12
450 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.80

PIT BP11
600 SQUARE PIT WITH MEDIUM
DUTY GRATED INLET
TOP OF GRATE - 148.40 nom
OUTLET - IL 147.70

DP
150

BASEMENT 2
FFL RL. 148.51

BP13

BP12


BP11

BP4

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

FOR CONTINUATION REFER TO SHEET SW3

Issue	Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK



Client
**BREWSTER MURRAY
ARCHITECTS**

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499



ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project
**PROPOSED RESIDENTIAL
DEVELOPMENT**
No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST


Drawing Title				
STORMWATER MANAGEMENT PLAN BASEMENT 2 SHEET No.1				
Drawn	Date	Scale	A1	O.A. Check
IK	NOV 2024	AS NOTED	-	-
Designed	Project No.	Dwg. No.	Issue	
BK	CC230124	SW2	C	

STORMWATER MANAGEMENT PLAN
BASEMENT 2 SHEET No.1
SCALE - 1:100/A1, 1:200/A3



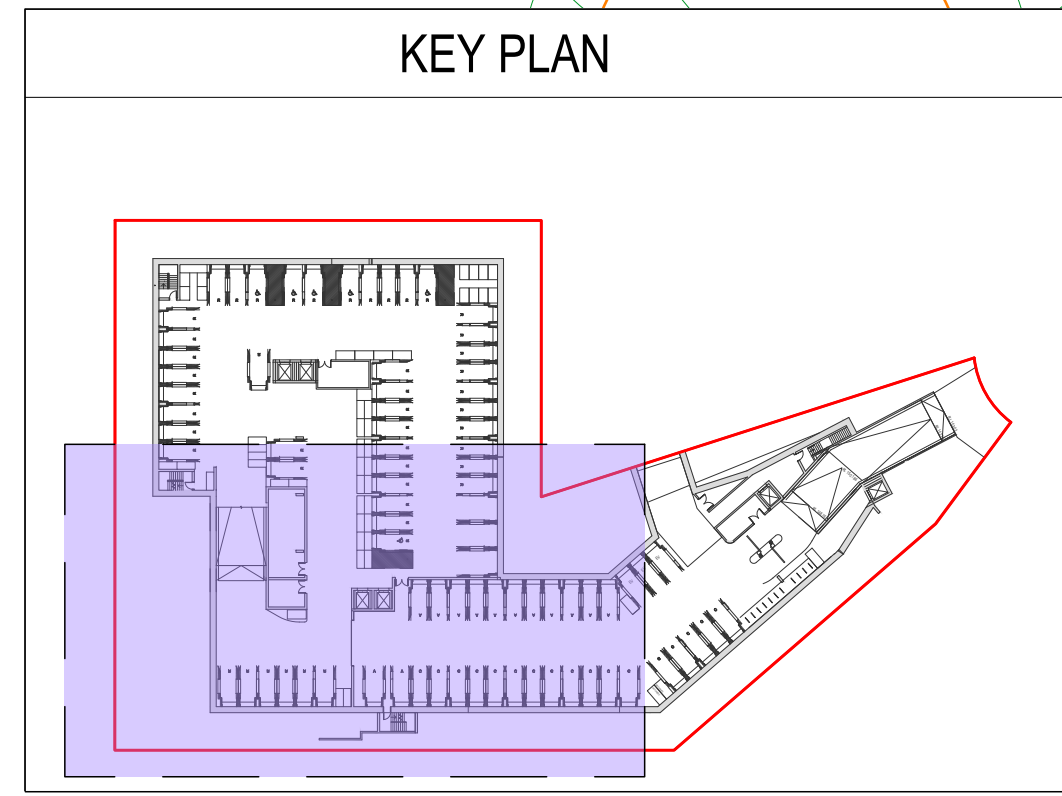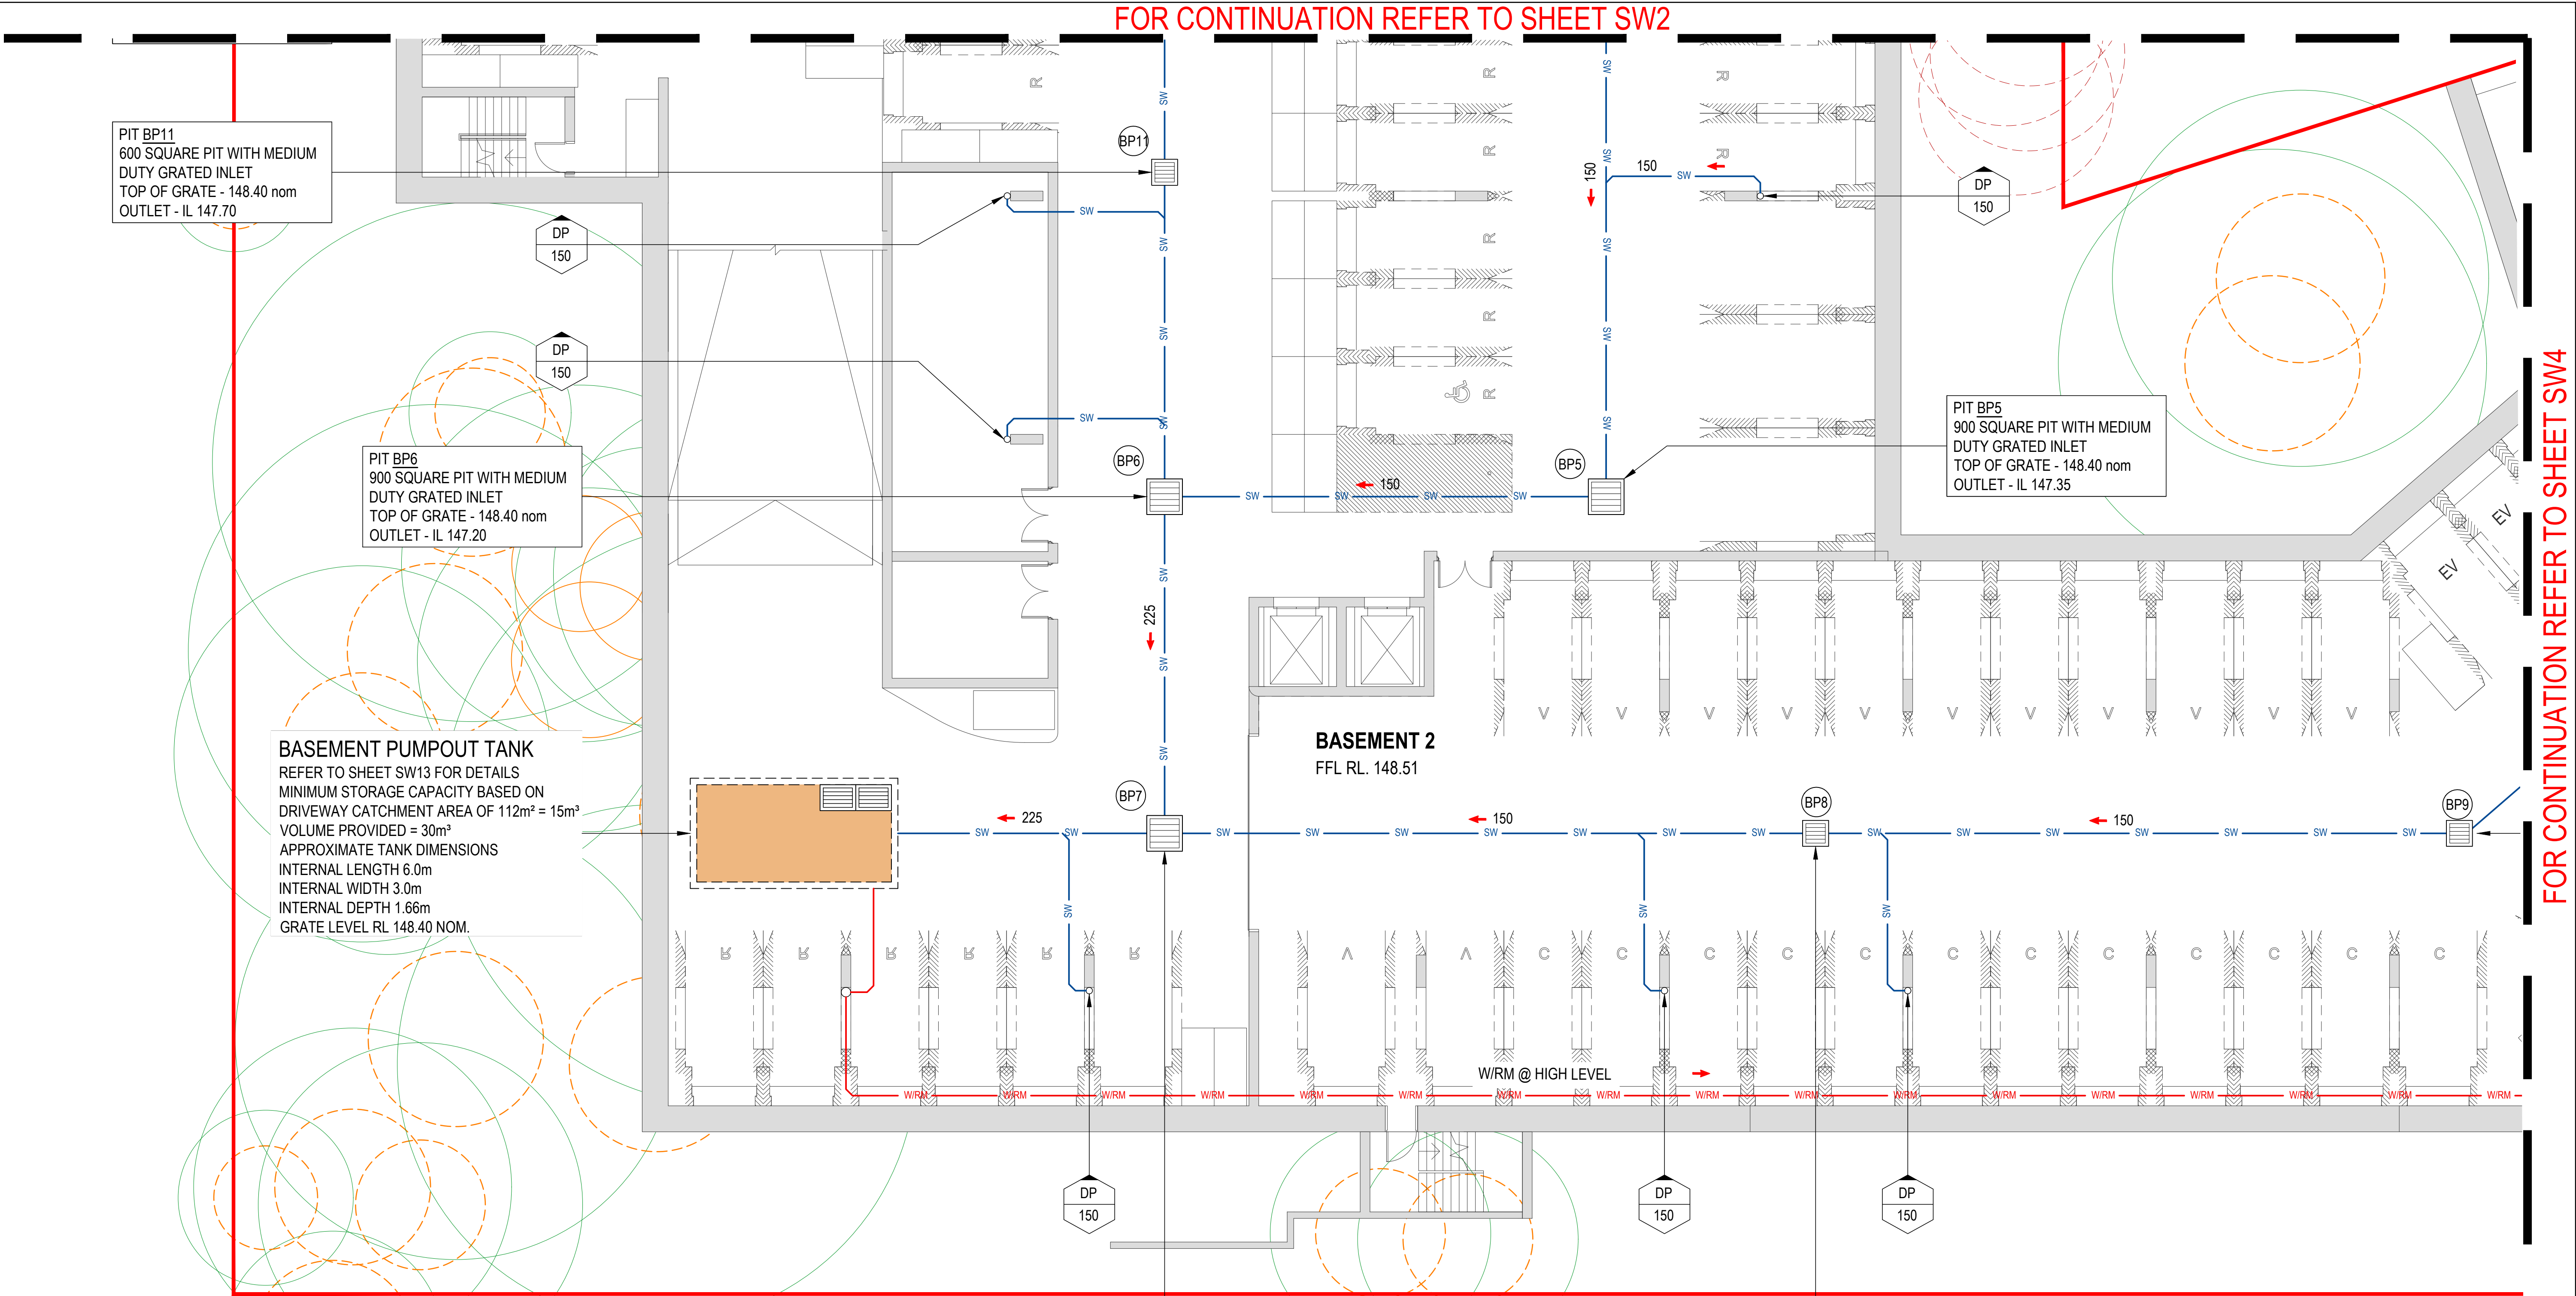


STORMWATER MANAGEMENT PLAN - BASEMENT 2 SHEET No.2





© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

					Client		Architect		Project		Drawing Title						
					BREWSTER MURRAY ARCHITECTS		HYDRACOR CONSULTING ENGINEERS		HYDRACOR Consulting Engineers Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499		PROPOSED RESIDENTIAL DEVELOPMENT No. 116 - 120 FRENCHS FOREST ROAD No. 11 GLADYS AVENUE FRENCHS FOREST		STORMWATER MANAGEMENT PLAN BASEMENT 2 SHEET No.2				
C	RE-ISSUED FOR DEVELOPMENT APPROVAL				12.11.24	LW	BK			Drawn		Date	Scale	A1	Q.A. Check	Date	
B	ISSUED FOR DEVELOPMENT APPROVAL				07.11.24	RH	BK			IK	NOV 2024	AS NOTED	-	-			
A	DRAFT ISSUE FOR REVIEW				05.11.24	LW	BK			Issue	Description	Date	Drawn	Approved			
											Designed BK		Project No. CC230124		Dwg. No. SW3		Issue C

FOR CONTINUATION REFER TO SHEET SW3

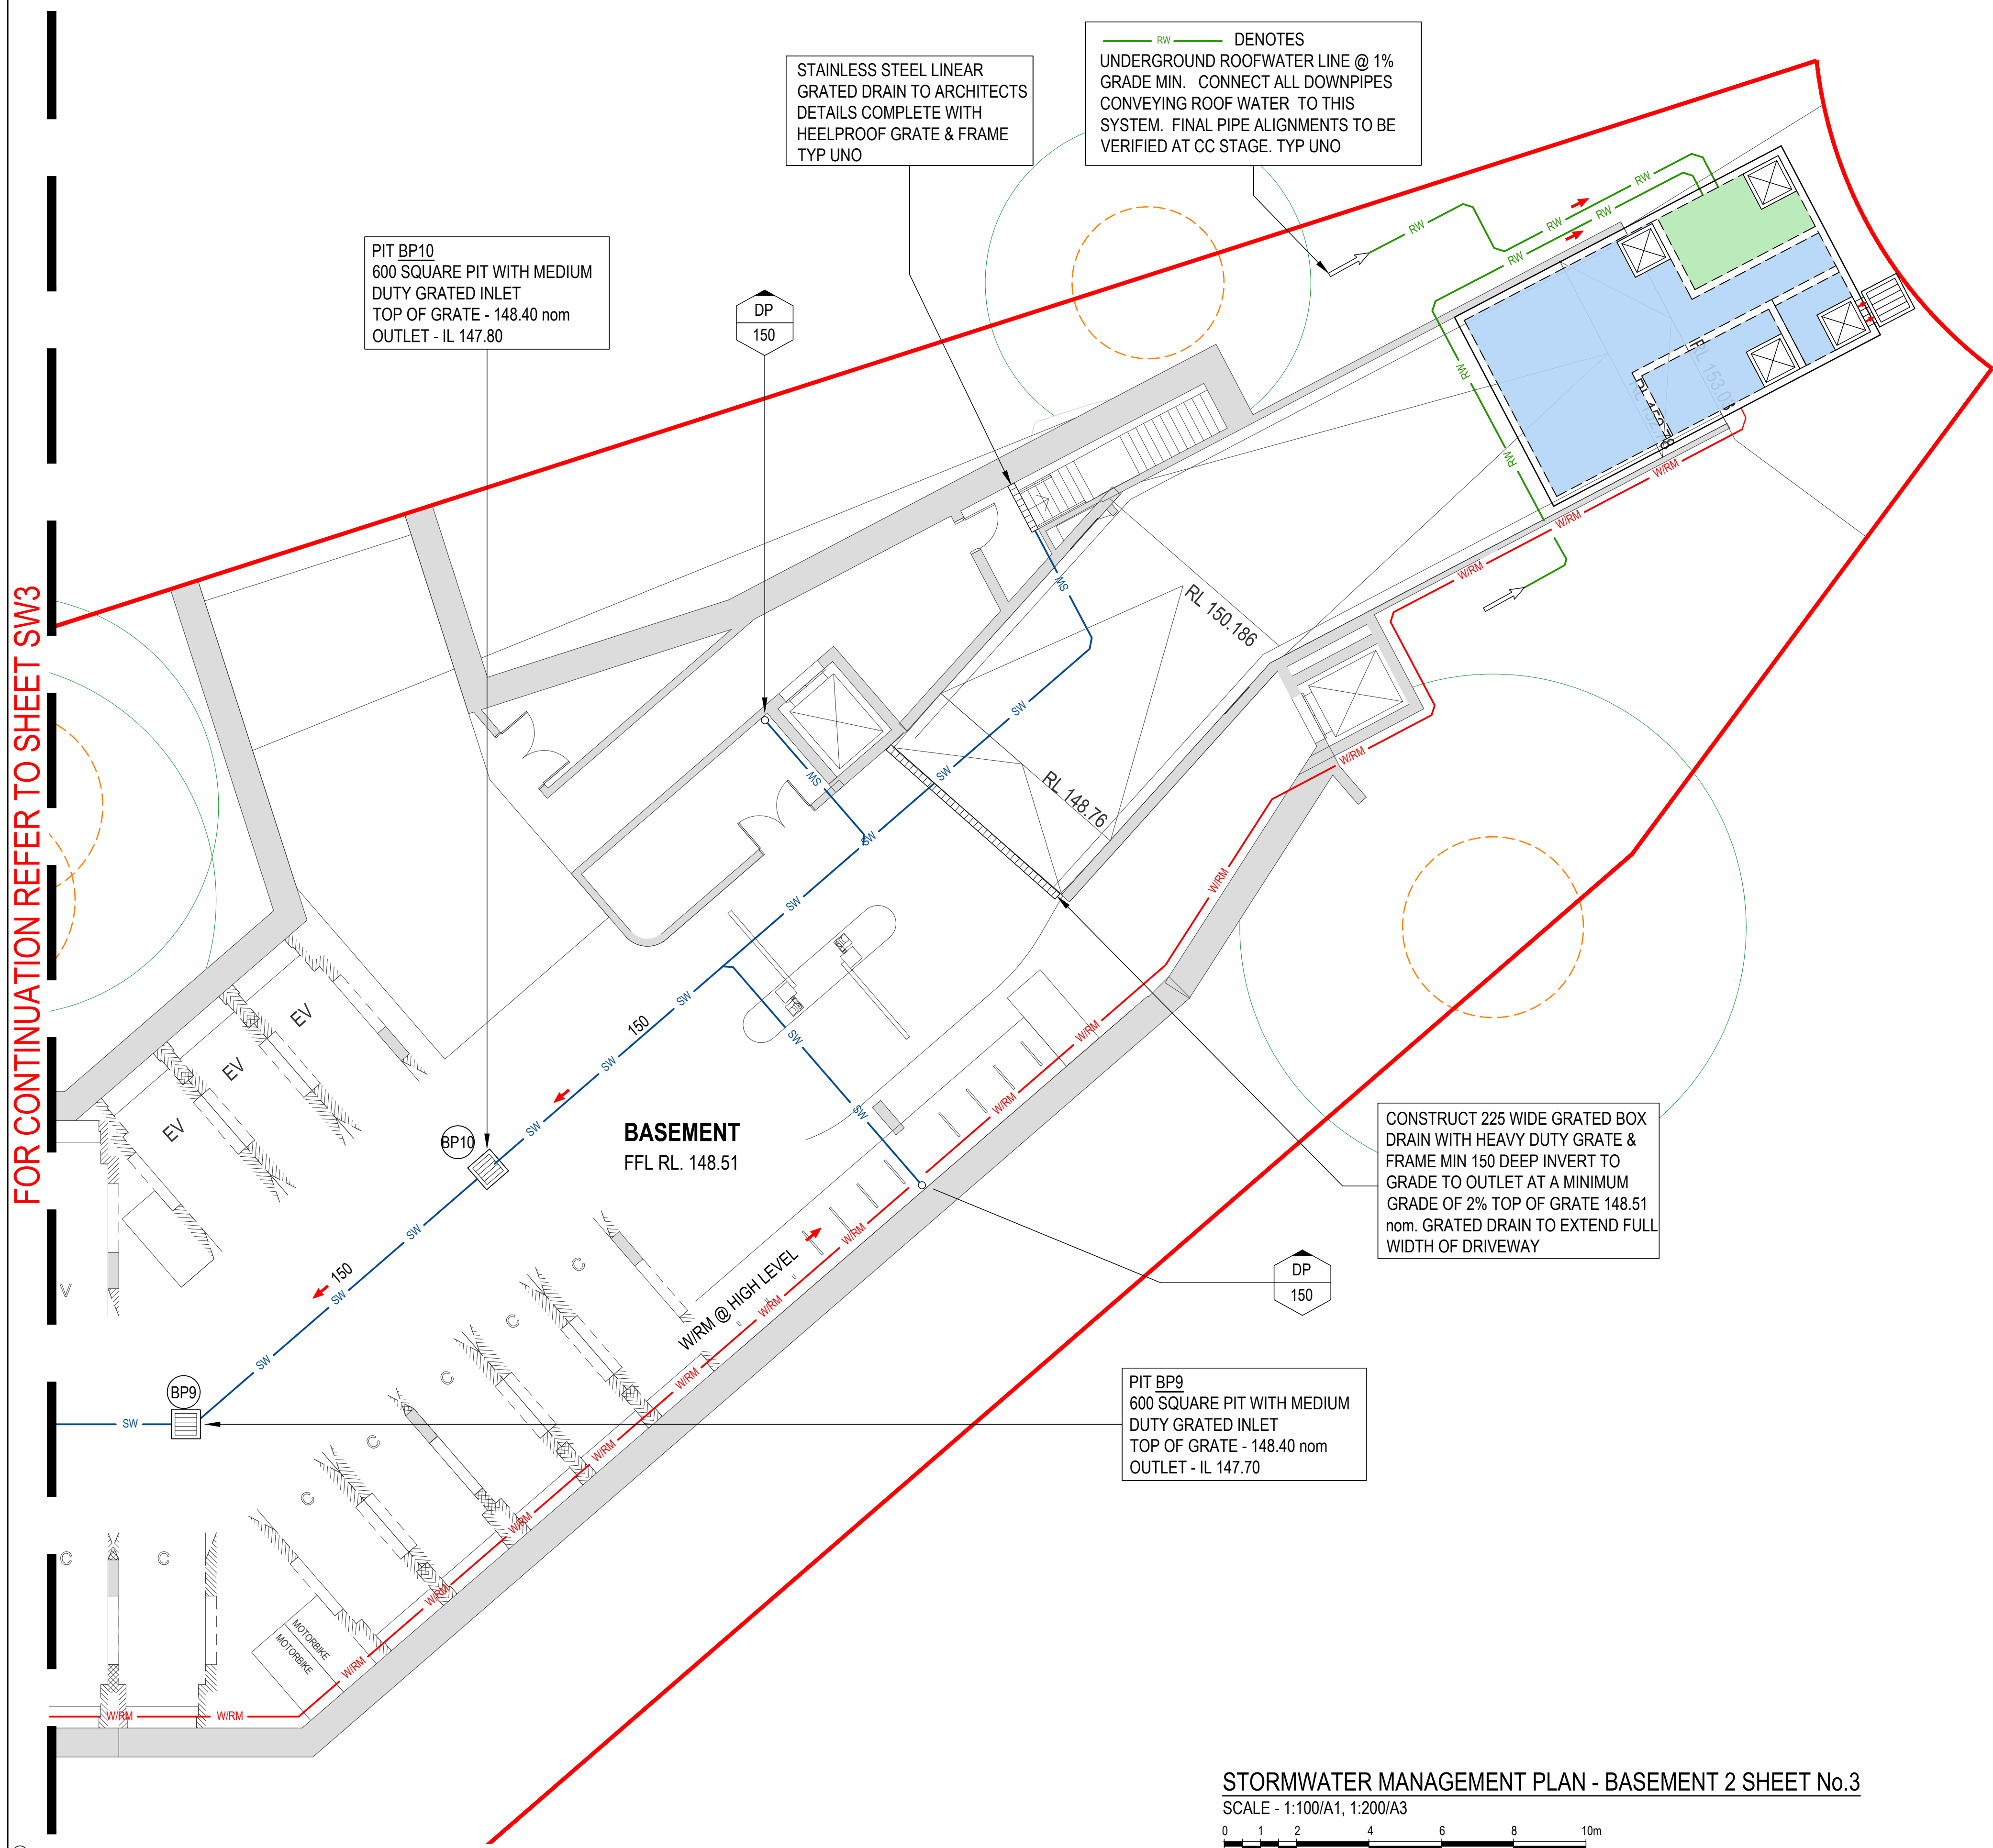

GLADYS
AVENUE

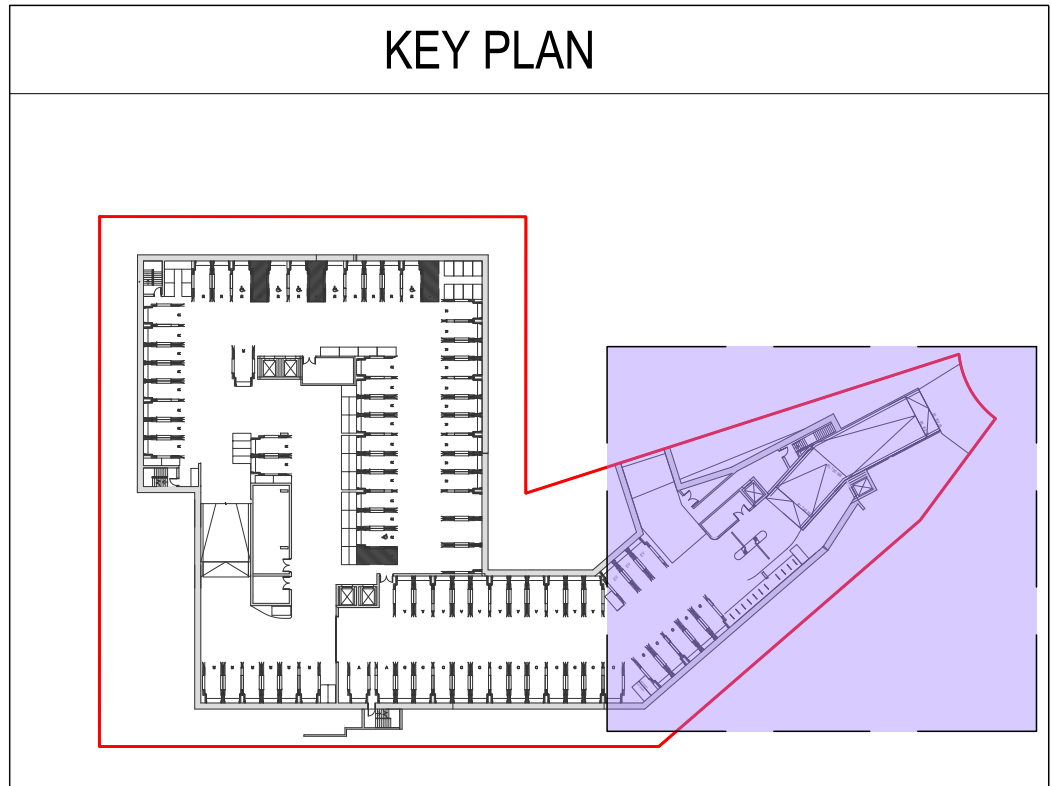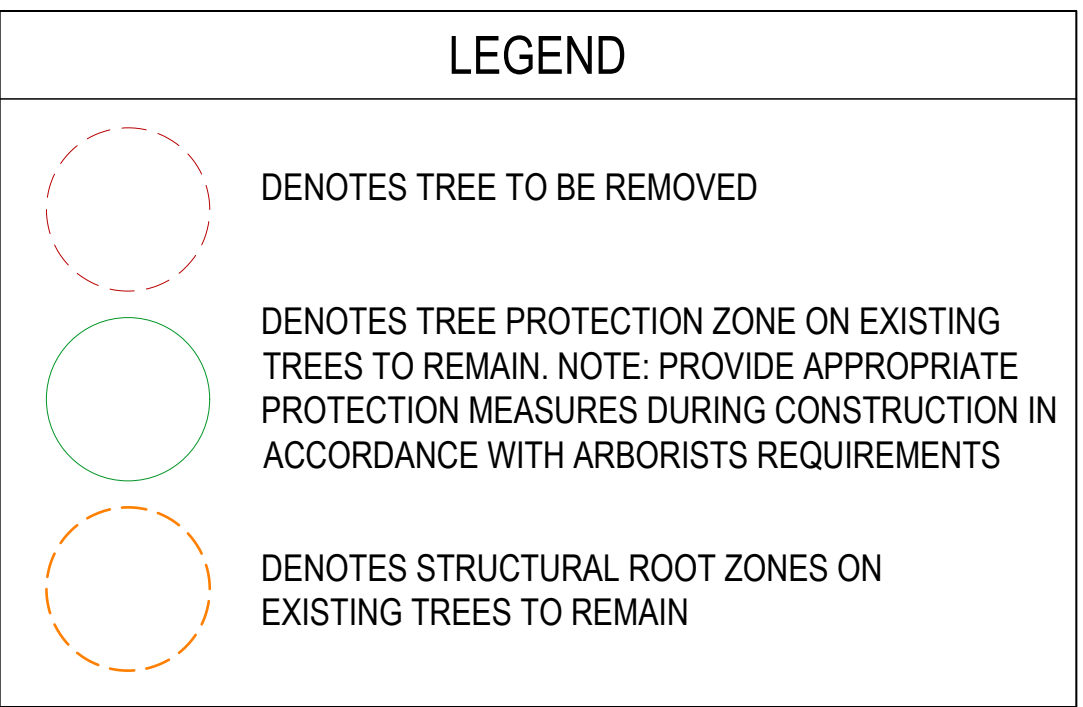

STORMWATER MANAGEMENT PLAN - BASEMENT 2 SHEET No.3

SCALE - 1:100/A1, 1:200/A3



© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK
Issue	Description	Date	Drawn	Approved
1	0	1cm at full size		
		15cm		

Client
**BREWSTER MURRAY
ARCHITECTS**

Architect

HYDRACOR
CONSULTING ENGINEERS


HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project


**PROPOSED RESIDENTIAL
DEVELOPMENT**
No.116 - 120 FRENCHS FOREST ROAD
No.11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title				
STORMWATER MANAGEMENT PLAN				
BASEMENT 2 SHEET No.3				
Drawn IK	Date NOV 2024	Scale AS NOTED	A1 -	Q.A. Check -
Designed BK	Project No. CC230124		Dwg. No. SW4	Issue C

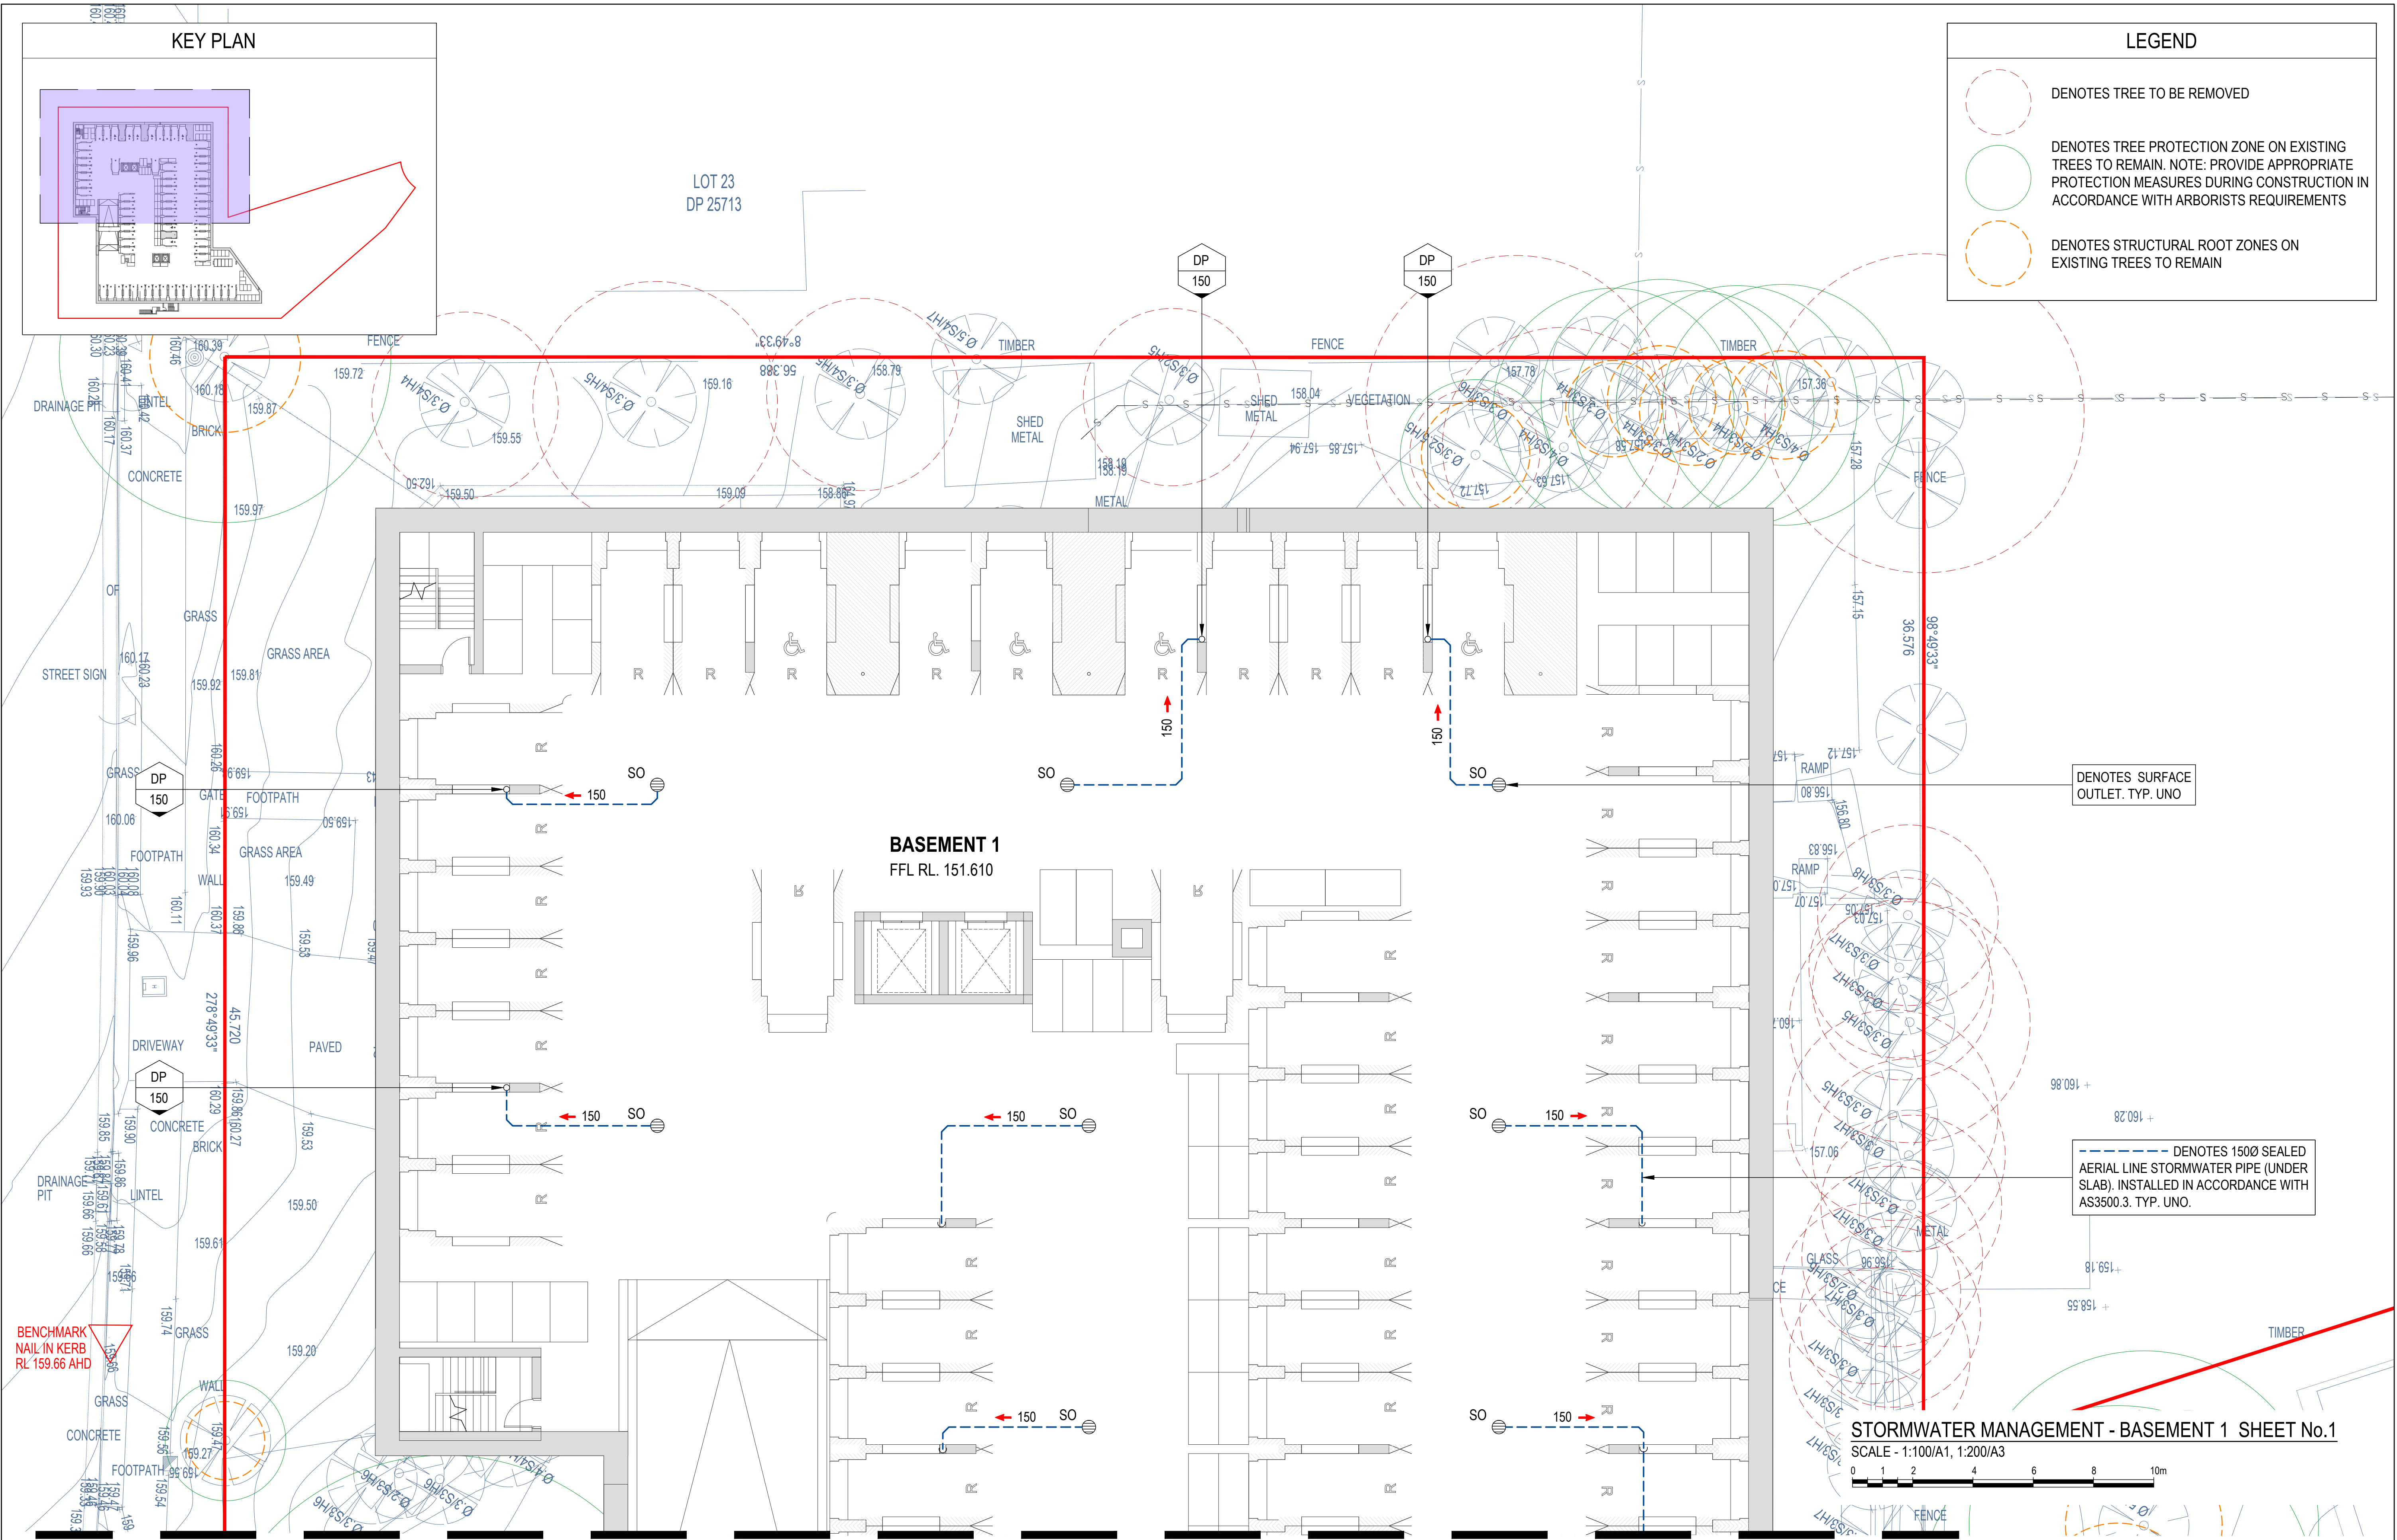

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK
Issue	Description	Date	Drawn	Approved



Client
**BREWSTER MURRAY
ARCHITECTS**

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499


ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project
**PROPOSED RESIDENTIAL
DEVELOPMENT**
No.116 - 120 FRENCHS FOREST ROAD
No.11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title
**STORMWATER MANAGEMENT PLAN
BASEMENT 1 SHEET No.1**

Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.	Dwg. No.	Issue		
BK	CC230124	SW5	C		

FOR CONTINUATION REFER TO SHEET SW5

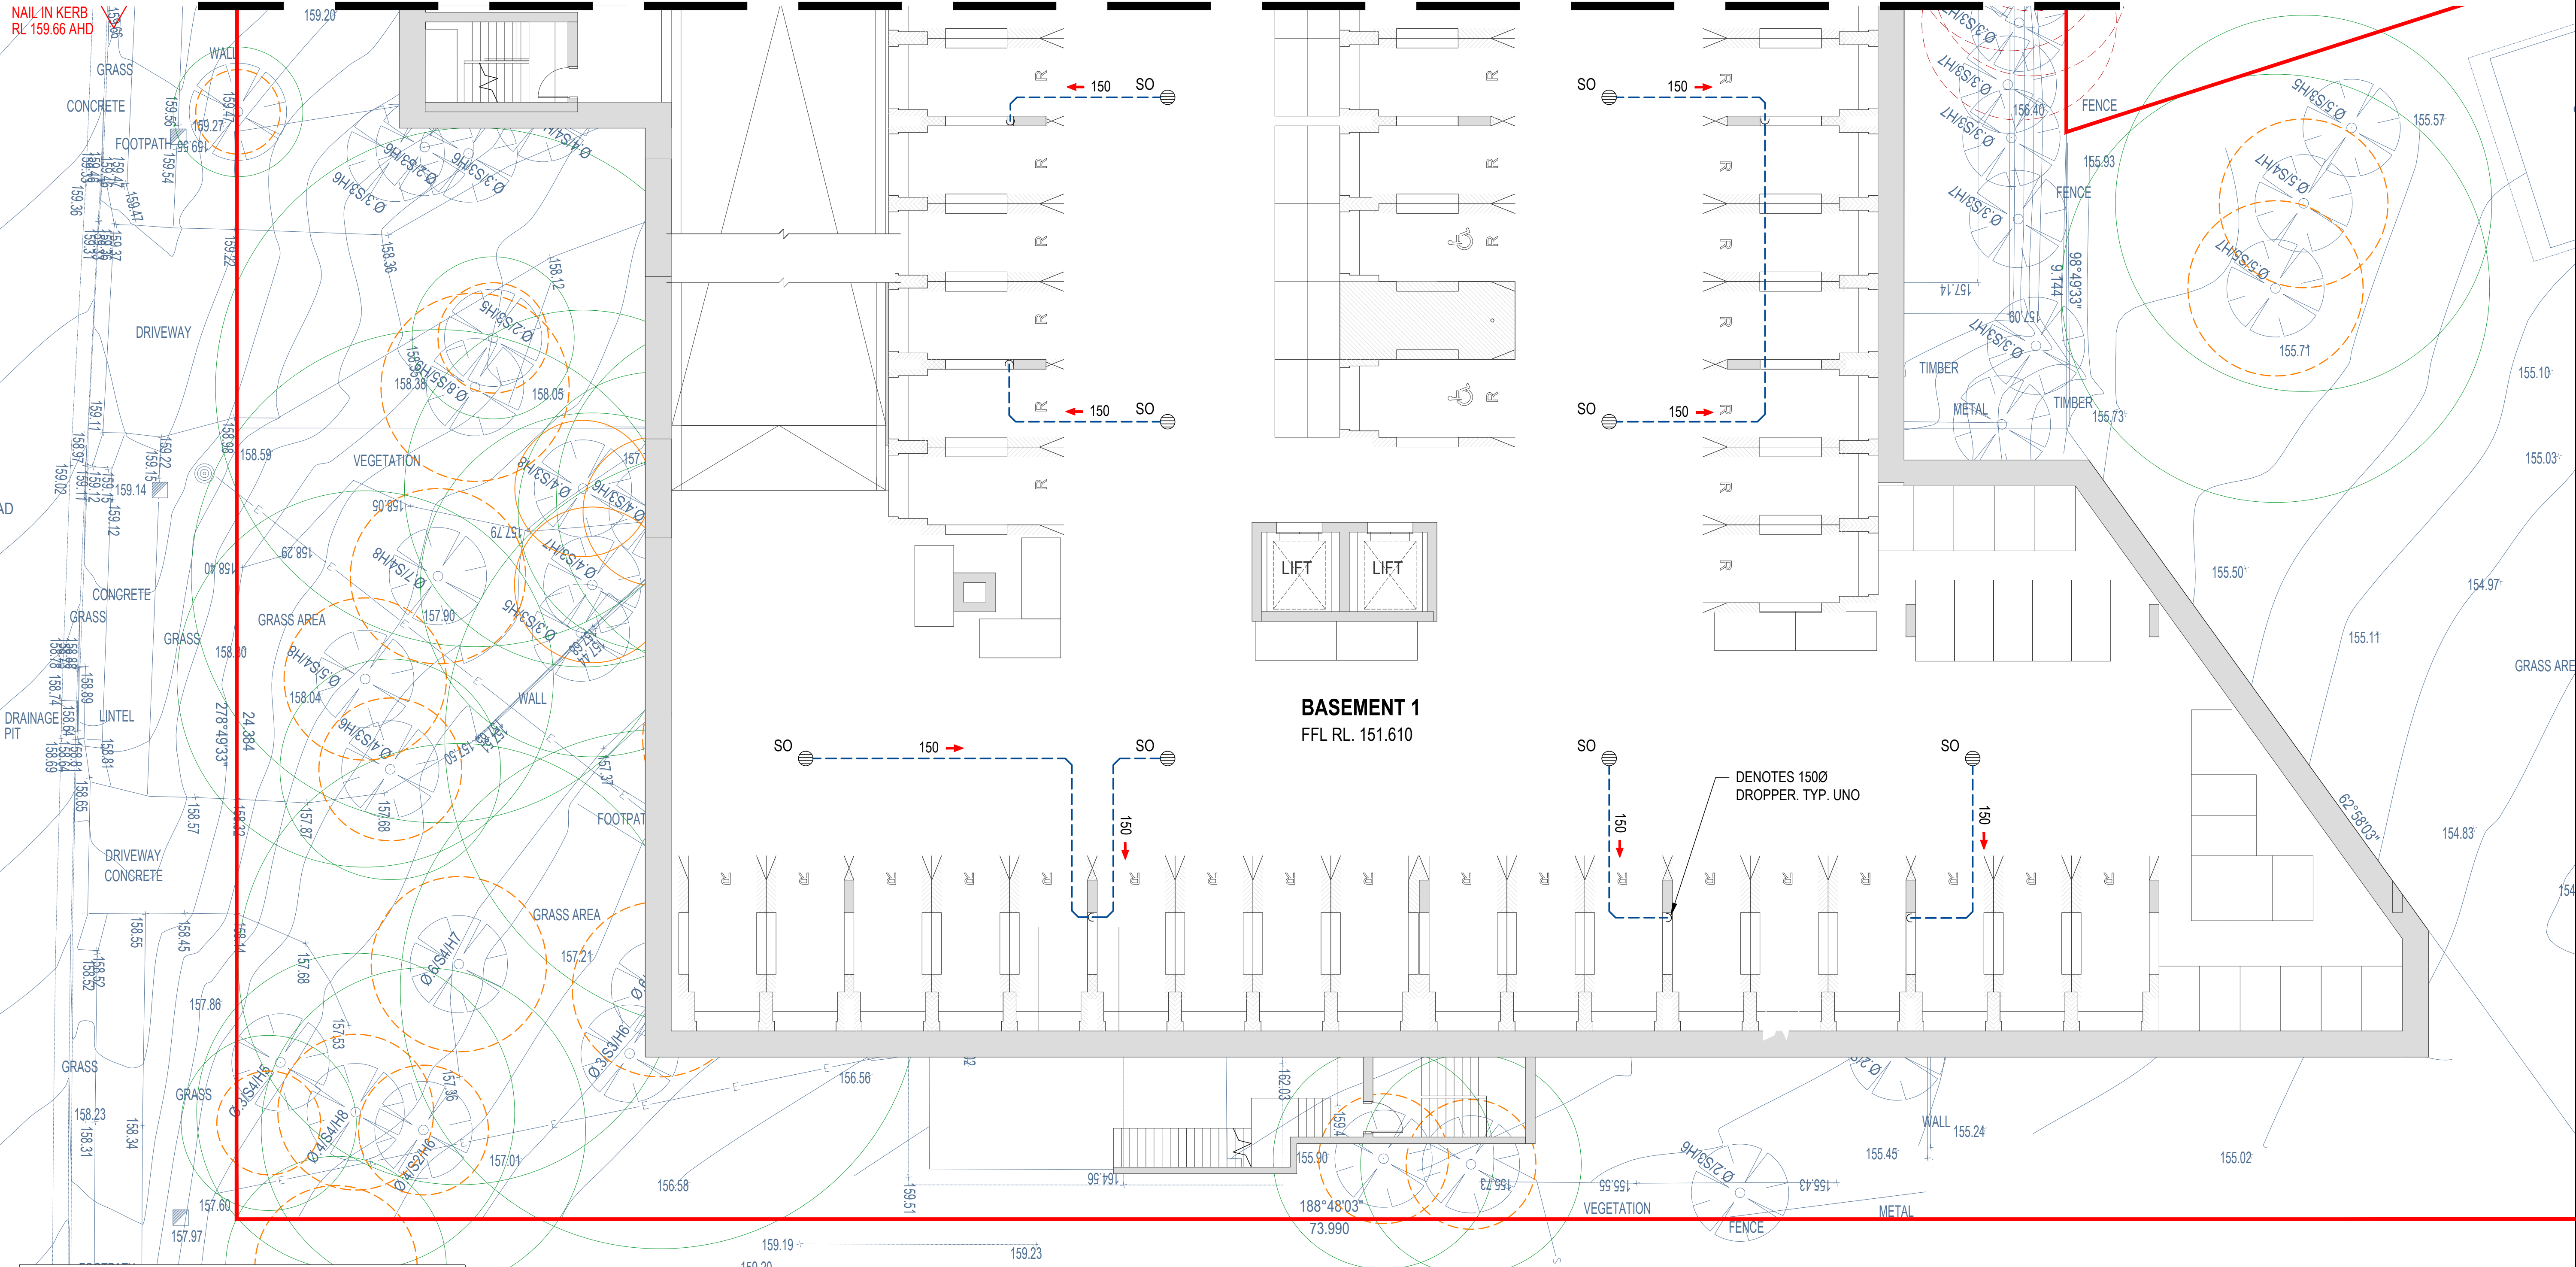

BASEMENT 1
FFL RL. 151.610

DENOTES 1500
DROPPER. TYP. UNO

KEY PLAN

LOT 25
DP 25713

STORMWATER MANAGEMENT - BASEMENT 1 SHEET No.2
SCALE - 1:100/A1, 1:200/A3



LEGEND

- DENOTES TREE TO BE REMOVED
- DENOTES TREE PROTECTION ZONE ON EXISTING TREES TO REMAIN. NOTE: PROVIDE APPROPRIATE PROTECTION MEASURES DURING CONSTRUCTION IN ACCORDANCE WITH ARBORISTS REQUIREMENTS
- DENOTES STRUCTURAL ROOT ZONES ON EXISTING TREES TO REMAIN

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

Issue	Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK

North

Client
**BREWSTER MURRAY
ARCHITECTS**

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC


Project

**PROPOSED RESIDENTIAL
DEVELOPMENT**
No.116 - 120 FRENCHS FOREST ROAD
No.11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title

**STORMWATER MANAGEMENT PLAN
BASEMENT 1 SHEET No.2**

Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.			Dwg. No.	Issue
BK	CC230124			SW6	C

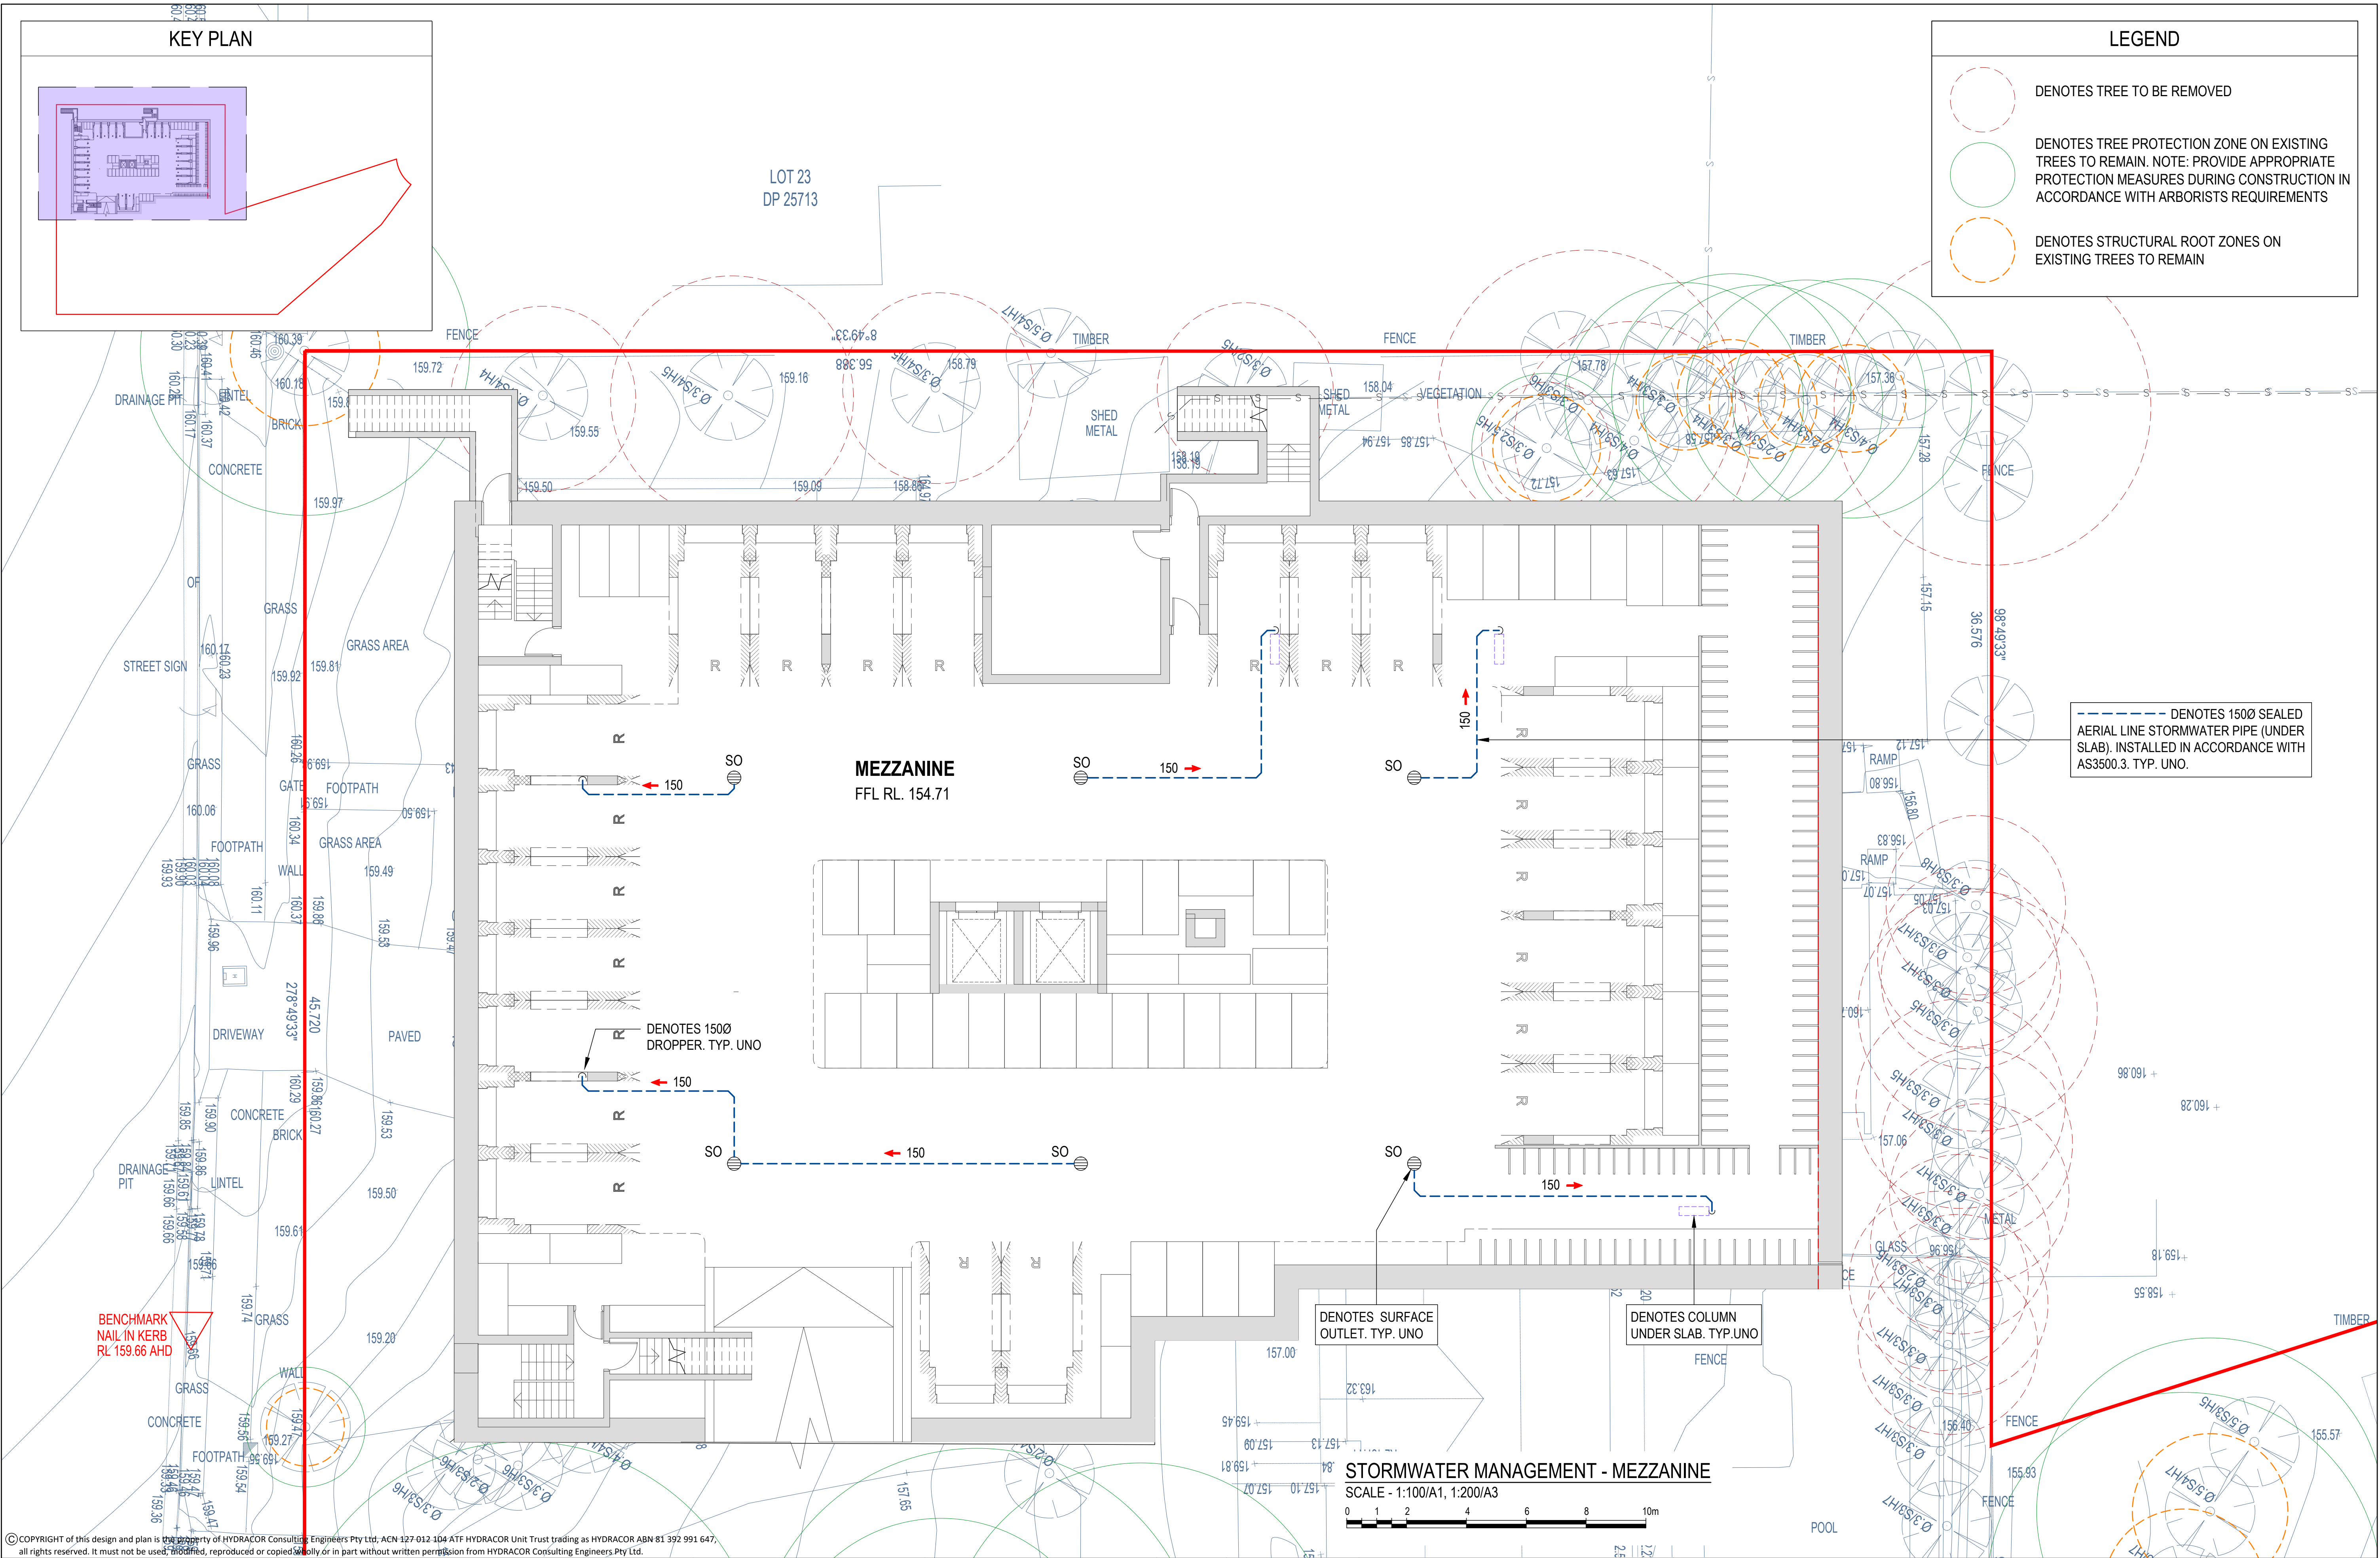

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd. ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

						<div>North</div>
C	RE-ISSUED FOR DEVELOPMENT APPROVAL		12.11.24	LW	BK	
B	ISSUED FOR DEVELOPMENT APPROVAL		07.11.24	RH	BK	
A	DRAFT ISSUE FOR REVIEW		05.11.24	LW	BK	
Issue	Description		Date	Drawn	Approved	
1	0 1cm at full size		110mm			

Client
BREWSTER MURRAY ARCHITECTS


Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499
ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project
PROPOSED RESIDENTIAL DEVELOPMENT
No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST


Drawing Title STORMWATER MANAGEMENT PLAN MEZZANINE					
Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.	Dwg. No.	Issue		
BK	CC230124	SW7	C		

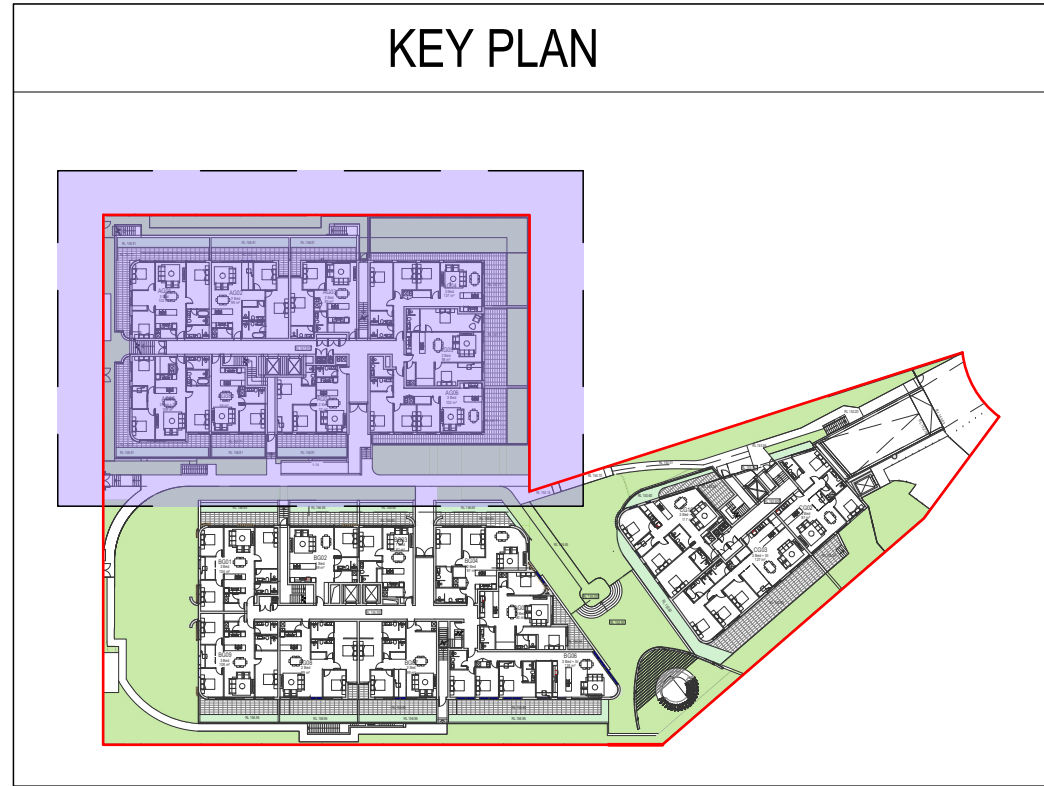

LEGEND

- DENOTES TREE TO BE REMOVED
- DENOTES TREE PROTECTION ZONE ON EXISTING TREES TO REMAIN. NOTE: PROVIDE APPROPRIATE PROTECTION MEASURES DURING CONSTRUCTION IN ACCORDANCE WITH ARBORISTS REQUIREMENTS
- DENOTES STRUCTURAL ROOT ZONES ON EXISTING TREES TO REMAIN

- NOTES:
- TOP OF GRATE LEVELS HAVE BEEN DETERMINED FROM THE SURVEY DETAIL PROVIDED. FOLLOWING EARTHWORKS AND BENCHING, VALIDITY OF GRATE LEVELS SHOULD BE ASSESSED AND ADJUSTED AS REQUIRED TO MEET THE INTENT OF THE DESIGN. WHERE IN DOUBT CONTACT THE DESIGN ENGINEER.
 - DOWNPipes CONVEYING ROOF WATER TO DISCHARGE TO RAINWATER TANK INDEPENDANT OF ANY OTHER STORMWATER SYSTEM ON SITE. REFER TO HYDRAULIC SERVICES PLANS FOR LOCATION OF ALL DOWNPIPES AND AERIAL PIPE ALIGNMENTS WITHIN THE BUILDING ENVELOPE. HYDRAULIC ENGINEER TO ALLOW TO TIE IN AS REQUIRED TO THE STORMWATER CONCEPT SHOWN ON THESE PLANS. TYP UNO.
 - DOWNPipes AND PIPES LOCATED WITHIN THE BUILDING ENVELOPE SHOWN ON THESE PLANS ARE DOCUMENTED FOR APPROVAL PURPOSES ONLY. GENERALLY AERIAL PIPES LOCATED WITHIN THE BUILDING ENVELOPE WITH THE EXCEPTION OF BASEMENT LEVELS BEING CONVEYED TO THE PUMPOUT, ARE TO BE DOCUMENTED AND COORDINATED BY THE HYDRAULIC SERVICES ENGINEER.

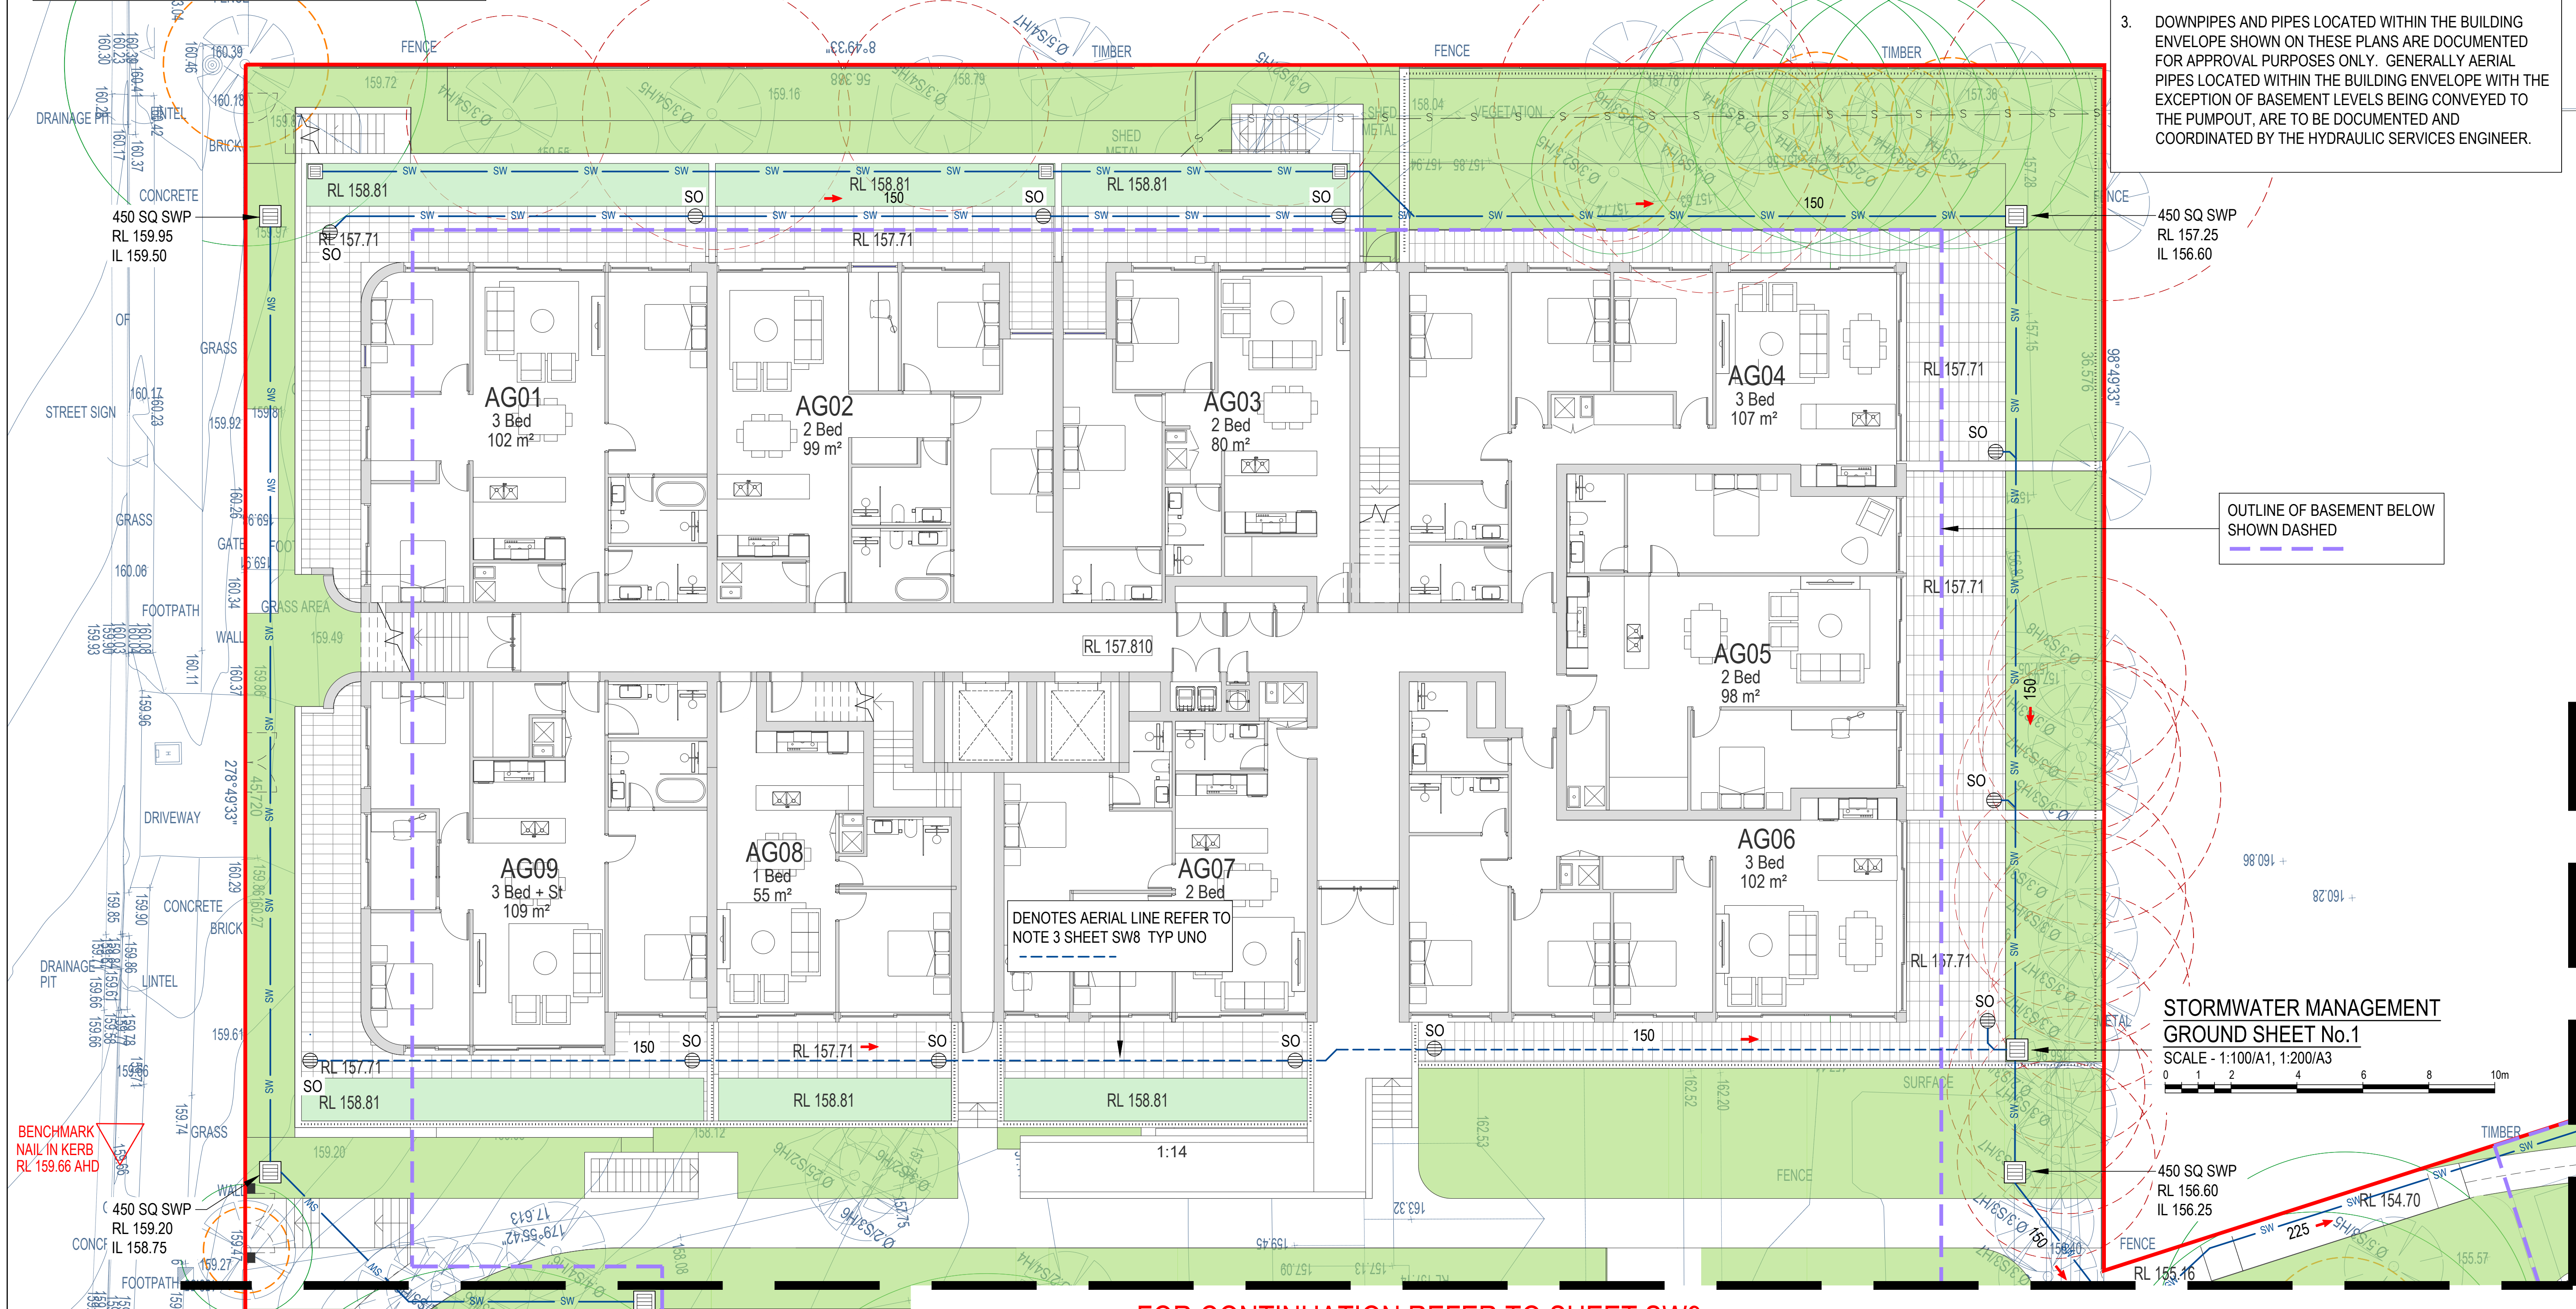

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

Issue	Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK

North

Client

BREWSTER MURRAY ARCHITECTS

Architect

HYDRACOR CONSULTING ENGINEERS

HYDRACOR CONSULTING ENGINEERS PTY LTD

Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

Project

PROPOSED RESIDENTIAL DEVELOPMENT


No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title

STORMWATER MANAGEMENT PLAN GROUND FLOOR SHEET No.1


Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.	Dwg. No.	Issue		
BK	CC230124	SW8	C		

FOR CONTINUATION REFER TO SHEET S8

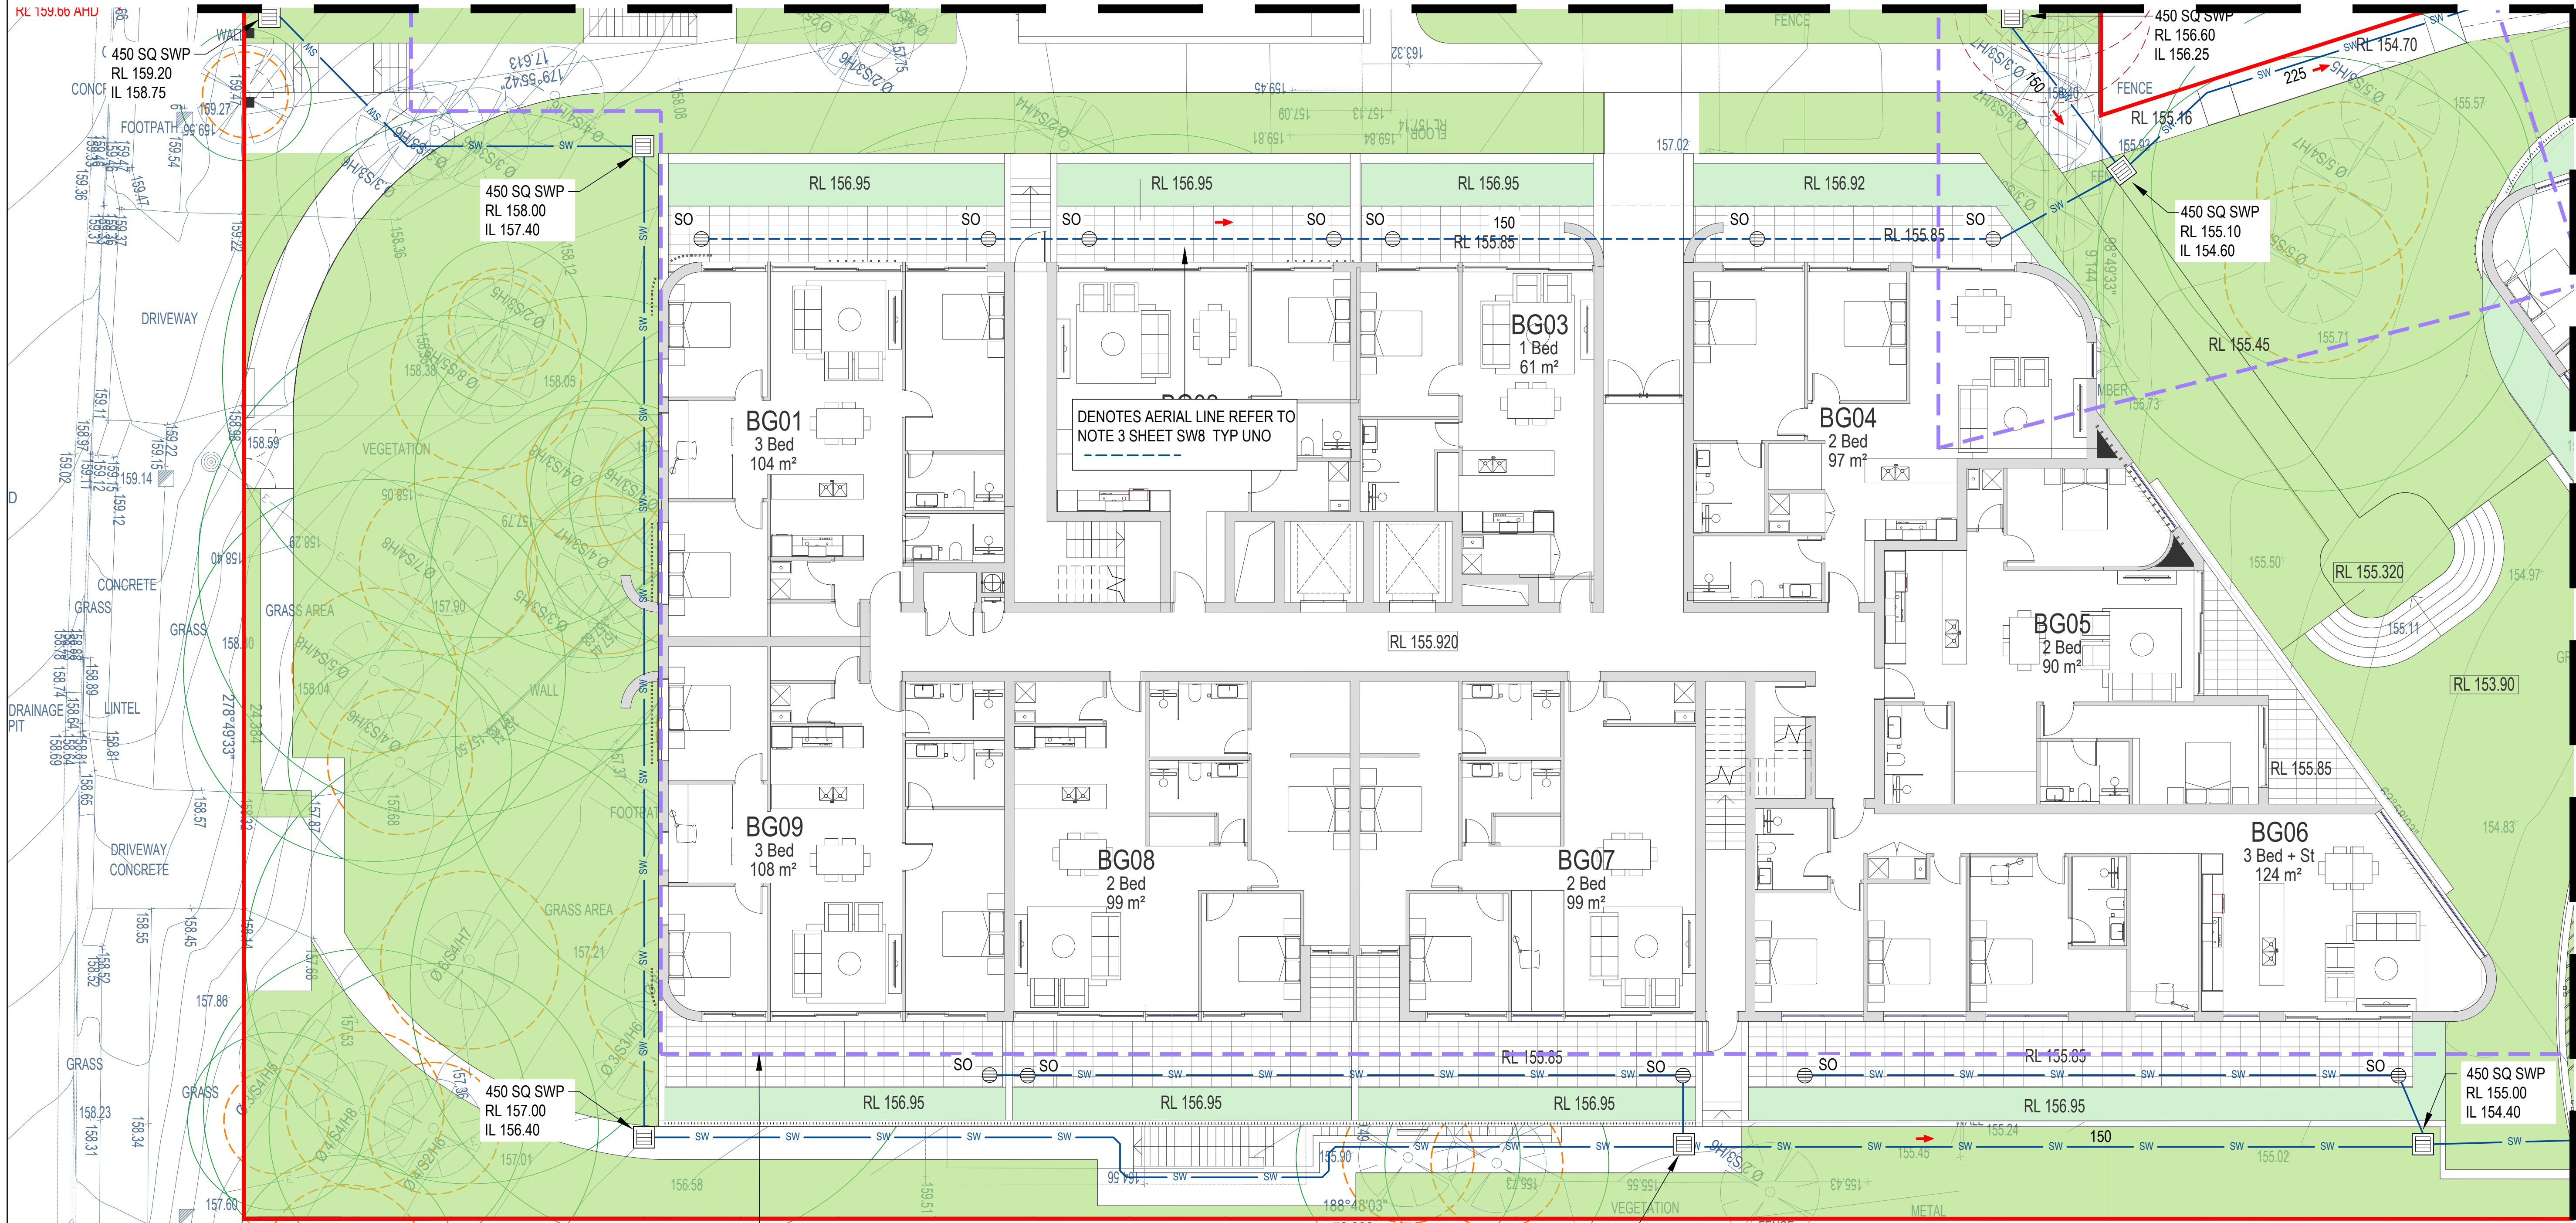

FOR CONTINUATION REFER TO SHEET SW10

KEY PLAN

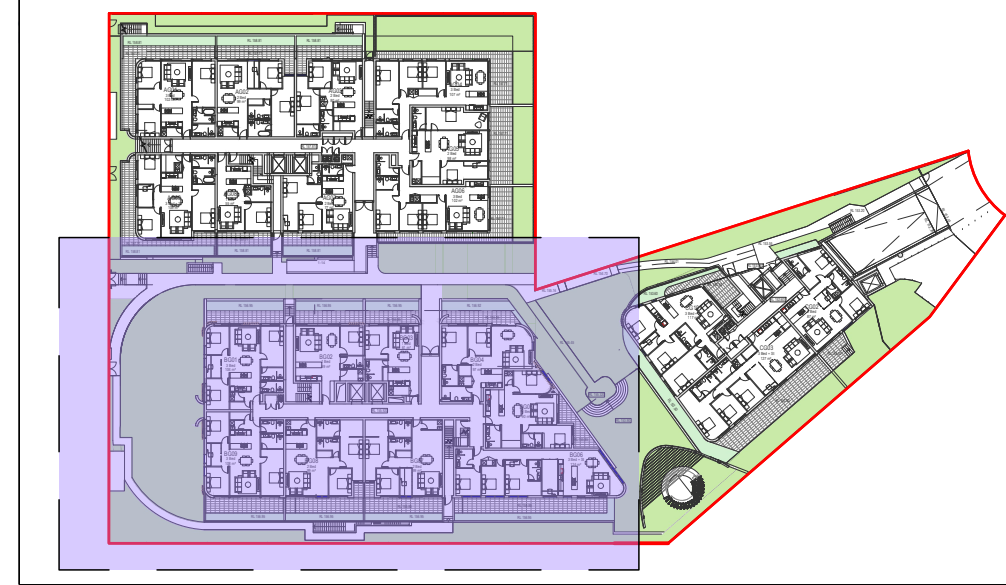

OUTLINE OF BASEMENT BELOW SHOWN DASHED

STORMWATER MANAGEMENT GROUND - SHEET No.2

SCALE - 1:100/A1, 1:200/A3



LEGEND

- Denotes tree to be removed
- Denotes tree protection zone on existing trees to remain. Note: provide appropriate protection measures during construction in accordance with arborists requirements
- Denotes structural root zones on existing trees to remain

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

Issue	Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK

North

Client
BREWSTER MURRAY ARCHITECTS

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project




PROPOSED RESIDENTIAL DEVELOPMENT
No.116 - 120 FRENCHS FOREST ROAD
No.11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title

**STORMWATER MANAGEMENT PLAN
GROUND FLOOR SHEET No.2**

Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.	Dwg. No.	Issue		
BK	CC230124	SW9	C		

FOR CONTINUATION REFER TO SHEET SW9

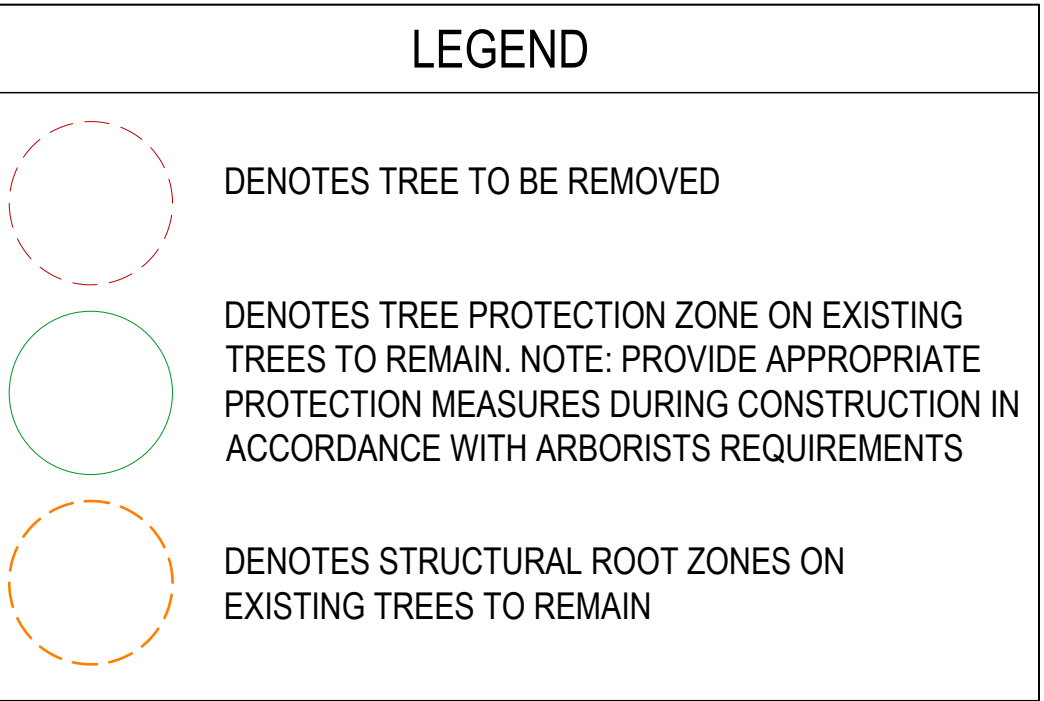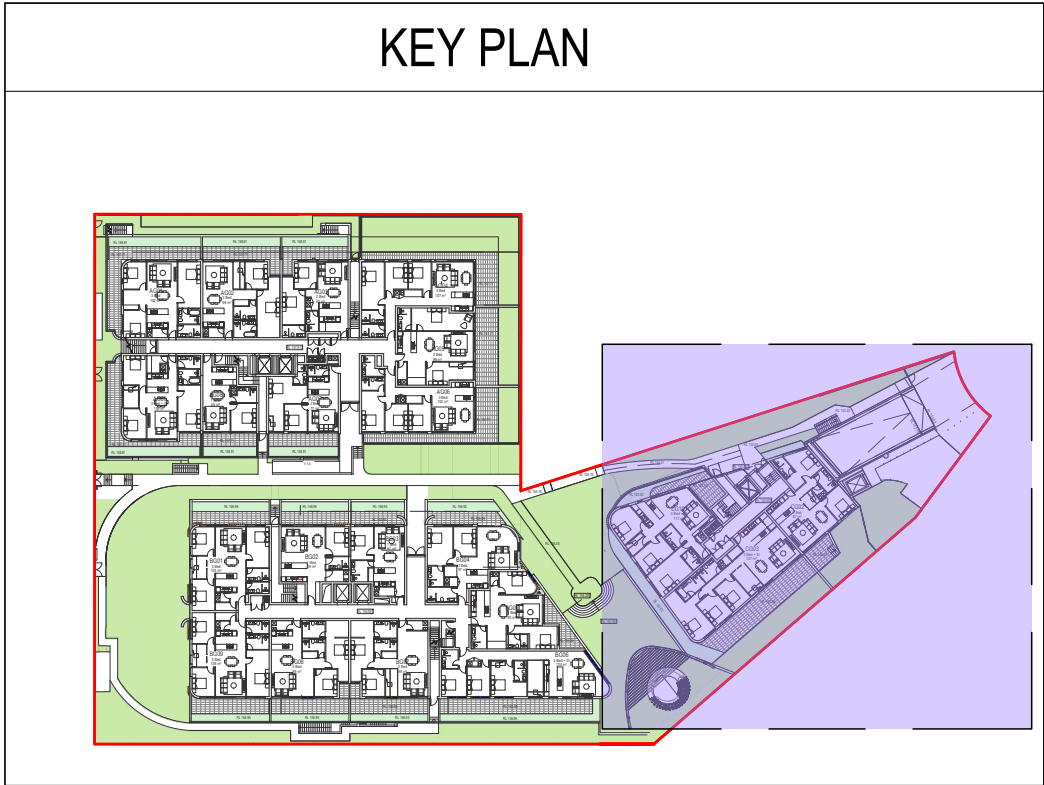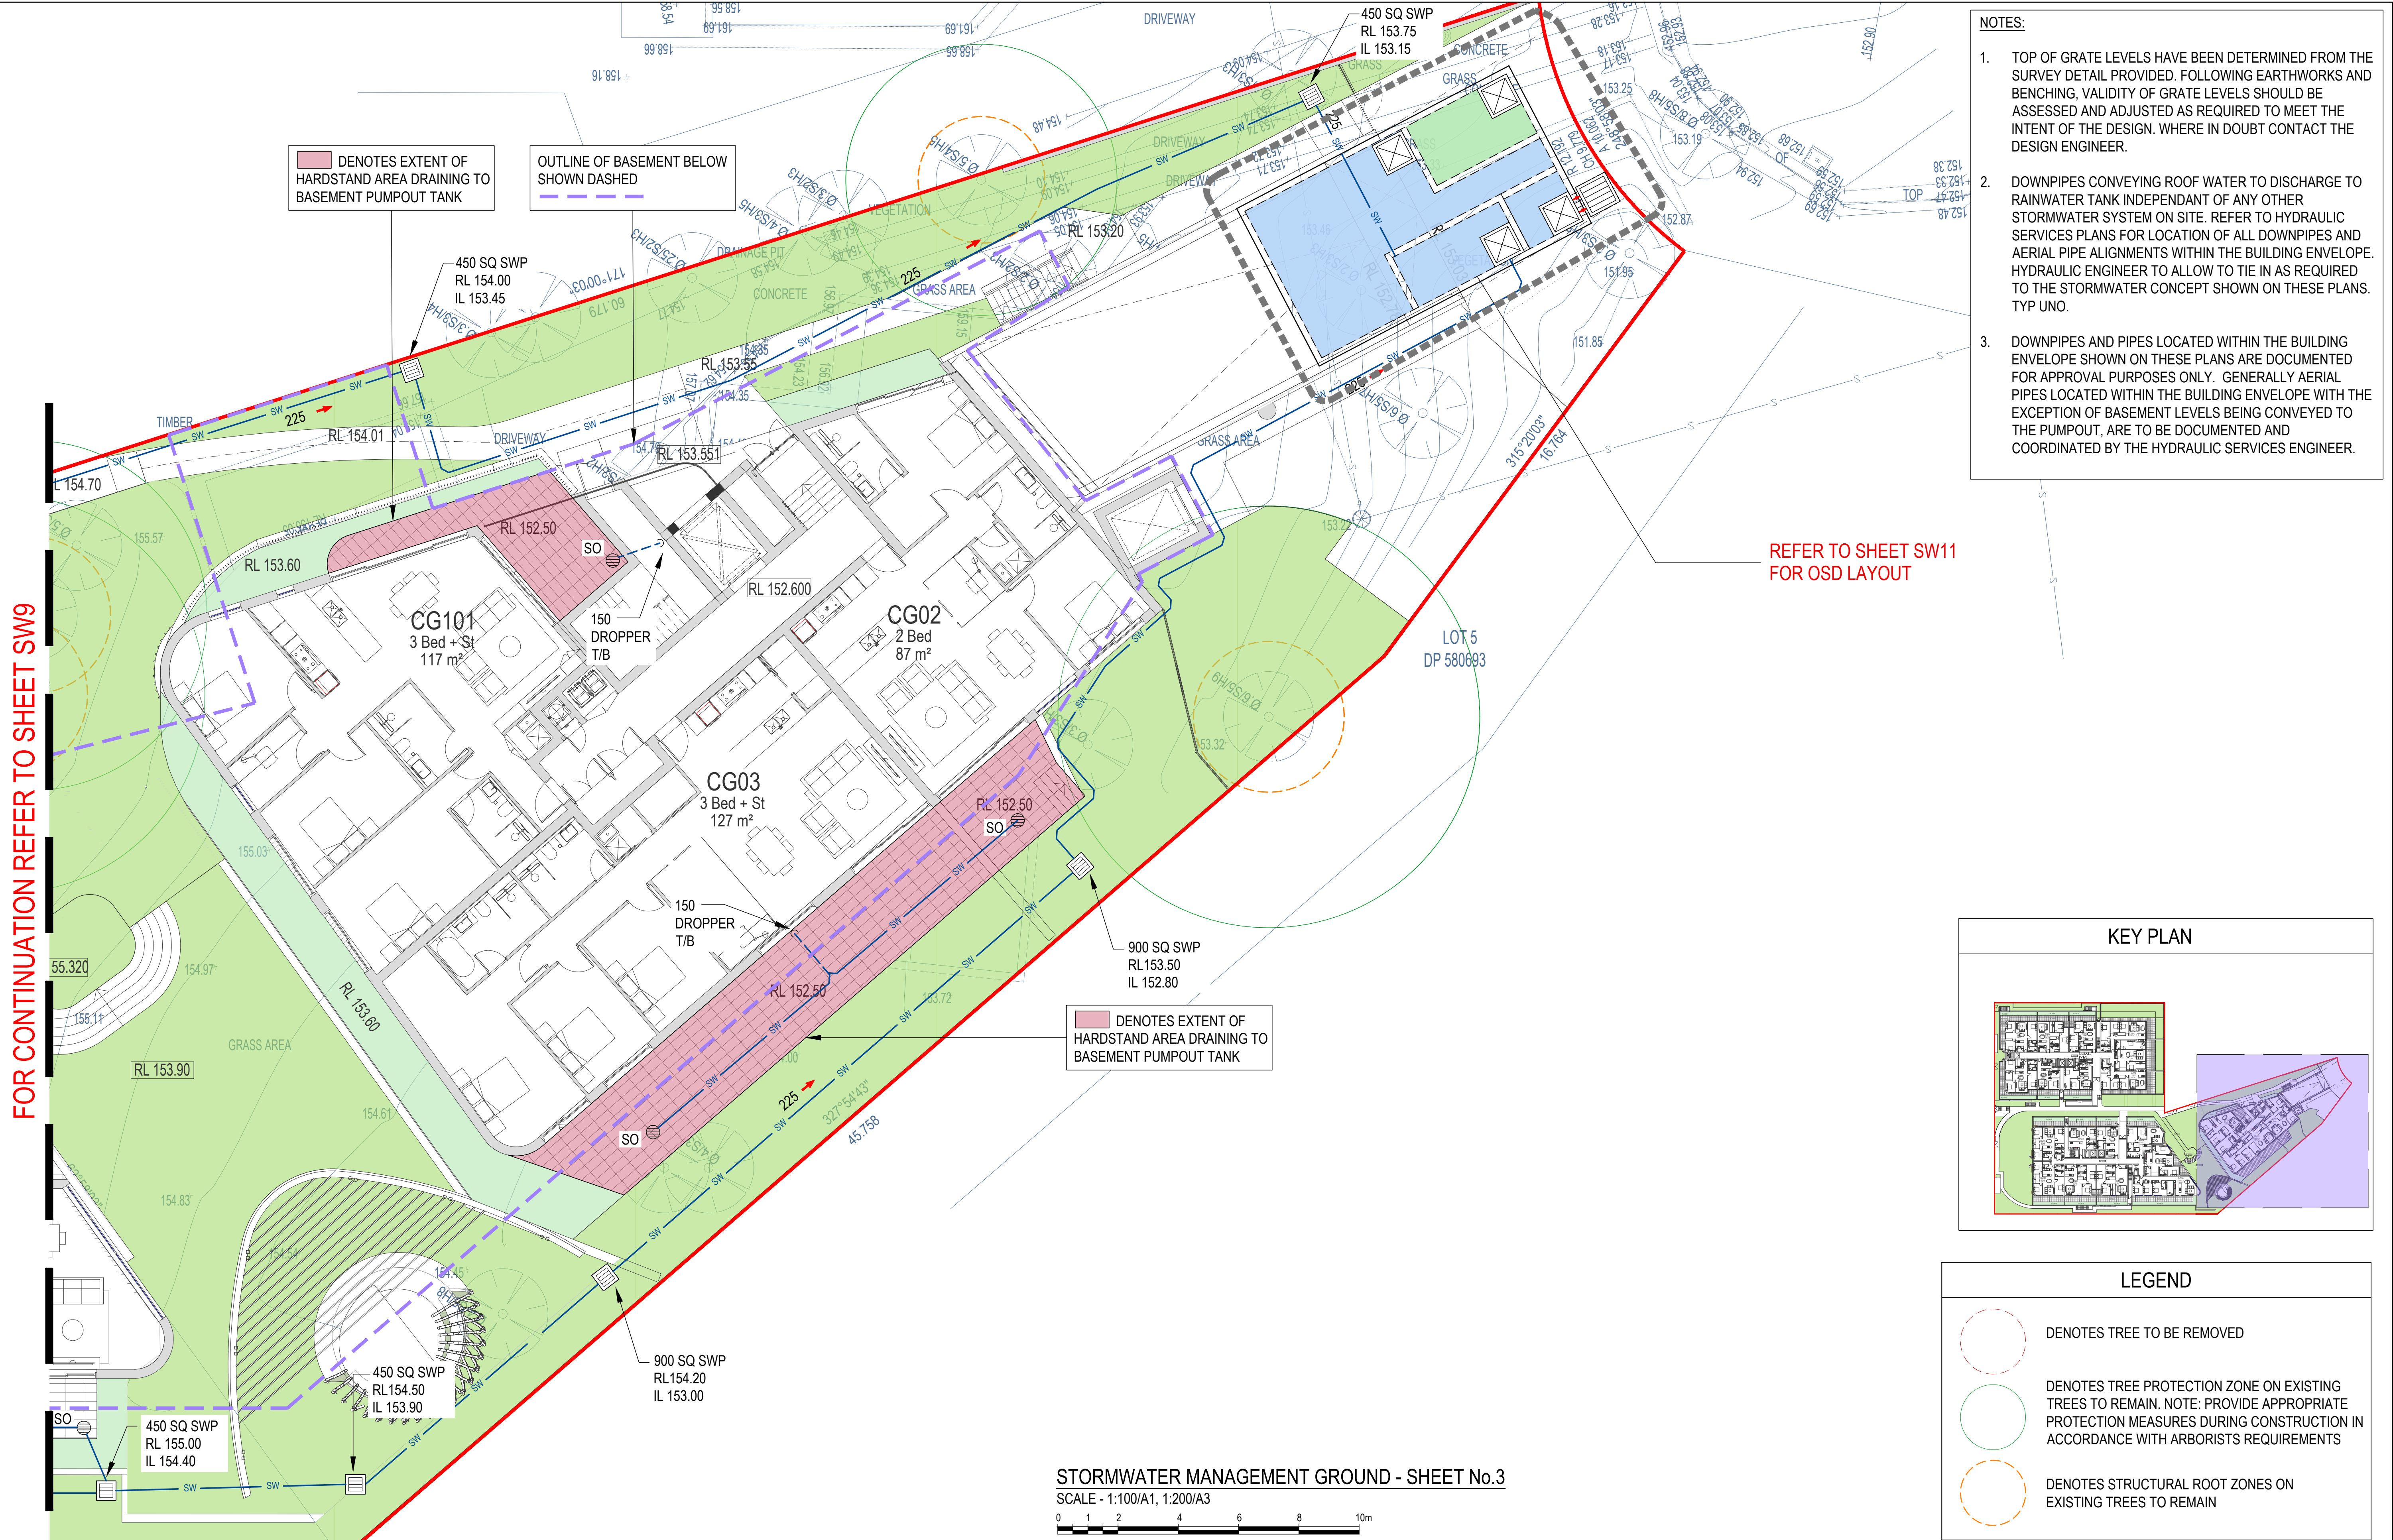

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

Issue	Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK

North

Client
BREWSTER MURRAY ARCHITECTS

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC




Project

PROPOSED RESIDENTIAL DEVELOPMENT
No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title

**STORMWATER MANAGEMENT PLAN
GROUND FLOOR SHEET No.3**

Drawn	Date	Scale	A1	Q.A. Check	Date
IK	NOV 2024	AS NOTED	-	-	-
Designed	Project No.	Dwg. No.	Issue		
BK	CC230124	SW10	C		

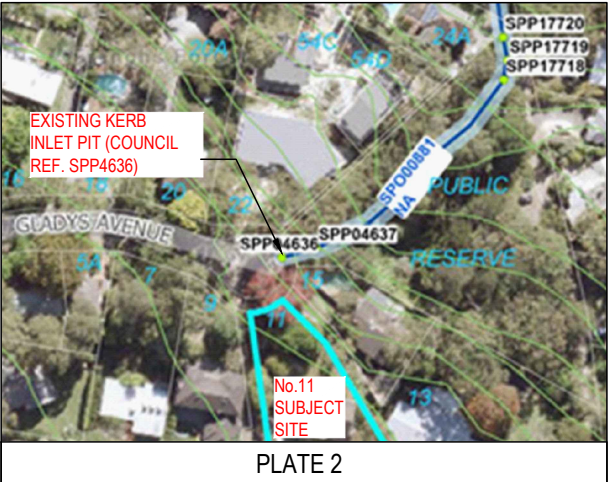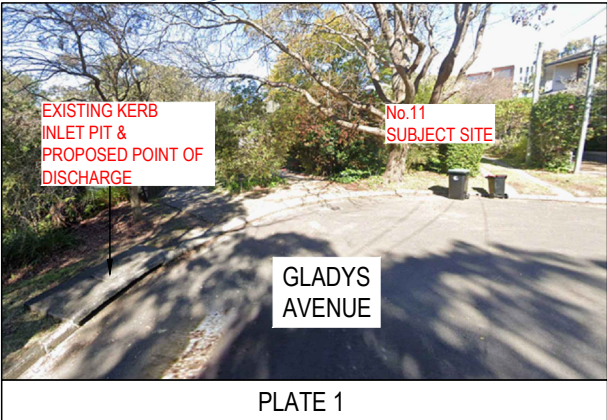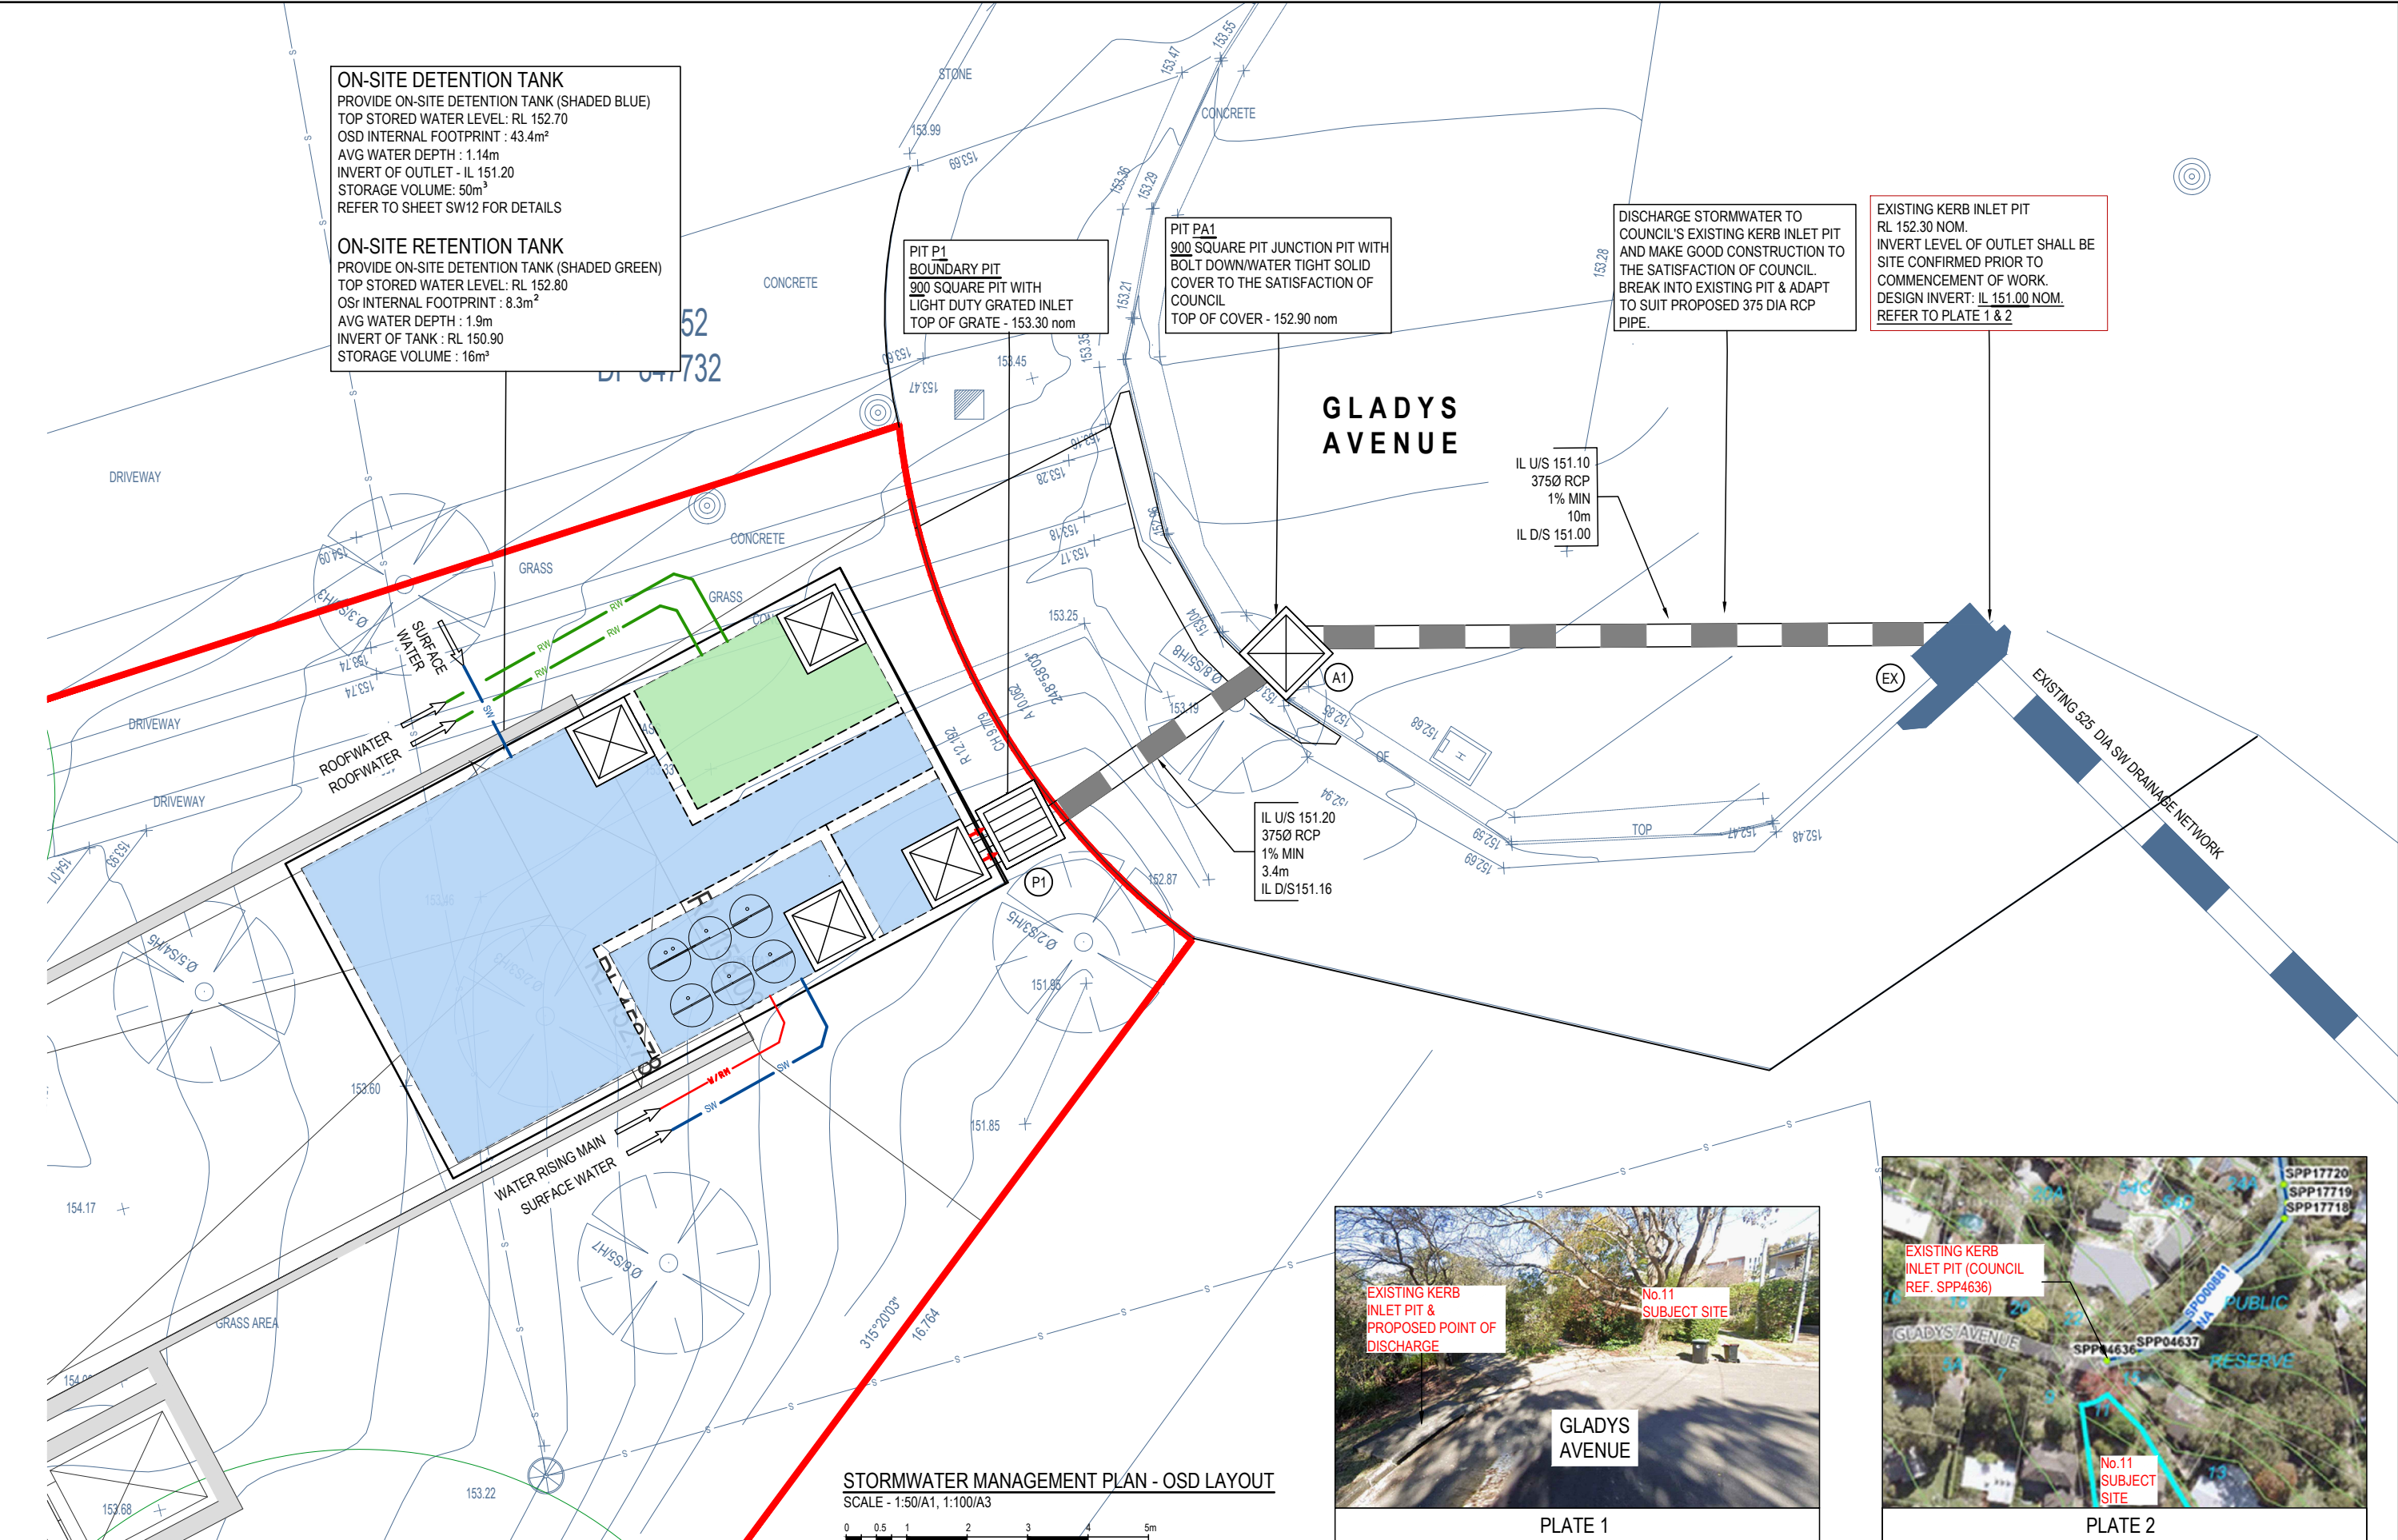

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd. ACN 127 012 104 ATF HYDRACOR Unit Trust (trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK
Issue	Description	Date	Drawn	Approved
10m at full size				

Client

BREWSTER MURRAY
ARCHITECTS

Architect

HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd

Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499


ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project


PROPOSED RESIDENTIAL
DEVELOPMENT

No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title STORMWATER MANAGEMENT PLAN - ON SITE DETENTION LAYOUT				
Drawn	Date	Scale	A1	Q.A. Check
IK	NOV 2024	AS NOTED	-	-
Designed	Project No.	Dwg. No.	Issue	
BK	CC230124	SW11	C	

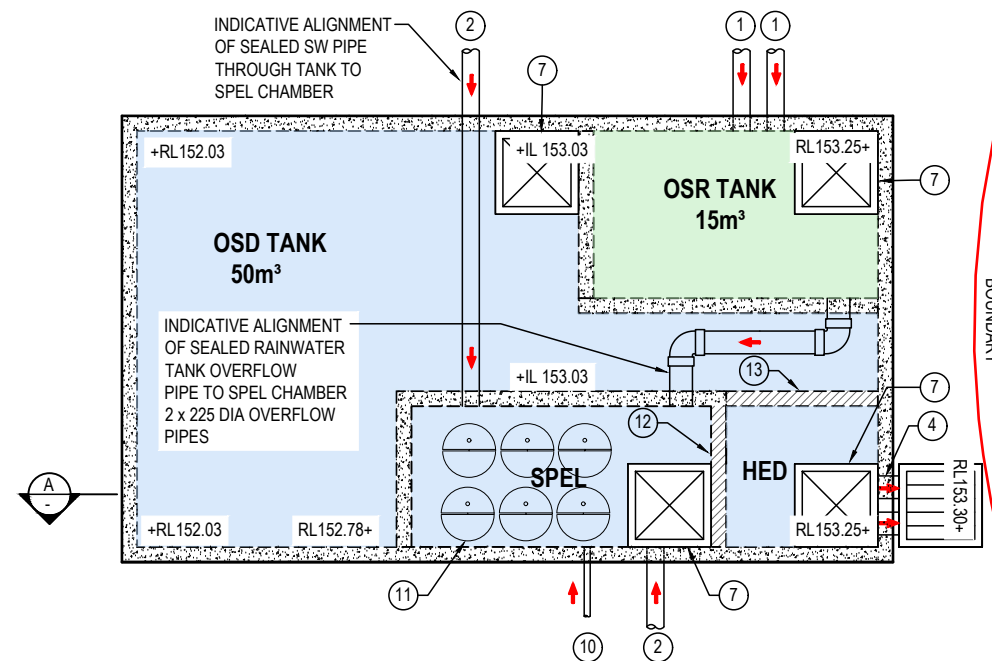


ON-SITE DETENTION / RETENTION TANK ROOF PLAN
SCALE - 1:50/A1 1:100/A3

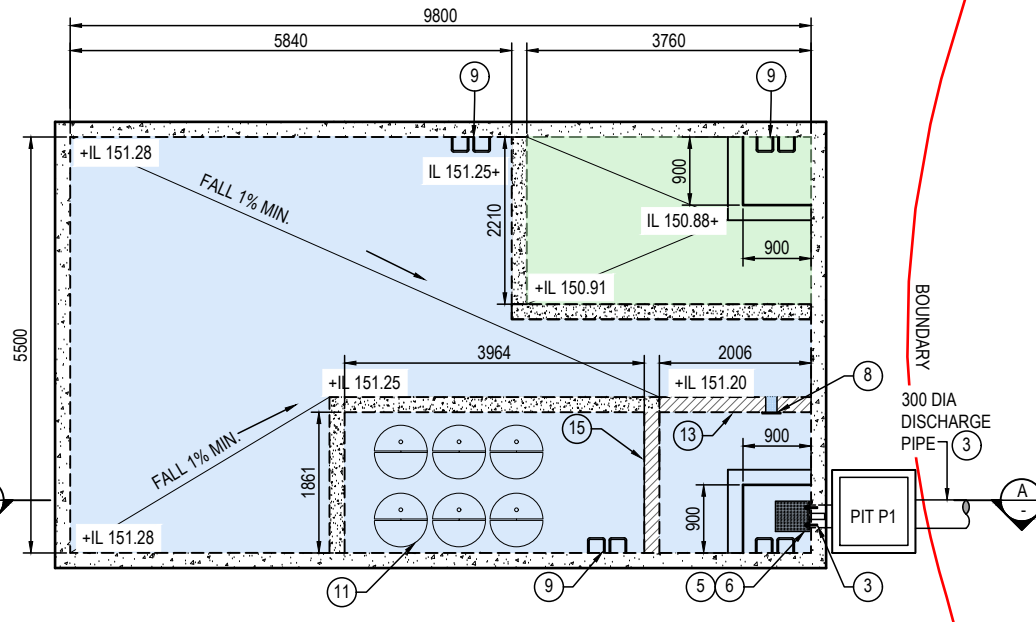


ON-SITE DETENTION / RETENTION TANK BASE PLAN
SCALE - 1:50/A1 1:100/A3


LEGEND	
①	ROOFWATER INLET PIPE/S
②	SURFACE WATER INLET PIPE
③	375 DIA DISCHARGE PIPE
④	2 x 300 DIA HIGH LEVEL OVERFLOW PIPE/S
⑤	350 x 350 x 4 PL 316SS 4 HOLES 12 DIA FOR M10 CHEMSETS REFER TO DETAIL 2
⑥	TRASH SCREEN LYSAGHT RH3030 GALV. REMOVABLE WITH HANDLE REER TO DETAIL 1
⑦	900 x 900 SOLID COVER BOLTED DOWN
⑧	REFLUX FLAP. REFER TO DETAIL 3 150 DIA. VOID
⑨	PROVIDE GALVANISED STEP IRONS AT 300mm CENTRES WHERE DEPTH EXCEEDS 1100mm IN ACCORDANCE WITH THE AUST. STANDARDS AT ALL ACCESS POINTS OF THE TANK, TYP.
⑩	RIISING MAIN FROM PUMP-OUT TANK
⑪	SPEL CARTRIDGE FILTERS (6 FULL HEIGHT)
⑫	WATER QUALITY OVERFLOW WEIR
⑬	HIGH EARLY DISCHARGE OVERFLOW WEIR
⑭	TANK STRUCTURE TO STRUCTURAL ENGINEERS DETAILS

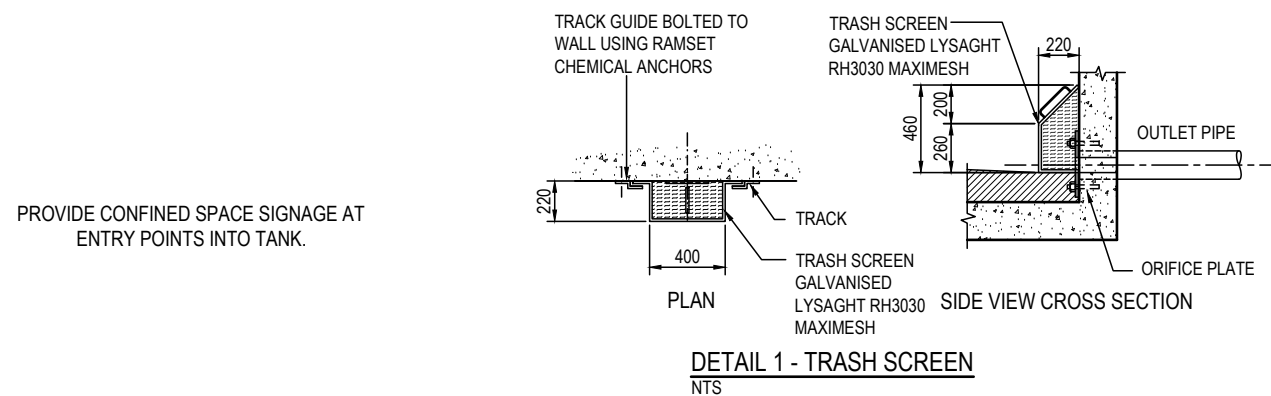


DETAIL 1 - TRASH SCREEN
NTS

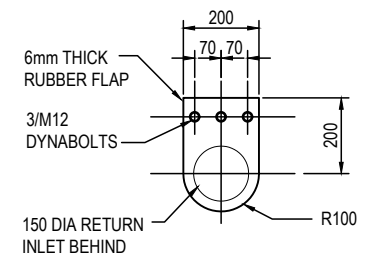

DETAIL 3 - REFLUX FLAP
NTS

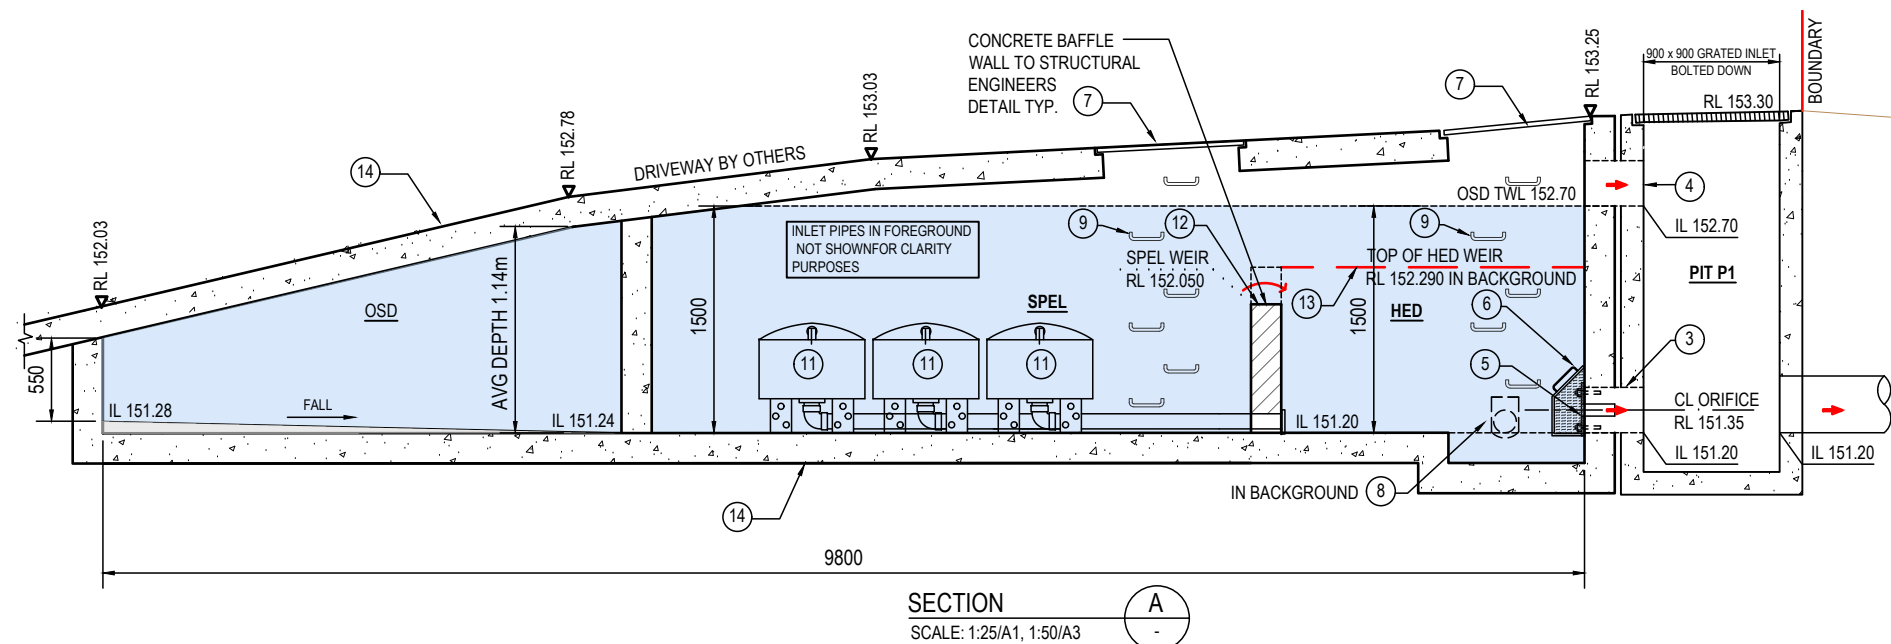


SECTION A-A
SCALE: 1:25/A1, 1:50/A3

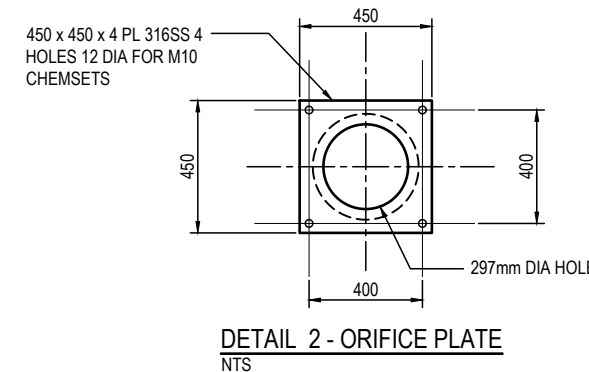


DETAIL 2 - ORIFICE PLATE
NTS

© COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

					Client	Architect	Project	Drawing Title								
					BREWSTER MURRAY ARCHITECTS	<div>HYDRACOR CONSULTING ENGINEERS</div>	HYDRACOR Consulting Engineers Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499	PROPOSED RESIDENTIAL DEVELOPMENT No.116 - 120 FRENCHS FOREST ROAD No.11 GLADYS AVENUE FRENCHS FOREST	STORMWATER MANAGEMENT DETAILS SHEET No.1							
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK					North	Drawn	Date	Scale	A1	G.A. Check	Date	
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK						IK	NOV 2024	AS NOTED				
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK						BK						
Issue	Description	Date	Drawn	Approved												
<div>10m</div>							ENGINEERS CIVIL FLOOD STUDIES STORMWATER HYDRAULIC									

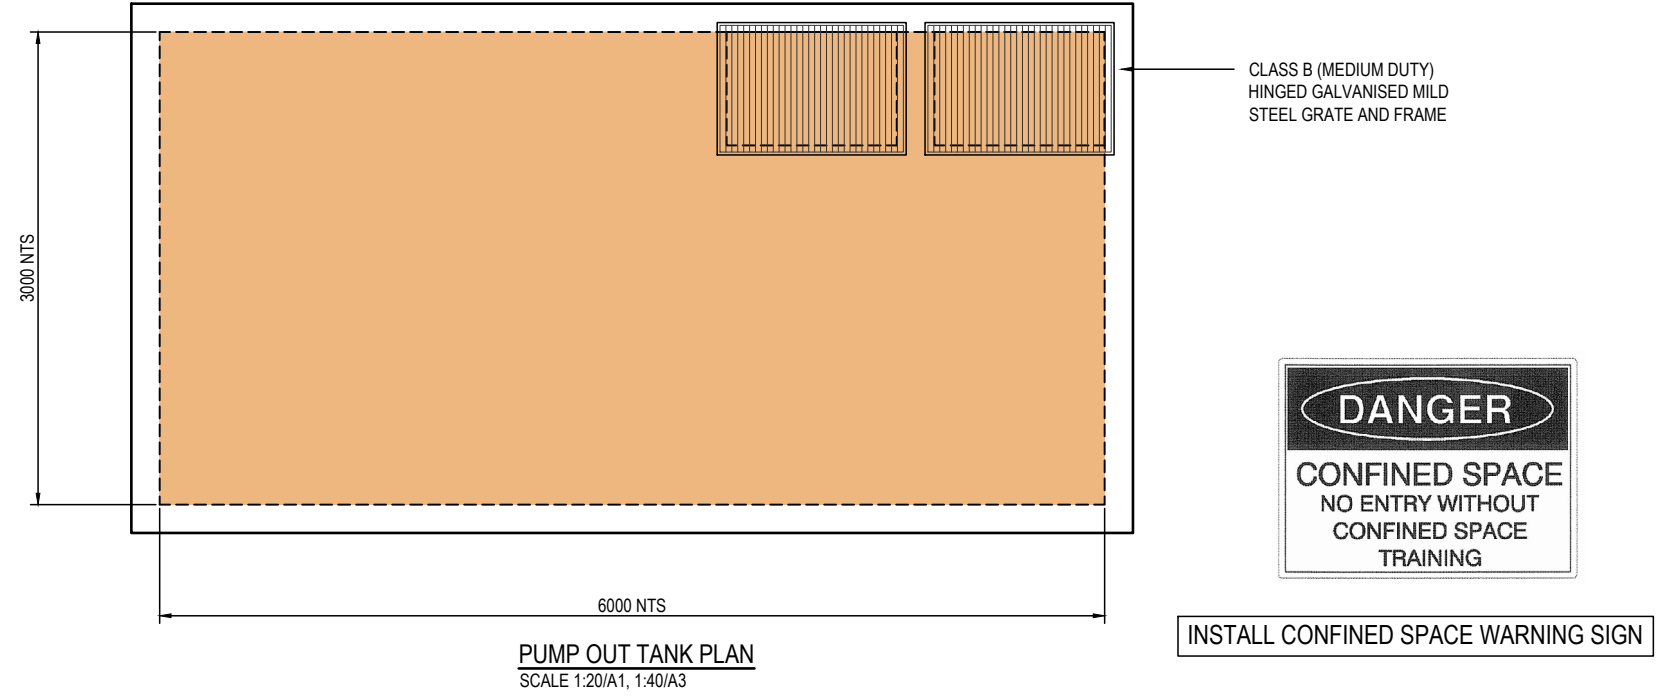

- STANDARD PUMP OUT DESIGN NOTES**
- THE PUMP SYSTEM SHALL BE OPERATED IN THE FOLLOWING MANNER:-
1. THE PUMPS SHALL BE PROGRAMMED TO WORK ALTERNATELY TO ALLOW BOTH PUMPS TO HAVE AN EQUAL OPERATION LOAD AND PUMP LIFE
 2. A FLOAT SHALL BE PROVIDED TO ENSURE THAT THE MINIMUM REQUIRED WATER LEVEL IS MAINTAINED WITHIN THE SUMP AREA OF THE BELOW GROUND TANK. IN THIS REGARD THIS FLOAT WILL FUNCTION AS AN OFF SWITCH FOR THE PUMPS AT THE MINIMUM WATER LEVEL. THE SAME FLOAT SHALL BE SET TO TURN ONE OF THE PUMPS ON UPON WATER LEVEL IN THE TANK RISING TO APPROXIMATELY 300mm ABOVE THE MINIMUM WATER LEVEL. THE PUMP SHALL OPERATE UNTIL THE TANK IS DRAINED TO THE MINIMUM WATER LEVEL.
 3. A SECOND FLOAT SHALL BE PROVIDED AT A HIGH LEVEL, WHICH IS APPROXIMATELY THE ROOF LEVEL OF THE BELOW GROUND TANK. THIS FLOAT SHALL START THE OTHER PUMP THAT IS NOT OPERATING AND ACTIVATE THE ALARM.
 4. AN ALARM SYSTEM SHALL BE PROVIDED WITH A FLASHING STROBE LIGHT AND A PUMP FAILURE WARNING SIGN WHICH ARE TO BE LOCATED AT THE DRIVEWAY ENTRANCE TO THE BASEMENT LEVEL. THE ALARM SYSTEM SHALL BE PROVIDED WITH A BATTERY BACK-UP IN CASE OF POWER FAILURE.
 5. A CONFINED SPACE DANGER SIGN SHALL BE PROVIDED AT ALL ACCESS POINTS TO THE PUMP OUT STORAGE TANK.

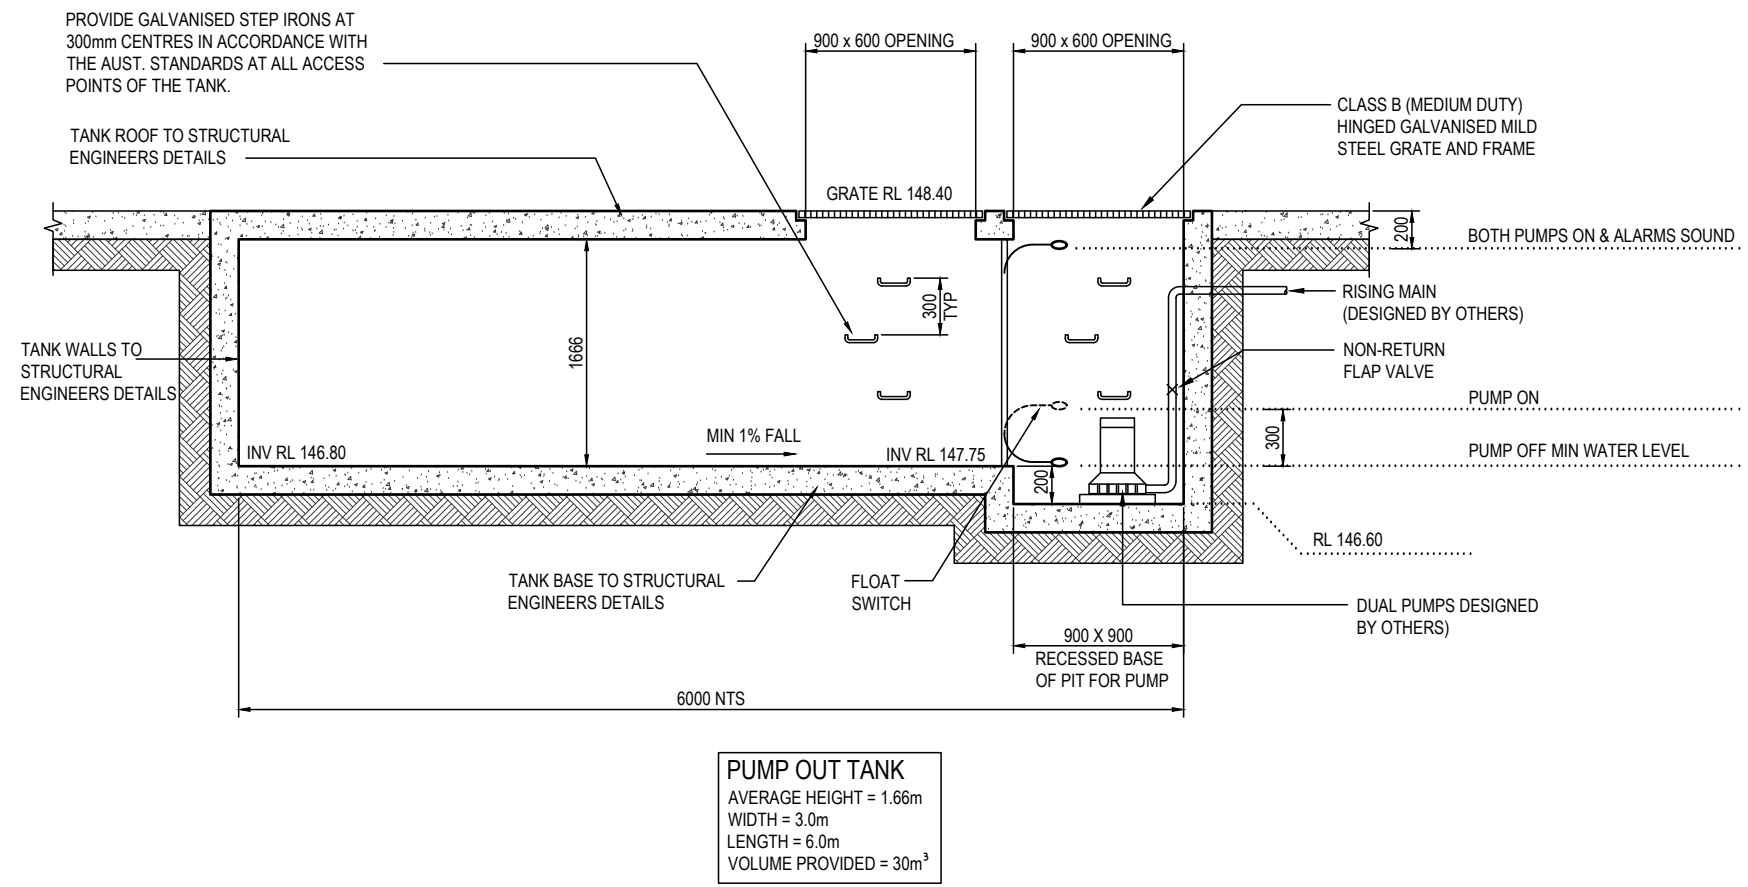

- PUMP-OUT TANK MAINTENANCE SCHEDULE**
- MAINTENANCE CONTRACT**
- NOTE: A 24 HOUR X 12 MONTHLY EMERGENCY AND MAINTENANCE CONTRACT SHALL BE OBTAINED FROM A COMPANY CAPABLE OF EXECUTING THE WORK AND SHALL BE KEPT IN FORCE BY THE PROPERTY OWNER(S) FOR THE LIFE OF THE BUILDING.
- THE MAINTENANCE CONTRACT SHALL BE CARRIED OUT EVERY THREE (3) MONTHS AND SHALL INCLUDE THE FOLLOWING ACTIVITIES:
1. CLEAN OUT ALL PITS OF SILT AND DEBRIS.
 2. CHECK AND CLEAN OUT, IF NECESSARY, ALL PIPELINES.
 3. CHECK:
 - 3.1. PUMPS FOR WEAR
 - 3.2. PUMP OIL SEALS
 - 3.3. PUMP STRAINER AND CLEAN
 4. CARRY OUT ROUTINE MAINTENANCE TO PUMPS AS RECOMMENDED BY THE MANUFACTURER.
 5. CHECK OPERATIONAL SEQUENCE OF LEVEL SWITCHES, PUMPS AND CONTROL PANEL.
 6. THE EMERGENCY CONTRACT SHALL PROVIDE FOR A 24 HOUR X 7 DAY PER WEEK SERVICE.
- THE CONTRACTOR SHALL PROVIDE A NAME PLATE STATING NAME, WORKING HOURS, TELEPHONE NUMBER AND OUT OF HOURS NUMBER AND SUCH NAME PLATE SHALL BE FIXED TO THE FRONT OF THE CONTROL PANEL.

STORMWATER QUALITY REPORT

1 INTRODUCTION

A CATCHMENT BASED WATER QUALITY MODEL WAS DEVELOPED TO ASSESS THE STORMWATER RUNOFF QUALITY IN ACCORDANCE WITH THE REQUIREMENTS OF TABLE 5 NORTHERN BEACHES WATER MANAGEMENT FOR DEVELOPMENT POLICY AND THE OBJECTIVES OUTLINED IN WARRINGAH DCP PART G SECTION G9.9 OBJECTIVE A AND B. IN THIS REGARD WE REFER TO THE PRESCRIBED TARGETS TABLED FOLLOWING:

TABLE 1 - STORMWATER POLUTANT REDUCTION TARGETS

STORMWATER POLLUTANT	REDUCTION TARGETS
GROSS POLLUTANT	90%
TOTAL SUSPENDED SOLIDS (TSS)	85%
TOTAL PHOSPHORUS (TP)	65%
TOTAL NITROGEN (TN)	45%

2 STUDY METHODOLOGY

THE OBJECTIVES OF THIS REPORT ARE TO:

- ASSESS THE RUNOFF QUALITY FOR THE UNTREATED POST DEVELOPED SCENARIO AND IDENTIFY STORMWATER QUALITY CONTROLS LIKELY TO IMPACT ON RUNOFF QUALITY.
- ASSESS THE STORMWATER QUALITY FOR THE POST DEVELOPED SCENARIO INCLUDING THE MEASURES PROPOSED TO MEET THE POLLUTANT REMOVAL TARGETS .

THE REPORT IS BASED ON THE APPLICATION OF MUSIC SOFTWARE (MODEL FOR URBAN STORMWATER IMPROVEMENT CONCEPTUALISATION). IN THIS REGARD THE MODEL IS DEFINED AS FOLLOWS:

A STORMWATER QUALITY MODEL TO CONVERT RAINFALL AND EVAPOTRANSPIRATION INTO RUNOFF.

- ESTIMATION OF STORMWATER FLOW AND POLLUTION GENERATION BY SIMULATING THE PERFORMANCE OF STORMWATER TREATMENT DEVICES INDIVIDUALLY AND AS PART OF A TREATMENT TRAIN.

THE MODEL DEFINES WATER QUALITY PROFILES TREATED SCENARIOS. THE TREATED POST DEVELOPED MODEL INCLUDES PARAMETERS WHICH REPRESENT THE WATER QUALITY MEASURES.

3 STORMWATER QUALITY MODELLING

3.1 GENERAL

THE FOLLOWING PARAMETERS WERE ASSESSED FOR THE HYDROLOGICAL MODELLING ASSOCIATED WITH THE CATCHMENT.

- RAINFALL/RUNOFF AND EVAPOTRANSPIRATION.
- SUB CATCHMENT DIVERSIONS.
- LAND USE (PERVIOUS AND IMPERVIOUS)

3.2 RAINFALL/RUNOFF AND EVAPOTRANSPIRATION

NORTHERN BEACHES COUNCIL'S WSUD & MUSIC MODELING GUIDELINES WERE UTILISED IN THIS STUDY. THEREFORE DAILY RAINFALL DATA WAS OBTAINED FROM THE SYDNEY OBSERVATORY HILL RAINFALL STATION WITH 6 min TIMESTEP, STATION NO. 066062. THE COUNCIL'S DEFAULT MONTHLY AVERAGE POTENTIAL EVAPOTRANSPIRATION DATA WAS ALSO UTILISED IN THIS STUDY.

THE DETAILS ARE SUMMARISED IN TABLE 3.1 AND 3.2

TABLE 3.1 - DETAILS OF DAILY RAINFALL DATA			
STATION	NAME	PERIOD	TIMESTEP
066062	SYDNEY OBSERVATORY HILL	01/01/1981-31/08/1985	6 min

TABLE 3.2 - SUMMARY OF POTENTIAL EVAPOTRANSPIRATION (PET)					
JAN	FEB	MAR	APR	MAY	JUN
180	135	128	85	58	43
JUL	AUG	SEP	OCT	NOV	DEC
43	58	88	127	152	163

3.3 CATCHMENT DEFINITION

THE POST DEVELOPED CATCHMENT CHARACTERISTICS ARE IDENTIFIED IN TABLE 3.3.

TABLE 3.3 - POST DEVELOPMENT SUB CATCHMENT DETAILS			
SUB CATCHMENT ID	SUB CATCHMENT AREA (ha)	% IMPERVIOUS AREA	% PERVIOUS AREA
ROOF	0.244	100	0
IMPERVIOUS AREA TO OSD	0.080	100	0
DRIVEWAY DRAINING TO OSD	0.011	100	0

4 MUSIC MODEL

THE MUSIC MODEL IS BASED ON A 6 min RAINFALL-RUNOFF MODEL IN CONJUNCTION WITH REPRESENTATIVE BASEFLOW AND STORMFLOW EVENT MEAN CONCENTRATIONS (EMCs).

4.1 WATER QUALITY PARAMETERS

THE ADOPTED VALUES OF VARIOUS MUSIC RAINFALL AND RUNOFF PARAMETERS ARE SUMMARISED IN TABLE 4.1 AS PER THE DEFAULT VALUES WHEN ADOPTING THE NORTHERN BEACHES COUNCIL'S WSUD & MUSIC MODELING GUIDELINES .

TABLE 4.1 - ADOPTED MUSIC RAINFALL/RUNOFF PARAMETERS	
PARAMETER	VALUE
IMPERVIOUS AREA PROPERTIES	
RAINFALL THRESHOLD (mm/DAY)	0.3 (roof) else 1.5
PERVIOUS AREA PROPERTIES (SANDY CLAY LOAM)	
SOIL STORAGE CAPACITY (mm)	108
SOIL INITIAL STORAGE (% OF CAPACITY)	30
FIELD CAPACITY (mm)	73
INFILTRATION CAPACITY COEFFICIENT - a	250
INFILTRATION CAPACITY EXPONENT - b	1.3
GROUNDWATER PROPERTIES	
INITIAL DEPTH (mm)	10
DAILY RECHARGE RATE (%)	60
DAILY BASEFLOW RATE (%)	45
DAILY DEEP SEEPAGE RATE (%)	0

					Client	Architect	Project	Drawing Title			
					BREWSTER MURRAY ARCHITECTS		HYDRACOR Consulting Engineers Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499	PROPOSED RESIDENTIAL DEVELOPMENT			
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK				No.116 - 120 FRENCHS FOREST ROAD			
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK				No.11 GLADYS AVENUE			
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK				FRENCHS FOREST			
Issue	Description	Date	Drawn	Approved				Designed	Project No.	Dwg. No.	Issue
								BK	CC230124	SW14	C

4.1 WATER QUALITY PARAMETERS CONT.

STORMWATER QUALITY IS CHARACTERISED USING EVENT MEAN CONCENTRATION (EMCs) UNDER STORM AND BASE FLOW CONDITIONS. THE VALUE OF WATER QUALITY PARAMETERS ADOPTED IN THIS STUDY IS SUMMARISED IN TABLE 4.2

TABLE 4.2 - ADOPTED MUSIC WATER QUALITY PARAMETERS							
LAND-USE CATEGORY		Log ₁₀ TSS (mg/L)		Log ₁₀ TP (mg/L)		Log ₁₀ TN (mg/L)	
		STORM FLOW	BASE FLOW	STORM FLOW	BASE FLOW	STORM FLOW	BASE FLOW
RESIDENTIAL	MEAN	2.15	1.20	-0.60	-0.85	0.30	0.11
	STD DEV	0.32	0.17	0.25	0.19	0.19	0.12
SEALED ROADS	MEAN	2.43	1.20	-0.3	-0.85	0.34	0.11
	STD DEV	0.32	0.17	0.25	0.19	0.19	0.12
ROOFS	MEAN	1.30	1.10	-0.89	-0.82	0.30	0.32
	STD DEV	0.32	0.17	0.25	0.19	0.19	0.12

4.2 STORMWATER TREATMENT MEASURES

THE PROPOSED STORMWATER TREATMENT MEASURES INCLUDED IN THE POST DEVELOPED MODEL ARE AS FOLLOWS:

- 15,000 LITRE OSR TANK (FOR IRRIGATION ONLY)
- 6 x ATLAN FILTERS (FULL HEIGHT) (FORMERLY SPELFILTERS)
- 2 x ATLAN STORMSACKS (FORMERLY SPEL STORMSACKS)

THE SCHEMATIC LAYOUT FOR THE POST DEVELOPED MUSIC MODEL IS DEPICTED IN FOLLOWING FIGURE 1

WATER QUALITY TREATMENT OPTIONS AND CONSTRAINTS
WE REFER TO GEOTECHNICAL INVESTIGATION REPORT PREPARED BY GREEN GEOTECHNICS PTY LTD, REFERENCE GG11138.001, DATED 8 AUGUST 2023 AND NOTE THAT THE SOIL PROFILE ON THE SITE CONSISTS GENERALLY OF FIRM TO STIFF AND STIFF TO VERY STIFF CLAYS OVERLAYING SHALE AND SANDSTONE BEDROCK. IN THIS REGARD, INFILTRATION IS EXTREMELY LIMITED ON THE SITE. THEREFORE INFILTRATION HAS NOT BEEN PROVIDED.

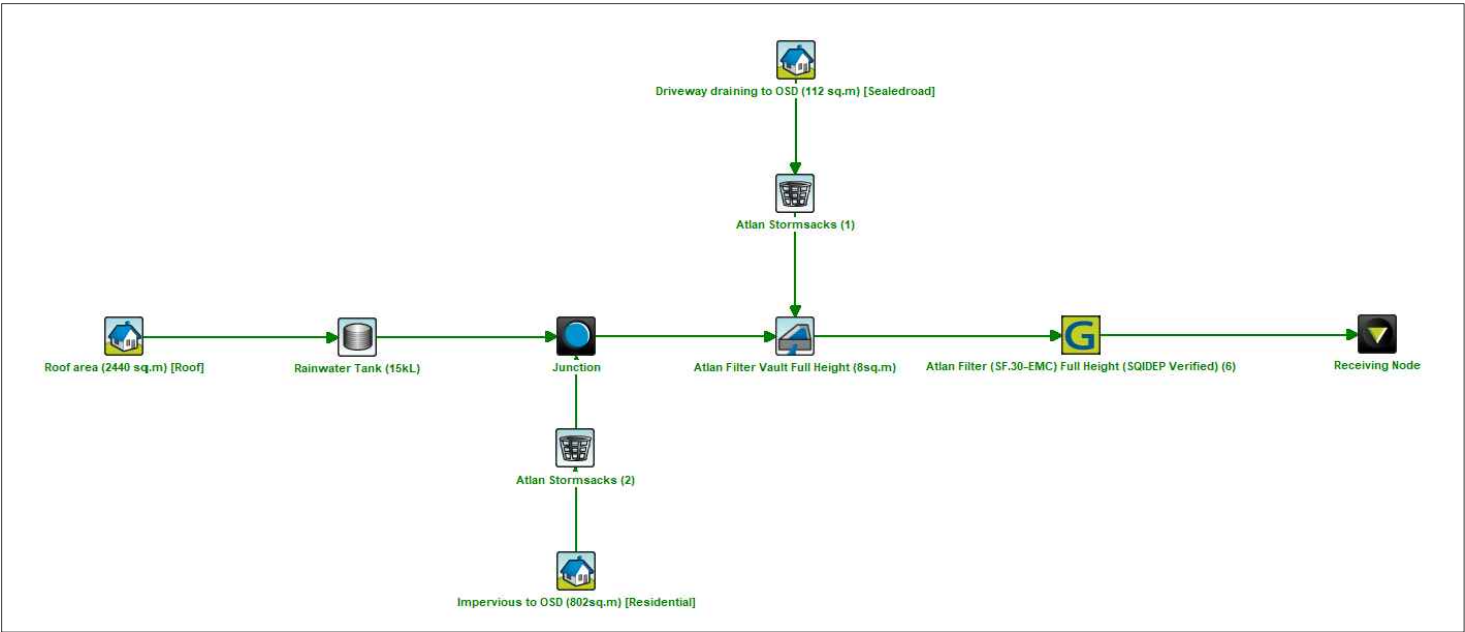


FIGURE 1 - MUSIC MODEL SCHEMATIC

5 RESULTS & CONCLUSION

BASED ON THE FOREGOING THE PROPOSED STORMWATER QUALITY TREATMENT MEASURES MEET THE REQUIRED TARGETS OF TABLE 5 OF NORTHERN BEACHES WATER MANAGEMENT FOR DEVELOPMENT POLICY AND THE OBJECTIVES OUTLINED IN WARRINGAH DCP PART G SECTION G9.9 OBJECTIVE A AND B.

TABLE 5.1 - TREATMENT TRAIN EFFECTIVENESS

Treatment Train Effectiveness - Receiving Node			
	Sources	Residual Load	% Reduction
Flow (ML/yr)	3.96	3.26	17.5
Total Suspended Solids (kg/yr)	285	33.2	88.3
Total Phosphorus (kg/yr)	0.784	0.189	75.8
Total Nitrogen (kg/yr)	8.78	2.86	67.4
Gross Pollutants (kg/yr)	101	0	100

EROSION AND SEDIMENT CONTROL NOTES

GENERAL INSTRUCTIONS

1. THIS SOIL AND WATER MANAGEMENT PLAN IS TO BE READ IN CONJUNCTION WITH OTHER ENGINEERING PLANS RELATING TO THIS DEVELOPMENT.
2. CONTRACTORS WILL ENSURE THAT ALL SOIL AND WATER MANAGEMENT WORKS ARE UNDERTAKEN AS INSTRUCTED IN THIS SPECIFICATION AND CONSTRUCTED FOLLOWING THE GUIDELINES OF "MANAGING URBAN STORMWATER SOILS AND CONSTRUCTION", DEPT OF HOUSING, 1998 (BLUE BOOK).
3. ALL SUBCONTRACTORS WILL BE INFORMED OF THEIR RESPONSIBILITIES IN REDUCING THE POTENTIAL FOR SOIL EROSION AND POLLUTION TO DOWNSLOPE AREAS.

LAND DISTURBANCE INSTRUCTIONS

4. DISTURBANCE TO BE NO FURTHER THAN 5 (PREFERABLY 2) METRES FROM THE EDGE OF ANY ESSENTIAL ENGINEERING ACTIVITY AS SHOWN ON APPROVED PLANS. ALL SITE WORKERS WILL CLEARLY RECOGNISE THESE ZONES THAT, WHERE APPROPRIATE, ARE IDENTIFIED WITH BARRIER FENCING (UPSLOPE) AND SEDIMENT FENCING (DOWNSLOPE) OR SIMILAR MATERIALS.
5. ACCESS AREAS ARE TO BE LIMITED TO A MAXIMUM WIDTH OF 10 METRES THE SITE MANAGER WILL DETERMINE AND MARK THE LOCATION OF THESE ZONES ON-SITE. ALL SITE WORKERS WILL CLEARLY RECOGNISE THESE BOUNDARIES THAT, WHERE APPROPRIATE, ARE IDENTIFIED WITH BARRIER FENCING (UPSLOPE) AND SEDIMENT FENCING (DOWNSLOPE) OR SIMILAR MATERIALS.
6. ENTRY TO LANDS NOT REQUIRED FOR CONSTRUCTION OR ACCESS IS PROHIBITED EXCEPT FOR ESSENTIAL THINNING OF PLANT GROWTH.
7. WORKS ARE TO PROCEED IN THE FOLLOWING SEQUENCE:
 - A) INSTALL ALL BARRIER AND SEDIMENT FENCING WHERE SHOWN ON THE PLAN.
 - B) CONSTRUCT THE STABILISED SITE ACCESS.
 - C) CONSTRUCT DIVERSION DRAINS AS REQUIRED.
 - D) INSTALL MESH AND GRAVEL INLETS FOR ANY ADJACENT KERB INLETS.
 - E) INSTALL GEOTEXTILE INLET FILTERS AROUND ANY ON-SITE DROP INLET PITS.
 - F) CLEAR SITE AND STRIP AND STOCKPILE TOPSOIL IN LOCATIONS SHOWN ON THE PLAN.
 - G) UNDERTAKE ALL ESSENTIAL CONSTRUCTION WORKS ENSURING THAT ROOF AND/OR PAVED AREA STORMWATER SYSTEMS ARE CONNECTED TO PERMANENT DRAINAGE AS SOON AS PRACTICABLE.
 - H) GRADE LOT AREAS TO FINAL GRADES AND APPLY PERMANENT STABILISATION (LANDSCAPING) WITHIN 20 DAYS OF COMPLETION OF CONSTRUCTION WORKS.
 - I) REMOVE TEMPORARY EROSION CONTROL MEASURES AFTER THE PERMANENT LANDSCAPING HAS BEEN COMPLETED.
5. ENSURE THAT SLOPE LENGTHS DO NOT EXCEED 80 METRES WHERE PRACTICABLE. SLOPE LENGTHS ARE DETERMINED BY SILTATION FENCING AND CATCH DRAIN SPACING.
6. ON COMPLETION OF MAJOR WORKS LEAVE DISTURBED LANDS WITH A SCARIFIED SURFACE TO ENCOURAGE WATER INFILTRATION AND ASSIST WITH KEYING TOPSOIL LATER.

SITE MAINTENANCE INSTRUCTIONS

7. THE SITE SUPERINTENDENT WILL INSPECT THE SITE AT LEAST WEEKLY AND AT THE CONCLUSION OF EVERY STORM EVENT TO:
 - A) ENSURE THAT DRAINS OPERATE PROPERLY AND TO EFFECT ANY NECESSARY REPAIRS.
 - B) REMOVE SPILLED SAND OR OTHER MATERIALS FROM HAZARD AREAS, INCLUDING LANDS CLOSER THAN 5 METRES FROM AREAS OF LIKELY CONCENTRATED OR HIGH VELOCITY FLOWS ESPECIALLY WATERWAYS AND PAVED AREAS.
 - C) REMOVE TRAPPED SEDIMENT WHENEVER THE DESIGN CAPACITY OF THAT STRUCTURE HAS BEEN EXCEEDED.
 - D) ENSURE REHABILITATED LANDS HAVE EFFECTIVELY REDUCED THE EROSION HAZARD AND TO INITIATE UPGRADING OR REPAIR AS NECESSARY.
 - E) CONSTRUCT ADDITIONAL EROSION AND/OR SEDIMENT CONTROL WORKS AS MIGHT BECOME NECESSARY TO ENSURE THE DESIRED PROTECTION IS GIVEN TO DOWNSLOPE LANDS AND WATERWAYS. MAKE ONGOING CHANGES TO THE PLAN WHERE IT PROVES INADEQUATE IN PRACTICE OR IS SUBJECTED TO CHANGES IN CONDITIONS ON THE WORK-SITE OR ELSEWHERE IN THE CATCHMENT.
 - F) MAINTAIN EROSION AND SEDIMENT CONTROL STRUCTURES IN A FULLY FUNCTIONING CONDITION UNTIL ALL EARTHWORK ACTIVITIES ARE COMPLETED AND THE SITE IS REHABILITATED.
 8. THE SITE SUPERINTENDENT WILL KEEP A LOGBOOK MAKING ENTRIES AT LEAST WEEKLY, IMMEDIATELY BEFORE FORECAST RAIN AND AFTER RAINFALL. ENTRIES WILL INCLUDE:
 - A) THE VOLUME AND INTENSITY OF ANY RAINFALL EVENTS.
 - B) THE CONDITION OF ANY SOIL AND WATER MANAGEMENT WORKS.
 - C) THE CONDITION OF VEGETATION AND ANY NEED TO IRRIGATE.
 - D) THE NEED FOR DUST PREVENTION STRATEGIES.
 - E) ANY REMEDIAL WORKS TO BE UNDERTAKEN.
- THE LOGBOOK WILL BE KEPT ON-SITE AND MADE AVAILABLE TO ANY AUTHORISED PERSON UPON REQUEST. IT WILL BE GIVEN TO THE PROJECT MANAGER AT THE CONCLUSION OF THE WORKS.

SEDIMENT CONTROL INSTRUCTIONS

9. SEDIMENT FENCES WILL BE INSTALLED AS SHOWN ON THE PLAN AND ELSEWHERE AT THE DISCRETION OF THE SITE SUPERINTENDENT TO CONTAIN SOIL AS NEAR AS POSSIBLE TO THEIR SOURCE.
10. SEDIMENT FENCES WILL NOT HAVE CATCHMENT AREAS EXCEEDING 900 SQUARE METRES AND HAVE A STORAGE DEPTH OF AT LEAST 0.6 METRES.
11. SEDIMENT REMOVED FROM ANY TRAPPING DEVICES WILL BE RELOCATED WHERE FURTHER POLLUTION TO DOWNSLOPE LANDS AND WATERWAYS CANNOT OCCUR.
12. STOCKPILES ARE NOT TO BE LOCATED WITHIN 5 METRES OF HAZARD AREAS INCLUDING AREAS OF HIGH VELOCITY FLOWS SUCH AS WATERWAYS, PAVED AREAS AND DRIVEWAYS.
13. WATER WILL BE PREVENTED FROM DIRECTLY ENTERING THE PERMANENT DRAINAGE SYSTEM UNLESS THE CATCHMENT AREA HAS BEEN PERMANENTLY LANDSCAPED AND/OR WATER HAS BEEN TREATED BY AN APPROVED DEVICE.
14. TEMPORARY SEDIMENT TRAPS WILL REMAIN IN PLACE UNTIL AFTER THE LANDS THEY ARE PROTECTING ARE COMPLETELY REHABILITATED.
15. ACCESS TO SITES SHOULD BE STABILISED TO REDUCE THE LIKELIHOOD OF VEHICLES TRACKING SOIL MATERIALS ONTO PUBLIC ROADS AND ENSURE ALL-WEATHER ENTRY/EXIT.

SOIL EROSION CONTROL INSTRUCTIONS

16. EARTH BATTERS WILL BE CONSTRUCTED WITH AS LOW A GRADIENT AS PRACTICABLE AND NO STEEPER, UNLESS OTHERWISE NOTED, THAN:
 - 2(H):1(V) WHERE SLOPE LENGTH LESS THAN 12 METRES
 - 2.5(H):1(V) WHERE SLOPE LENGTH BETWEEN 12 AND 16 METRES.
 - 3(H):1(V) WHERE SLOPE LENGTH BETWEEN 16 AND 20 METRES.
 - 4(H):1(V) WHERE SLOPE LENGTH GREATER THAN 20 METRES.
17. ALL WATERWAYS, DRAINS, SPILLWAYS AND THEIR OUTLETS WILL BE CONSTRUCTED TO BE STABLE IN AT LEAST THE 1:20 YEAR ARI, TIME OF CONCENTRATION STORM EVENT.
18. WATERWAYS AND OTHER AREAS SUBJECT TO CONCENTRATED FLOWS AFTER CONSTRUCTION ARE TO HAVE A MAXIMUM GROUND COVER C-FACTOR OF 0.05 (70% GROUND COVER) WITHIN 10 WORKING DAYS FROM COMPLETION OF FORMATION. FLOW VELOCITIES ARE TO BE LIMITED TO THOSE SHOWN IN TABLE 5-1 OF "MANAGING URBAN STORMWATER - SOILS AND CONSTRUCTION", DEPT. OF HOUSING 1998 (BLUE BOOK). FOOT AND VEHICULAR TRAFFIC WILL BE PROHIBITED IN THESE AREAS.
19. STOCKPILES AFTER CONSTRUCTION ARE TO HAVE A MAXIMUM GROUND COVER C-FACTOR OF 0.1 (60% GROUND COVER) WITHIN 10 WORKING DAYS FROM COMPLETION OF FORMATION.
20. ALL LANDS, INCLUDING WATERWAYS AND STOCKPILES, DURING CONSTRUCTION ARE TO HAVE A MAXIMUM GROUND COVER C-FACTOR OF 0.15 (50% GROUND COVER) WITHIN 20 WORKING DAYS FROM INACTIVITY EVEN THOUGH WORKS MAY CONTINUE LATER.
21. FOR AREAS OF SHEET FLOW USE THE FOLLOWING GROUND COVER PLANT SPECIES FOR TEMPORARY COVER: JAPANESE MILLET 20 KG/HA AND OATS 20 KG/HA.
22. PERMANENT REHABILITATION OF LANDS AFTER CONSTRUCTION WILL ACHIEVE A GROUND COVER C-FACTOR OF LESS THAN 0.1 AND LESS THAN 0.05 WITHIN 60 DAYS. NEWLY PLANTED LANDS WILL BE WATERED REGULARLY UNTIL AN EFFECTIVE COVER IS ESTABLISHED AND PLANTS ARE GROWING VIGOROUSLY. FOLLOW-UP SEED AND FERTILISER WILL BE APPLIED AS NECESSARY.
23. REVEGETATION SHOULD BE AIMED AT RE-ESTABLISHING NATURAL SPECIES. NATURAL SURFACE SOILS SHOULD BE REPLACED AND NON-PERSISTANT ANNUAL COVER CROPS SHOULD BE USED.

WASTE CONTROL INSTRUCTIONS

24. ACCEPTABLE BINS WILL BE PROVIDED FOR ANY CONCRETE AND MORTAR SLURRIES, PAINTS, ACID WASHING, LIGHTWEIGHT WASTE MATERIALS AND LITTER. CLEARANCE SERVICES WILL BE PROVIDED AT LEAST WEEKLY. DISPOSAL OF WASTE WILL BE IN A MANNER APPROVED BY THE SITE SUPERINTENDENT.
25. ALL POSSIBLE POLLUTANT MATERIALS ARE TO BE STORED WELL CLEAR OF ANY POORLY DRAINED AREAS, FLOOD PRONE AREAS, STREAMBANKS, CHANNELS AND STORMWATER DRAINAGE AREAS. STORE SUCH MATERIALS IN A DESIGNATED AREA UNDER COVER WHERE POSSIBLE AND WITHIN CONTAINMENT BUNDS.
26. ALL SITE STAFF AND SUB-CONTACTORS ARE TO BE INFORMED OF THEIR OBLIGATION TO USE WASTE CONTROL FACILITIES PROVIDED.
27. ANY DE-WATERING ACTIVITIES ARE TO BE CLOSELY MONITORED TO ENSURE THAT WATER IS NOT POLLUTED BY SEDIMENT, TOXIC MATERIALS OR PETROLEUM PRODUCTS.
28. PROVIDE DESIGNATED VEHICULAR WASHDOWN AND MAINTENANCE AREAS WHICH ARE TO HAVE CONTAINMENT BUNDS.


PROCEDURE FOR DE-WATERING

1. ENSURE PERMISSION FOR DE-WATERING IS RECEIVED FROM AUTHORITIES BEFORE PUMPING OUT.
2. AN ON-SITE TREATMENT PROCESS DISCHARGING TO THE STORMWATER SYSTEM WILL BE IMPLEMENTED. ALL SITE WATERS DURING CONSTRUCTION WILL BE CONTAINED ON SITE AND RELEASED ONLY WHEN pH IS BETWEEN 8.5 & 6.5, SUSPENDED SOLIDS ARE LESS THAN 50mg/L, TURBIDITY LESS THAN 100 NTU/S, OIL AND GREASE LESS THAN 10mg/L AND BIOCHEMICAL OXYGEN DEMAND (BOD5) LESS THAN 30mg/L (FOR STORMS LESS INTENSE THAN 1 IN 5 YEAR EVENTS).
3. METHODS OF SAMPLING AND ANALYSIS OF WATER QUALITY WILL BE IN ACCORDANCE WITH THE APPLICABLE METHOD LISTED IN THE EPA PUBLISHED APPROVED METHODS FOR THE SAMPLING ANALYSIS OF WATER POLLUTANTS IN NEW SOUTH WALES.
4. WHERE LABORATORY ANALYSIS IS REQUIRED AS INDICATED BY IN-SITU TESTING, APPROPRIATE SAMPLE BOTTLES AND PRESERVATIVES WILL BE USED AND GUIDANCE FOR THE SAMPLING METHOD OBTAINED FROM APPLICABLE PARTS OF AS5667.1 AND AS5667.6. ANALYSIS WILL BE UNDERTAKEN WHERE PRACTICAL BY A NATA REGISTERED LABORATORY CERTIFIED TO PERFORM THE APPLICABLE ANALYSIS.
5. A FURTHER INSPECTION WILL BE CARRIED OUT DURING A STORM EVENT (DURING WORK HOURS WHERE POSSIBLE) TO ENSURE CONTROLS ARE COPING WITH THE EVENT. THIS APPLIES TO ANY RAIN EVENT AS WELL.
6. AS EXCAVATION TO TOP SOIL PROGRESSES, ANY WATER COLLECTED AT THE BOTTOM OF EXCAVATIONS WILL BE DIVERTED TO A TEMPORARY SEDIMENTATION BASIN OR SETTLEMENT TANK. IF THE WATER CONTAINS ONLY SEDIMENTS, IT WILL BE FILTERED AND PUMPED TO STORMWATER. BEFORE THIS CAN HAPPEN IT MUST CONTAIN LESS THAN 50mg/L TOTAL SUSPENDED SOLIDS.
7. POLLUTED WATER MUST NOT ENTER THE STORMWATER SYSTEM. IN SOME CIRCUMSTANCES, A LIQUID WASTE COMPANY MAY BE REQUIRED TO COLLECT CONTAMINATED WATER FOR DISPOSAL AT A LICENSED TREATMENT FACILITY

					Client	Architect	Project		Drawing Title					
					BREWSTER MURRAY ARCHITECTS		HYDRACOR Consulting Engineers Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499	PROPOSED RESIDENTIAL DEVELOPMENT No.116 - 120 FRENCHS FOREST ROAD No.11 GLADYS AVENUE FRENCHS FOREST	EROSION & SEDIMENT CONTRL NOTES					
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK					Drawn	Date	Scale	A1	G.A. Check	Date
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK					RH	NOV 2024	AS NOTED			-
A	DRAFT ISSUE FOR REVIEW	05.11.24	LW	BK										
Issue	Description	Date	Drawn	Approved										
									Designed BK			Project No. CC230124	Dwg. No. SW16	Issue C

EROSION & SEDIMENT LEGEND

- 1 INSTALL SEDIMENT FENCING REFER DETAIL SD 6-8, SHEET SW18. WHERE UNDER CANOPY AREAS OF TREES TO BE RETAINED, FENCING NOT TO BE DUG INTO THE GROUND BUT INSTEAD ATTACHED TO GROUND BY TIGHTLY PACKED SANDBAGS.
- 2 NOTE: PROVIDE PROTECTION TO DRAINAGE PITS FOLLOWING PIT INSTALLATION. REFER DETAIL SD6-12 ON SHEET SW18
- 3 SITE ACCESS PROVIDE LARGE COARSE DIA AGGREGATE OR RECYCLED CONCRETE. IN ACCORDANCE WITH DETAIL SD 6-14, SHEET SW18
- 4 STOCKPILE IN ACCORDANCE WITH DETAIL SD 4-1. REFER TO SHEET SW18 LOCATION MAY VARY PENDING CONSTRUCTION STAGING
- 5 WASTE STORAGE AREA PROVIDE SOLID AND LIQUID WASTE RECEPTACLE BINS. LOCATION TO BE ADJUSTED TO SUIT CONSTRUCTION STAGING.
- 6 BARRIER FENCING OR UTILISE EXISTING BOUNDARY FENCE
- 7 PROPOSED DISTURBED AREA
- 8 PROVIDE TYPE 'D' SEDIMENT RETENTION BASIN. NOMINAL SIZE: 4.0m x 4.0m x 0.5m DEEP VOLUME = 8.0m³ TO BE CONFIRMED AT CC STAGE DISCHARGE TO BE CONTOLLED PUMP OUT FOLLOWING FLOCCULATION
- 9 PROVIDE TEMPORARY PUMP OUT AND RISING MAIN TO OUTLET.
- 10 TRUCK WASH DOWN AREA. PROVIDE RAILWAY LINE SHAKER ON LARGE COARSE DIA. AGGREGATE OR RECYCLED CONCRETE IN ACCORDANCE WITH DETAIL SD 10-1 ON SHEET S18
- 11 THE EXISTING CROSSOVER & LAYBACK ARE TO BE RETAINED FOR SITE ACCESS UNTIL REASONABLE COMPLETION OF CONSTRUCTION WORKS
- NOTE: PROVIDE TREE PROTECTION MEASURES TO BE PROVIDED IN ACCORDANCE WITH ARBORIST REPORT OR COUNCIL SPECIFICATIONS.

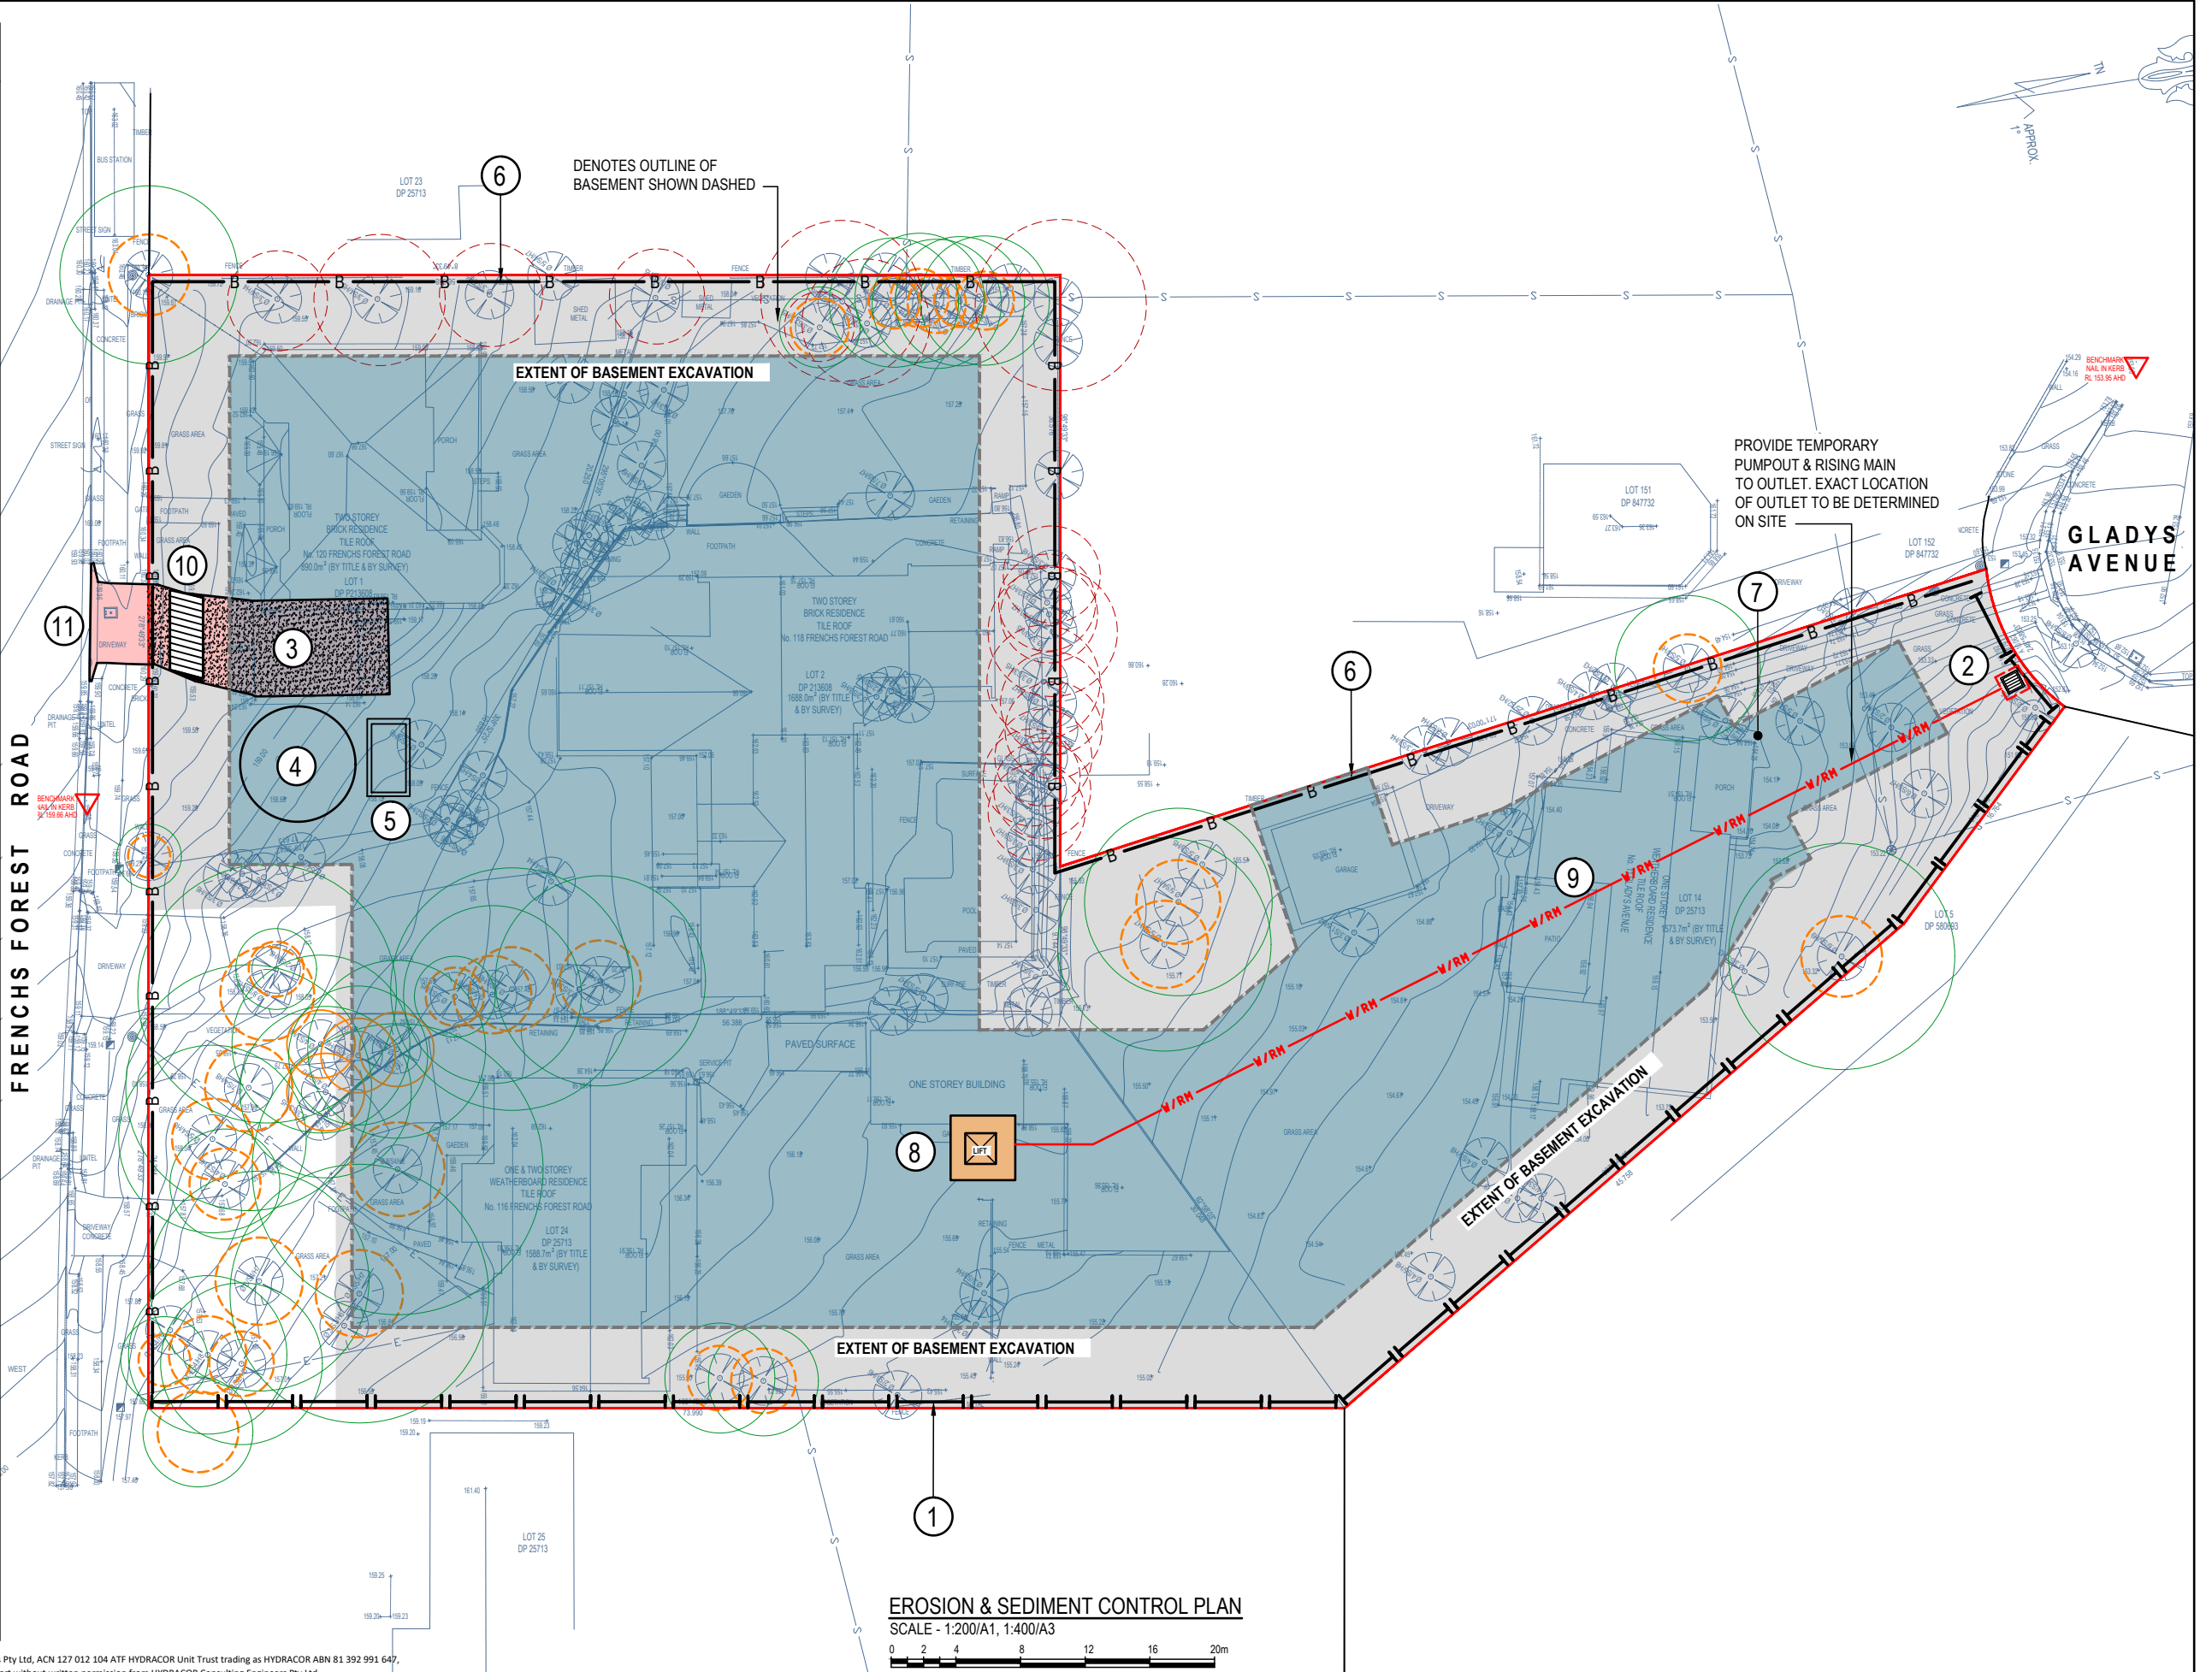

EROSION & SEDIMENT CONTROL PLAN
SCALE - 1:200/A1, 1:400/A3
0 2 4 8 12 16 20m

©COPYRIGHT of this design and plan is the property of HYDRACOR Consulting Engineers Pty Ltd, ACN 127 012 104 ATF HYDRACOR Unit Trust trading as HYDRACOR ABN 81 392 991 647, all rights reserved. It must not be used, modified, reproduced or copied wholly or in part without written permission from HYDRACOR Consulting Engineers Pty Ltd.

Issue		Description	Date	Drawn	Approved
C	RE-ISSUED FOR DEVELOPMENT APPROVAL		12.11.24	LW	BK
B	ISSUED FOR DEVELOPMENT APPROVAL		07.11.24	RH	BK
A	DRAFT ISSUE FOR REVIEW		05.11.24	LW	BK

Client
**BREWSTER MURRAY
ARCHITECTS**

Architect






HYDRACOR
CONSULTING ENGINEERS

HYDRACOR Consulting Engineers Pty Ltd
Platinum Building, Suite 2.01, 4 Ilya Avenue
ERINA NSW 2250, Australia
T +61 2 4324 3499

ENGINEERS | CIVIL | FLOOD STUDIES | STORMWATER | HYDRAULIC

Project
**PROPOSED RESIDENTIAL
DEVELOPMENT**
No. 116 - 120 FRENCHS FOREST ROAD
No. 11 GLADYS AVENUE
FRENCHS FOREST

Drawing Title		EROSION & SEDIMENT CONTROL PLAN	
Drawn	Date	Scale	A1
RH	NOV 2024	AS NOTED	-
Designed	Project No.	Dwg. No.	Issue
BK	CC230124	SW17	C

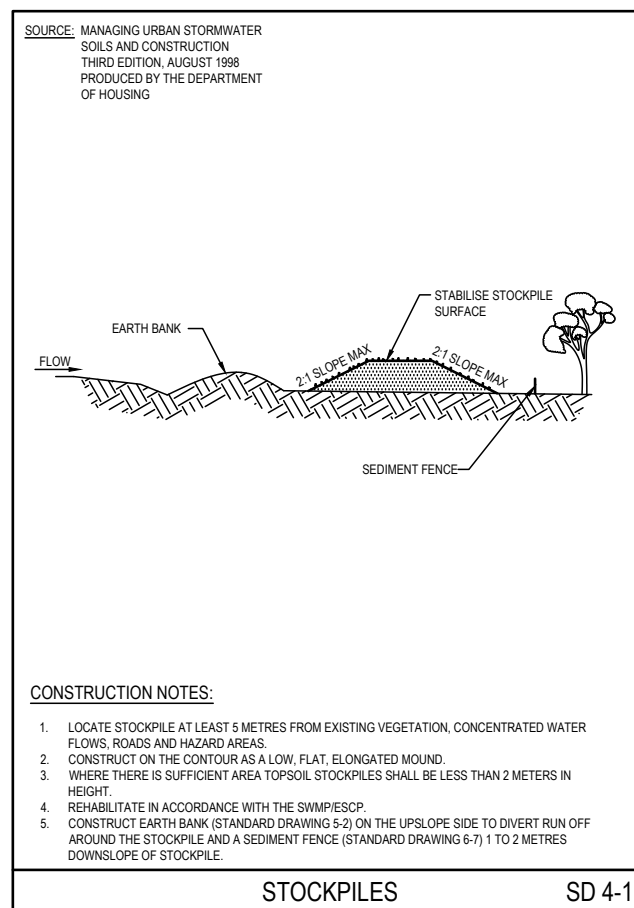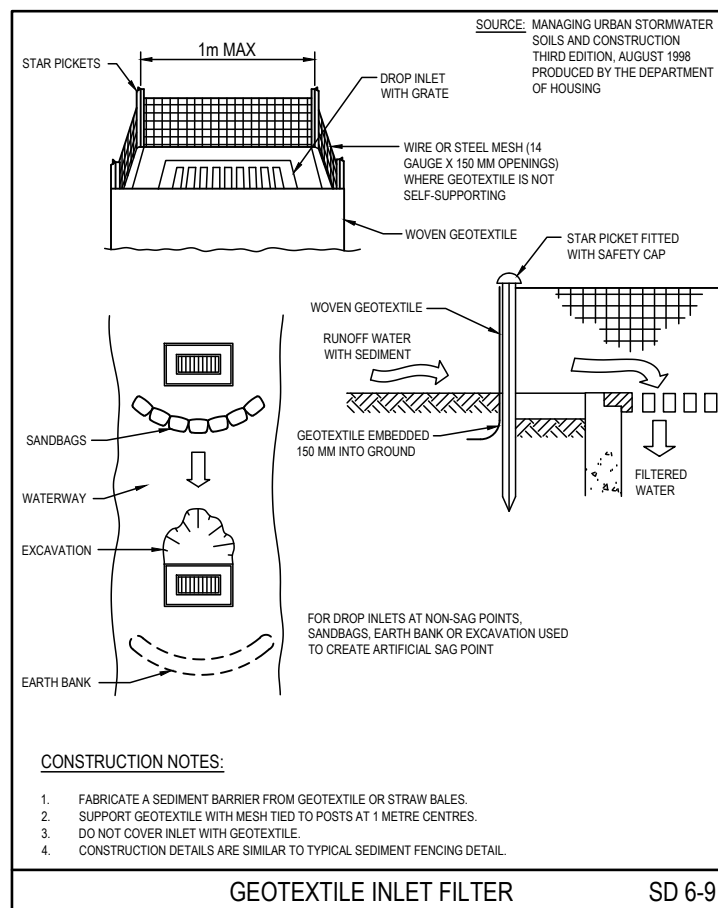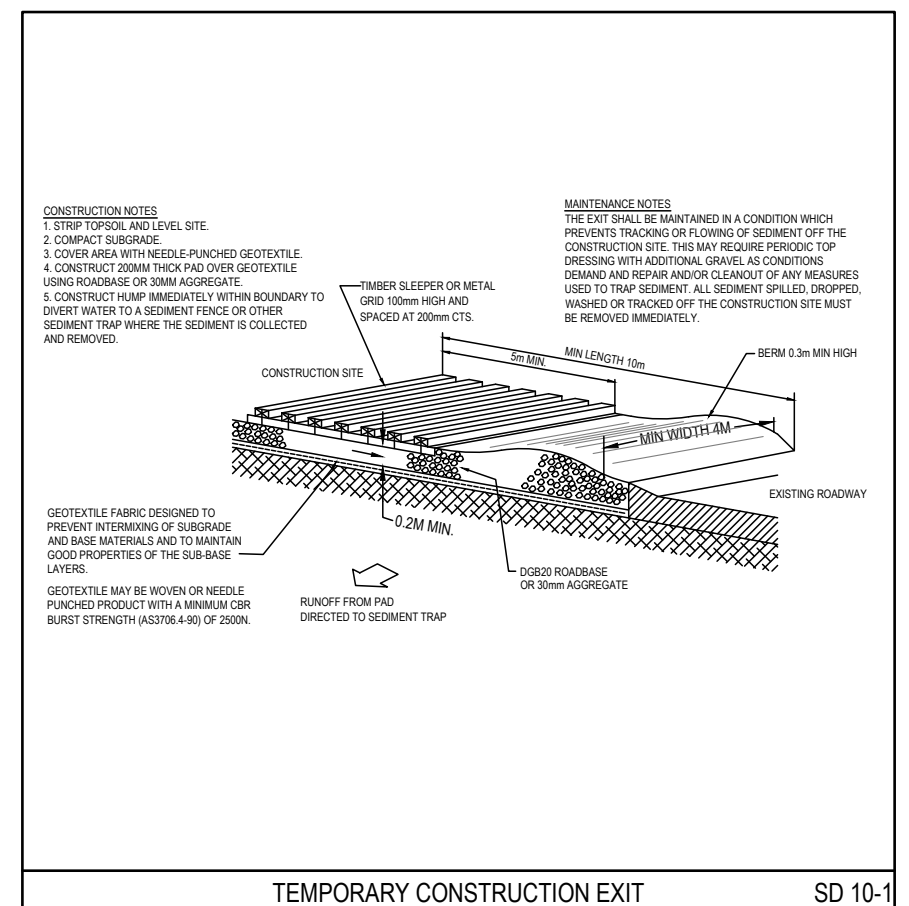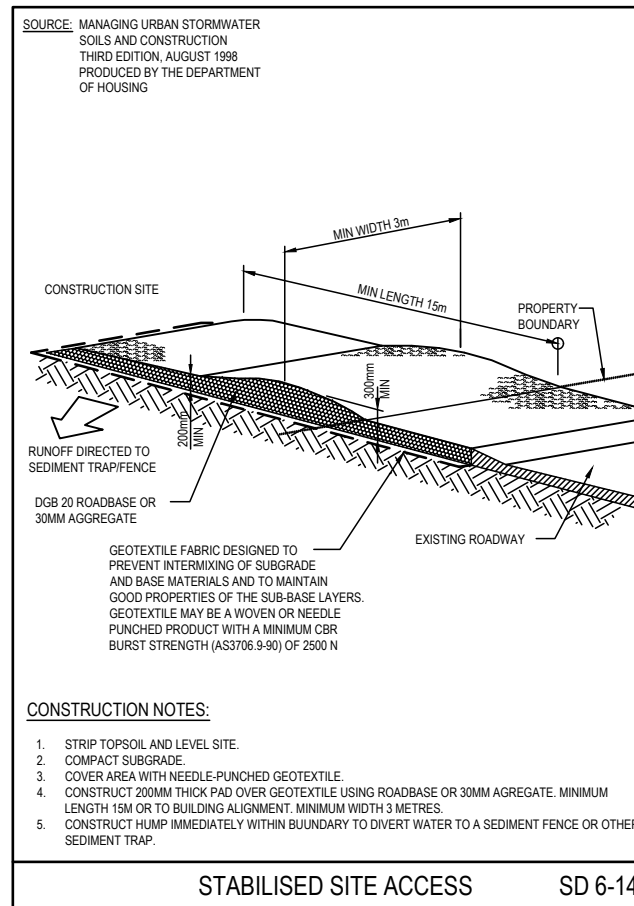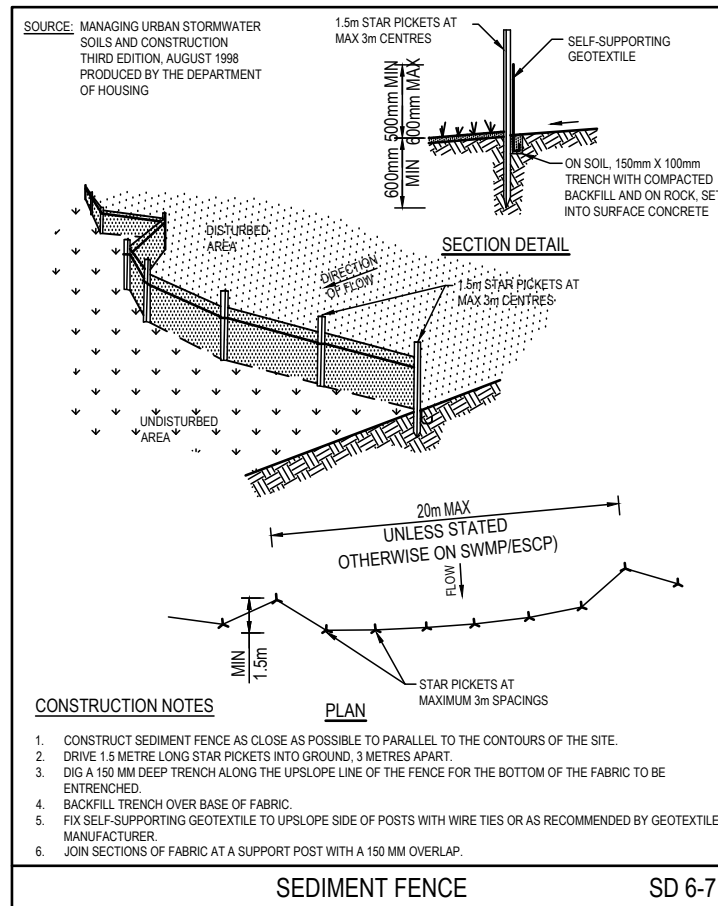

					Client	Project		Drawing Title					
					BREWSTER MURRAY ARCHITECTS		EROSION & SEDIMENT CONTROL DETAIL SHEET						
C	RE-ISSUED FOR DEVELOPMENT APPROVAL			12.11.24			LW	BK	Drawn RH	Date NOV 2024	Scale AS NOTED	A1 Q.A. Check -	Date -
B	ISSUED FOR DEVELOPMENT APPROVAL			07.11.24			RH	BK					
A	DRAFT ISSUE FOR REVIEW			05.11.24			LW	BK					
Issue		Description		Date	Drawn	Approved							
													
						Project No. CC230124		Dwg. No. SW18		Issue C			



Appendix 16 – On-site Detention Checklist

This checklist is to be used to determine the on-site stormwater disposal requirement for developments and must be completed and included with the submission of any development application for these works. Please read this form carefully for its notes, guidelines, definition and relevant policies.

For assistance and support, please contact Council's Development Engineering and Certification team on 1300 434 434.

Part 1 Location of the Property

House Humber	116-120 & 11	Legal Property Description	
Street	FRENCHS FOREST ROAD & 11 GLADYS AVENUE	Lot	LOT 24, 2, 1, 14
Suburb	FRENCHS FOREST	Section	
Postcode	2086	DP	25713 & 213608

Part 2 Site Details

Northern Beaches Stormwater Regions (refer to Map 2 of Northern Beaches Council's Water Management for Development policy)	2	Total Site Area	5740m²
Pre-Development Impervious Area	1825m²	Post-Development Impervious Area	3354m²
Is the site of the development located within an established Flood Prone Land as referred to Council's Local Environmental Plans?		Yes <input type="checkbox"/> No <input type="checkbox"/>	
If yes, On-site stormwater Detention system (OSD) is not required and please proceed to part 5 of this checklist If no, please proceed to part 3 of this checklist.			

Part 3: Northern Beaches Stormwater Regions

(refer to Map 2 of Northern Beaches Council's Water Management for Development policy)

If the site of the development located within Region 1, please proceed to the part 4.1 of this checklist

If the site of the development located within Region 2, please proceed to the part 4.2 of this checklist

If the site of the development located within Region 3, please proceed to the part 4.3 of this checklist

If the site of the development located within Region 4, please refer to Council's Warriewood Valley Water Management Specification.



Part 4 Determination of OSD Requirements

Part 4.1 Northern Beaches Stormwater Region 1

Is the additional impervious area of the development more than 50 m² on a cumulative basis since February 1996?	Yes <input type="checkbox"/> No <input type="checkbox"/>
If yes, OSD is required and please refer to section 9.3.1 of Council's Water Management for Development Policy If no, OSD is not required and please proceed to the part 5 of this checklist	

Part 4.2 Northern Beaches Stormwater Region 2

Part 4.2.1 Description of Work

Residential flat building, commercial, industrial, multiple occupancy development and subdivisions resulting in the creation of three lots or more, will require OSD in all case. Please provide a design in accordance with the section 9.3.2 of Council's Water Management for Development Policy. Any single residential building development, please proceed to part 4.2.2 of this checklist.

Part 4.2.2 Exemption

Is the site area less than 450m²?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Does the site of the development drain directly to the ocean without the need to pass through a drainage control structure such as pipe, bridge, culvert, kerb and gutter or natural drainage system?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
Is it an alternation and addition development to the existing dwellings?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
If yes to any of the above questions, OSD is not required. If no to all the above questions, proceed to part 4.2.3	

Part 4.2.3 Determination of OSD Requirements

Calculation	a) Site area m² x 0.40 (40%) = 2296 m² b) Post- development impervious area = 3354 m²
OSD will not be required when (a) is greater than (b) Is OSD required for this development (tick one only) Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
If yes, provide a design in accordance with the section 9.3.2 of Council's Water Management for Development Policy. If no, OSD is not required and please proceed to part 5 of this checklist.	

<div>Issue Description</div> <div>0 10m at full size</div>					<div>Client</div> <div>BREWSTER MURRAY ARCHITECTS</div>		<div>Architect</div>		<div>HYDRACOR CONSULTING ENGINEERS</div>		<div>Project</div> <div>HYDRACOR Consulting Engineers Pty Ltd Platinum Building, Suite 2.01, 4 Ilya Avenue ERINA NSW 2250, Australia T +61 2 4324 3499</div>		<div>Project</div> <div>PROPOSED RESIDENTIAL DEVELOPMENT No.116 - 120 FRENCHS FOREST ROAD No.11 GLADYS AVENUE FRENCHS FOREST</div>		<div>Drawing Title</div> <div>ON-SITE DETENTION CHECKLIST</div>				
C	RE-ISSUED FOR DEVELOPMENT APPROVAL	12.11.24	LW	BK									Drawn		Date	Scale	A1	Q.A. Check	Date
B	ISSUED FOR DEVELOPMENT APPROVAL	07.11.24	RH	BK									RH		NOV 2024	AS NOTED	-	-	-
-	NIL ISSUE	-	-	-									Designed		Project No.	Dwg. No.	Issue		
													BK		CC230124	SW19	C		