ALTERATIONS & ADDITIONS AT 20 IDALINE STREET, COLLAROY PLATEAU

GENERAL

- These drawings shall be read in conjunction with all architectural and other consultants drawings and specifications and with such other written instructions and sketches as may be issued during the cour the Contract. Any discrepancies shall be referred to the Superintendent before proceeding with any reworks. Construction from these drawings, and their associated consultant's drawings is not to comme until approved by the Local Authorities.
- All materials and workmanship shall be in accordance with the relevant and current Standards Australia codes and with the By-Laws and Ordinances of the relevant building authorities except where varied by the

- G5 Unless noted otherwise levels are in metres and dimensions are in millimetres.

- All services, or conduits for servicing shall be installed prior to commencement of pavement construction.
- G9 Subsoil drainage, comprising 100 agriculture pipe in geo-stocking to be placed as shown and as may be directed by the superintendent. Subsoil drainage shall be constructed in accordance with the relevant local
- The structural components detailed on these drawings have been designed in accordance with the relevant Standards Australia codes and Local Government Ordinances for the following loadings, Refer to the Architectural drawings for proposed floor usage. Refer to drawings for five loads and superimposed dead


DRAINAGE NOTES


- D2 All pipes within the property to be a minimum of 100 dia upvc @ 1% minimum grade, uno.
- D3 All pits within the property are to be fitted with "weldlok" or approved equivalent grates:
 Light duty for landscaped areas
 Heavy duty where subjected to vehicular traffic

- D6 Any pipes beneath relevant local authority road to be rubber ring jointed RCP, uno.
- D7 All pits in roadways are to be fitted with heavy duty grates with locking bolts and continuous hinge
- D8 Provide step irons to stormwater pits greater than 1200 in depth.
- D10 Where a high early discharge (hed) pit is provided all pipes are to be connected to the hed pit, uno.
- D11 Down pipes shall be a minimum of dn100 sw grade upvc or 100 x100 colorbond/zincalume steel, uno. D12 Colorbond or zincalume steel box gutters shall be a minimum of 450 wide x 150 deep.
- D13 Eaves gutters shall be a minimum of 125 wide x 100 deep (or of equivalent area) colorbond or zincalume
- D14 Subsoil drainage shall be provided to all retaining walls & embankments, with the lines feeding into the stormwater drainage system, uno.

EROSION AND SEDIMENT CONTROL NOTES

- E2 The contractor shall implement all soil erosion and sediment control measures as necessary and to the satisfaction of the relevant local authority prior to the commencement of and during construction. No disturbance to the site shall be permitted other than in the immediate area of the works and no material is usualizative to the site stand by permitted unter that in the immendate area of the works and in himself shall be removed from the site without the relevant local authority approval. All erosion and sediment control devices to be installed and maintained in accordance with standards outlined in nsw department of housing's "manaring unhan stormwater," soils and constructions".
- Council approved filter fabric to be entrenched 150mm deep upslope towards disturbed surface. Fabric to be
- Stabalised entry/exit points to remain intact until finished driveway is complete. Construction of entry/exit points to be maintained and repaired as required so that it's function is not compromised. Construction of entry
- E6 All drainage pipe inlets to be capped until:
 - downpipes connected nits constructed and protected with silt barrier
- E6 Provide and maintain silt traps around all surface inlet pits until catchment is revegetated or paved.
- E8 The contractor shall implement dust control by regularly wetting down (but not saturating) disturbed area.
- E9 Topsoil shall be stripped and stockpiled outside hazard areas such as drainage lines. This topsoil shall be by covering them with a mulch and hydroseeding and, if necessary, by locating banks or drains downstrean of a stockpile to retard silt laden runoff.
- E11 The contractor shall grass seed all disturbed areas with an approved mix as soon as practicable after completion of earthworks and regrading.
- E12 Revegetate all trenches immediately upon completion of backfilling.

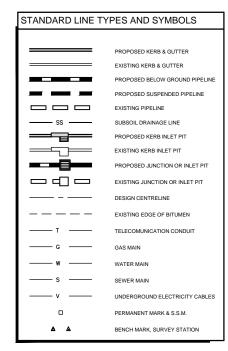

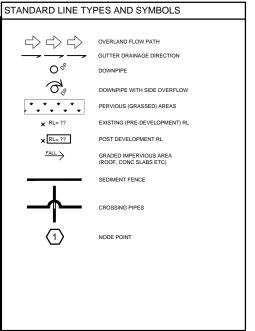

| AHD | Australian height datum | SS | Stainless steel |
|------|------------------------------|-----|------------------------|
| AG | Ag-pipe (Sub soil drainage) | SU | Box gutter sump |
| ARI | Average recurrence interval | TW | Top of wall |
| BG | Box Gutter | TWL | Top water level |
| BWL | Bottom water level | U/S | Underside of slab |
| CL | Cover level | VG | Vally gutter |
| CO | Clean out inspection opening | UNO | Unless noted otherwise |
| DCP | Discharge control pit | | |
| DP | Down pipe | | |
| DRP | Dropper pipe | | |
| EBG | Existing box gutter | | |
| EDP | Existing down pipe | | |
| EEG | Existing eaves gutter | | |
| EG | Eaves gutter | | |
| FRC | Fiber reinforced concrete | | |
| FW | Floor waste | | |
| GD | Grated drain | | |
| GSIP | Grated surface inlet pit | | |
| HED | High early discharge | | |
| HP | High point of gutter | | |
| IL | Invert level | | |
| IO | Inspection opening | | |
| O/F | Overflow | | |
| OSD | On-site detention | | |
| PSD | Permissible site discharge | | |
| P1 | Pipe 1 | | |
| RCP | Reinforced concrete pipe | | |
| RHS | Rectangular hollow section | | |
| RL | Reduced level | | |
| RRJ | Rubber ring joint | | |
| RRT | Rainwater re-use tank | | |
| RWH | Rain water head | | |
| RWO | Rain water outlet | | |
| SLAP | Sealed lid access pit | | |
| SP | Spreader pipe | | |
| SPR | Spreader | | |

| RECOMMENDED MAINTENA | NCE SCHED | ULE | |
|---|-------------|---------------------------|---|
| DISCHARGE CONTROL PIT (DCP) | FREQUENCY | RESPONSIBILITY | PROCEDURE |
| Inspect flap valve and remove any blockage. | Six monthly | Owner | Remove grate. Ensure flap valve moves freely and remove any blockages or debris. |
| Inspect screen and clean. | Six monthly | Owner | Revove grate and screen if required and clean it. |
| Inspect & remove any blockage of orifice. | Six monthly | Owner | Remove grate & screen to inspect orifice. see plan for location of dcp. |
| Inspect dcp sump & remove any sediment-sludge. | Six monthly | Owner | Remove grate and screen. Remove sediment/sludge build-up and check orifice and flap valve clear. |
| Inspect grate for damage or blockage. | Six monthly | Owner | Check both sides of grate for corrosion, (especially corners and welds) damage or blockage. |
| Inspect return pipe from storage and return any blockage. | Six monthly | Owner | Remove grate and screen. ventilate underground storage if present. open flap valve and remove any blockages in return line. Check for sludge/debris on upstream side of return line. |
| Inspect outlet pipe and remove any blockage. | Six monthly | Maintenance Contractor | Remove grate and screen. ventilate underground storage if present. Check orifice and remove any blockages in outlet pipe. Flush outlet pipe to confirm it drains freely. Check for sludge/debris on upstream side of return line. |
| Check fixing of step irons is secure. | Six monthly | Maintenance Contractor | Remove grate and ensure fixings secure prior to placing weight on step iron. |
| Inspect overflow weir & remove any blockage. | Six monthly | Maintenance Contractor | Remove grate and open cover to ventilate underground storage if present. ensure weir clear of blockages. |
| Empty basket at overflow weir (if present). | Six monthly | Maintenance Contractor | Remove grate and ventilate underground storage chamber if present. Empty basket, check fixings secure and not corroded. |
| Check attachment of orifice plate to wall of pit (gaps less than 5 mm). | Annually | Maintenance Contractor | Remove grate and screen. ensure plate mounted securely, tighten fixings if required. seal gaps as required. |
| Check attachment of screen to wall of pit. | Annually | Maintenance Contractor | Remove grate and screen. ensure screen fixings secure. repair as required. |
| Check screen for corrosion. | Annually | Maintenance Contractor | Remove grate and examine screen for rust or corrosion, especially at corners or welds. |
| Check attachment of flap valve to wall of . | Annually | Maintenance Contractor | Remove grate. Ensure fixings of valve are secure. |
| Check flap valve seals against wall of pit. | Annually | Maintenance Contractor | Remove grate. fill pit with water and check that flap seals against side of pit with minimal leakage. |
| Check any hinges of flap valve move freely. | Annually | Maintenance Contractor | Remove grate. Test valve hinge by moving flap to full extent. |
| Inspect dcp walls (internal and external, if appropriate) for cracks or spalling. | Annually | Maintenance Contractor | Remove grate to inspect internal walls. Repair as required. Clear vegetation from external walls if necessary and repair as required. |
| Check step irons for corrosion. | Annually | Maintenance Contractor | Remove grate. Examine step irons and repair any corrosion or damage. |
| Check orifice diameter correct and retains sharp edge. | Five yearly | Maintenance Contractor | Compare diameter to design (see work-as- executed) and ensure edge is not pitted or damaged. |
| STORAGE | | | |
| Inspect & remove any blockage of orifice. | Six monthly | Owner | Remove grate and screen. remove sediment/sludge build-up. |
| Check orifice diameter correct and retains sharp edge. | Six monthly | Owner | Remove blockages from grate and check if pit blocked. |
| Inspect screen and clean. | Six monthly | Owner | Remove debris and floatable material likely to be carried to grates. |
| Check attachment of orifice plate to wall of pit (gaps less than 5 mm). | Annually | Maintenance | Remove grate to inspect internal walls. repair as required, clear vegetation from external walls if necessary and repair as required. |
| Check attachment of screen to wall of pit. | Five yearly | Maintenance Contractor | Compare actual storage available with work-as executed plans. If volume loss is greater than 5%, arrange for reconstruction to replace the volume lost. Council to be notified of the proposal. |
| Check attachment of screen to wall of pit. | Five yearly | Maintenance Contractor | Check along drainage lines and at pits for subsidence likely to indicate leakages. |


| | ı | <u> </u> | <u> </u> | 1 |
|-----|----------|----------------------|----------|--|
| | | | | COPYRIGHT All rights reserved. |
| | | | | These drawings, plans and specific |
| В | 26.06.19 | REVISED RWT LOCATION | F.I. | the copyright are the property of E Studio and must not be used, repre- |
| Α | 21.06.19 | ISSUED FOR APPROVAL | F.I. | copied wholly or in part without the permission of Engineering Studio. |
| REV | DATE | DESCRIPTION | BY | pormosion or Engineering Olddio. |


Engineering Studio These drawings, plans and specifications and the copyright are the property of Engineering Studio and must not be used, reproduced or copied wholly or in part without the written Car. €MI & Shuctural


| | Postal Address |
|--------|--|
| com.au | PO Box 7191 BAULKHAM HILLS NSW 2153 |

| ALTERATIONS & ADDITIONS ALT 20 IDALINE STREET, COLLAROY PLATEAU FOR DISTINCT INNOVATIONS | JOB NUMBER: 19363 | DWG NUMBER: C00.01 | ORIGINAL SIZE: | |
|--|----------------------|-----------------------|----------------|--|
| | DESIGNED BY: F.I. | DATE: JUNE 2019 | | |
| GENERAL NOTES | DRAWN BY: F.I. | SCALE: N.T.S | | |

NOTE: DO NOT SCALE OFF DRAWINGS. REFER TO ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE

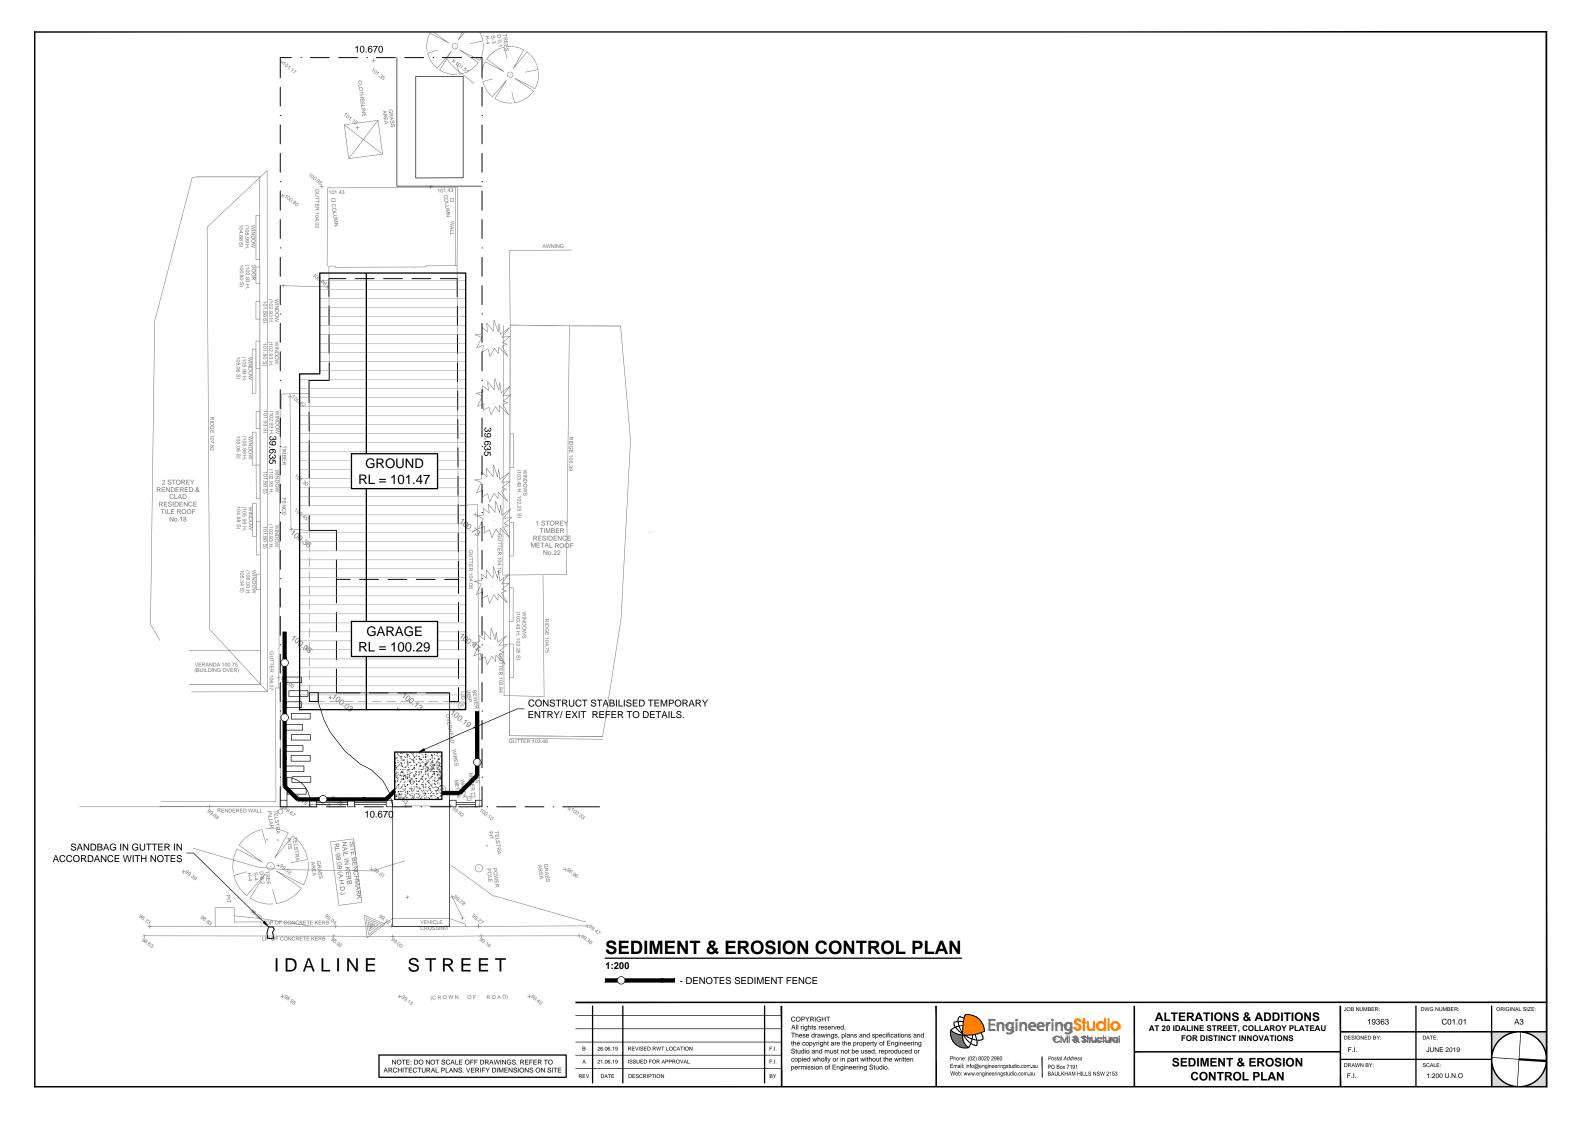

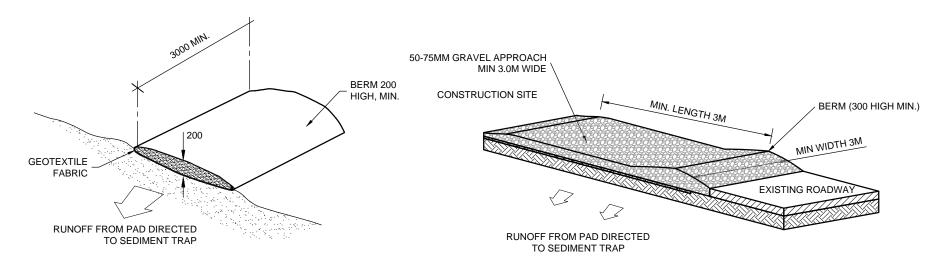

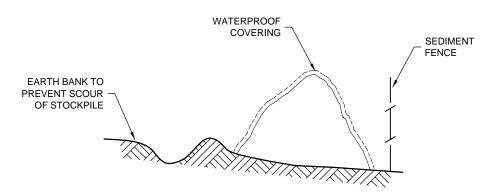

OPTION 1 - EXISTING DRIVEWAY TO REMAIN

OPTION 2 - DRIVEWAY TO BE RENEWED

VEHICLE ACCESS TO SITE

NTS


VEHICLE ACCESS TO THE BUILDING SITE SHOULD BE RESTRICTED TO A SINGLE POINT SO AS TO REDUCE THE AMOUNT OF SOIL DEPOSITED ON THE STREET PAVEMENT.

BUILDING MATERIAL STOCKPILES

N.T.S

ALL STOCKPILES OF BUILDING MATERIAL SUCH AS SAND AND SOIL MUST BE PROTECTED TO PREVENT SCOUR AND EROSION.

THEY SHOULD NEVER BE PLACED IN THE STREET GUTTER WHERE THEY WILL WASH AWAY WITH THE FIRST RAINSTORM.

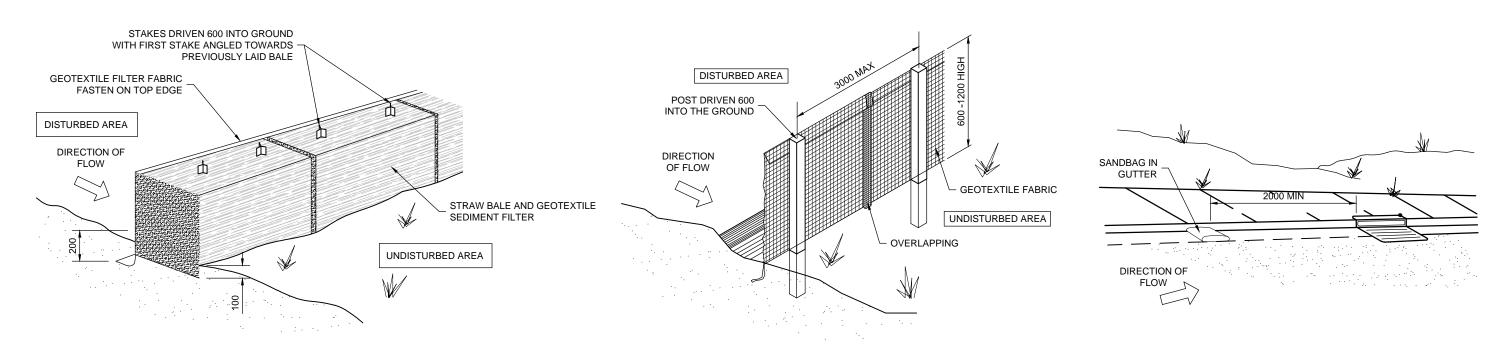

STRAW BALE DETAIL

SEDIMENT AND EROSION FENCE DETAIL N.T.S

SANDBAG KERB SEDIMENT TRAP

N.T.S


IN CERTAIN CIRCUMSTANCES EXTRA SEDIMENT TRAPPING MAY BE NEEDED IN THE STREET GUTTER.

| | | | | l 1 | ĺ |
|---|-----|----------|----------------------|------|---|
| | | | | | |
| | | | | | |
| | В | 26.06.19 | REVISED RWT LOCATION | F.I. | ĺ |
| OTE: DO NOT SCALE OFF DRAWINGS. REFER TO | Α | 21.06.19 | ISSUED FOR APPROVAL | F.I. | ĺ |
| HITECTURAL PLANS. VERIFY DIMENSIONS ON SITE | REV | DATE | DESCRIPTION | BY | l |

COPYRIGHT
All rights reserved.
These drawings, plans and specifications and the copyright are the property of Engineering Studio and must not be used, reproduced or copied wholly or in part without the written permission of Engineering Studio.

Phone: (02) 8020 2960
Email: info@engineeringstudio.com.au
Web: www.engineeringstudio.com.au
Postal Address
PO 802 7191
BAULKHAW HILLS

| ALTERATIONS & ADDITIONS | JOB NUMBER: 19363 | DWG NUMBER: C01.02 | ORIGINAL SIZE: |
|------------------------------------|----------------------|-----------------------|----------------|
| FOR DISTINCT INNOVATIONS | DESIGNED BY: F.I. | DATE: JUNE 2019 | |
| SEDIMENT & EROSION CONTROL DETAILS | DRAWN BY: F.I. | SCALE: 1:20 U.N.O | |

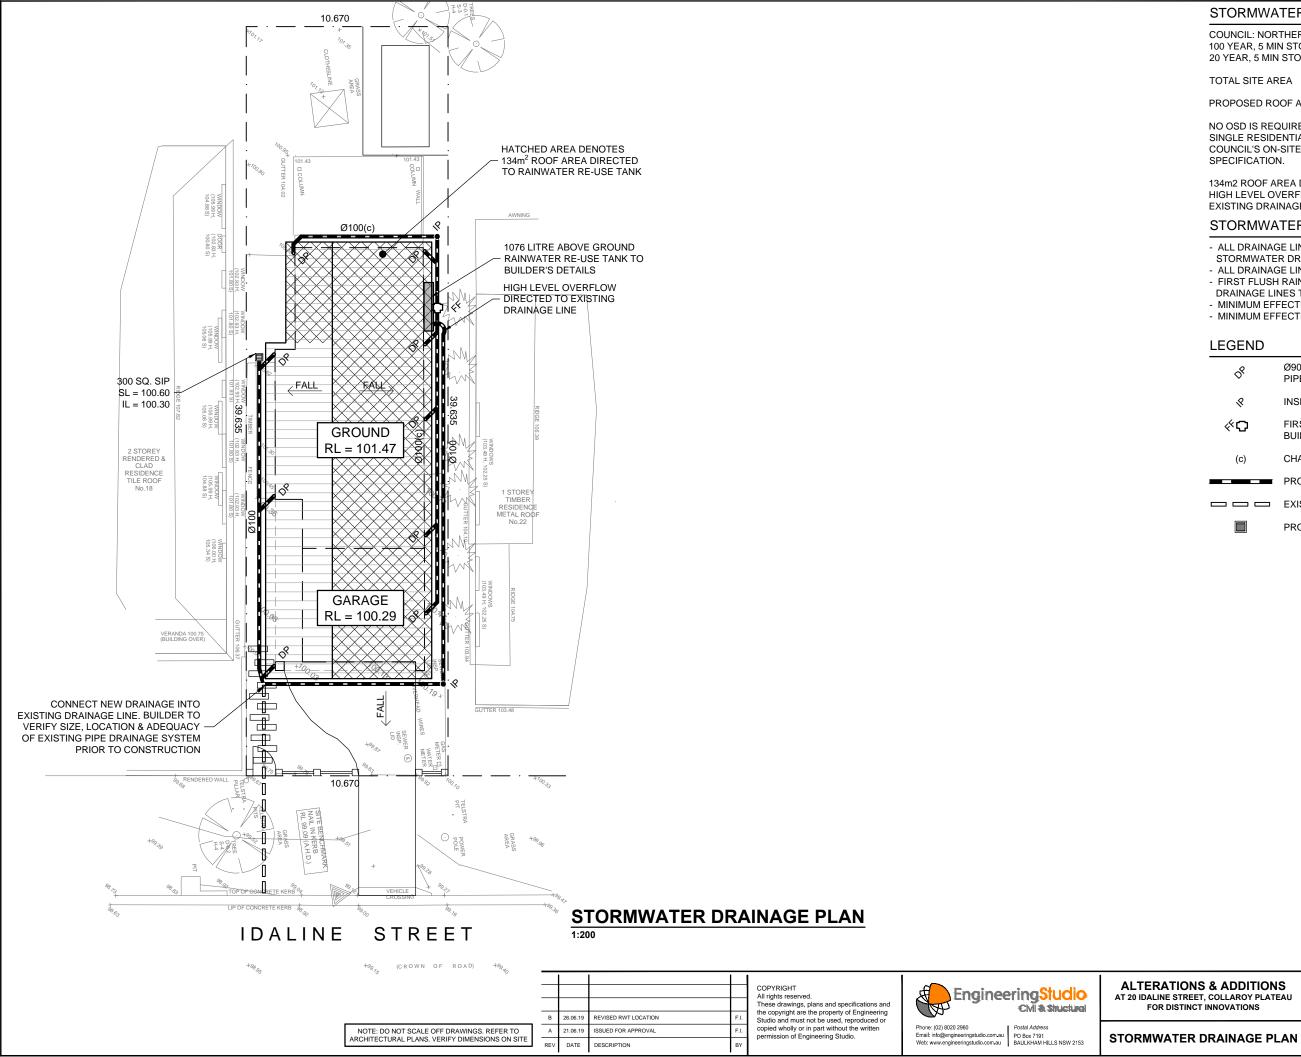

STORMWATER DESIGN SUMMARY

COUNCIL: NORTHERN BEACHES COUNCIL

100 YEAR, 5 MIN STORM = 266 mm/hr20 YEAR, 5 MIN STORM = 199 mm/hr

TOTAL SITE AREA $= 422.9 \text{ m}^2$

PROPOSED ROOF AREA $= 197.2 \text{ m}^2$

NO OSD IS REQUIRED FOR ALTERATIONS & ADDITIONS TO SINGLE RESIDENTIAL DWELLINGS IN ACCORDANCE WITH COUNCIL'S ON-SITE STORMWATER DETENTION TECHNICAL

134m2 ROOF AREA DIRECTED TO RAINWATER RE-USE TANK. HIGH LEVEL OVERFLOW DIRECTED TO KERB & GUTTER VIA EXISTING DRAINAGE LINE

STORMWATER DRAINAGE NOTES

- ALL DRAINAGE LINES SHALL BE uPVC (CLASS SH)
- STORMWATER DRAINAGE PIPE, U.N.O. - ALL DRAINAGE LINES SHALL BE LAID @ 1% FALL MIN, U.N.O.
- FIRST FLUSH RAINWATER DEVICES TO BE FITTED TO
- DRAINAGE LINES TO BUILDER'S DETAIL, TYPICAL
- MINIMUM EFFECTIVE EAVES GUTTER SLOPE = 1:500 U.N.O.
- MINIMUM EFFECTIVE EAVES GUTTER SIZE = 5800 mm²

LEGEND

Ø90 OR 100 x 50 RECTANGULAR DOWN d PIPE, U.N.O.

INSPECTION POINT

FIRST FLUSH RAINWATER DEVICE TO **BUILDERS DETAIL**


CHARGED PIPE


PROPOSED BELOW GROUND PIPELINE

PROPOSED SURFACE INLET PIT

AT 20 IDALINE STREET, COLLAROY PLATEAU FOR DISTINCT INNOVATIONS

JOB NUMBER OWG NUMBER 19363 C02.01 АЗ DESIGNED BY JUNE 2019 1:200 U.N.O

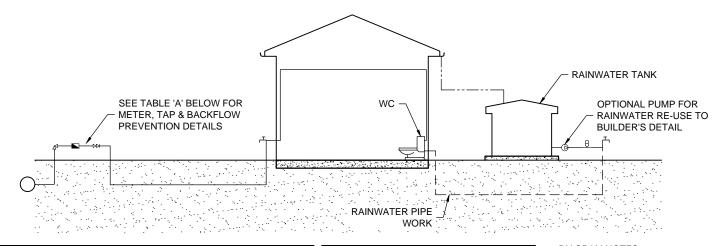


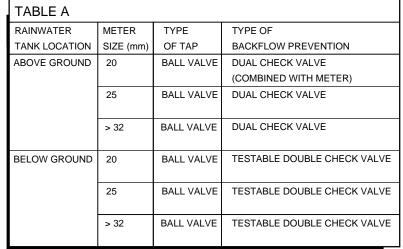

LEGEND PRESSURE VESSEL METER BALL VALVE RIGHT ANGLE TYPE DUAL CHECK VALVE ڼ PUMP **GARDEN TAP** DRINKING WATER SUPPLY PIPES — — RAINWATER SUPPLY PIPES --- DOWN PIPES


DIAGRAM NOTES:

- DRAWING TO BE READ IN CONJUNCTION WITH SYDNEY WATER PLUMBING REQUIREMENTS
- FOR TANKS 10,000 LITRES OR LESS, COUNCIL DEVELOPMENT CONSENT IS NOT REQUIRED, IF THEIR CONDITIONS FOR INSTALLATION ARE FOLLOWED.
- 3 FOR TANKS GREATER THAN 10,000 LITRES COUNCIL DEVELOPMENT CONSENT IS GENERALLY REQUIRED.
- 4 FOR TANKS MORE THAN 10,000 LITRES APPROVAL IS REQUIRED FOR BUILDING OVER SEWERS.
- SYDNEY WATER'S APPROVAL IS REQUIRED FOR ANY TOP UP FROM DRINKING WATER SUPPLY, REGARDLESS OF TANK SIZE. NO DIRECT CONNECTION IS ALLOWED BETWEEN THE DRINKING
- WATER SUPPLY AND THE RAINWATER TANK SUPPLY. RAINWATER PIPEWORK IS SHOWN ON THE DIAGRAM AS SUPPLYING INTERNAL AND EXTERNAL RAINWATER USES. CUSTOMERS MAY WANT ONE OR THE OTHER.
- 7 ANY DESIGNED ACCESS LID INTO RAINWATER RE-USE TANK IS TO HAVE A LOCKABLE LID. IF THE LID IS DESIGNED TO BE ACCESSED BY A MAINTENANCE PERSON, IT MUST BE AT LEAST 600 mm x 900 mm IN SIZE.

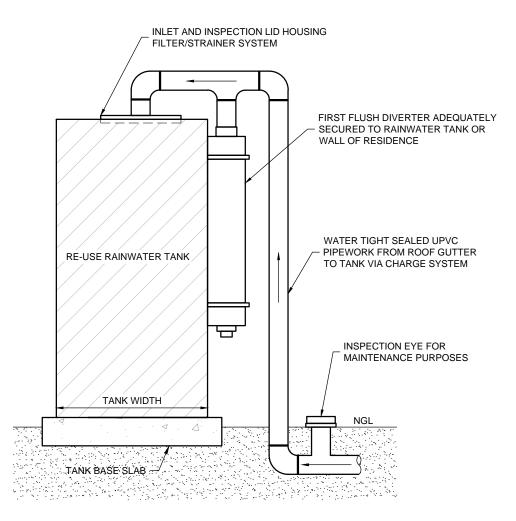


TYPICAL FIRST FLUSH DETAIL

DUAL DRINKING WATER & RAINWATER SUPPLY DIAGRAM

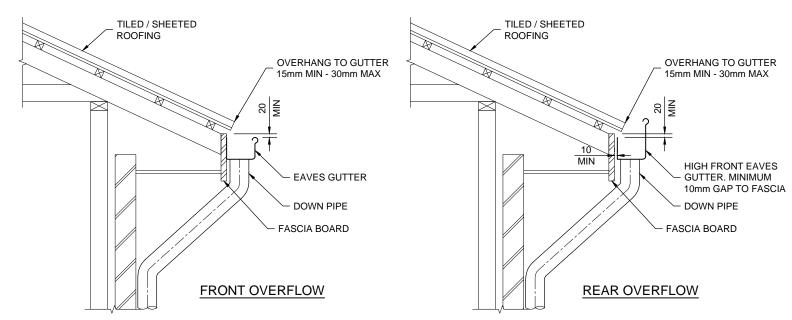

TYPICAL EAVES GUTTER DETAIL

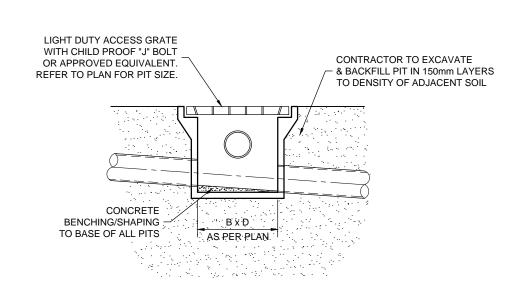

TYPICAL SURFACE INLET PIT DETAIL

| | 1 1 | | | | _ |
|--|-----|----------|----------------------|------|----------|
| | | | | | 1 |
| | | | | | 1 |
| | | | | |] |
| | В | 26.06.19 | REVISED RWT LOCATION | F.I. |] ; |
| NOTE: DO NOT SCALE OFF DRAWINGS. REFER TO | Α | 21.06.19 | ISSUED FOR APPROVAL | F.I. | <u>י</u> |
| ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE | REV | DATE | DESCRIPTION | BY | l |

COPYRIGHT COPYRIGHT
All rights reserved.
These drawings, plans and specifications and the copyright are the property of Engineering Studio and must not be used, reproduced or copied wholly or in part without the written permission of Engineering Studio. Phone: (02) 8020 2960

ALTERATIONS & ADDITIONS AT 20 IDALINE STREET, COLLAROY PLATEAU FOR DISTINCT INNOVATIONS STORMWATER DETAILS SHEET

| JOB NUMBER: 19363 | | DWG NUMBER: C02.02 | ORIGINAL SIZE: | | |
|-------------------|-------------------|-----------------------|----------------|---|--|
| | DESIGNED BY: F.I. | DATE: JUNE 2019 | | ١ | |
| T | DRAWN BY: F.I. | SCALE: 1:20 U.N.O | | | |