




1 Wastewater System Site Plan
1:400

- SRZ of Trees with High Retention Value
- SRZ of Trees with Medium Retention Value
- SRZ of Trees with Low Retention Value

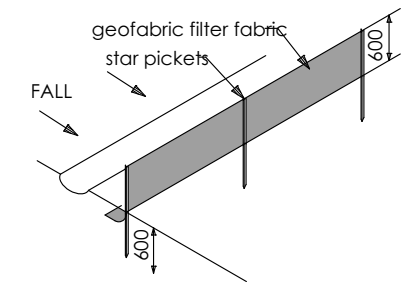

SEDIMENT CONTROL FENCE - TYPE 1
1.2m star pickets to be driven in a minimum of 600mm at a maximum of 1800mm centres.
Self-supporting geotextile fabric to be securely fastened to the upslope side of each picket with tie wires and turned upslope in a trench at least 200mm deep.
void joints in the filter fabric if possible but if necessary, joints are to be made at a support post with a minimum of 150mm overlap of fabric, securely stitched together with both ends fixed to the post.
Backfill the trench over the toe of the fabric.
Inspect for any sagging, undercutting or overtopping after rain and repair as necessary.

