

J2379. 6th September, 2019. Page 1.

GEOTECHNICAL INVESTIGATION:

New Pool and Decks at 135 Seaforth Crescent, Seaforth

1. Proposed Development

- 1.1 Construct a new suspend pool and decks on the downhill side of the house.
- 1.2 Details of the proposed development are shown on 3 drawings prepared by Urban Escape, drawings labelled LA101, Revision A, elevation drawings dated 1/08/19 and Landscape concept plan 26/08/19.

2. Site Description

- **2.1** The site was inspected on the 5th September, 2019.
- This residential property is on the low side of the road and has a NW aspect. The block is located on the steeply graded middle reaches of a hillslope. From the road frontage, the natural surface falls at an average angle of ~33° to the downhill side of the house. The slope below the property continues at steep angles. The slope above the property continues at steep angles before easing as it reaches the crest of the hill.
- 2.3 At the road frontage, a concrete driveway runs to a suspended carport on the uphill side of the property (Photo 1). A timber and steel stair case runs downslope from the carport to the house (Photo 2). Outcropping sandstone was observed across the entire site. The three storey timber framed and clad house continues downslope. The house is partially suspended and is supported by steel beams and concrete footings on sandstone (Photo 3). All visible footings showed no signs of movement and are considered stable. An inclined lift runs along the S boundary and rough sandstone block set of stairs along the E side of the property (Photo 4). A ~3.0m high sloped and jointed sandstone rock face extends downslope of the house (Photo 5). The rock face is considered stable. The footprint of the suspended pool will fall over this portion of the slope. A timber stair case has been cut into the sandstone rock face



J2379.

6th September, 2019.

Page 2.

and provides access to narrow lawn covered terraces. Sandstone stack rock retaining

walls founded on outcropping sandstone have been used to support the fills that form

these terraces. The retaining walls range in height from 0.4m to 2.0m and are

considered stable (Photo 6). Where terraces don't exist the slope is covered in native

and exotic shrubs and trees. The steep slope continues to the downhill property

boundary.

3. Geology

The Sydney 1:100 000 Geological sheet indicates the site is underlain by Hawkesbury

Sandstone. It is described as a medium to coarse grained quartz sandstone with very minor

shale and laminite lenses.

4. Subsurface Investigation

One auger hole was put down to identify the soil materials. Four Dynamic Cone Penetrometer

(DCP) tests were put down to determine the relative density of the overlying soil and the

depth to bedrock. The locations of the tests are shown on the site plan. It should be noted

that a level of caution should be applied when interpreting DCP test results. The test will not

pass through hard buried objects so in some instances it can be difficult to determine whether

refusal has occurred on an obstruction in the profile or on the natural rock surface. This is not

expected to be an issue for the testing on this site and the results are as follows:

AUGER HOLE 1 (~RL33.8) – AH1 (Photo 7)

Depth (m)

Material Encountered

0.0 to 1.0

Sandy Soil, brown, medium grained with sandstone fragments

Refusal @ 1.0m grinding on rock. No watertable encountered.



J2379. 6th September, 2019. Page 3.

DCP TEST RESULTS – Dynamic Cone Penetrometer				
Equipment: 9kg hammer, 510mm drop, conical tip.			Standard: AS1289.6.3.2 - 1997	
Depth(m)	DCP 1	DCP 2	DCP 3	DCP 4
Blows/0.3m	(~RL34.2)	(~RL33.8)	(~RL32.1)	(~RL29.2)
0.0 to 0.3	4F	3	1	5
0.3 to 0.6	6	3	6	5
0.6 to 0.9	6	8	9	20
0.9 to 1.2	11	11	#	#
1.2 to 1.5	14	22		
1.5 to 1.8	21	#		
1.8 to 2.1	33			
2.1 to 2.4	6			
2.4 to 2.7	#			
	Refusal on Rock @ 2.1m	Refusal on Rock @ 1.5m	Refusal on Rock @ 0.75m	Refusal on Rock @ 0.9m

#refusal/end of test. F = DCP fell after being struck showing little resistance through all or part of the interval.

DCP Notes:

DCP1 – Refusal on rock @ 2.1m, DCP bouncing off rock surface, white to maroon impact dust on dry tip.

DCP2 – Refusal on rock @ 1.5m, DCP bouncing off rock surface, clean dry tip.

DCP3 – Refusal on rock @ 0.75m, DCP bouncing off rock surface, white impact dust on dry tip.

DCP4 – Refusal on rock @ 0.9m, DCP bouncing off rock surface, white to orange fragments on dry tip.

5. Geological Observations/Interpretation

The surface features of the block are controlled by the outcropping and underlying sandstone bedrock that steps down the property forming sub-horizontal benches between the steps. Where the grade is steeper, the steps are larger and the benches narrower. Where the slope eases, the opposite is true. Where the rock is not exposed, it is overlain by sandy soils over sandy clays that fill the bench step formation. In the test locations the depth to rock ranged between 0.0 to 2.1m below the current surface, being variable due to the jointed and blocky



J2379. 6th September, 2019. Page 4.

nature of the top layer or bedrock. The outcropping sandstone on the property is estimated to be Medium Strength or better and similar strength rock is expected to underlie the entire site. See Type Section attached for a diagrammatical representation of the expected ground materials.

6. Groundwater

Normal ground water seepage is expected to move over the buried surface of the rock and through the cracks. Due to the slope and elevation of the block, the water table is expected to be many metres below the base of the proposed excavation.

7. Surface Water

No evidence of significant surface flows were observed on the property during the inspection. Normal sheet wash from the slope above will be intercepted by the street drainage system for Seaforth Cres above.

8. Geotechnical Hazards and Risk Analysis

No geotechnical hazards were observed above, below, or beside the property. The steeply graded land surface that falls across the property is a potential hazard (Hazard One).

Risk Analysis Summary

HAZARDS	Hazard One		
ТҮРЕ	The steep slope that falls across the property and continues above and below failing and impacting on the property.		
LIKELIHOOD	'Unlikely' (10 ⁻⁴)		
CONSEQUENCES TO PROPERTY	'Medium' (20%)		
RISK TO PROPERTY	'Low' (2 x 10 ⁻⁵)		
RISK TO LIFE	8.3 x 10 ⁻⁷ /annum		
COMMENTS	'ACCEPTABLE' level of risk to life & property when the recommendation in Section 13 & 14 are followed.		

(See Aust. Geomech. Jnl. Mar 2007 Vol. 42 No 1, for full explanation of terms)



J2379. 6th September, 2019.

Page 5.

9. Suitability of the Proposed Development for the Site

The proposed development is suitable for the site. No geotechnical hazards will be created by

the completion of the proposed development provided it is carried out in accordance with

the requirements of this report and good engineering and building practice.

10. Stormwater

All stormwater or drainage runoff from the proposed covered deck are to be piped into

properties the existing stormwater system.

11. Excavations

Only excavations for footings will be required.

12. Foundations

Due to the rocky surface it is recommended when the footing locations are marked out the

geotechnical consultant be on site to determine if the rock below the proposed pier is suitable

to support the pool. Footing depth is expected to be variable on this site with the ground

testing indicating a range from 0.0 to 2.1m below the surface. Piered foundations are to be

socketed at least 0.3m into rock. Where suitable sloping rock is exposed at the surface level

pads are to be cut into the rock for the foundation surface.

Piers supported directly off Medium Strength Sandstone are suitable footings for the

proposed pool and decks. This ground material is expected to be partially exposed at the

surface under the footprint of the pool and decks. On this location a maximum allowable

bearing pressure of 600kPa can be assumed for footings on Medium Strength Sandstone.

Naturally occurring vertical cracks (known as joints) commonly occur in sandstone. These are

generally filled with soil and are the natural seepage paths through the rock. They can extend

to depths of several metres and are usually relatively narrow but can range between 0.1 to

0.8m wide. If a footing falls over a joint in the rock, the construction process is simplified if,



J2379.

6th September, 2019.

Page 6.

with the approval of the structural engineer, the joint can be spanned or, alternatively, the

footing can be repositioned so it does not fall over the joint.

NOTE: If the contractor is unsure of the footing material required, it is more cost-effective to

get the geotechnical consultant on site at the start of the footing excavation to advise on

footing depth and material. This mostly prevents unnecessary over-excavation in clay-like

shaly rock but can be valuable in all types of geology.

13. Inspections

The client and builder are to familiarise themselves with the following required inspections

as well as council geotechnical policy. We cannot provide geotechnical certification for the

owners or the regulating authorities if the following inspections have not been carried out

during the construction process.

• When the pier locations are initially marked out on site the geotechnical consultant is

to assess the surface rock and advise if it is suitable to support the point loads from

the proposed pool.

• All footings are to be inspected and approved by the geotechnical consultant while

the excavation equipment is still onsite and before steel reinforcing is placed or

concrete is poured.

White Geotechnical Group Pty Ltd.

Feelect

Ben White M.Sc. Geol., AuslMM., CP GEOL.

No. 222757

Engineering Geologist.



J2379. 6th September, 2019. Page 7.



Photo 1

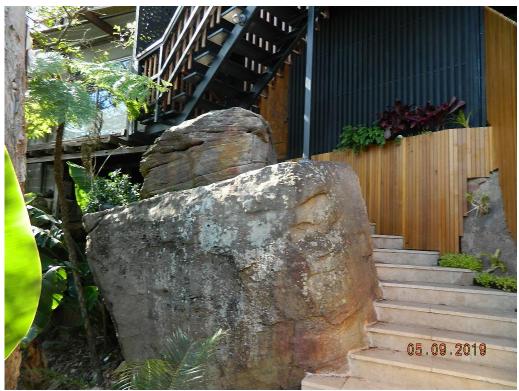


Photo 2



J2379. 6th September, 2019. Page 8.



Photo 3



Photo 4



J2379. 6th September, 2019. Page 9.

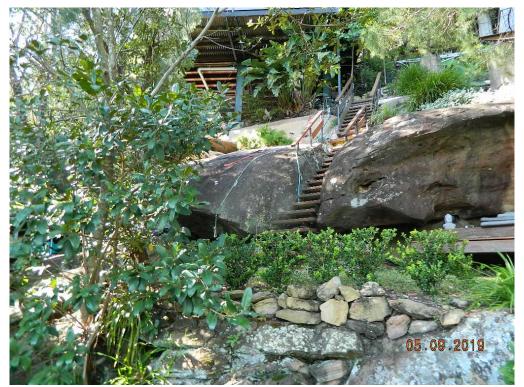


Photo 5



Photo 6



J2379. 6th September, 2019. Page 10.



Photo 7 – AH1




J2379. 6th September, 2019. Page 11.

Important Information about Your Report


It should be noted that Geotechnical Reports are documents that build a picture of the subsurface conditions from the observation of surface features and testing carried out at specific points on the site. The spacing and location of the test points can be limited by the location of existing structures on the site or by budget and time constraints of the client. Additionally, the test themselves, although chosen for their suitability for the particular project, have their own limiting factors. The testing gives accurate information at the location of the test, within the confines of the test's capability. A geological interpretation or model is developed by joining these test points using all available data and drawing on previous experience of the geotechnical consultant. Even the most experienced practitioners cannot determine every possible feature or change that may lie below the earth. All of the subsurface features can only be known when they are revealed by excavation. As such, a Geotechnical report can be considered an interpretive document. It is based on factual data but also on opinion and judgement that comes with a level of uncertainty. This information is provided to help explain the nature and limitations of your report.

With this in mind, the following points are to be noted:

- If upon the commencement of the works the subsurface ground or ground water conditions prove
 different from those described in this report, it is advisable to contact White Geotechnical Group
 immediately, as problems relating to the ground works phase of construction are far easier and
 less costly to overcome if they are addressed early.
- If this report is used by other professionals during the design or construction process, any questions should be directed to White Geotechnical Group as only we understand the full methodology behind the report's conclusions.
- The report addresses issues relating to your specific design and site. If the proposed project design changes, aspects of the report may no longer apply. Contact White Geotechnical if this occurs.
- This report should not be applied to any other project other than that outlined in section 1.0.
- This report is to be read in full and should not have sections removed or included in other documents as this can result in misinterpretation of the data by others.
- It is common for the design and construction process to be adapted as it progresses (sometimes to suit the previous experience of the contractors involved). If alternative design and construction processes are required to those described in this report, contact White Geotechnical Group. We are familiar with a variety of techniques to reduce risk and can advise if your proposed methods are suitable for the site conditions.

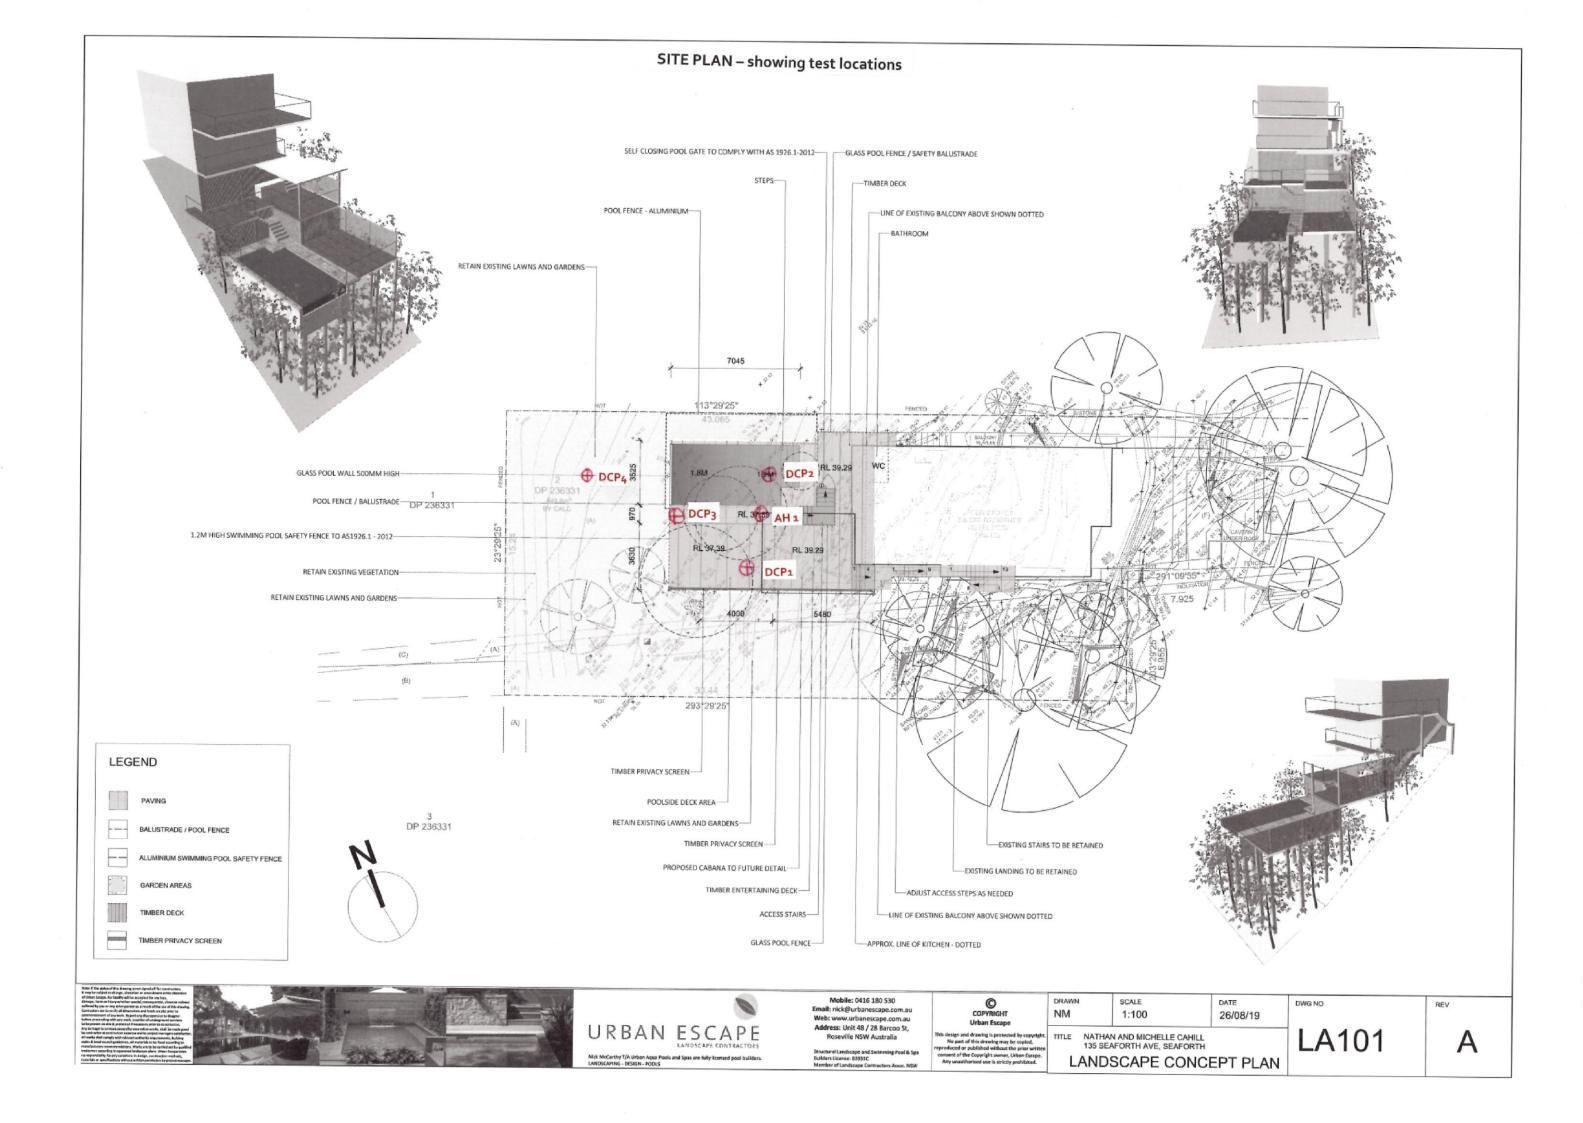

TYPE SECTION – Diagrammatical Interpretation of expected Ground Materials

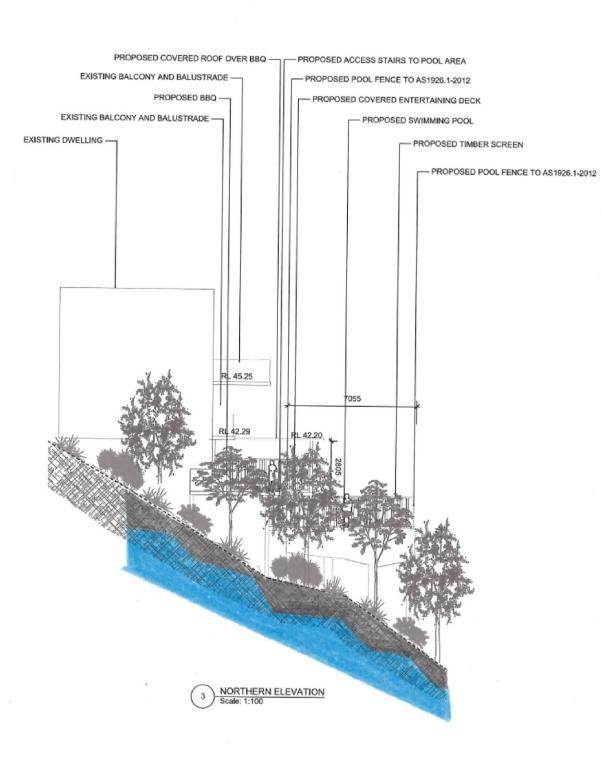

Fill Sandy Soil Sandy Clay Hawkesbury Sandstone – Medium Strength





Mobile: 0416 180 530 Emall: nick@urbanescape.com.au Web: www.urbanescape.com.au Address: Unit 48 / 28 8arcoo St, Roseville NSW Australia




SCALE 1:100

01/08/19

TITLE NATHAN AND MICHELLE CAHILL 135 SEAFORTH AVE, SEAFORTH **ELEVATIONS**

LA101

EXAMPLES OF GOOD HILLSIDE PRACTICE

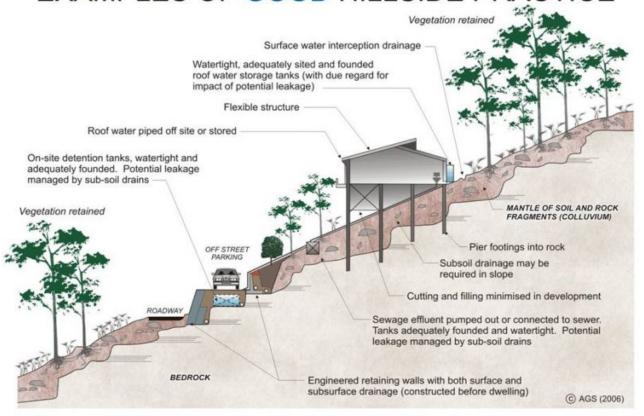

EXAMPLES OF POOR HILLSIDE PRACTICE

