

Notes:

Levels shown are approx. and should be verified on site

Figured dimensions are to be taken in preference to scaling

All measurements are in mm unless otherwise stated

Window sizes are nominal only. Final window sizes by builder

Dimensions are to be verified on site by builder before commencement of work Centre line of downpipes to be 350mm from corner of face brickwork (unless specified on elevation)

Refer to the builders project specification for inclusions Construction to be in accordance with the Relevant BCA/NCC and other relevant Australian standards

All service positions, air conditioning droppers, outlets, return air grills, manholes and bulkheads to be determined on site by supervisor

10. Termite protection to Australian standards

Brick sill to be greater than 18'

. Refer to Basix page for energy requirements . 20mm tolerance to be allowed for frames that are built to the low side of the slab

. All upstairs windows with a sill height less than 1700mm to have a max opening width of 125mm or fitted with a screen with secure fittings to comply with BCA

15. Final AJ's to engineers specifications 16. Plus or minus 200mm to floor level

Copyright to plans remains at all times with Abeaut design t/a Accurate Design and Drafting.

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN 3. TRAFFIC MANAGEMENT

THIS INCLUDES (but is not limited): OWNER, BUILDER, SUBCONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTAINERS, DEMOLISHERS.

1 FALLS, SLIPS, TRIPS

a) WORKING AT HEIGHTS DURING CONSTRUCTION

Wherever possible, components for this building should be prefabricated off-site or at ground level to minimize the risk of workers falling more than two meters. However, construction of this building will require workers to be working at heights where a fall in excess of two meters is possible and injury is likely to result from such a fall. The builder should provide such a barrier wherever a person is required to work in a situation where

DURING OPERATION OR MAINTENANCE

DURING OPERATION OR MAINTENANCE

For houses or other low-rise buildings when scaffolding is appropriate:

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two meters is possible. Where this type of activity is required scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation.

Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be in situations where a fall from a height in excess of two meters is possible. Where this type of activity is required, scaffolding fall barriers or Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislations.

FLOVE FINISHES Specified
If finishes have been specified by the designer these have been selected to minimize the risk of floors and
paved areas becoming slippery when wet or when walked on with wet shoes/feet. Any changes to
The specified finished should be made in consultation with the designer, or if this is not practical, surfaces
with an equivalent or better slip resistance should be chosen.

areas where maintenance is routinely carned out to ensure that suraces have no move or cracked so that they become uneven and present at high bazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from says and Contractors should be required to maintain a tild, work slie during construction, maintenance or demoitilion to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be sorted in designated areas away from access ways and work areas.

LOOSE MATERIALS OR SMALL OBJECTS

Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above foor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the works is being carried out onto persons below.

1. Prevent or restrict access to areas below where the works is being carried out.
2. Provide is boards to assaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area.

Ensure that all persons below the work area have Personal Protective Equipment (PPE)

During construction, renovation or demolition of this building, parts of the structure including fabricated steelwork, heavy panels and many other components will remain standing prior to or after the support parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times to avoid a collapse, which may injure persons in the area.

Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

For building on a major, narrow or steeply sloping road:
Parking of vehicles or leadinglunloading of vehicles on this roadway may cause a traffic hazard. During construction,
maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained
traffic management personnel should be responsible for the supervision of these areas.
For building where on-site loading furnioading is restricted:
Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be planned to
a great or specific or supervise loading from the properties of the supervise loading/unloading
areas.

For an ununning.

Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site.

7. CONFINED SPACES A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

used. Locations with underground power lines:
Underground power lines MAY be located near or on this site. These pose a risk of electrocution if struck or approached by litting devices or other plant and persons working above ground level. Where there is a danger of this occurring power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by a mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass. All material packaging, building and maintenance components should be required to limit the total mass of packages and where practical all items should be sorted on site in a way which minimizes bending before lifting. Advice should be provided about unsafe lifting methods in areas where lifting methods for Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturers request are used to pursue tools and equipment. I hese should be fully maintained in accordance with manufacturers specifications and not used when faulty or (in the case of electrical equipment) not carnying a current electrical safety tags. All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in an accordance with the manufacturer's soedification.

ASBESTOS
For alterations to a building constructed prior to:
*^^^ - It therefore may contain asbestos

considering considerations, operations materialise in centralised in termination strong entire took vertilisation and wear Personal active Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting therwise disturbing or creating powdered material.

TREATED IMBGE.

The design of this building may include provision for the inclusion of treated timber within the structure. Dust or furnes from this material can be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including profection against inhalation of harmful materials when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

NON-TILE UNDANNIC LOWN-UUNDIS

Man typed of glue, solvents, spray back, paints, vanishes, and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE

Amendments

IMBEAR FLOURS
This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendation for use must be carefully considered at all times.

Construction of this building and some maintenance of the building will require excavation and installation of items within excavation. Where practical, installation should be carried out using methods which do not require workers to enter the excavations. Where this is not practical, adequate support for the excavated are should be provided to prevent a collapse Warning signs and barriers to prevent accidental or unauthorized access to all excavations should be provided.

Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorized access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secure when not gully supervised.

9. OPERATIONAL USE OF BUILDING RESIDENTIAL BUIDLINGS

This building has been designed as a residential building. If it, at a later date, is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the name use.

10. OTHER HIGH RISK ACTIVITY

All electrical work should be carried out in accordance with the Code of Practice:
Managing Electrical Risks at the Workplace, ASINZ 3012 and all illocationsing requirements.
All work using Plant should be carried out in accordance with the Code of Practice:
Managing Risks of Plant at the Workplace.
All work should be carried out in accordance with the Code of Practice: Managing Risks of Plant at the Workplace.
All work should be carried out in accordance with the Code of Practice: Managing Noise and Preventing Hearing Loss at Work. Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement



THIS PLAN IS TO BE READ IN **CONJUNCTION WITH** THE CONDITIONS OF DEVELOPMENT CONSENT

DA2021/2174

Amenaments					
	Changes	Date	Signed/Requested Date Requested	Drawing Number	
Sketch		19-04-21	S.G.	21096	
Amendme	nts	26-04-21	A.L.	21096-1	
Levels		30-04-21	BS	21096-2	
Survey		28-06-21	AL	21096-3	
Preliminar	y Plans	26-07-21	SG	21096-4	
Estimating	Mark ups	27-07-21	SG	21096-5	
Variation 1		11-8-21	SG	21096-6	
Submissio	n Plans + Amendments	27-8-21	AL	21096-7	
Variations	3 + Markups	24-9-21	AL	21096-8	
Facade		30-9-21	BS	21096-10	
Variation 4		11-10-21	AL	21096-11	
	Sketch Amendme Levels Survey Preliminary Estimating Variation 1 Submission Variations Facade	Changes Sketch Amendments Levels Survey Preliminary Plans Estimating Mark ups Variation 1 Submission Plans + Amendments Variations 3 + Markups	Changes Date Sketch 19-04-21 Amendments 26-04-21 Levels 30-04-21 Survey 28-06-21 Preliminary Plans 26-07-21 Estimating Mark ups 27-07-21 Variation 1 11-8-21 Submission Plans + Amendments 27-8-21 Variations 3 + Markups 24-9-21 Facade 30-9-21	Changes Date Signed/Requested Date Requested Date Requested Sketch 19-04-21 S.G. Amendments 26-04-21 A.L. Levels 30-04-21 BS Survey 28-06-21 AL Preliminary Plans 26-07-21 SG Estimating Mark ups 27-07-21 SG Variation 1 11-8-21 SG Submission Plans + Amendments 27-8-21 AL Variations 3 + Markups 24-9-21 AL Facade 30-9-21 BS	


Sheet Number Sheet Name 01 Perspective View 02 Cover Page 03 Ground Floor Plan 04 Upper Floor Plan 05 Front & Rear Elevations 06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details 14 Basix		
02 Cover Page 03 Ground Floor Plan 04 Upper Floor Plan 05 Front & Rear Elevations 06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	Sheet Number	Sheet Name
03 Ground Floor Plan 04 Upper Floor Plan 05 Front & Rear Elevations 06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	01	Perspective View
04 Upper Floor Plan 05 Front & Rear Elevations 06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	02	Cover Page
05 Front & Rear Elevations 06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	03	Ground Floor Plan
06 Side Elevations 07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	04	Upper Floor Plan
07 Section & Details 08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	05	Front & Rear Elevations
08 Site Plan 09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	06	Side Elevations
09 Landscape Plan 10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	07	Section & Details
10 Shadow Diagrams 21st June 11 Electrical Plan 12 Slab Detail 13 Wet Area Details	08	Site Plan
11 Electrical Plan 12 Slab Detail 13 Wet Area Details	09	Landscape Plan
12 Slab Detail 13 Wet Area Details	10	Shadow Diagrams 21st June
13 Wet Area Details	11	Electrical Plan
100000000000000000000000000000000000000	12	Slab Detail
14 Basix	13	Wet Area Details
	14	Basix

ISSUE: DRAWING: 21096-11 SHEET: 2/14

Proposed Residence #71 Lorikeet Grove, Warriewood





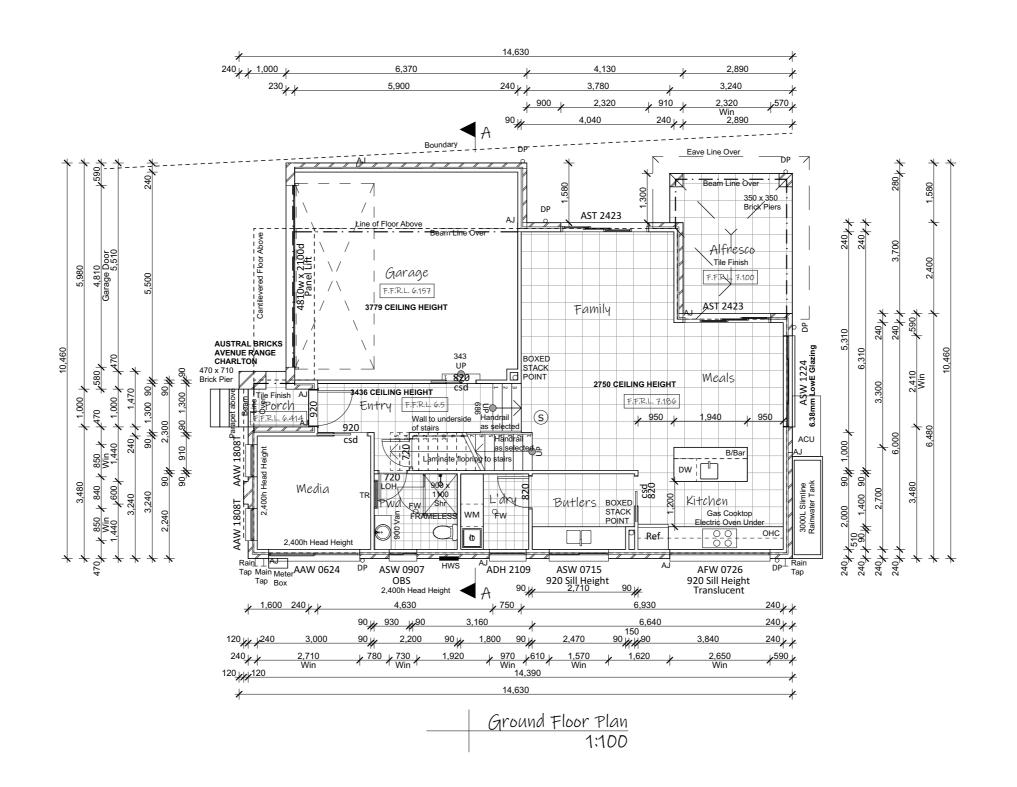



THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/2174

<u>Legend:</u>

ACU - Air Conditioning Unit AJ - Articulation Joint B/Bar - Breakfast Bar DP - Downpipe DW - Dishwasher

Ens - Ensuite
F/P - Fire Place
FW - Floor Waste
HWS - Hot Water Syst

L - Linen LC - Laundry Chute LOH - Lift off Hinge LT - Laundry Tub MH - Manhole MW - Microwave Oven it OBS - Obscure OHC - Over Head Cupboard P - Pantry

OHC - Over Head Cupboar P - Pantry R - Robe RHS - Rolled Hollow Steel

S - Smoke Alarm
Shr - Shower
TR - Towel Rail
Van - Vanity
w.i.l. - Walk in Linen

w.i.l. - Walk in Linen w.i.r. - Walk in Robe w.i.p. - Walk in Pantry w.c. - Wash Closet WM - Washing Machine

ISSUE: DRAWING:

note: all works to be carried out in conj with the construction notes on sheet 2

Lower Living

Porch

Balcony

Alfresco

Garage

Upper Living

Floor Area (m2)

88.74

2.18

6.42

11.15

36.24

107.54

252.27 m²


DRAWING: DATE:
21096-11 11-10-21
SHEET: PAPER:
3/14 A3

LOT: 2 DP: 270907







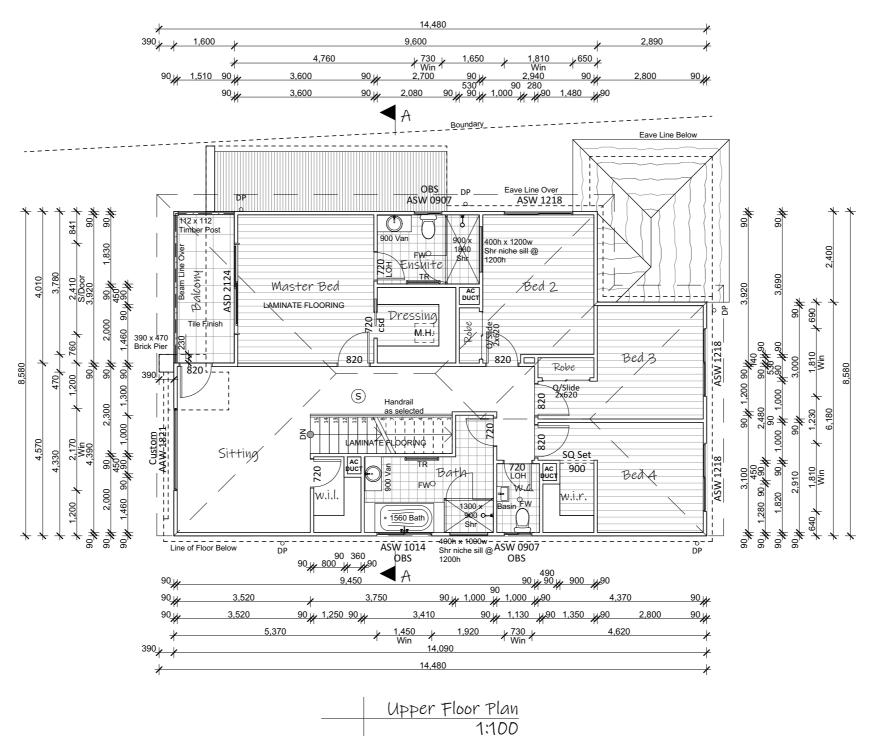



Legend:

ACÚ - Air Conditioning Unit AJ - Articulation Joint B/Bar - Breakfast Bar DP - Downpipe DW - Dishwasher

Ens - Ensuite F/P - Fire Place FW - Floor Waste HWS - Hot Water Syst

L - Linen LC - Laundry Chute LC - Laundry Chute
LOH - Lift off Hinge
LT - Laundry Tub
MH - Manhole
MW - Microwave Oven OBS - Obscure OHC - Over Head Cupboard P - Pantry
R - Robe
RHS - Rolled Hollow Steel

S - Smoke Alarm Shr - Shower TR - Towel Rail Van - Vanity w.i.l. - Walk in Linen w.i.r. - Walk in Robe

w.i.p. - Walk in Pantry w.c. - Wash Closet WM - Washing Machine

Floor Area (m2) Lower Living 88.74 Porch 2.18 Balcony 6.42 Alfresco 11.15 36.24 Garage 107.54 Upper Living 252.27 m²

ISSUE: DRAWING: 21096-11 SHEET:

note: all works to be carried out in conj with the construction notes on sheet 2

4/14

DATE: 11-10-21 PAPER: A3

LOT: 2 270907

Proposed Residence #71 Lorikeet Grove, Warriewood







Legend: ACU - Air Conditioning Unit ACU - Air Conditioning Ur AJ - Articulation Joint CL - Ceiling Level FGL - Finish Ground Line FL - Floor Level HWS - Hot Water System NGL - Natural Ground Line OBS - Obscure DP - Downpipe RW - Retaining Wall

Provide Secondary Feature Render to the Front Facade

Austral Bricks The Avenue Rane, Charlton to Porch feature pier. 4300mm height

Weathergroove 600mm cladding to first floor

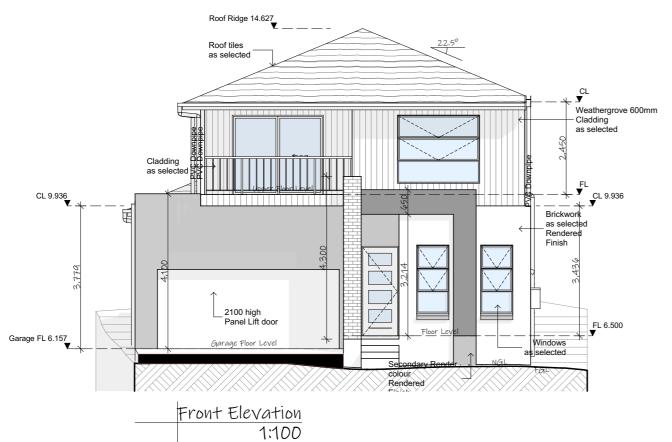

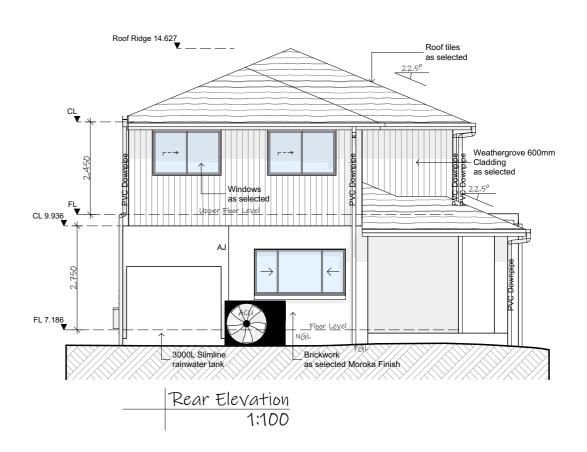



note: all works to be carried out in conj with the construction notes on sheet 2


Artisan (ICON HOMES



Legend: ACU - Air Conditioning Unit

ACU - Air Conditioning Un AJ - Articulation Joint CL - Ceiling Level FGL - Finish Ground Line FL - Floor Level HWS - Hot Water System

NGL - Natural Ground Line OBS - Obscure DP - Downpipe RW - Retaining Wall

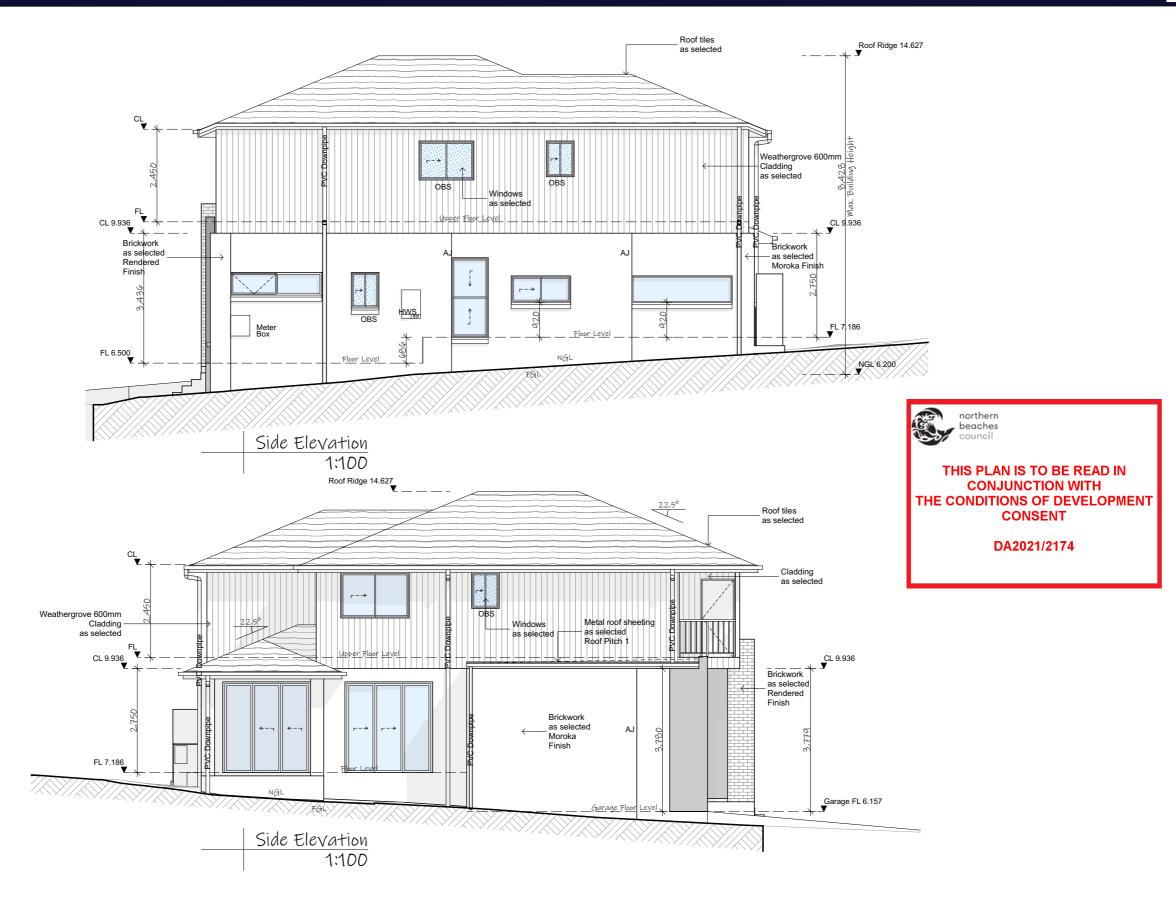



note: all works to be carried out in conjugith the construction notes on sheet 2




Legend: ACU - Air Conditioning Unit

AJ - Articulation Joint
CL - Ceiling Level
FGL - Finish Ground Line FL - Floor Level HWS - Hot Water System NGL - Natural Ground Line OBS - Obscure
DP - Downpipe
RW - Retaining Wall

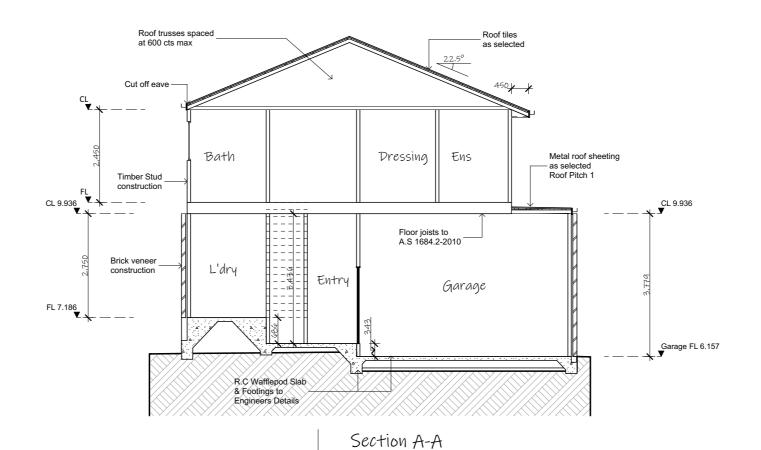

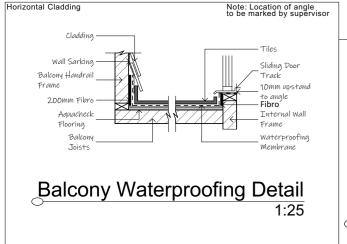






1:100




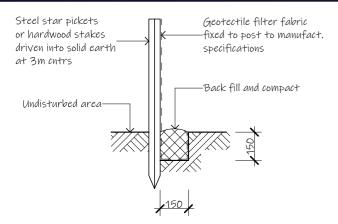


Soil Erosion and Sediment Control Fence
1. Siltation fencing is to be placed as shown on the site plan as so to prevent silt run off to any ajoining property or to the street. This measure is to be placed prior to any excavation work beggining and is to be removed only when the sites surface as been stabalized, i.e. paved, landscaped or turfed 2. 40mm crushed rock aggregate is to be placed as an access driveway to the site and must be maintained throughout the course of construction.

Typical Silt Fence 1:20



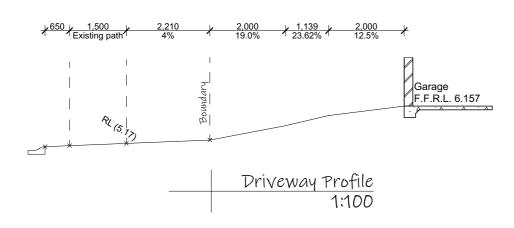

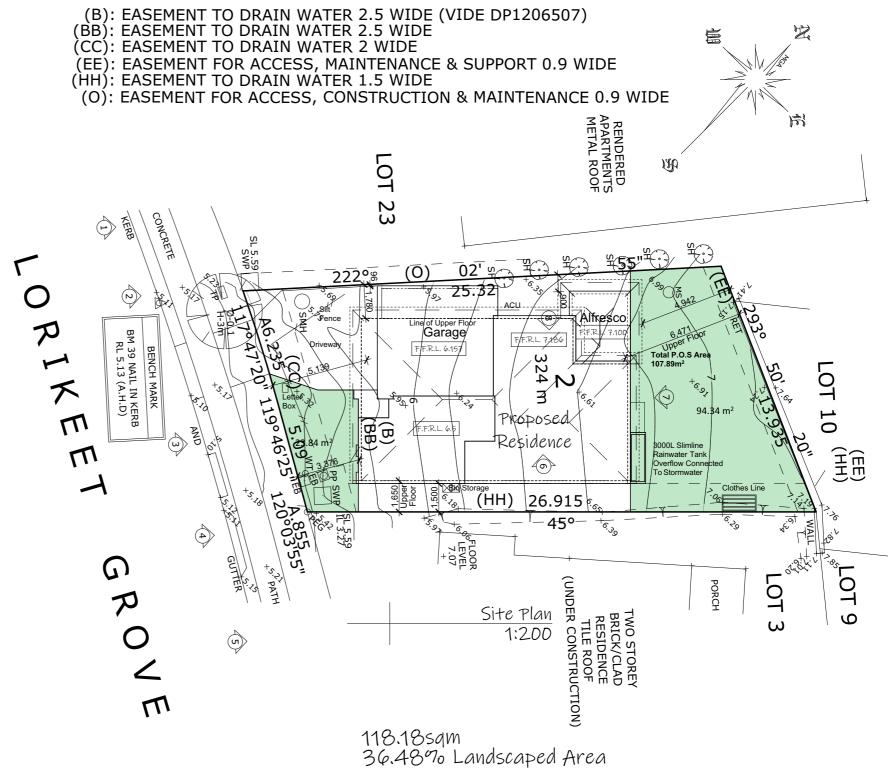

note: all works to be carried out in conju with the construction notes on sheet 2




(B): EASEMENT TO DRAIN WATER 2.5 WIDE (VIDE DP1206507) (BB): EASEMENT TO DRAIN WATER 2.5 WIDE


(CC): EASEMENT TO DRAIN WATER 2 WIDE


(EE): EASEMENT FOR ACCESS, MAINTENANCE & SUPPORT 0.9 WIDE

(HH): EASEMENT TO DRAIN WATER 1.5 WIDE

(O): EASEMENT FOR ACCESS, CONSTRUCTION & MAINTENANCE 0.9 WIDE



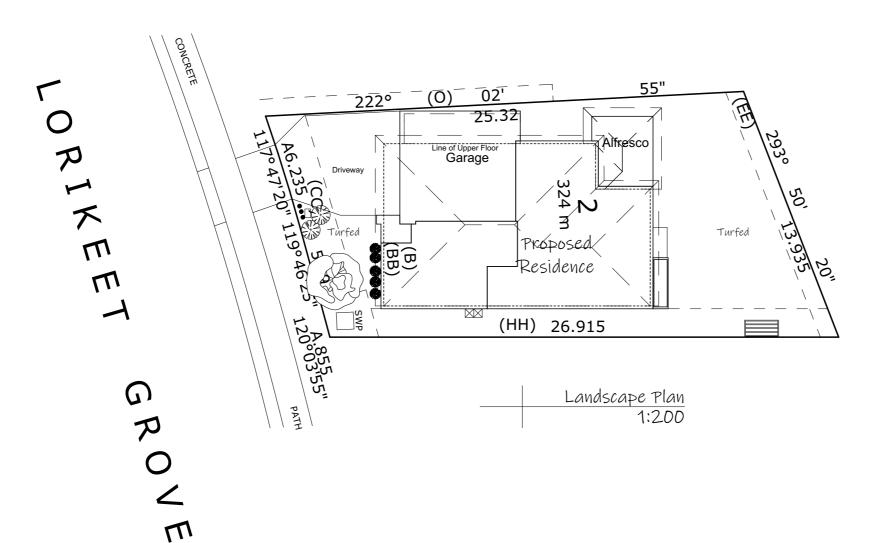

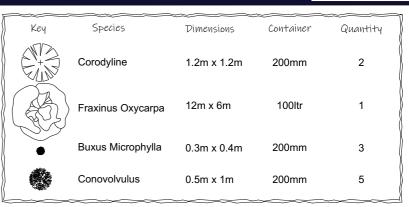

NOTES:

* All plants to be planted in premium garden mix and slow release fertilizer

* Gardens to be mulched with Eucalyptus Mulch

* Plants are to be maintained for 6 months or until established

* Any losses are to be replaced







Description	Symbol	Qty	Notes	Description	Symbol	Qty	Notes	Description	Symbol	Qty	Notes
Light Point	0	-		T.V Point	TV	-				-	
Pendant Light	\otimes	-		Exhaust Fan	*	- 1				-	
Wall Light Point	<u></u>	-		2 in 1	\oplus	-				-	
Downlight		-		3 in 1	\otimes	-				-	
Spotlight	W	-		Door Chime	_	-				-	
Small Up/Down Light	-0-	-		Smoke Alarm	<u>(S)</u>	-				-	
20W Flouro		-		Ceiling Fan	8	-				-	
Dimmer Switch	0	-		Ceiling Fan/Light		-				-	
Light Switch	•	-		Sensor Light	0	-				-	
Single G.P.O	A	-		Phone Point	PH	-				-	
Double G.P.O	M	-		Gas Point	GAS	-				-	
Ext. Single G.P.O		-		Data Point	DATA	-				-	
Ext. Double G.P.O		-		Alarm Pad	AP	-				-	



THIS PLAN IS TO BE READ IN **CONJUNCTION WITH** THE CONDITIONS OF DEVELOPMENT CONSENT

DA2021/2174

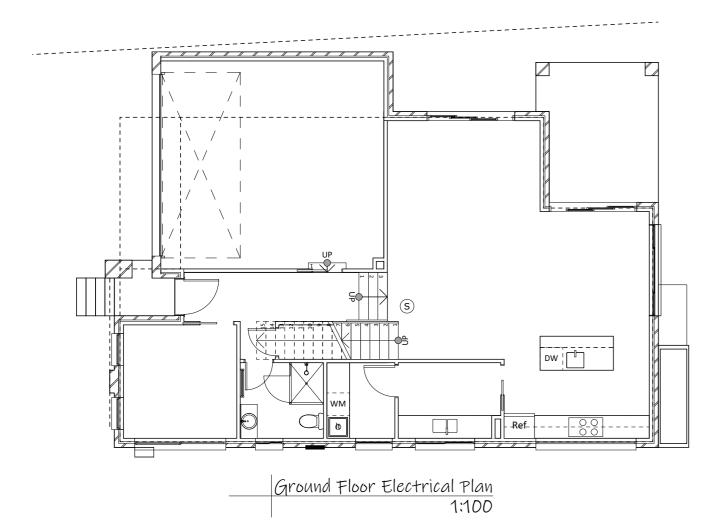

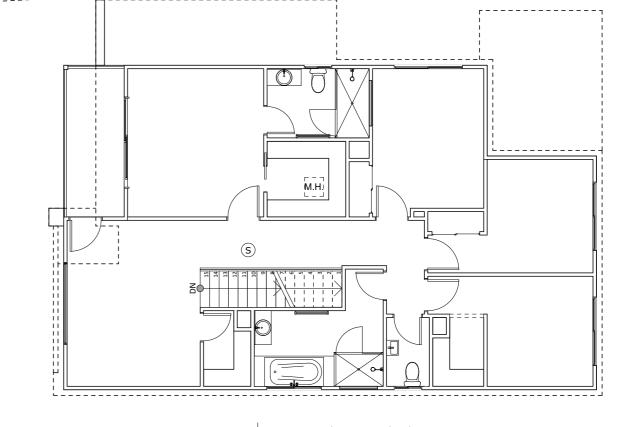


Upper Electrical Plan 1:100

note: all works to be carried out in conj with the construction notes on sheet 2



Note:

Frames built to the low side of the slab, allow 20mm tolerance

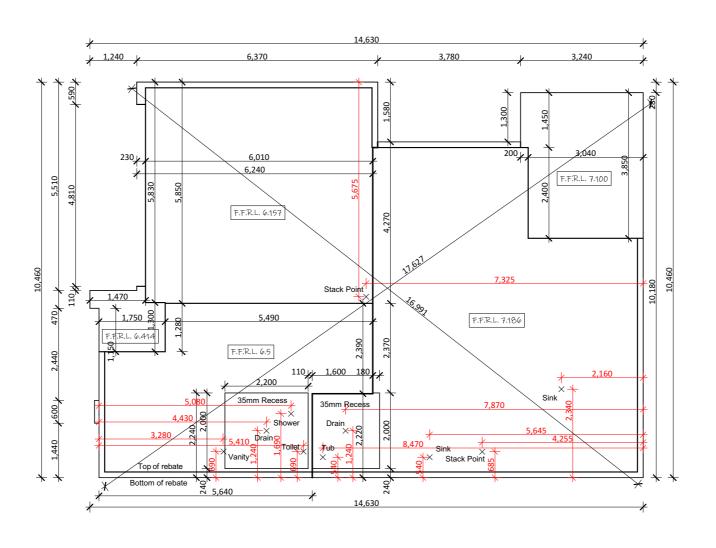



Slab Detail 1:100

note: all works to be carried out in conjugith the construction notes on sheet 2

21096-11

SHEET:

note: all works to be carried out in conju with the construction notes on sheet 2

13/14

11-10-21


PAPER:

A3

2

270907



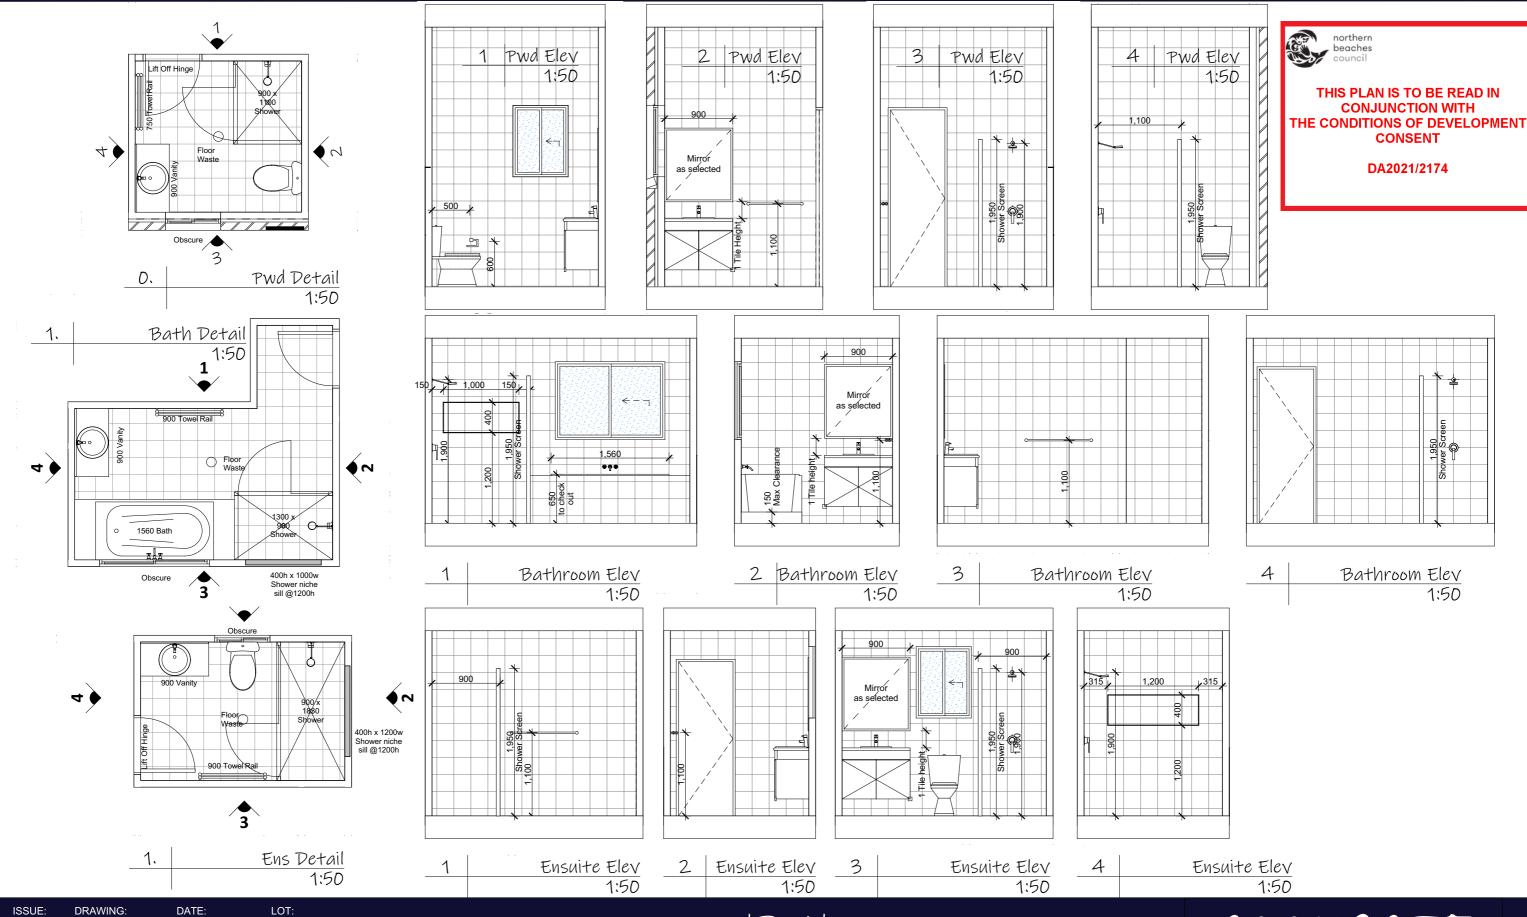



BASIX Certificate

Building Sustainability Index www basis new go

Single Dwelling

Certificate number: 1235538S (

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments have the meaning given by the document entitled "PASIX Definitions" datedd 10/09/2020 published by the Department. This document is available at www.basix.nsw.gov.au

Secretary
Date of issue: Monday, 11 October 2021
To be valid, this certificate must be lodged within 3 months of the date of issue.



Project summary	
Project name	21096 - 71 Lorikeet Grove, Warriewood_02
Street address	71 Lorikeet Grove Warriewood 2102
Local Government Area	Northern Beaches Council
Plan type and plan number	deposited 270907
Lot no.	2
Section no.	-
Project type	separate dwelling house
No. of bedrooms	4
Project score	
Water	✓ 41 Target 40
Thermal Comfort	✓ Pass Target Pass
Energy	✓ 51 Target 50

Certificate Prepared by
Name / Company Name: Abeaut Design Pty Ltd t/a Accurate Design and Draf
ABN (if applicable): 66116356551

IX Plannina, Industry & Environment www.basix.nsw.gov.au Version: 3.0 / DARWINIA 3 18 5 Certificate No.: 1235538\$ 02 Monday, 11 October 2021 sage

Project address		Assessor details and thermal le	oads	
Project name	21096 - 71 Lorikeet Grove, Warriewood_02	Assessor number	n/a	
Street address	71 Lorikeet Grove Warriewood 2102	Certificate number	n/a	
ocal Government Area	Northern Beaches Council	Climate zone	n/a	
Plan type and plan number	Deposited Plan 270907	Area adjusted cooling load (MJ/m².year)	n/a	
Lot no.	2	Area adjusted heating load (MJ/m².year)	n/a	
Section no.	-	Ceiling fan in at least one bedroom	n/a	
Project type		Ceiling fan in at least one living room or other conditioned area	n/a	
Project type	separate dwelling house	Project score		
No. of bedrooms	4			
Site details		Water	✓ 41	Target 40
Site area (m²)	324	Thermal Comfort	✓ Pass	Target Pass
Roof area (m²)	154		•	
Conditioned floor area (m2)	151.0	Energy	✓ 51	Target 50
Unconditioned floor area (m2)	18.0			
Total area of garden and lawn (m2)	118			

Vater Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifi check
ixtures			
he applicant must install showerheads with a minimum rating of 3 star (> 7.5 but <= 9 L/min) in all showers in the development.			
he applicant must install a toilet flushing system with a minimum rating of 3 star in each toilet in the development.		~	-
he applicant must install taps with a minimum rating of 3 star in the kitchen in the development.		~	
he applicant must install basin taps with a minimum rating of 3 star in each bathroom in the development.		_	
Alternative water			
tainwater tank			
he applicant must install a rainwater tank of at least 3000 litres on the site. This rainwater tank must meet, and be installed in coordance with, the requirements of all applicable regulatory authorities.	~	~	-
he applicant must configure the rainwater tank to collect rain runoff from at least 75 square metres of the roof area of the developmen excluding the area of the roof which drains to any stormwater tank or private dam).	t	~	-
he applicant must connect the rainwater tank to:			
all tollets in the development		~	-
		~	-
the cold water tap that supplies each clothes washer in the development at least one outdoor tap in the development (Note: NSW Health does not recommend that rainwater be used for human			

Thermal Comfort Commitments			ow on plans	Show on CC/CDC plans & specs	Certifie
General features					
The dwelling must not have more than 2 storeys.			J		
The conditioned floor area of the dwelling must not exceed	300 square metres.		J		J
The dwelling must not contain open mezzanine area exceed		V	•	-	
The dwelling must not contain third level habitable attic roor		V	~	-	
Floor, walls and ceiling/roof					
The applicant must construct the floor(s), walls, and ceiling/ below.	roof of the dwelling in accordance with the specifications li	sted in the table	~	~	-
Construction	Additional insulation required (R-Value)	Other specific	ations		
floor - concrete slab on ground, 80 square metres	nil				
floor - above habitable rooms or mezzanine, 75 square metres, framed	nil				
floor - suspended floor above garage, framed	nil				
external wall - brick veneer	1.86 (or 2.40 including construction)				
internal wall shared with garage - plasterboard	nil				
ceiling and roof - flat ceiling / pitched roof	ceiling: 4.5 (up), roof: foil/sarking	unventilated; m	nedium (s	iolar absorptance 0.475	5-0.70)
	alled in accordance with Part 3.12.1.1 of the Building Code with due consideration of condensation and associated with due consideration of condensation and associated with due consideration of condensation and associated with due to the condensation and due to the		ng buildin	g materials.	

Thermal Comfort Co	mmitments				Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Windows, glazed do	ors and skylight	s					
			evices described in the table below, in a ons must be satisfied for each window a		~	~	~
The dwelling may have 1 s	kylight (<0.7 square r	metres) which is not I	isted in the table.		~	~	~
The following requirements	must also be satisfie	ed in relation to each	window and glazed door:		~	~	~
For the following glass:	and frame types, the	certifier check can b	e performed by visual inspection.				
- Aluminium single cl	ear						'
- Aluminium double (a	air) clear						
- Timber/uPVC/fibreg	lass single clear						
- Timber/uPVC/fibreg	lass double (air) clea	r					
than that listed and a be calculated in accor table below are for ref	Solar Heat Gain Coel dance with National I erence only.	fficient (SHGC) within Fenestration Rating (ist be accompanied with certification shin the range of those listed. Total system Council (NFRC) conditions. Frame and of the conditions is the conditions.	n U values and SHGC must glass types shown in the			~
 Overshadowing building door, as specified in the 			stance from the centre and the base of	the window and glazed	~	~	~
Window/glazed door no.	Maximum height (mm)	Maximum width (mm)	Туре	Shading Device (Dimens 10%)	sion within	Overshadowing	
North-East facing							
Bed 3	1200	1800	aluminium, single, clear	eave 600 mm, 300 mm at of window or glazed door	ove head	not overshadowed	
Meals	1200	2400	U-value: 5.4, SHGC: 0.522 - 0.638 (aluminium, single, Hi-Tsol Low-e)	eave 600 mm, 300 mm ab of window or glazed door	ove head	not overshadowed	
Wedis							
Bed 4	1200	1800	aluminium, single, clear	eave 600 mm, 300 mm ab of window or glazed door	ove head	not overshadowed	
	1200	1800	aluminium, single, clear		ove head	not overshadowed	

Window/glazed door no.	Maximum height (mm)	Maximum width (mm)	Туре	Shading Device (Dimension within 10%)	Overshadowing
w.c.	900	700	aluminium, single, clear	none	not overshadowed
Bathroom	1000	1400	aluminium, single, clear	none	not overshadowed
Laundry	2100	900	aluminium, single, clear	none	not overshadowed
Media	600	2400	aluminium, single, clear	none	not overshadowed
Kitchen	700	2600	aluminium, single, clear	none	not overshadowed
Pwd	900	700	aluminium, single, clear	none	not overshadowed
South-West facing					
Media 2	1800	900	aluminium, single, clear	eave 600 mm, 300 mm above head of window or glazed door	not overshadowed
Sitting	1800	2100	U-value: 5.6, SHGC: 0.369 - 0.451 (aluminium, single, Lo-Tsol Low-e)	eave 600 mm, 300 mm above head of window or glazed door	not overshadowed
Balcony	2100	3200	U-value: 5.6, SHGC: 0.369 - 0.451 (aluminium, single, Lo-Tsol Low-e)	eave 2100 mm, 0 mm above head of window or glazed door	not overshadowed
Media 1	1800	900	aluminium, single, clear	eave 600 mm, 300 mm above head of window or glazed door	not overshadowed
North-West facing					
Bed 2	1200	1800	aluminium, single, clear	eave 600 mm, 300 mm above head of window or glazed door	not overshadowed
Meals	2400	2300	aluminium, single, clear	eave 4300 mm, 0 mm above head of window or glazed door	>4 m high, 2-5 m away
Ensuite	900	700	aluminium, single, clear	eave 600 mm, 300 mm above head of window or glazed door	not overshadowed
Family	2400	2300	U-value: 5.4, SHGC: 0.522 - 0.638 (aluminium, single, Hi-Tsol Low-e)	eave 600 mm, 300 mm above head of window or glazed door	>4 m high, 2-5 m away

Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifier check
Hot water			
The applicant must install the following hot water system in the development, or a system with a higher energy rating: gas instantaneous with a performance of 6 stars.	~	~	~
Cooling system			
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER 3.0 - 3.5		~	-
The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER 3.0 - 3.5		~	~
The cooling system must provide for day/night zoning between living areas and bedrooms.		~	~
Heating system			
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER 3.0 - 3.5		~	-
The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER 3.0 - 3.5		~	~
The heating system must provide for day/night zoning between living areas and bedrooms.		~	-
Ventilation			
The applicant must install the following exhaust systems in the development:			
At least 1 Bathroom: individual fan, ducted to façade or roof; Operation control: manual switch on/off		-	-
Kitchen: individual fan, ducted to façade or roof; Operation control: manual switch on/off		•	-
Laundry: individual fan, ducted to façade or roof; Operation control: manual switch on/off		•	-
Artificial lighting			
The applicant must ensure that the "primary type of artificial lighting" is fluorescent or light emitting diode (LED) lighting in each of the following rooms, and where the word "dedicated" appears, the fittings for those lights must only be capable of accepting fluorescent or light emitting doloe (LED) larges:			
at least 4 of the bedrooms / study;			

Energy Commitments	Show on DA plans	Show on CC/CDC plans & specs	Certifie check
at least 2 of the living / dining rooms;			_
the kitchen;			
all hallways;			
Natural lighting			
The applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting.			
The applicant must install a window and/or skylight in 4 bathroom(s)/toilet(s) in the development for natural lighting.	-	•	-
Other			
The applicant must install a gas cooktop & electric oven in the kitchen of the dwelling.		~	
The applicant must construct each refrigerator space in the development so that it is "well ventilated", as defined in the BASIX definitions.		~	
The applicant must install a fixed outdoor clothes drying line as part of the development.		J	



ISSUE: DRAWING:

21096-11

SHEET:

14/14

note: all works to be carried out in conju with the construction notes on sheet 2'

DATE: 11-10-21 PAPER: A3


LOT: 2 DP: 270907 Proposed Residence #71 Lorikeet Grove, Warriewood

Icon Job Number: J/XXXXX




info@accuratedesign.com.au
© abeaut designs t/a Accurate Design and Drafting 2021

Site Plan 1:100@A1 1:200@A3. Do not scale off plan

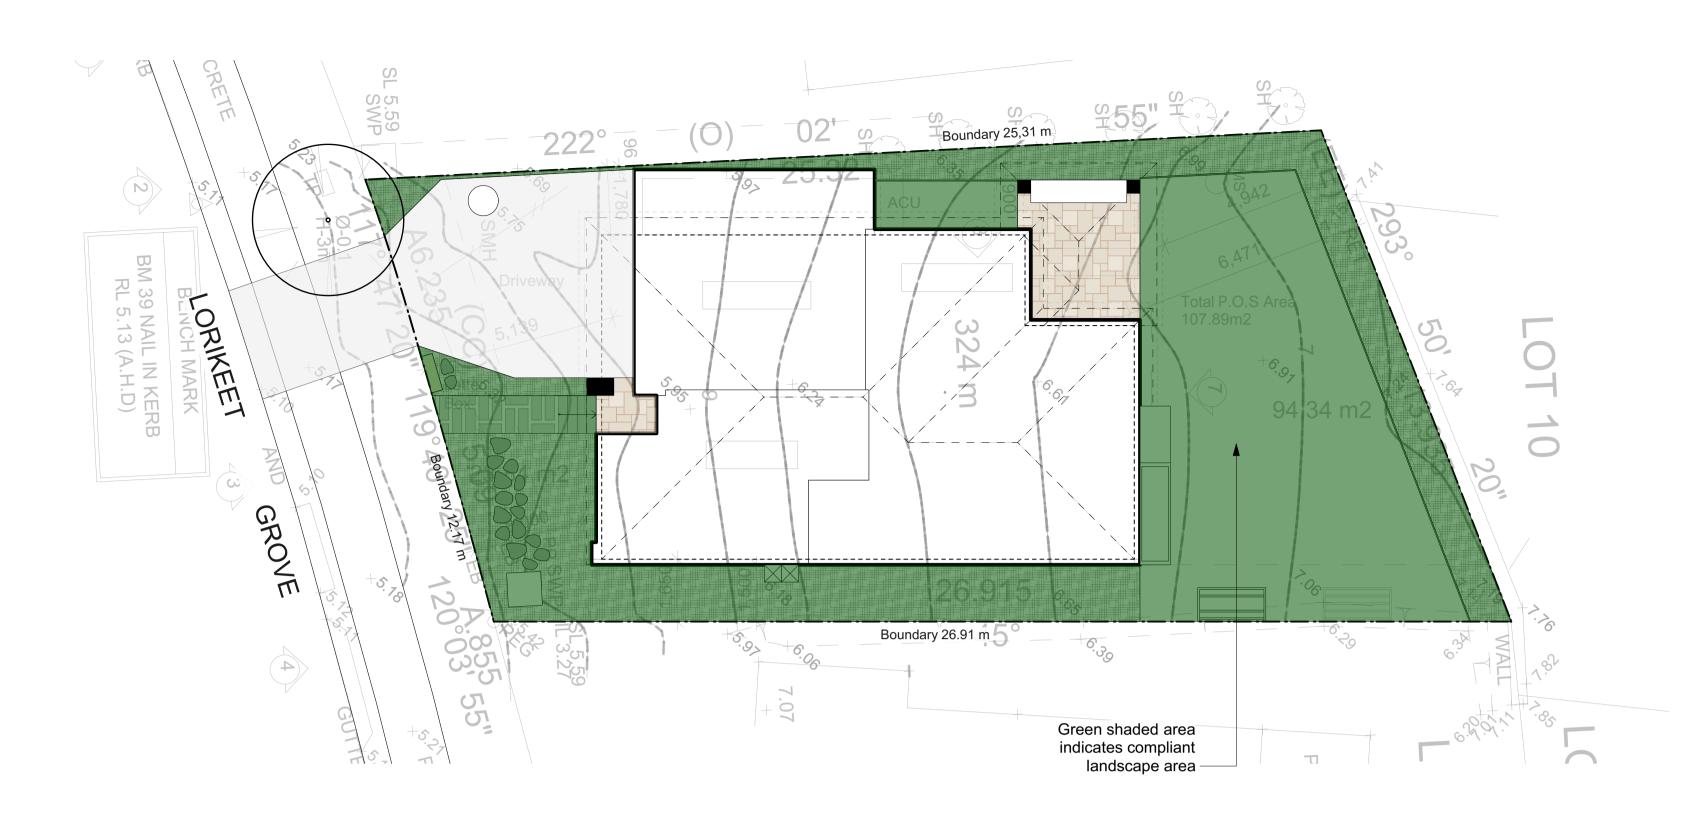



Planting Plan

1:100@A1 1:200@A3. Do not scale off plan

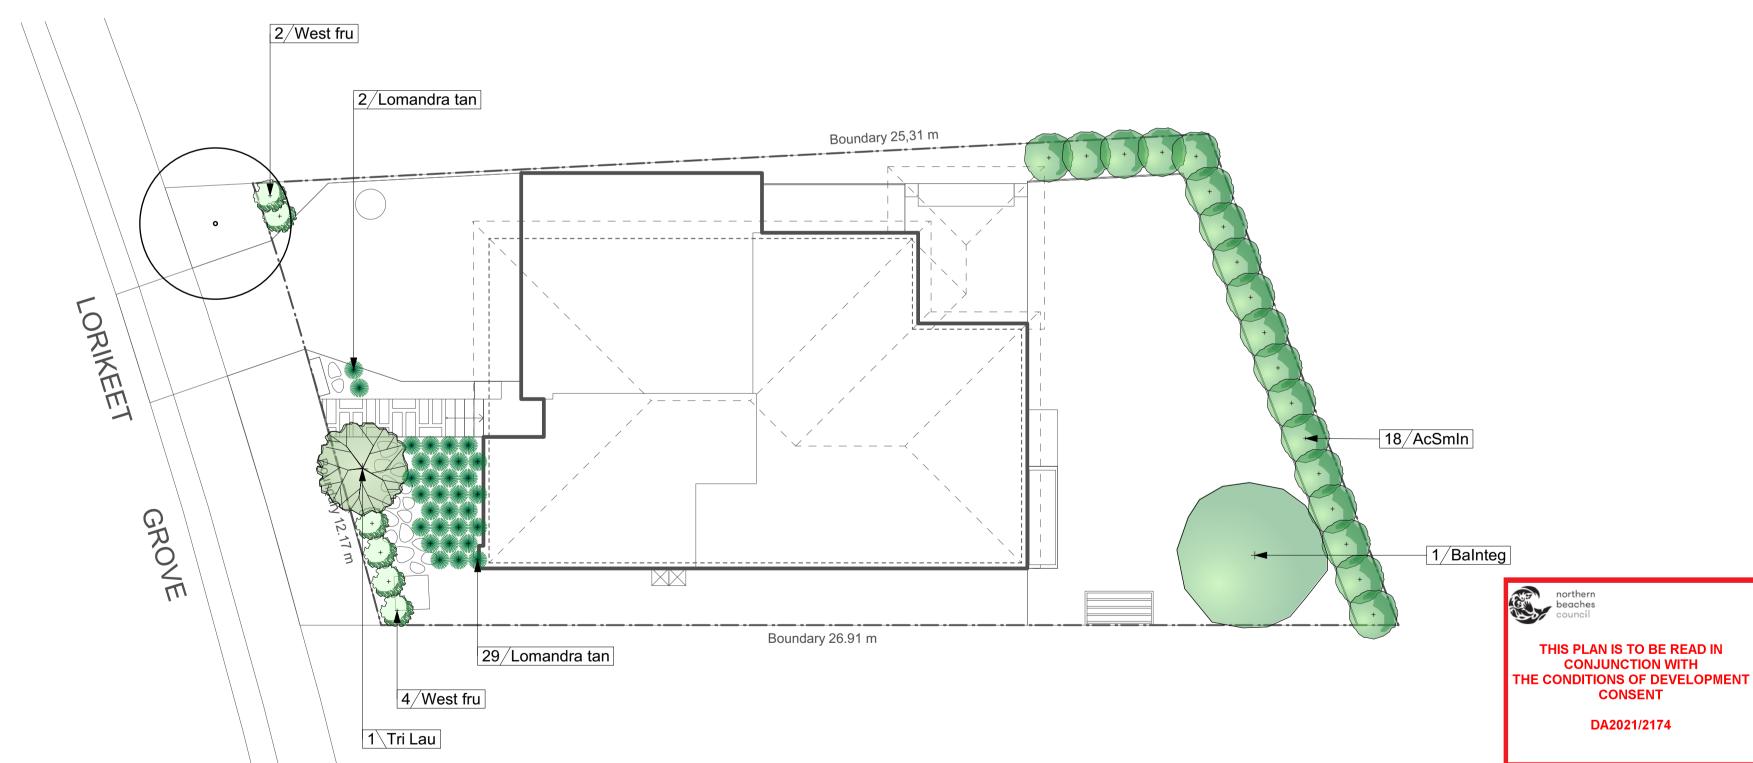

ID	Quantity	Latin Name	Common Name	Scheduled Size	Mature Height	Mature Spread
AcSmIn	18	Acmena smithii 'minor'	Lillypilly	200mm	3 - 5m	3.5m
Balnteg	1	Banksia integrifolia	Coastal Banksia	75lt	8 - 12m	3.5 - 6m
Lomandra tan	31	Lomandra longifolia 'Tanika'	Spiny-headed mat rush	150mm	0.45 - 0.6m	0.6 - 0.9m
Tri Lau	1	Tristaniopsis laurina 'Luscious'	Kanooka, Water Gum	75lt	12 - 15m	3.5 - 6m
West fru	6	Westringia fruticosa	Coastal Rosemary	150mm	0.9 - 1.5m	0.9 - 1.2m

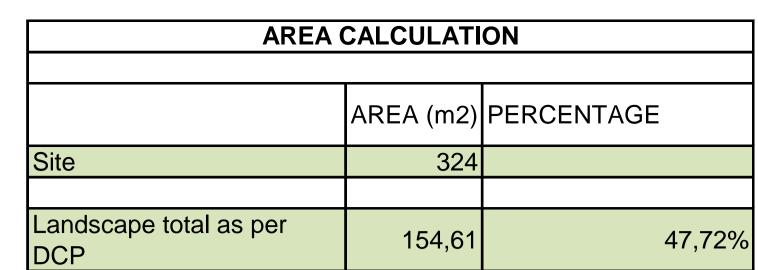

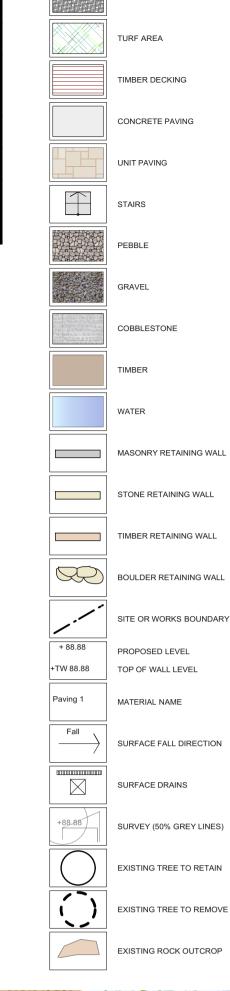


Legend









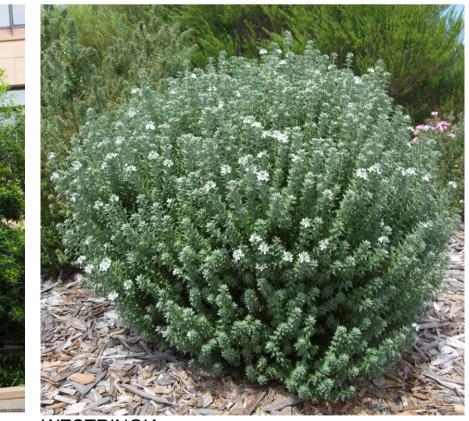

WESTRINGIA

Notes: >Do not scale off plan. >Contractors to check all measurements onsite before quoting or commencing work.
>If abnormalities arrise, contact the Lands



C 06/09/21 B 20/08/21 A 13/08/21		20/08/21	Issue C Issue B DRAFT issue for review.	Architect. >This desig reproduced	Architect. >This design is copyright and is not to be reproduced in anyway without writen consent o Jamie King Landscape Architect.		
ISSUE		DATE	REVISION				
PROJECT	71	Lorikee	t Grove, Warriewood			PROJECT # 2201	
CLIENT	Kutti pully					DWG#	
	Νu	tti pully		SCALE @ A1	See Plan	Sht-10	
DWG	N / c	otor Lor	dagana Dlan	DRAWN	RAR	Sill-10	
	IVIC	ister Lar	ndscape Plan	CHKD	JK	REVISION	
lomi	a Vi		oone Architect				

