Nationwide House Energy Rating Scheme* Certificate

Certificate number: 0003587227

Certificate Date: 05 Feb 2019

★ Star rating: 4.7



BERS Pro v4.3.0.0 (3.13) cannot be used to model 'roof windows'. Roof windows are 'openable or fixed windows in a roof' and do not have a shaft, as distinct from skylights which incorporate a built-in shaft and are not ventilated. BERS Pro v4.3 can only model skylights. If a roof window is present on the floor plan then this certificate is not valid

Assessor details

Accreditation number:	VIC/BDAV/12/1441
Name:	lan Fry
Organisation:	Frys Energywise
Email:	comply@frysenergywise.com.au
Phone:	02 9899 2825
Declaration of interest:	The Assessor has provided design advice to the Applicant
Software:	BERS Pro v4.3.0.2d (3.13)

BDAV AAO:

Overview

Dwelling details

Street:	Unit A, 14 Gladsto	ne Street	
Suburb:	Newport		
State:	NSW	Postcode:	2106
Type:	New Dwelling	NCC Class:	1 A
.)po.		NatHERS	
Lot/DP		climate zone:	56
number:	11/10548	Exposure:	Open

Key construction and insulation materials

(see following pages for details)

Construction:	Brick Veneer Corrugated Iron
Insulation:	Suspended AAC (75mm) R2.0 wall insulation
	R4.0 ceiling insulation R2.0 floor insulation
Glazing:	WID-012-04 A Aluminium Awning Window SG 4mmClr


Net floor area (m²)

Conditioned: Unconditioned:	138.0 53.0	performanc (MJ/m²)	e loads
Garage:	36.0	Heating:	47.2
TOTAL:	191.0	Cooling:	25.1
		TOTAL:	72.4

Annual thermal

Plan documents

Plan ref/date: J1317 Prepared by: IZ

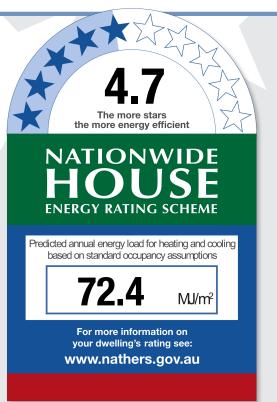

Ceiling penetration (see following pages for deta	s ma ails) pe	*NOTE: This total is the naximum number of ceiling enetrations allowed to a
Unsealed:	1 ce ex 0 thi 1 an Lo pe tal	eiling (under a roof) for this ertificate. If this number is xceded in construction then his certificate IS NOT VALID nd a new certificate is required oss of ceiling insulation for the enetrations listed has been aken into account with the rating.
Window selection - default windows only	v	Scan to access this certificate online and
		confirm this is valid.
Note on allowable window values: Only a 5% tolerance to the nominat SHGC window values shown on pa can be used with this rating. Note: Only a +/- 5% SHGC toleranc	ted age 2	confirm this is valid.

NB: This tolerance ONLY applies to SHGC, the U-value can always be lower but not higher than the values stated on page 2.

If any of windows selected are outside the 5% tolerance then this certificate is no longer valid and the dwelling will need to be rerated to confirm compliance.



Nationwide House Energy R	ating Scheme* C	ertificate		*******
Certificate number: 0003587227	Certificate Date:	05 Feb 2019	★ Star rating:	4.7 NATIONWIDE ENERCY PATING SCHEME
Building features				

Window type and performance value

Window ID	Window type	U-value	SHGC
WID-012-04 A	WID-012-04 A Aluminium Awning Window SG 4mmClr	6.4	0.64
WID-005-01 A	WID-005-01 A AI Residential Internal Sliding Door SG 4mm Clear	6.3	0.72
TIM-001-01 W	TIM-001-01 W Timber A SG Clear	5.4	0.56
WID-003-01 A	WID-003-01 A AI Residential Double Hung Window SG 3Clr	6.2	0.74

Window schedule

Location	Window ID	Window no.	Height (mm)	Width (mm)	Orientation	Outdoor shade
LIVING DINING	kWID-012-04 A	n/a	600	2700	N	No Shading
LIVING DINING	kWID-005-01 A	n/a	2400	3200	E	No Shading
LIVING DINING	KWID-005-01 A	n/a	2400	2700	Ν	No Shading
LIVING DINING	KWID-012-04 A	n/a	600	3300	E	No Shading
LIVING DINING	KWID-012-04 A	n/a	600	2100	E	No Shading
LIVING DINING	KTIM-001-01 W	n/a	2400	1840	W	No Shading
LIVING DINING	KWID-012-04 A	n/a	1800	2700	W	No Shading
LIVING DINING	KWID-012-04 A	n/a	1800	2700	W	No Shading
POWDER	WID-012-04 A	n/a	900	600	E	No Shading
POWDER	TIM-001-01 W	n/a	2400	870	E	No Shading
POWDER	TIM-001-01 W	n/a	1200	600	E	No Shading
BED 2	WID-012-04 A	n/a	600	1800	Ν	No Shading
BED 2	WID-012-04 A	n/a	1800	2700	W	No Shading
MASTER BED	WID-003-01 A	n/a	1200	2400	E	No Shading
ENSUITE	WID-012-04 A	n/a	600	900	Ν	No Shading
STUDY UF HALL	WID-012-04 A	n/a	1800	1200	W	No Shading
STUDY UF HALL	WID-012-04 A	n/a	1800	1800	W	No Shading
BED 3	WID-003-01 A	n/a	1200	1600	E	No Shading
BED 4	WID-003-01 A	n/a	1200	1600	S	No Shading
UF BATH	WID-012-04 A	n/a	1800	1200	W	No Shading

ID	Window	type			U-value	SHGC
None Present						
Roof window	v and skyligh	t schedule				
Location	ID	Roof	Area (m ²)	Orientation	Outdoor shade	Indoor

External w	vall type		
ID	Wall type	Insulation	Wall wrap or foil
EW-1	Brick Veneer	Bulk Insulation R2	No
EW-2	Brick Veneer	No insulation	No
EW-3	Single Skin Brick	No insulation	No

Nationwide House Energy Rating Scheme (NatHERS) is an initiative of the Australian, state and territory governments. For more details see www.nathers.gov.au

Nationwide House Energy Rating Scheme* Certificate				*******************************
Certificate number: 0003587227	Certificate Date:	05 Feb 2019	★ Star rating:	4.7 NATIONWIDE HOUSE ENERGY RATING SCHEME

Building features continued

EW-4

Fibro Cavity Panel Direct Fix

Bulk Insulation R2

22

No

External wall schedule

Location	ID	Width (mm)	Height (mm)	Orientation	Fixed Shade	Eaves (mm)
LIVING DINING K	EW-1	5200	2750	N	No	600
LIVING DINING K	EW-1	3800	2750	E	No	4100
LIVING DINING K	EW-1	4000	2750	Ν	No	4400
LIVING DINING K	EW-1	7595	2750	E	No	100
LIVING DINING K	EW-1	2195	2750	W	No	2200
LIVING DINING K	EW-1	500	2750	Ν	No	8200
LIVING DINING K	EW-1	3800	2750	W	No	2300
LIVING DINING K	EW-1	1100	2750	S	No	12300
LIVING DINING K	EW-1	3800	2750	W	No	600
POWDER	EW-1	2090	2750	E	No	100
POWDER	EW-1	2495	2750	E	No	100
POWDER	EW-1	2695	2750	S	No	100
GARAGE	EW-2	5895	3093	S	No	100
GARAGE	EW-3	6195	3093	W	No	100
BED 2	EW-1	2795	2600	Ν	No	600
BED 2	EW-1	3795	2600	W	No	600
MASTER BED	EW-1	1490	2600	Ν	No	600
MASTER BED	EW-1	3190	2600	E	No	600
ENSUITE	EW-1	1895	2600	Ν	No	600
ENSUITE	EW-1	1795	2600	E	No	600
STUDY UF HALL	EW-1	990	2600	E	No	600
STUDY UF HALL	EW-1	2995	600	W	No	0
STUDY UF HALL	EW-4	2995	2000	W	No	600
STUDY UF HALL	EW-1	600	2600	S	No	6800
STUDY UF HALL	EW-1	2200	2600	W	No	600
STUDY UF HALL	EW-1	600	2600	Ν	No	4400
BED 3	EW-1	3090	2600	E	No	600
BED 4	EW-1	3095	2600	E	No	600
BED 4	EW-1	3595	600	S	No	0
BED 4	EW-4	3595	2000	S	No	600
UF BATH	EW-1	2595	600	S	No	0
UF BATH	EW-4	2595	2000	S	No	600
UF BATH	EW-1	3195	600	W	No	0
UF BATH	EW-4	3195	2000	W	No	600

Internal wall type

Wall type	Area (m²)	Insulation	Wall wrap or foil
IW-1 - Cavity wall, direct fix plasterboard, single gap	103.0	No insulation	No
IW-2 - Cavity wall, direct fix plasterboard, single gap	33.0	Bulk Insulation, No Air Gap R2	No

* Nationwide House Energy Rating Scheme (NatHERS) is an initiative of the Australian, state and territory governments. For more details see www.nathers.gov.au

Certificate number: 0003587227

Certificate Date:

05 Feb 2019





4.7

Building features continued

Floors					
Location	Construction	Area (m ²)	Sub floor ventilation	Added insulation	Covering
LIVING DINING K	Suspended AAC (75mm) 75mm	75.2	Enclosed	Bulk Insulation, Gap to Floor R2	80/20 Carpet 10mm/Ceramic
POWDER	Suspended AAC (75mm) 75mm	3.3	Enclosed	Bulk Insulation, Gap to Floor R2	Ceramic Tiles 8mm
POWDER	Suspended AAC (75mm) 75mm	6.5	Enclosed	Bulk Insulation, Gap to Floor R2	Ceramic Tiles 8mm
GARAGE	Waffle pod slab 175 mm 75mm	36.0	None	Waffle Pod 175mm	Bare
BED 2/LIVING DINING K	Timber Above Plasterboard 19mm	8.5		No Insulation	Carpet+Rubber Underlay 18mm
BED 2	Suspended Timber Floor 19mm	1.8	Open	Bulk Insulation, Gap to Floor R2	Carpet+Rubber Underlay 18mm
MASTER BED/LIVING DINING K	Timber Above Plasterboard 19mm	13.0		No Insulation	Carpet+Rubber Underlay 18mm
ENSUITE/LIVING DINING K	Timber Above Plasterboard 19mm	3.3		No Insulation	Ceramic Tiles 8mm
STUDY UF HALL/LIVING DINING K	Timber Above Plasterboard 19mm	9.1		No Insulation	Carpet+Rubber Underlay 18mm
STUDY UF HALL/GARAGE	Timber Above Plasterboard 19mm	9.4		Bulk Insulation R2	Carpet+Rubber Underlay 18mm
STUDY UF HALL	Suspended Timber Floor 19mm	1.3	Open	Bulk Insulation, Gap to Floor R2	Carpet+Rubber Underlay 18mm
BED 3/LIVING DINING K	Timber Above Plasterboard 19mm	0.9		No Insulation	Carpet+Rubber Underlay 18mm
BED 3/GARAGE	Timber Above Plasterboard 19mm	9.2		Bulk Insulation R2	Carpet+Rubber Underlay 18mm
BED 4/POWDER	Timber Above Plasterboard 19mm	0.7		No Insulation	Carpet+Rubber Underlay 18mm
BED 4/GARAGE	Timber Above Plasterboard 19mm	9.3		Bulk Insulation R2	Carpet+Rubber Underlay 18mm
UF BATH/GARAGE	Timber Above Plasterboard 19mm	7.3		Bulk Insulation R2	Ceramic Tiles 8mm

Ceiling type

Location	Construction	Added insulation	Roof space above
LIVING DINING K	Plasterboard	Bulk Insulation R4	Yes
LIVING DINING K	Timber Above Plasterboard	No Insulation	No
POWDER	Plasterboard	Bulk Insulation R4	Yes

Nationwide House Energy Rating Scheme (NatHERS) is an initiative of the Australian, state and territory governments. For more details see www.nathers.gov.au

ertificate number:	0003587227	Certificate Date:	05 Feb 2019	★ Star rating:	4.7	NATION HOU ENERGY RATING
uilding feature	es continued					
POWDER	Plasterboard			Bulk Insulation R4	Yes	
POWDER	Timber Above	Plasterboard		No Insulation	No	
GARAGE	Timber Above	Plasterboard		Bulk Insulation R2	No	
BED 2	Plasterboard			Bulk Insulation R4	Yes	
MASTER BED	Plasterboard			Bulk Insulation R4	Yes	
INSUITE	Plasterboard			Bulk Insulation R4	Yes	
STUDY UF HALL	Plasterboard			Bulk Insulation R4	Yes	
BED 3	Plasterboard			Bulk Insulation R4	Yes	
BED 4	Plasterboard			Bulk Insulation R4	Yes	
JF BATH	Plasterboard			Bulk Insulation R4	Yes	

trations			
Number	Туре	Diameter (mm)	Sealed/unsealed
1	Exhaust Fans	300	Sealed
		Number Type	Number Type Diameter (mm)

Ceiling fans			
Location	Number	Diameter (mm)	
None Present			

Roof type		
Construction	Added Roof colou insulation	
Corrugated Iron	Bulk, Reflective Dark Side Down, No Air Gap Above R1.3	

Nationwide House Energy Rating Scheme* Certificate

Certificate number: 0003587227

Certificate Date: 05 Feb 2019

★ Star rating: 4.7



Additional information

Explanatory notes

About this report

Residential energy ratings address the quality of the building fabric i.e. walls, windows, floors and roof/ceilings. Ratings do not cover the energy or water efficiency of appliances including heating and cooling, hot water, dishwashers, ovens, fridges, TVs etc. or solar panel or water tank requirements. The efficiency or specification of these items is generally covered by other regulations, standards or guidelines.

General Information

A NatHERS House Energy Rating is a comprehensive, dynamic computer modelling evaluation of the floorplans, elevations and specifications to predict an energy load of a home. Not all of us use our homes in the same way, so ratings are generated using standard assumptions. This means homes can be compared across the country.

The actual energy consumption of your home may vary significantly from the predicted energy load figures in the report depending on issues such as the size of your household and your personal preferences, e.g. in terms of heating or cooling.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparative purposes between different house designs and for demonstrating that the design meets the required regulatory compliance.

Homes that are energy efficient use less energy, are warmer in winter, cooler in summer and cost less to run. The higher the star rating the more energy efficient.

This NatHERS House Energy Rating report was carefully prepared by your assessor on the basis of comprehensive modelling using standard procedures to rate your home using the underlying engine developed by the Australian Commonwealth Scientific and Industrial Research Organisation (CSIRO).

All information relating to energy loads presented in this report is based on a range of standard assumptions in order to allow for comparisons with reports prepared for other homes and to demonstrate minimum regulatory compliance.

The standard assumptions include figures for occupancy, indoor air temperature and are based on a unique climate file for your region.

Accredited Assessors

To ensure you get a high-quality, professional NatHERS House Energy Rating report, you should always use an accredited assessor, accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

AAOs have specific quality assurance processes in place and continuing professional development requirements to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any on-going training requirements.

If you have any questions or concerns about this report, please direct them to your assessor in the first instance.

If your assessor is unable to address your questions or concerns, please contact their AAO listed under 'assessor details'. You can also find a range of information about accredited assessors on the AAO websites.

Disclaimer

The energy values quoted are for comparison purposes only; they are not a prediction of actual energy use. This rating only applies to the floor plan, construction details, orientation and climate as submitted and included in the attached drawing set that bears a stamp with the same number as this certificate. Changes to any of these details could affect the rating.

Contact

For more information on the Nationwide House Energy Rating Scheme (NatHERS), visit www.nathers.gov.au

For more information on energy efficient design and insulation visit www.yourhome.gov.au