2. DO NOT SCALE FROM THESE DRAWING.

3. ALL DIMENSIONS ARE TO BE VERIFIED ON SITE BY THE BUILDER BEFORE COMMENCING WITH ASSOCIATED WORK.

#### STORMWATER NOTES:

#### **GENERAL:**

AI. ALL WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE AUSTRALIAN STANDARDS (LATEST VERSION) AND THE REQUIREMENTS OF THE LOCAL COUNCIL AND ANY APPLICABLE AUTHORITIES. A2. ALL LEVELS SHOWN ARE TO THE AUSTRALIAN HEIGHT DATUM (AHD) UNLESS NOTED OTHERWISE. A3. THE LOCATION OF ALL DRAINAGE ELEMENTS ARE SHOWN INDICATIVELY BASED ON AVAILABLE SURVEY OR OTHER INFORMATION. ALL DRAINAGE ELEMENTS ARE TO BE INSTALLED WITH CONSIDERATION TO SITE CONSTRAINTS AND THE INTENT OF THE DRAINAGE CONCEPT.

A4. ANY MATERIAL VARIATIONS TO THE DRAINAGE CONCEPT OR DETAILED STORMWATER ELEMENTS MUST BE APPROVED BY NORTHERN BEACHES CONSULTING ENGINEERS PTY LTD PRIOR TO COMMENCEMENT

A5. ANY EXCAVATION OR TRENCHING FOR SERVICES ADJACENT TO A STRUCTURE OR PROPERTY BOUNDARY MUST NOT ENCROACH ON THE 'ZONE OF INFLUENCE', REFER TO THE NCC FOR FURTHER DETAILS.

#### **GENERAL CONSTRUCTION NOTES:**

BI. CONTRACTORS TO LOCATE ALL EXISTING SERVICES PRIOR TO EXCAVATION AND NOTIFY ENGINEER OF ANY POTENTIAL CLASHES WITH THE PROPOSED STORMWATER DRAINAGE SYSTEM. B2. ANY ELEMENTS OF THE EXISTING STORMWATER SYSTEM WHICH ARE PROPOSED TO BE RETAINED MUST BE INSPECTED AND APPROVED BY AN ENGINEER PRIOR TO CONSTRUCTION AS BOTH HAVING

ADEQUATE CAPACITY TO CATER FOR THE RUNOFF DIRECTED TO IT AND BEING IN ADEQUATE CONDITION

B3. EXISTING STORMWATER SYSTEM ALSO TO BE INSPECTED BY A SUITABLY QUALIFIED PLUMBER PRIOR

TO CONSTRUCTION AND UPGRADED AS REQUIRED IN ACCORDANCE WITH AS3500.3. B4. CARE SHOULD BE TAKEN WHEN UNDERTAKING WORKS IN THE VICINITY OF TREES NOT TO DISTURB THE TREE ROOT SYSTEM, HAND DIGGING OF TRENCHES MAY BE REQUIRED SUBJECT TO THE PROJECT ARBORISTS REQUIREMENTS. REFER TO THE ARBORIST REPORT FOR EXCAVATION REQUIREMENTS

SURROUNDING PROTECTED TREE ROOT ZONES. B5. SWIMMING POOL SURCHARGE OVERFLOW TO BE CONNECTED VIA GRAVITY TO THE SEWER IN ACCORDANCE WITH AS3500. DETAILS AND CERTIFICATION BY OTHERS

B6. EXTENT, ALIGNMENT, DEPTH AND CONDITION OF ANY COUNCIL STORMWATER PIPELINE WITHIN A DEVELOPMENT SITE MUST BE VERIFIED PRIOR TO CONSTRUCTION AND THE ENGINEER MUST BE NOTIFIED UPON VERIFICATION. ANY NEW CONNECTION TO A COUNCIL STORMWATER PIPELINE WILL BE SUBJECT TO COUNCIL APPROVAL AND MUST BE INSTALLED IN ACCORDANCE WITH THE LOCAL COUNCIL SPECIFICATIONS

#### PIPEWORK INSTALLATION:

- CI. ALL PIPES TO BE MINIMUM 100mm & UNLESS NOTED OTHERWISE.
- C2. ALL PIPES TO BE UPVC SEWER GRADE TO AS 1254 UNLESS NOTED OTHERWISE.
- C3. ALL PIPES TO BE LAYED AT 1 % MINIMUM GRADE UNLESS NOTED OTHERWISE.

C4. ALL CONNECTIONS INTO EXISTING PIPES MUST BE MADE IN THE DIRECTION OF FLOW

C5. ANY NEW UPVC CONNECTIONS INTO EXISTING R.C. PIPES MUST BE MADE INTO THE TOP HALF OF THE PIPE USING A FLOWCON CONNECTION FITTING U.N.O.

C6. ALL PIPES SHALL BE LAID ON A 75mm SAND BED, COMPACTED TO 100% S.M.D.D. BELOW PAVEMENTS. (NO COMPACTION REQUIRED BELOW LANDSCAPING) COVER TO SURFACE FROM TOP OF PIPE TO BE 300mm MINIMUM, BACKFILL TO BE ADEQUATELY CONSOLIDATED AROUND PIPES BY METHOD OF RAMMING AND WATERING IN. TRENCHES TO BE FILLED WITH NO-FINES GRANULAR MATERIAL AS SPECIFIED.

C7. ALL EXISTING EARTHENWARE PIPES TO BE UPGRADED TO UPVC.

C8. MINIMUM PIPE COVER TO ALL IN-GROUND PIPEWORK SHALL BE CARRIED OUT IN ACCORDANCE WITH

C9. ALL SUSPENDED PIPE FIXINGS ARE TO BE CARRIED OUT IN ACCORDANCE WITH AS2032. CIO. ENSURE THAT ALL STORMWATER PITS AND PIPES ARE LOCATED CLEAR FROM TREE ROOT

CII. ALL PIPEWORK MUST BE INSTALLED WITHIN THE SITE BOUNDARY OF THE DEVELOPMENT SITE. ANY NEW OR EXISTING PIPEWORK EXTENDING THROUGH PRIVATE PROPERTY BEYOND THE BOUNDARY OF THE DEVELOPMENT SITE MUST BE CONTAINED SOLELY WITHIN A DRAINAGE EASEMENT. IF NO DRAINAGE EASEMENT EXISTS, A NEW DRAINAGE EASEMENT MUST BE SOUGHT AND REGISTERED PRIOR TO UTILISING OR INSTALLING PIPEWORK THROUGH NEIGHBOURING PROPERTIES. CONTACT THE ENGINEER IF A DRAINAGE EASEMENT CANNOT BE OBTAINED.

### ROOF DRAINAGE

DI. ALL DOWN PIPES TO BE 100mm \$\phi\$ UNLESS NOTED OTHERWISE.

D2. DOWN PIPE LOCATIONS ARE INDICATIVE ONLY. LOCATIONS TO BE CONFIRMED WITH ARCHITECT PRIOR TO COMMENCEMENT OF WORK.

D3. PROVIDE CLEANING EYES AT ALL DOWNPIPES.

D4. GUTTER GUARDS MUST BE INSTALLED ON ALL GUTTERS UNLESS NOTED OTHERWISE. D5. ALL EAVES GUTTER AND VALLEY GUTTER SYSTEMS MUST BE INSTALLED IN ACCORDANCE WITH AS3500.3 REQUIREMENTS.

D6. ALL BOX GUTTER SYSTEMS MUST BE INSTALLED STRICTLY IN ACCORDANCE WITH THE DETAILS SHOWN ON THE APPROVED STORMWATER MANAGEMENT PLAN. IF NO DETAILS ARE SHOWN, THE BOX GUTTER SYSTEM MUST BE INSTALLED IN ACCORDANCE WITH AS3500.3. IF ANY CHANGE TO THE BOX GUTTER SYSTEM CONFIGURATION IS PROPOSED, THE ENGINEER MUST BE NOTIFIED FOR A RE-DESIGN. IF THE INSTALLED BOX GUTTER DOES NOT STRICTLY COMPLY WITH THE DESIGN DETAILED ON THE STORMWATER MANAGEMENT PLAN, CERTIFICATION OF THE HYDRAULIC SYSTEM MAY BE REFUSED. D7. ALL GREEN ROOFS, PEBBLED ROOFS AND PLANTERS WITH A CONCRETE BASE MUST BE WATERPROOFED AND HAVE DRAINAGE CELL INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS SPECIFICATION.

## <u>PITS:</u>

05-07-2021

EI. ALL STORMWATER PITS MUST BE INSTALLED IN ACCORDANCE WITH AS3500.3.

ISSUED FOR D.A. SUBMISSION

Description:

Issue: I

E2. ALL CONCRETE PITS TO BE CAST INSITU OR, IF PRECAST, APPROVED BY ENGINEER. CAST INSITU PITS TO HAVE 150mm THICK CONCRETE WALLS AND BASE. WALLS TO BE REINFORCED WITH 1 NI2 TOP TIE UNLESS NOTED OTHERWISE. CAST INSITU PITS GREATER THAN 900 DEEP TO BE MINIMUM 900x600 AND TO HAVE 150mm THICK CONCRETE WALLS AND BASE. WALLS TO BE REINFORCED WITH NI2 AT 300 EACH WAY UNLESS NOTED OTHERWISE.

E3. MINIMUM INTERNAL DIMENSIONS FOR STORMWATER AND INLET PITS TO BE IN ACCORDANCE WITH TABLE 8.2, AS3500.3.

E4. ALL PITS GREATER THAN 1200mm DEEP SHALL HAVE STEP IRONS INSTALLED. STEP IRON INSTALLATION MUST BE IN ACCORDANCE WITH THE RELEVANT AUSTRALIAN STANDARDS.



# Consulting Engineers

## STRUCTURAL - CIVIL - STORMWATER - REMEDIAL

E5. THE BOUNDARY OR SILT ARRESTOR PIT MUST INCORPORATE A SUMP OF MINIMUM 200mm DEPTH BELOW THE INVERT OF THE OUTLET PIPE AND A MAXI-MESH SCREEN AS PER LOCAL COUNCIL AND THE AUSTRALIAN STANDARD REQUIREMENTS. HOWEVER, UNLESS SPECIFICALLY REQUIRED BY COUNCILS POLICY OR IF THE SITE CONSISTS OF A CLAY OR ROCK SUBGRADE, ALL OTHER DRAINAGE PITS WILL NOT REQUIRE A SUMP.

E6. ALL STORMWATER PITS TO BE LOCATED AT LOW POINTS TO PREVENT PONDED WATER. E7. FOR STORMWATER PITS LOCATED BELOW THE WATER TABLE, CUT INTO ROCK OR IN POORLY DRAINED SOILS. THE PIT SUMP MAY BE FILLED WITH MORTAR AND SCREEDED TOWARDS THE OUTLET AT MINIMUM 1% FALL, SUBJECT TO THE ENGINEERS APPROVAL. SUBSOIL DRAINAGE:

FI. ALL SUBSOIL DRAINAGE TO BE INSTALLED AS REQUIRED IN ACCORDANCE WITH AS3500.3 (SPECIFICALLY SECTION 6, 7 AND APPENDIX M) AND THE NCC.

F2. INSTALLATION OF SUBSOIL DRAINAGE LINES IS GENERALLY REQUIRED WHERE SUBSURFACE WATER MOVEMENT COULD DAMAGE BUILDINGS OR CAUSE LOSS OF AMENITY THROUGH THE BUILD-UP OF EXCESSIVE MOISTURE OR LATERAL WATER PRESSURE. THIS INCLUDES ALONG WALLS THAT IMPEDE THE NATURAL FLOW OF GROUNDWATER, ON THE UPHILL SIDE OF CUT AND FILL SITES, ADJACENT TO DEEP FOOTINGS, BEHIND RETAINING WALLS AND ADJACENT TO BASEMENT WALLS. SUBSOIL DRAINAGE IS GENERALLY ALSO REQUIRED IN SHALLOW LANDSCAPED AREAS OVER ROCK OR POORLY DRAINED SOILS TO PREVENT OVERLY SATURATED LANDSCAPED AREAS.

F3. THE INSTALLATION OF SUBSOIL DRAINAGE MAY REQUIRE TRENCHING THROUGH ROCK.

F4. ALL SUBSOIL LINES ARE TO BE 100mm UPVC SLOTTED PIPE (UNSOCKED), LAID AT (MIN.) 0.5% FALL

F5. THE SUBSOIL LINE IS TO BE SURROUNDED BY SELECT FILTER MATERIAL, GENERALLY 10-20mm DIAMETER AGGREGATE.

F6. THE TRENCH SHALL BE SIZED TO PROVIDE A MINIMUM 50mm BEDDING AND 100mm COVER ALL AROUND THE SUBSOIL LINE, GENERALLY MINIMUM 300mm WIDE X 300mm DEEP. THE TRENCH IS TO BE WRAPPED ALL-ROUND IN NON-WOVEN, GEOTEXTILE FABRIC OF STRENGTH CLASS A, WITH SUFFICIENT OVERLAP (LESSER OF TRENCH WIDTH OR 500mm).

F7. WHERE THE IN-SITU SOILS HAVE A GRAIN SIZE SMALLER THAN THE GEOTEXTILE FABRIC, COURSE WASHED-SAND SHOULD BE USED AS A FILTER TO PREVENT BLOCKAGE OF THE GEOFABRIC. F8. THE BACKFILL LAYER OVER THE TRENCH SHALL BE NO-FINES COURSE WASHED-SAND, WHERE LANDSCAPED AREAS ARE PROPOSED OVER THE TRENCH, THE TOP 300mm OF BACKFILL MAY BE MIXED

WITH UP TO 20% ORGANIC MATTER. F9. ALL SUBSOIL LINES ARE TO DISCHARGE INTO A GRATED PIT, AT A LEVEL MINIMUM 50mm ABOVE THE PIT OUTLET UNO. THE PROJECT BUILDER IS TO IMPLEMENT APPROPRIATE MEASURES TO PREVENT SUBSOIL LINE BLOCKAGE OR INFESTATION OF VERMIN.

FIO. THE HIGH-END OF THE SUBSOIL LINE IS TO BE TURNED UP AT 45° AND TERMINATE AT GROUND

LEVEL WITH AN INSPECTION CAP TO ENABLE FUTURE FLUSH OUT AND MAINTENANCE. FII. 100mm \$\psi\$ x 3000 LONG TAIL OUT SUBSOIL LINE TO BE PROVIDED ON THE UPSTREAM SIDE OF ALL LARGE PITS OR IN AREAS WITH HIGH SEEPAGE FLOWS. SUBSOIL LINE TO BE COVERED WITH GEOTEXTILE FILTER SOCK FOR THE FULL LENGTH AND END COVERED. BACKFILL MUST BE IN NO-FINES COARSE

#### WASHED-SAND. CHARGED SYSTEM:

GI. ALL PIPEWORK IN A CHARGED SYSTEM TO BE 100mm & UPVC PRESSURE OR SEWER GRADE PIPES WITH ALL JOINTS PRESSURE SEALED TO A MINIMUM OF 1,000mm (UNLESS NOTED OTHERWISE) ABOVE THE INLET OF THE DISCHARGE POINT. ALL JOINTS TO BE SOLVENT WELDED IN ACCORDANCE WITH THE AUSTRALIAN STANDARDS

G2. ALL CHARGED SYSTEMS MUST HAVE A BLEED OUT LINE AT THE LOW POINT IN THE CHARGED SYSTEM WHICH MUST BE CONNECTED TO A FLUSH OUT PIT VIA GRAVITY. THE BLEED LINE MUST BE MAINTAINED AND REGULARLY FLUSHED OUT.

### SURFACE DRAINAGE:

JI. WHEN LAND FALLS TOWARDS A BUILDING, INCLUDING LAND UPSLOPE OF THE PROPERTY BOUNDARY, GROUND SURFACE LEVELS ADJACENT TO THE BUILDING ARE TO BE REGRADED SUCH THAT THE FIRST METRE HAS MINIMUM 50mm FALL AWAY FROM THE BUILDING, GENERALLY IN ACCORDANCE WITH THE

J2. ANY NEW DEVELOPMENT WORKS MUST NOT CREATE ANY TRAPPED SURFACE AREAS. IN SUCH CASES WHERE TRAPPED AREAS EXIST, SWALE DRAINS OR GRATED PITS WITH PIPED OUTLETS OF ADEQUATE CAPACITY MAY BE REQUIRED TO ROUTE RUNOFF AROUND THE BUILDING TO AN APPROVED DISCHARGE POINT, IF THE TRAPPED AREA IS BELOW THE NATURAL SURFACE LEVEL, A PUMP OUT SYSTEM MAY BE REQUIRED. IN EITHER CASE, THE PROJECT ENGINEER MUST BE CONTACTED FOR DESIGN DETAILS (AS REQUIRED) PRIOR TO CONSTRUCTION.

J3. BUILDER TO PROVIDE A MINIMUM 100mm WIDE x 30mm HIGH OR 50mm DIA OVERFLOW FOR EVERY 6m2 OF EXPOSED AREA THAT IS TRAPPED OR SURROUNDED BY HOBS/BALUSTRADES/WALLS/ETC. THE FULL OVERFLOW DEPTH MUST BE LOCATED BELOW ANY ADJACENT INTERNAL FLOOR LEVELS OR OPENINGS TO PROTECT AGAINST WATER INGRESS DUE TO BLOCKAGE OF THE PRIMARY OUTLET(S).

#### RAINWATER RE-USE TANKS:

KI: CONSIDERING THE ROOF CATCHMENT AREA, LOCATION OF PROPERTY, INTENDED USE OF RAINWATER AND GARDEN SIZE WE RECOMMEND PROVIDING A RAINWATER TANK FOR USE AS PER BASIX REQUIREMENTS, SYDNEY WATER AND NSW HEALTH REQUIREMENTS FOR NON DRINKING USE ONLY. K2: THE TANKS PROVIDED WILL REDUCE PRESSURE ON COUNCIL'S STORMWATER INFRASTRUCTURE. K3: REFERENCES: COOMBES P.J. & KUCZERA G. (2001), "RAINWATER TANK DESIGN FOR WATER SUPPLY & STORMWATER MANAGEMENT." STORMWATER INDUSTRY ASSOCIATION REGIONAL CONFERENCE. PATRICK DUPONT & STEVE SHACKLE, "RAINWATER" AUSTRALIAN GOVERNMENT (2004), "GUIDANCE ON USE OF RAINWATER TANKS"

K4: ALL CONNECTIONS TO PLUMBING AND RAINWATER TANKS TO BE IN ACCORDANCE WITH SYDNEY WATERS' GUIDE "INSTALLING A RAINWATER TANK" AVAILABLE AT www.sydneywater.com.au K5: PROVIDE A DUAL SUPPLY SYSTEM AND BACKFLOW PREVENTION SYSTEM IN ACCORDANCE WITH 'BASIX-DESIGN GUIDE FOR SINGLE DWELLINGS' BY NSW DEPARTMENT OF INFRASTRUCTURE, PLANING AND NATURAL RESOURCES.

K6: IF NOT SPECIFIED ON PLANS, THE FIRST FLUSH SYSTEM IS TO HAVE A MINIMUM SIZE OF 20L PER 100m2 OF ROOF CATCHMENT AREA PRIOR TO ENTERING THE RAINWATER TANK, INDIVIDUAL SITE ANALYSIS IS REQUIRED IN HEAVILY POLLUTED AREAS TO DETERMINE IF LARGER VOLUMES OF FIRST FLUSH RAINWATER ARE TO BE DIVERTED. IF IN DOUBT, CHECK WITH LOCAL HEALTH AUTHORITIES. K7: SCREENED DOWNPIPE RAINWATER HEAD OR OTHER SUITABLE LEAF AND DEBRIS DEVICE TO BE INSTALLED ON EACH DOWNPIPE. SCREEN MESH TO BE 4-6mm AND DESIGNED TO BE SELF-CLEANING K8: FIRST FLUSH DEVICES, OR APPROVED ALTERNATIVE, TO BE INSTALLED WITH AN AUTOMATED DIVERSION AND DRAINAGE SYSTEM, THAT IS, NO MANUAL DIVERSION AND DRAINAGE VALVES. REFER TYPICAL FLUSH OUT PIT FOR DETAILS.

K9: BEFORE PURCHASING MATERIALS OR PAINT TO BE USED ON ROOF CATCHMENT AREAS, THE MANUFACTURER'S RECOMMENDATIONS ON LABELS AND BROCHURES FOR RAINWATER TANK SUITABILITY TO BE READ AND ADHERED TO.

KIO: PRE-STORAGE PITS FOR UNDERGROUND RAINWATER STORAGE TANKS AND FLUSH OUT PITS MAY ASSIST IN LIMITING SILT, AND PREVENT VERMIN, INSECTS (INCLUDING MOSQUITOES) AND DEBRIS FROM ENTERING THE RAINWATER STORAGE AREA.

KII: BUILDER/PLUMBER TO ENSURE THE INSTALLATION OF THE RAINWATER TANK SYSTEM IS IN ACCORDANCE WITH THE RELEVANT AUSTRALIAN STANDARDS AND THE RAINWATER TANK DESIGN AND INSTALLATION HANDBOOK - HB 230-2008. IF IN DOUBT CONTACT ENGINEER.

KI2: RAINWATER TANK TO BE WATER PROOFED IN ACCORDANCE WITH HB 230-200B

#### DIAL BEFORE YOU DIG NOTE:

NO INVESTIGATION OF UNDERGROUND SERVICES HAS BEEN MADE. ALL RELEVANT AUTHORITIES SHOULD BE NOTIFIED PRIOR TO ANY EXCAVATION ON OR NEAR THE SITE DEVELOPERS \$ EXCAVATORS MAY BE HELD FINANCIALLY RESPONSIBLE BY THE ASSET OWNER SHOULD THEY DAMAGE UNDERGROUND NETWORKS.

#### CARELESS DIGGING CAN:

REPAIRED

- CAUSE DEATH OR SERIOUS INJURY TO WORKERS AND THE GENERAL PUBLIC
- INCONVENIENCE USERS OF ELECTRICITY, GAS, WATER AND COMMUNICATIONS
- LEAD TO CRIMINAL PROSECUTION AND DAMAGES CLAIMS
- CAUSE EXPENSIVE FINANCIAL LOSSES TO BUSINESS
- CUT OFF EMERGENCY SERVICES - DELAY PROJECT COMPLETION TIMES WHILE THE DAMAGE IS

MINIMISE YOUR RISK

AND DIAL BEFORE YOU DIG. - TEL. 1100

## NORTHERN BEACHES COUNCIL (WARRINGAH AREA) ON-SITE DETENTION SYSTEM CALCULATION SHEET

ADDRESS: 13 MORGAN ROAD, BELROSE

SITE STORMWATER DISPOSAL METHOD

(IN ACCORDANCE WITH NORTHERN BEACHES WATER MANAGEMENT FOR DEVELOPMENT POLICY)

SITE DETAILS

TOTAL SITE AREA  $19,916.0\,\mathrm{m}^2$ 

PRE DEVELOPMENT IMPERVIOUS AREA 5001 m<sup>2</sup> APPROX. ( 25% IMPERVIOUS ) POST DEVELOPMENT IMPERVIOUS AREA 5451 m<sup>2</sup> APPROX. (27% IMPERVIOUS)

INCREASE

OSD REQUIREMENT

THIS IS A NEW DWELLING AND THE SITE HAS A DIRECT CONNECTION TO COUNCIL'S

STORMWATER SYSTEM AND BELOW 40% IMPERVIOUS, THEREFORE OSD IS NOT REQUIRED

PERMITTED SITE DISCHARGE

PSD N/A (DIRECT CONNECTION TO COUNCIL SYSTEM)

SITE STORAGE REQUIREMENT

OSD VOLUME REQUIRED

RAINWATER 'BASIX' PROVIDED

OUTLET CONTROL

DIRECT CONNECTION TO COUNCIL METHOD OF DISCHARGE

STORMWATER SYSTEM

208 m<sup>3</sup> PROVIDED

 $450 \text{ m}^{-2}$ 

## DRAWING SCHEDULE:

DOI - STORMWATER MANAGEMENT GENERAL NOTES DO2 - SITE DRAINAGE PLAN

DO2.1 - GROUND FLOOR DRAINAGE PLAN

DO2.2 - FIRST FLOOR AND LOWER ROOF DRAINAGE PLAN

D02.3 - ROOF DRAINAGE PLAN

DO2.4 - BASEMENT DRAINAGE PLAN

DO3 - STORMWATER MANAGEMENT DETAILS DO4 - STORMWATER MANAGEMENT DETAILS

> ISSUED FOR CONSTRUCTION CERTIFICATE SUBMISSION ONLY

IF IN DOUBT ASK



24-02-2022 ISSUED FOR C.C. SUBMISSION REVISED 27-09-2021

DOCUMENT CERTIFICATION Date : 3 Mar '22 Michael Wachjo B.E.(Civil), MIEAust. (Director NB Consulting Engineers) The copyright of this drawing remains with Northern Beaches Consulting Engineers Pty Ltd. Trading as NB Consulting Engineers

НО

HO

Consulting Engineers A C N 076 121 616 A B N 24 076 121 616 **Sydney**: Ph: (02) 9984 7000 Fax: (02) 9984 7444

STRUCTURAL - CIVIL - STORMWATER - REMEDIAL Suite 207. 30 Fisher Road Dee Why N.S.W. 2099 Gold Coast: Ph: (07) 5631 4744 Suite 1, 30B Griffith Street Coolangatta QLD 4225 E: nb@nbconsulting.com.au W: www.nbconsulting.com.au

PRESTONPETERSON Client:

DAVID & JENNY AUSTIN


Project: ALTERATIONS AND ADDITIONS 13 MORGAN ROAD, BELROSE


Drawing Title: STORMWATER MANAGEMENT GENERAL NOTES AND DRAWING SCHEDULE


JUNE 2021

CF/LB MC Drawing No:

Drawn:

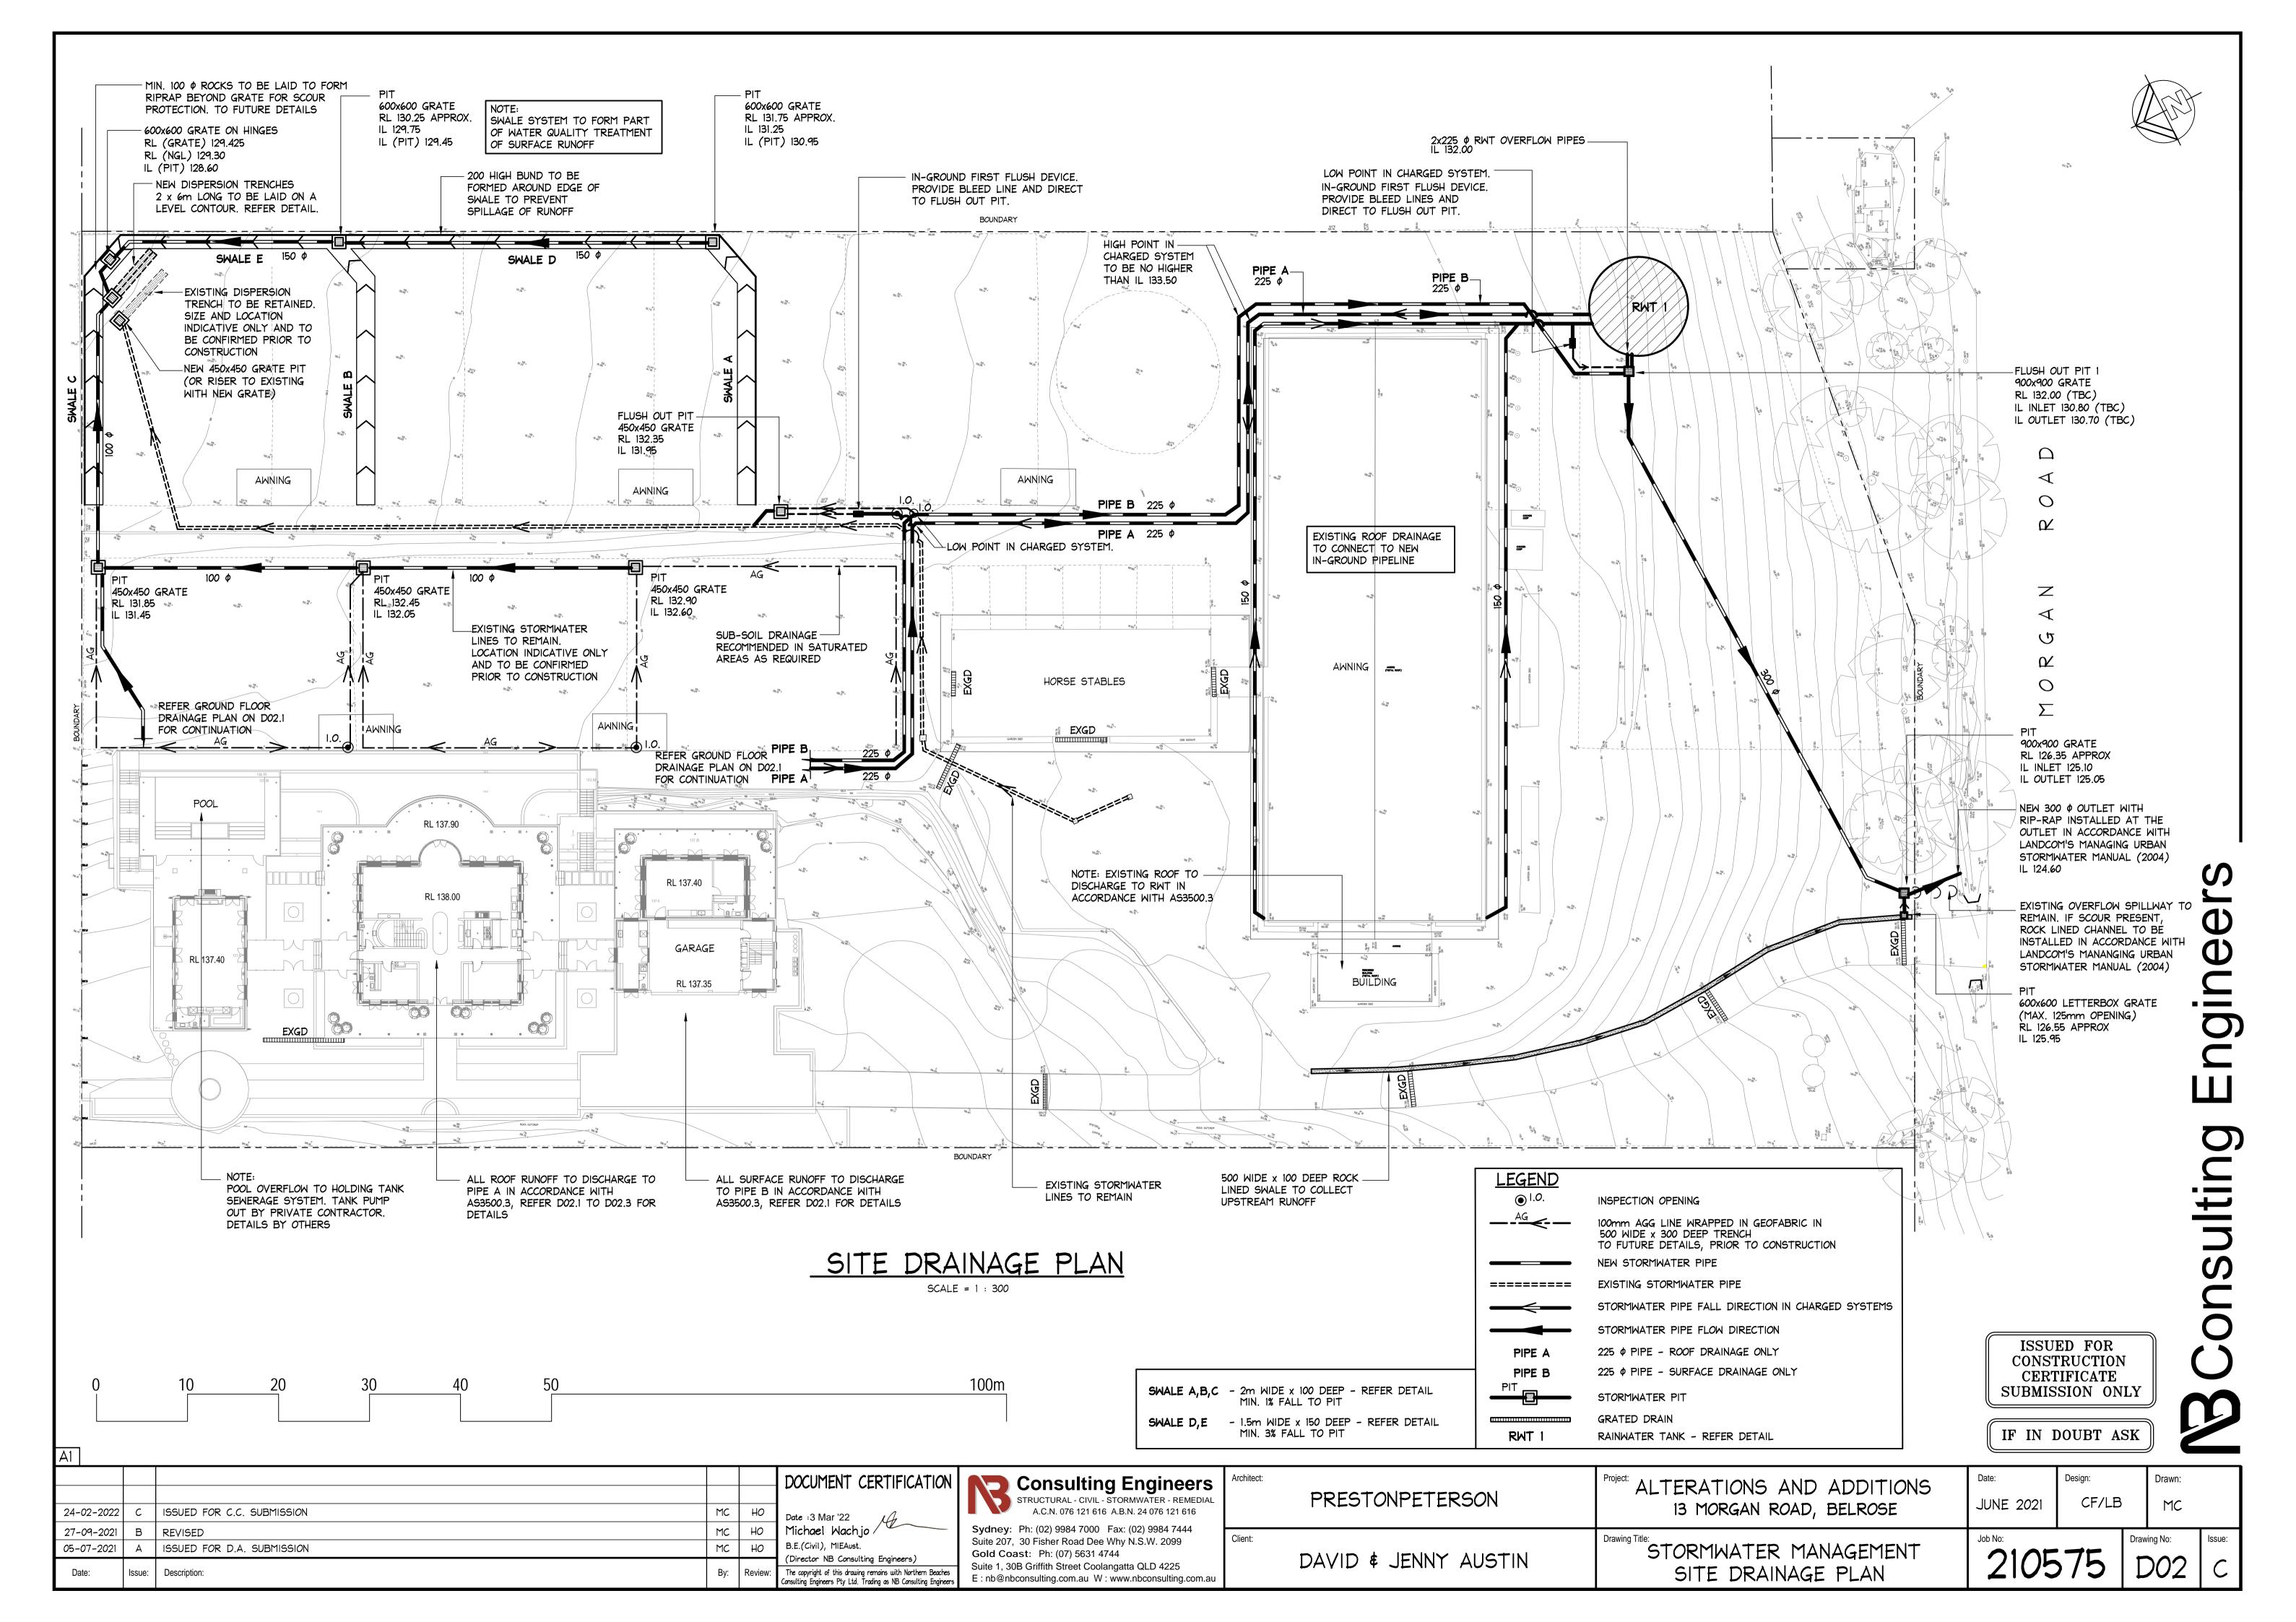

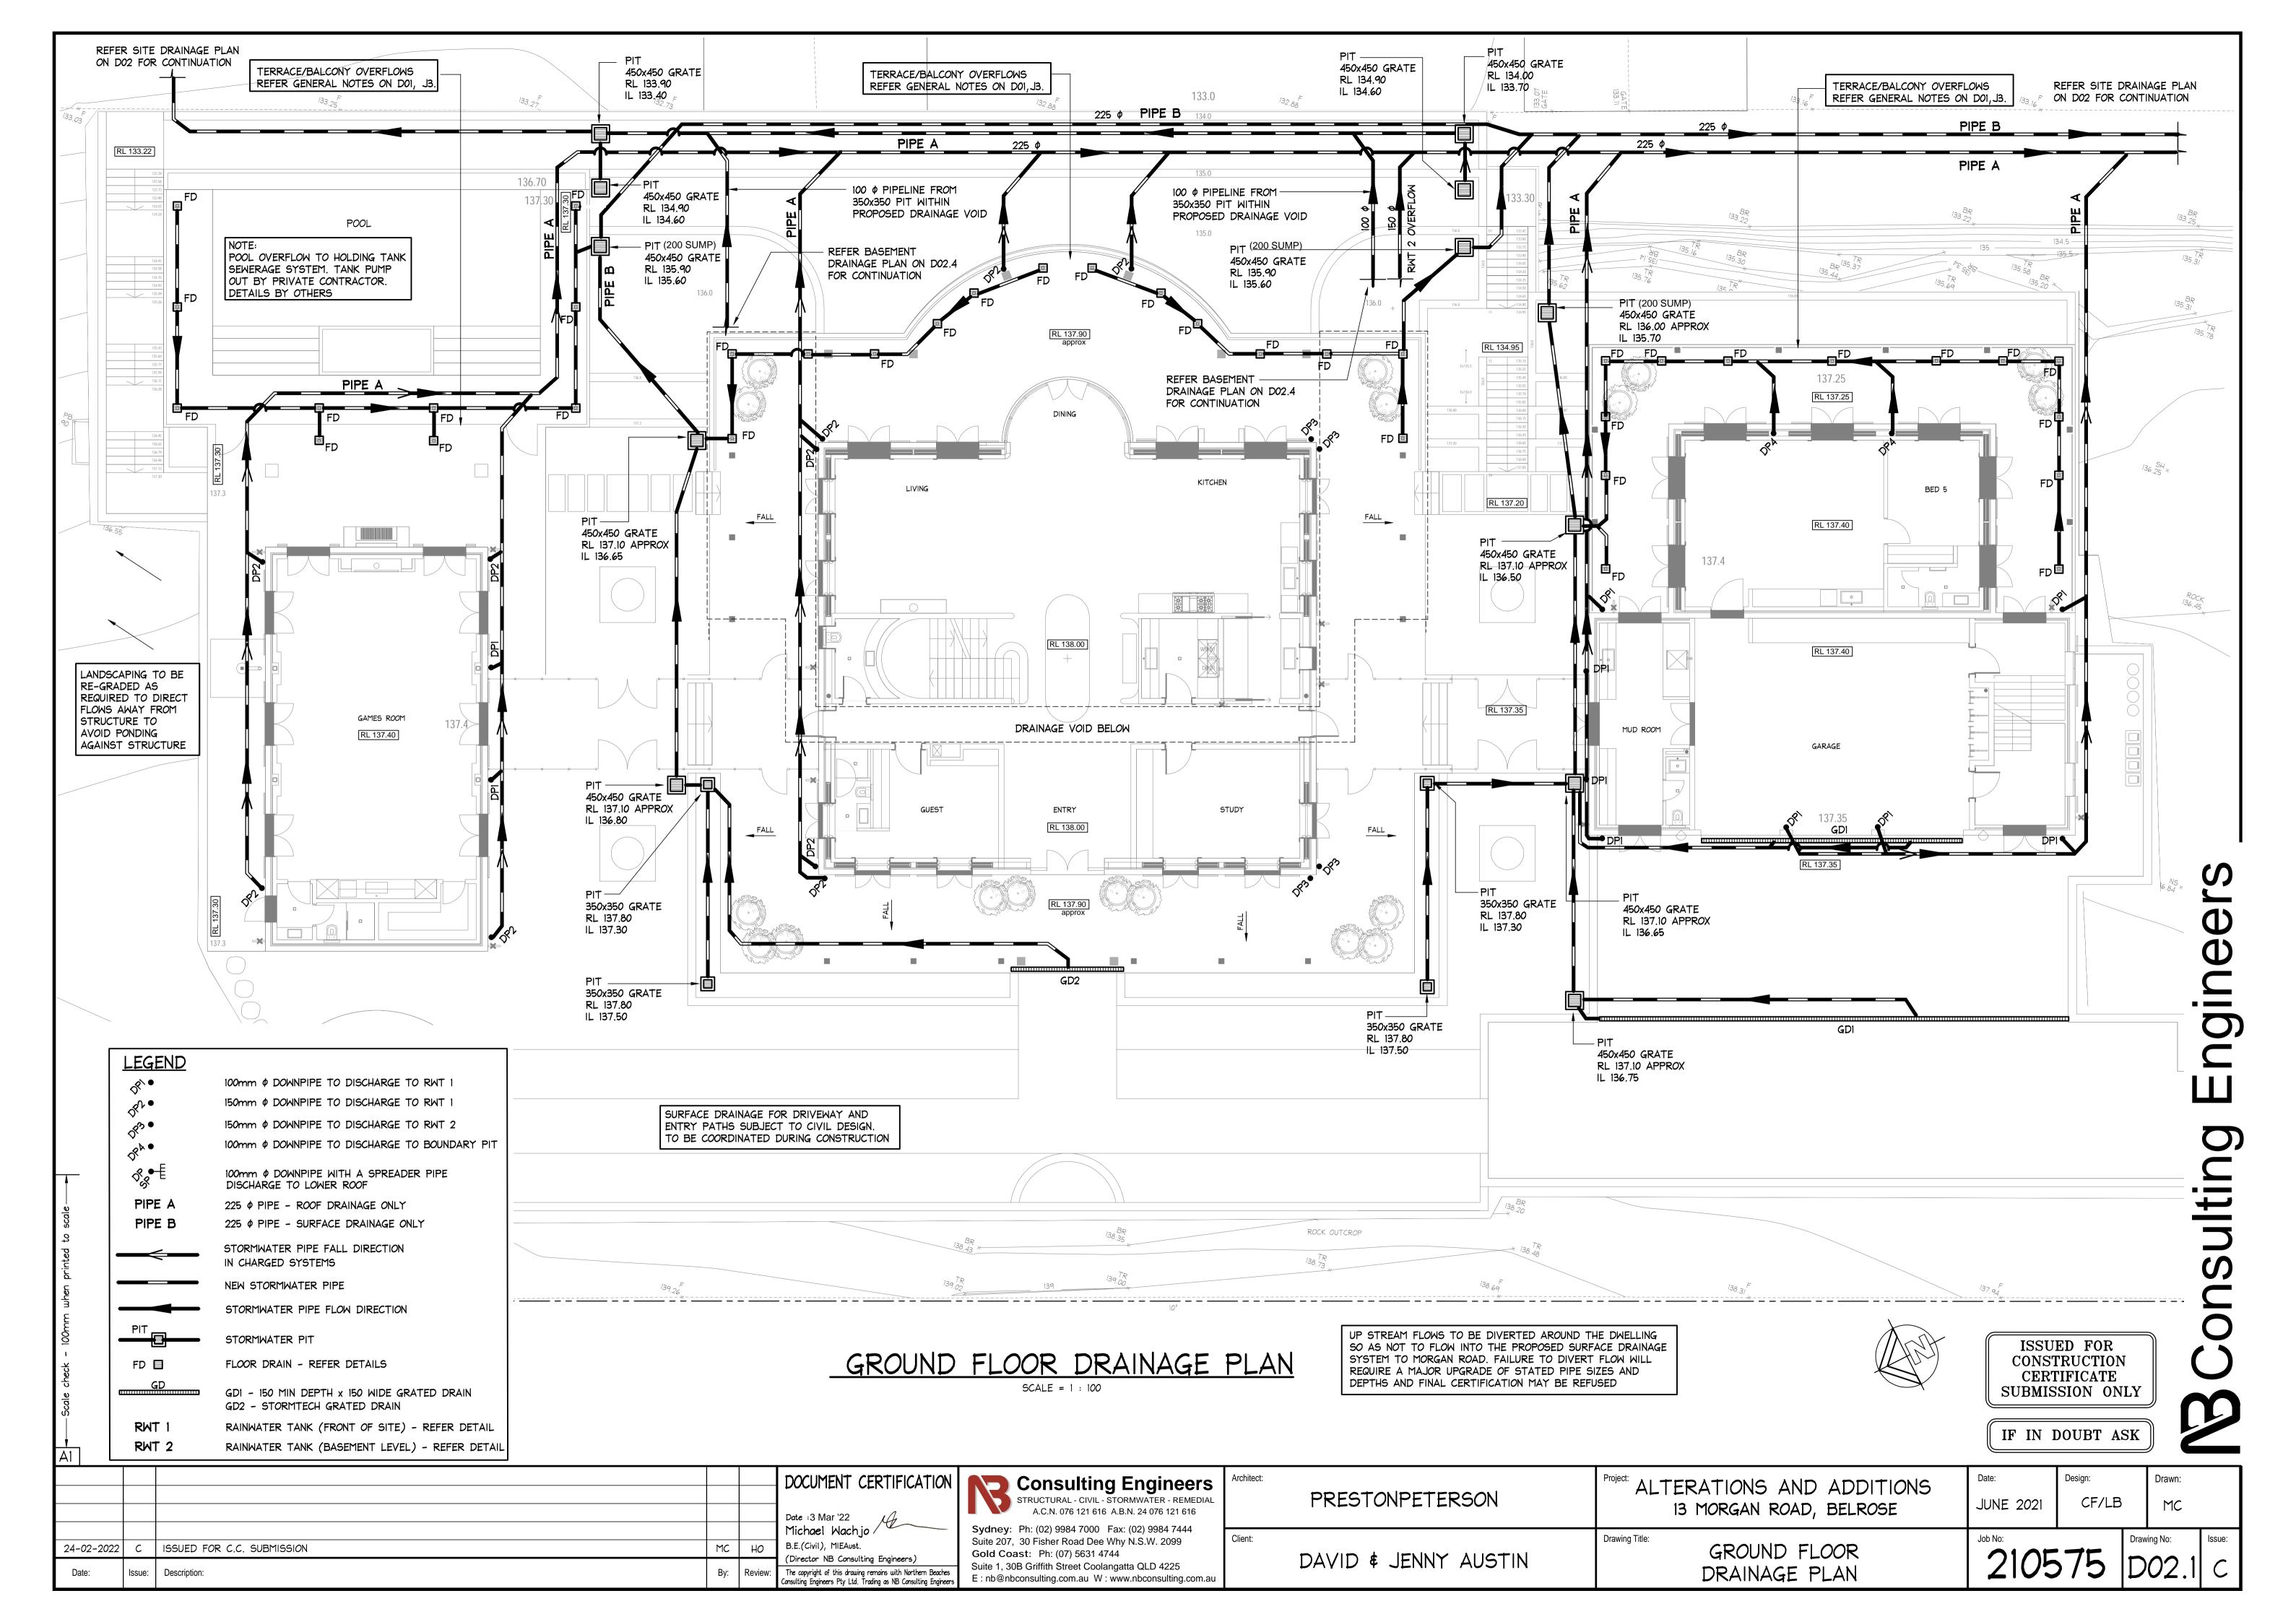

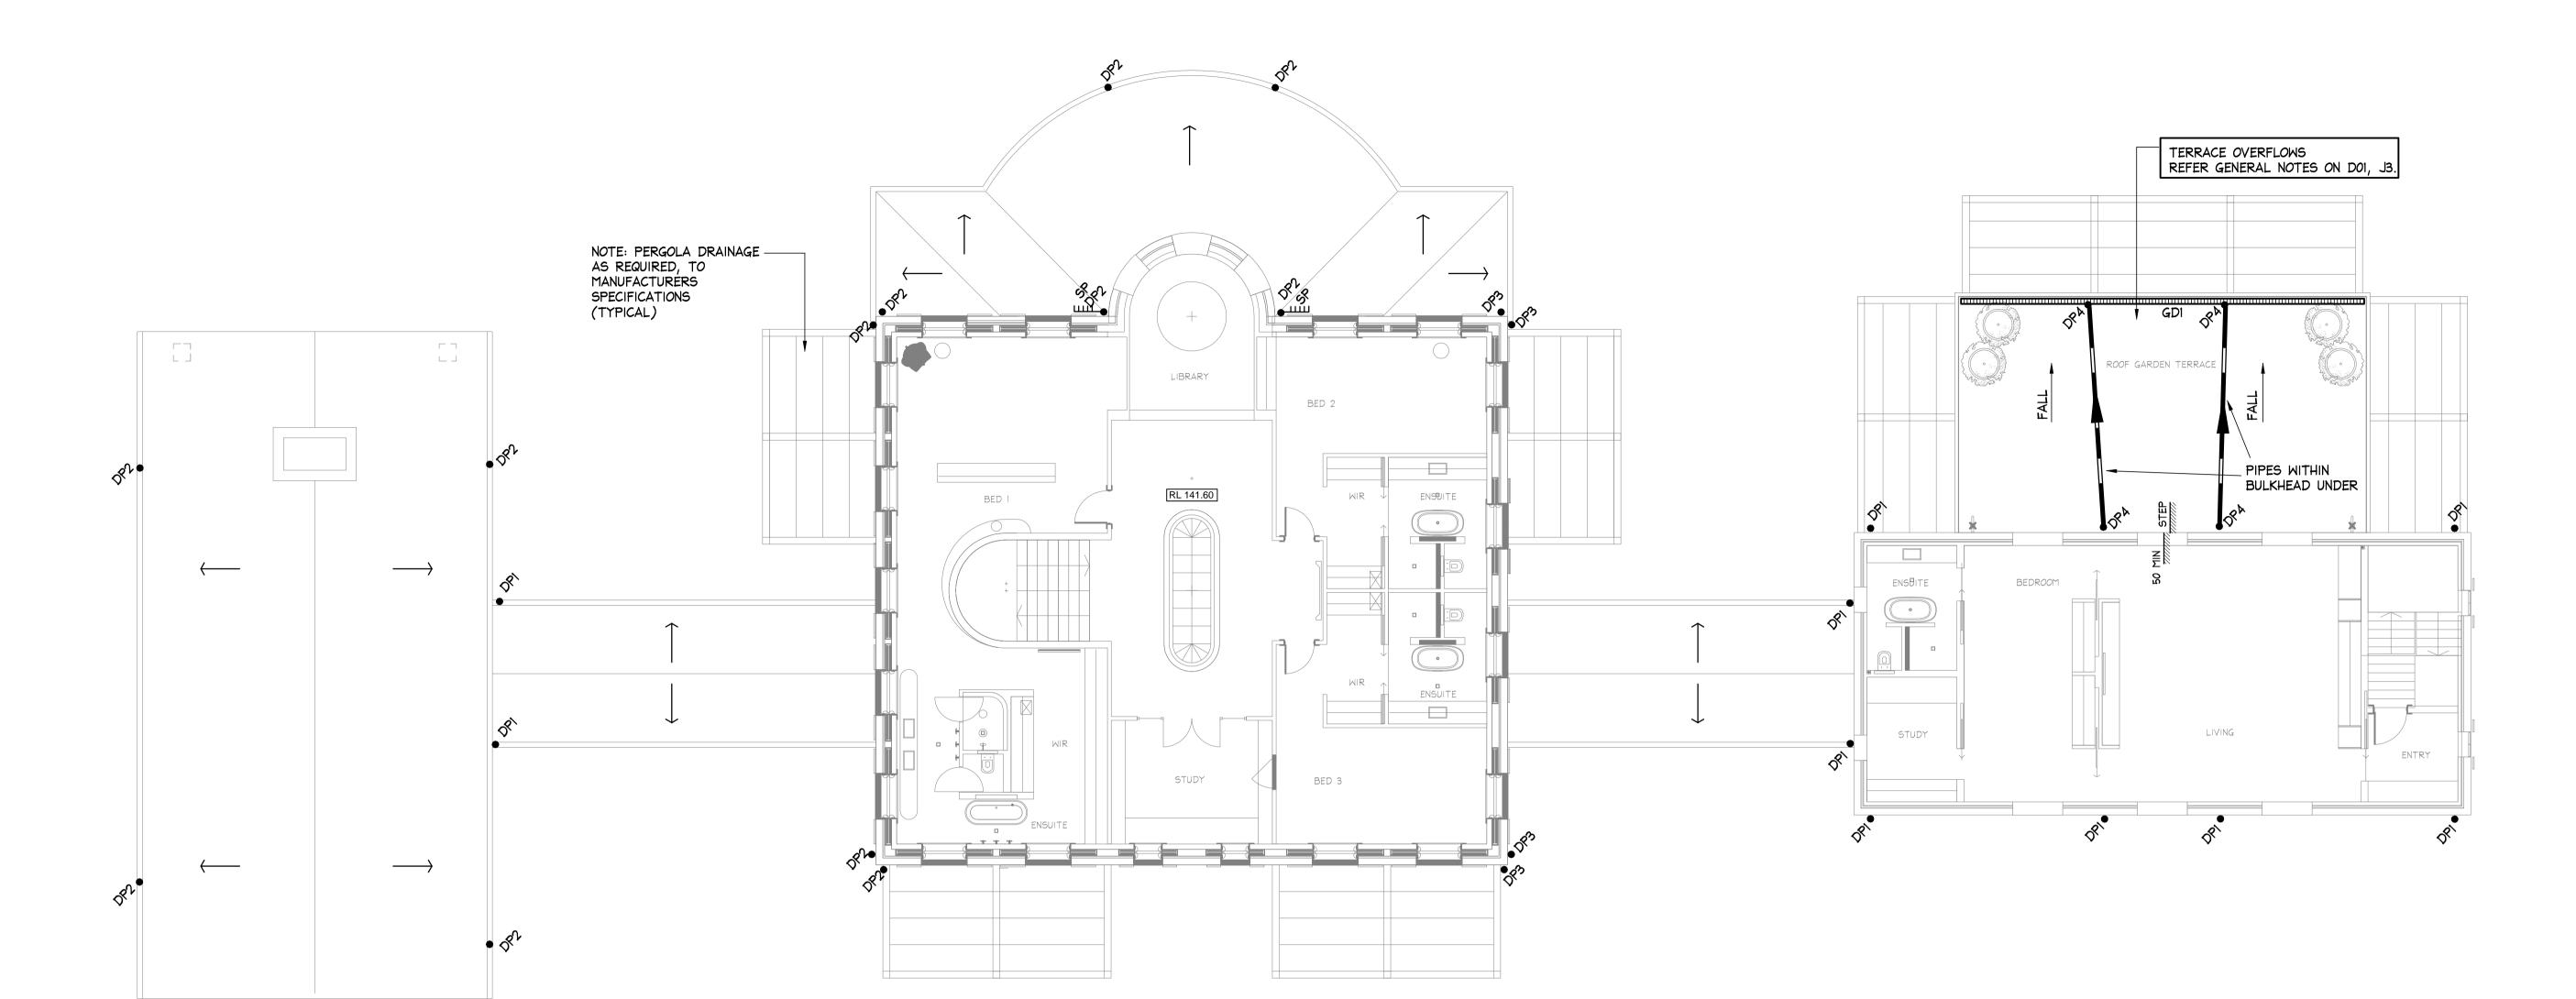

## <u>LEGEND</u> 100mm \$\phi\$ DOWNPIPE TO DISCHARGE TO RWT 1 150mm \$\phi\$ DOWNPIPE TO DISCHARGE TO RWT 1 150mm \$\phi\$ DOWNPIPE TO DISCHARGE TO RWT 2 100mm \$\phi\$ DOWNPIPE TO DISCHARGE TO BOUNDARY PIT 100mm Ø DOWNPIPE WITH A SPREADER PIPE DISCHARGE TO LOWER ROOF 225 Φ PIPE - ROOF DRAINAGE ONLY 225 \$\phi\$ PIPE - SURFACE DRAINAGE ONLY STORMWATER PIPE FALL DIRECTION IN CHARGED SYSTEMS NEW STORMWATER PIPE STORMWATER PIPE FLOW DIRECTION STORMWATER PIT FLOOR DRAIN - REFER DETAILS GDI - 150 MIN DEPTH x 150 WIDE GRATED DRAIN

GD2 - STORMTECH GRATED DRAIN

RAINWATER TANK (FRONT OF SITE) - REFER DETAIL

RAINWATER TANK (BASEMENT LEVEL) - REFER DETAIL

RWT 1

RWT 2

## FIRST FLOOR AND LOWER ROOF DRAINAGE PLAN SCALE = 1 : 100

ISSUED FOR CONSTRUCTION CERTIFICATE SUBMISSION ONLY


IF IN DOUBT ASK


, ,,						
					DOCUMENT CERTIFICATION	Consulting Engineers  STRUCTURAL - CIVIL - STORMWATER - REMEDIAL
					Date: 3 Mar '22 Michael Wachjo	A.C.N. 076 121 616 A.B.N. 24 076 121 616  Sydney: Ph: (02) 9984 7000 Fax: (02) 9984 7444
17-02-2022	С	ISSUED FOR C.C. SUBMISSION	MC	НО	B.E.(Civil), MIEAust. (Director NB Consulting Engineers)	Suite 207, 30 Fisher Road Dee Why N.S.W. 2099 Gold Coast: Ph: (07) 5631 4744
Date:	Issue:	Description:	Ву:	Review:	The copyright of this drawing remains with Northern Beaches Consulting Engineers Pty Ltd. Trading as NB Consulting Engineers	Suite 1, 30B Griffith Street Coolangatta QLD 4225 E : nb@nbconsulting.com.au W : www.nbconsulting.com.au

TI <i>O</i> N	Consulting Engineers STRUCTURAL - CIVIL - STORMWATER - REMEDIAL A.C.N. 076 121 616 A.B.N. 24 076 121 616
	Sydney: Ph: (02) 9984 7000 Fax: (02) 9984 7444 Suite 207, 30 Fisher Road Dee Why N.S.W. 2099 Gold Coast: Ph: (07) 5631 4744
Reaches	Suite 1, 30B Griffith Street Coolangatta QLD 4225

PRESTONPETERSON	13 MORGAN ROAD, E
DAVID & JENNY AUSTIN	Drawing Title: FIRST FLOOR AND LO DRAINAGE PL

RATIONS AND ADDITIONS MORGAN ROAD, BELROSE	JUNE 2021	CF/L	3
FLOOR AND LOWER ROOF	Job No: 2105	575	Drawin

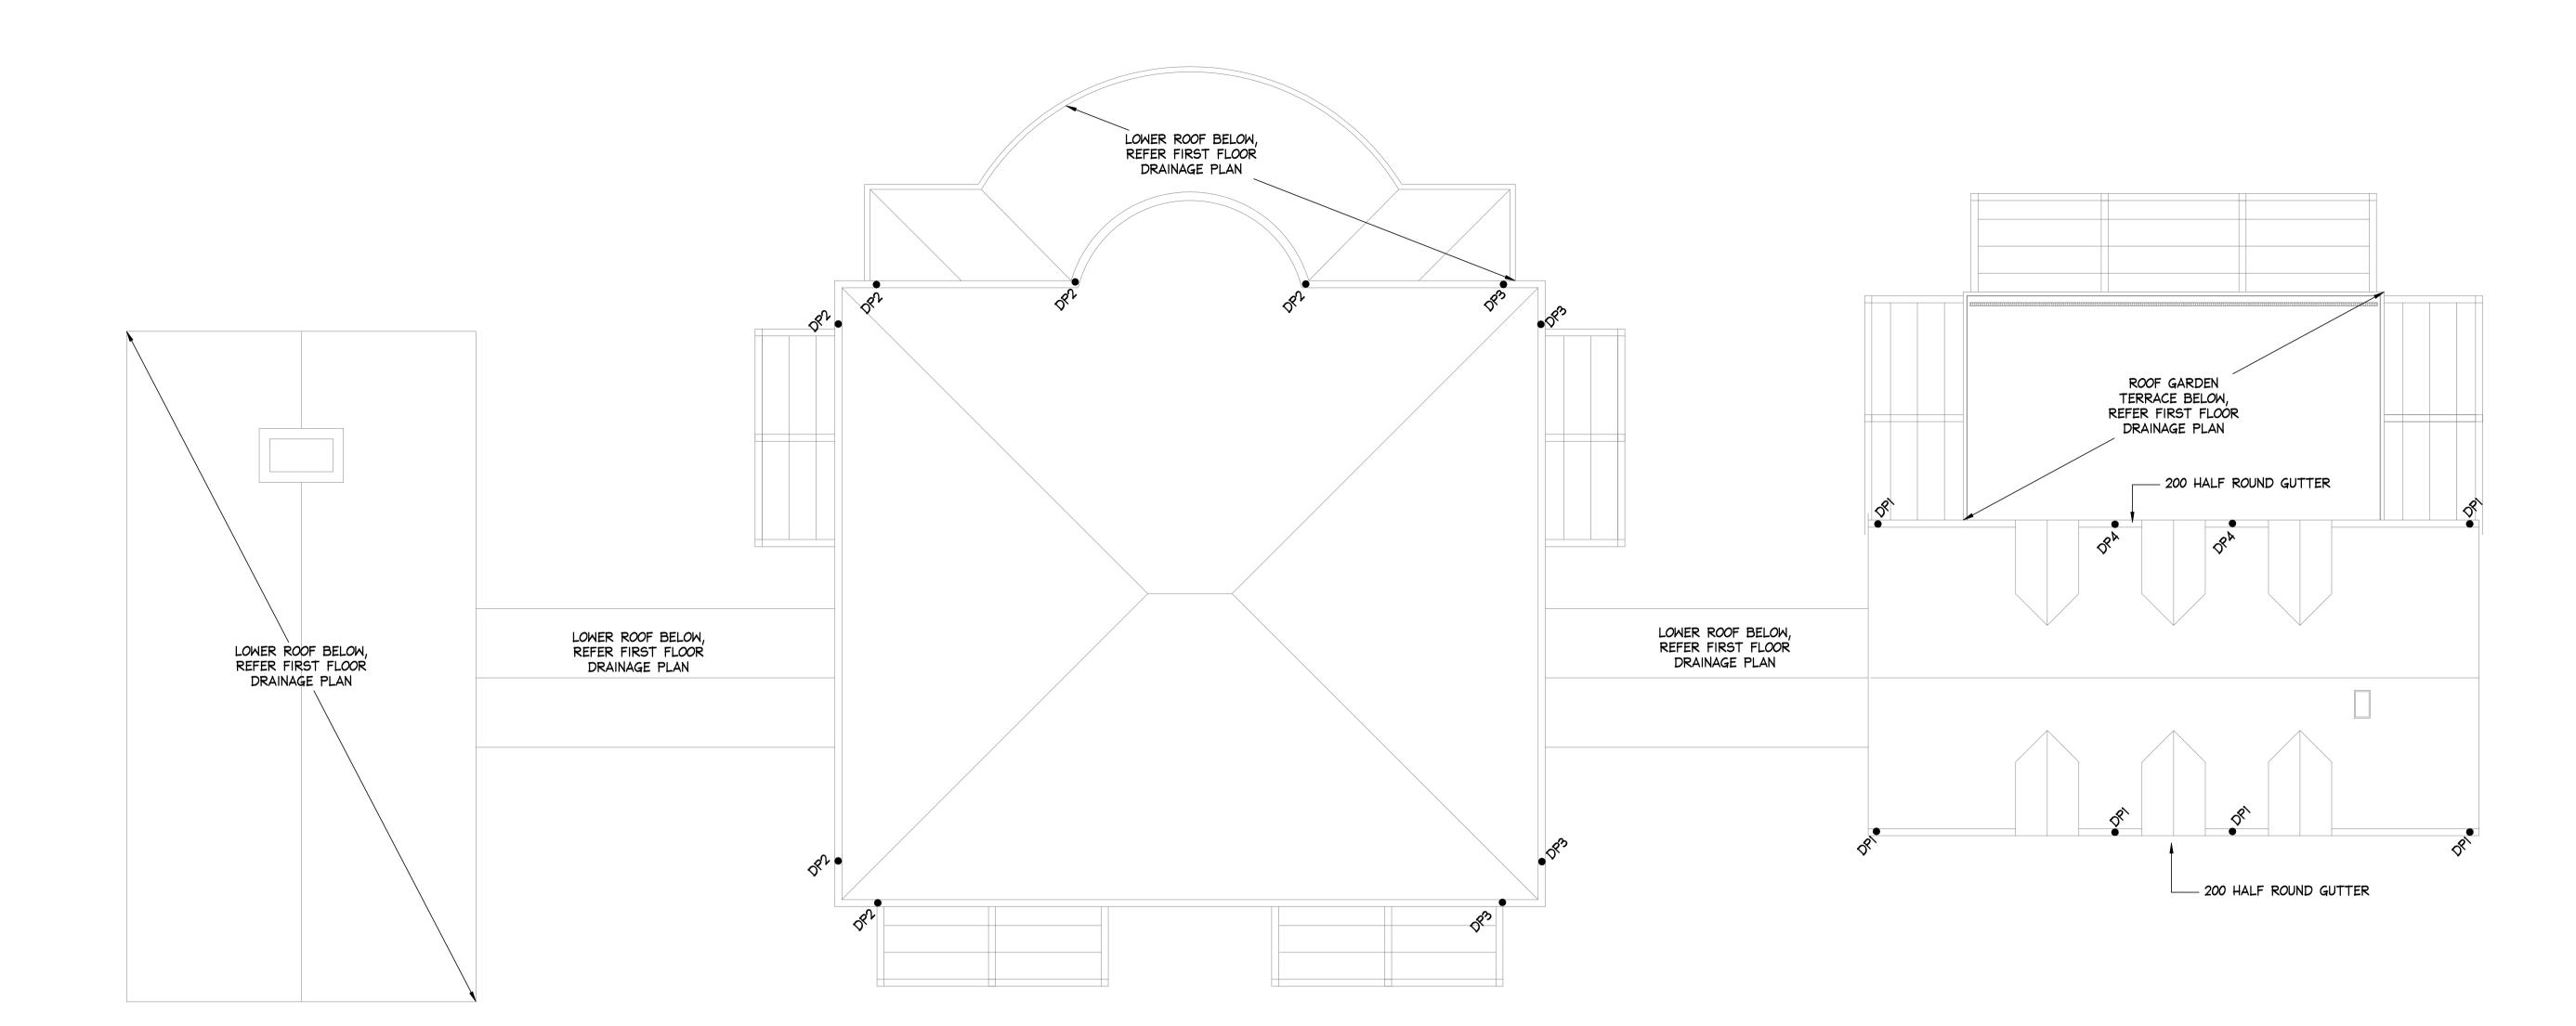

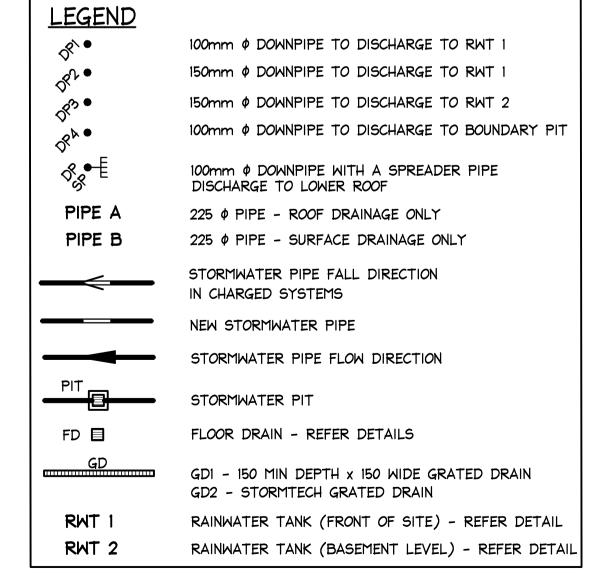

## UPPER ROOF DRAINAGE PLAN

ISSUED FOR
CONSTRUCTION
CERTIFICATE
SUBMISSION ONLY

IF IN DOUBT ASK

					DOCUMENT CERTIFICATION	
					Date: 3 Mar '22 Michael Wachjo	
17-02-2022	С	ISSUED FOR C.C. SUBMISSION	MC	НО	B.E.(Civil), MIEAust. (Director NB Consulting Engineers)	
Date:	Issue:	Description:	Ву:		The copyright of this drawing remains with Northern Beaches Consulting Engineers Ptv Ltd. Trading as NB Consulting Engineers	

ON	Consulting Engineers STRUCTURAL - CIVIL - STORMWATER - REMEDIA A.C.N. 076 121 616 A.B.N. 24 076 121 616
_	Sydney: Ph: (02) 9984 7000 Fax: (02) 9984 7444
	Suite 207, 30 Fisher Road Dee Why N.S.W. 2099
	Gold Coast: Ph: (07) 5631 4744
nchec	Suite 1, 30B Griffith Street Coolangatta QLD 4225

E:nb@nbconsulting.com.au W:www.nbconsulting.com.au

PRESTONPETERSON	Project: ALTERATIONS AND ADDITIONS 13 MORGAN ROAD, BELROSE	Date:
DAVID & JENNY AUSTIN	UPPER ROOF DRAINAGE PLAN	Job No:


Date: Design: Drawn:


JUNE 2021 CF/LB MC

Job No: Drawing No: Issue

210575 Drawing No: Drawing No: Drawing No: C

3 Consulting Engineers

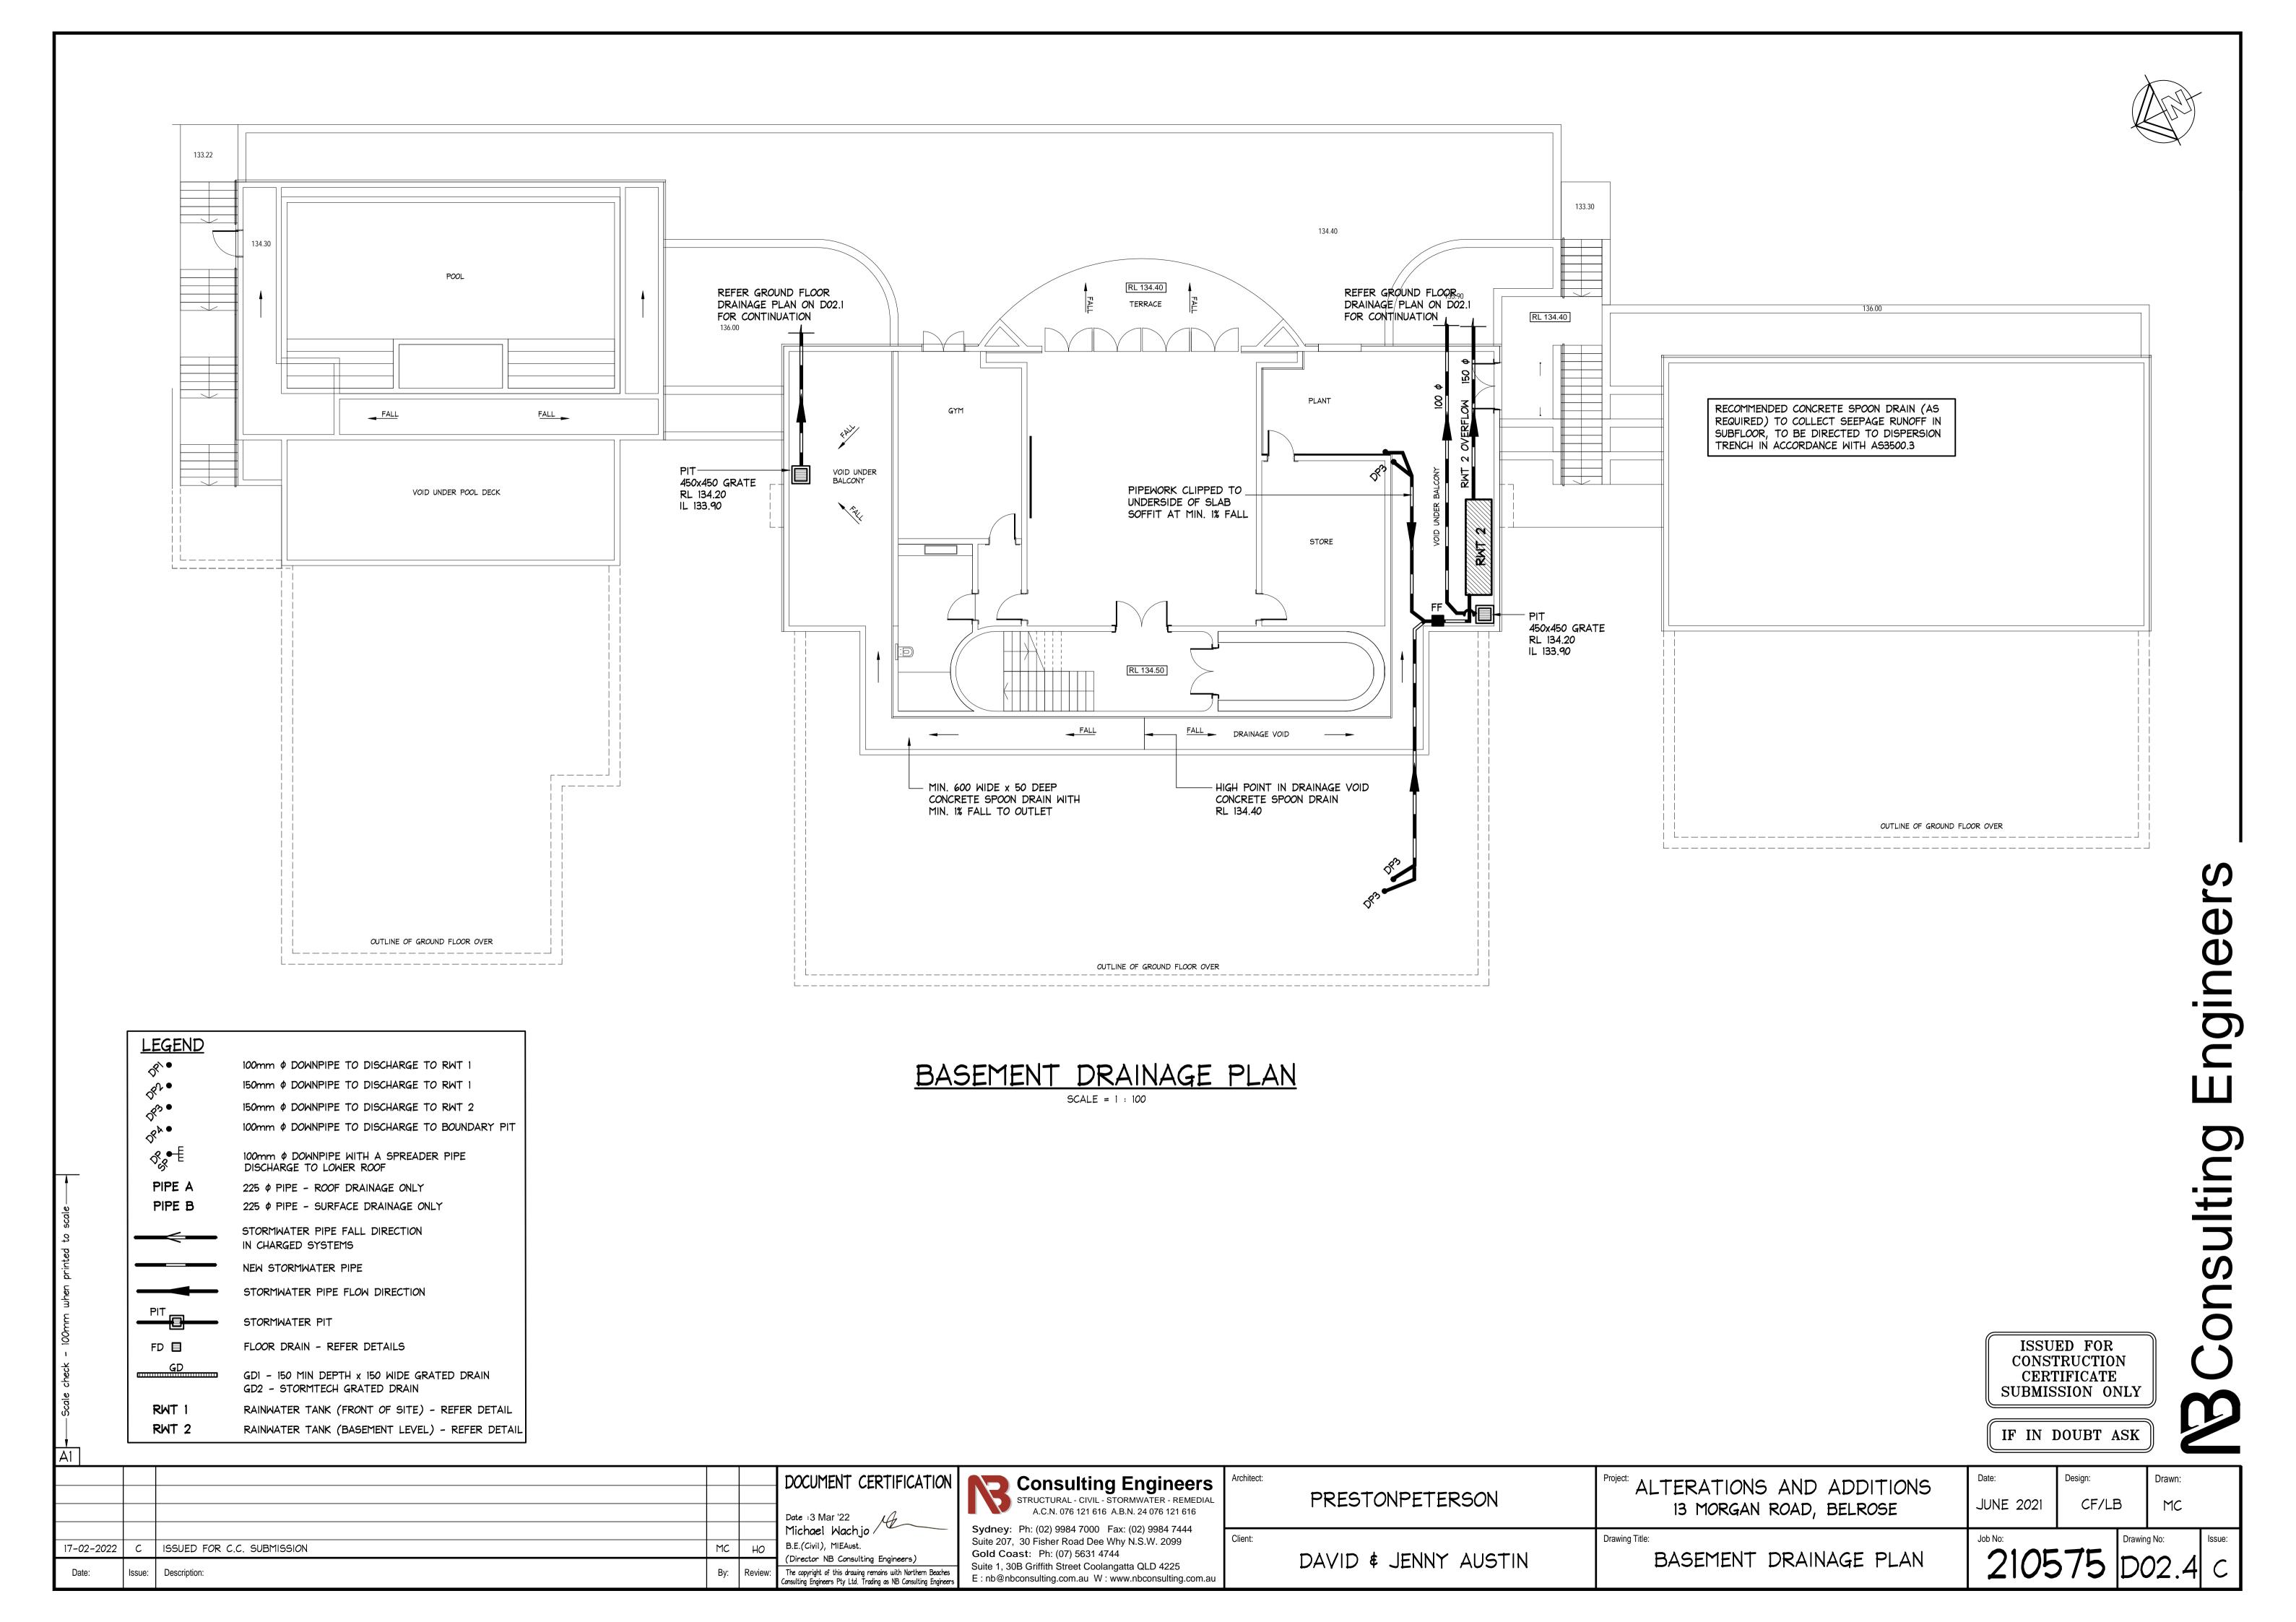

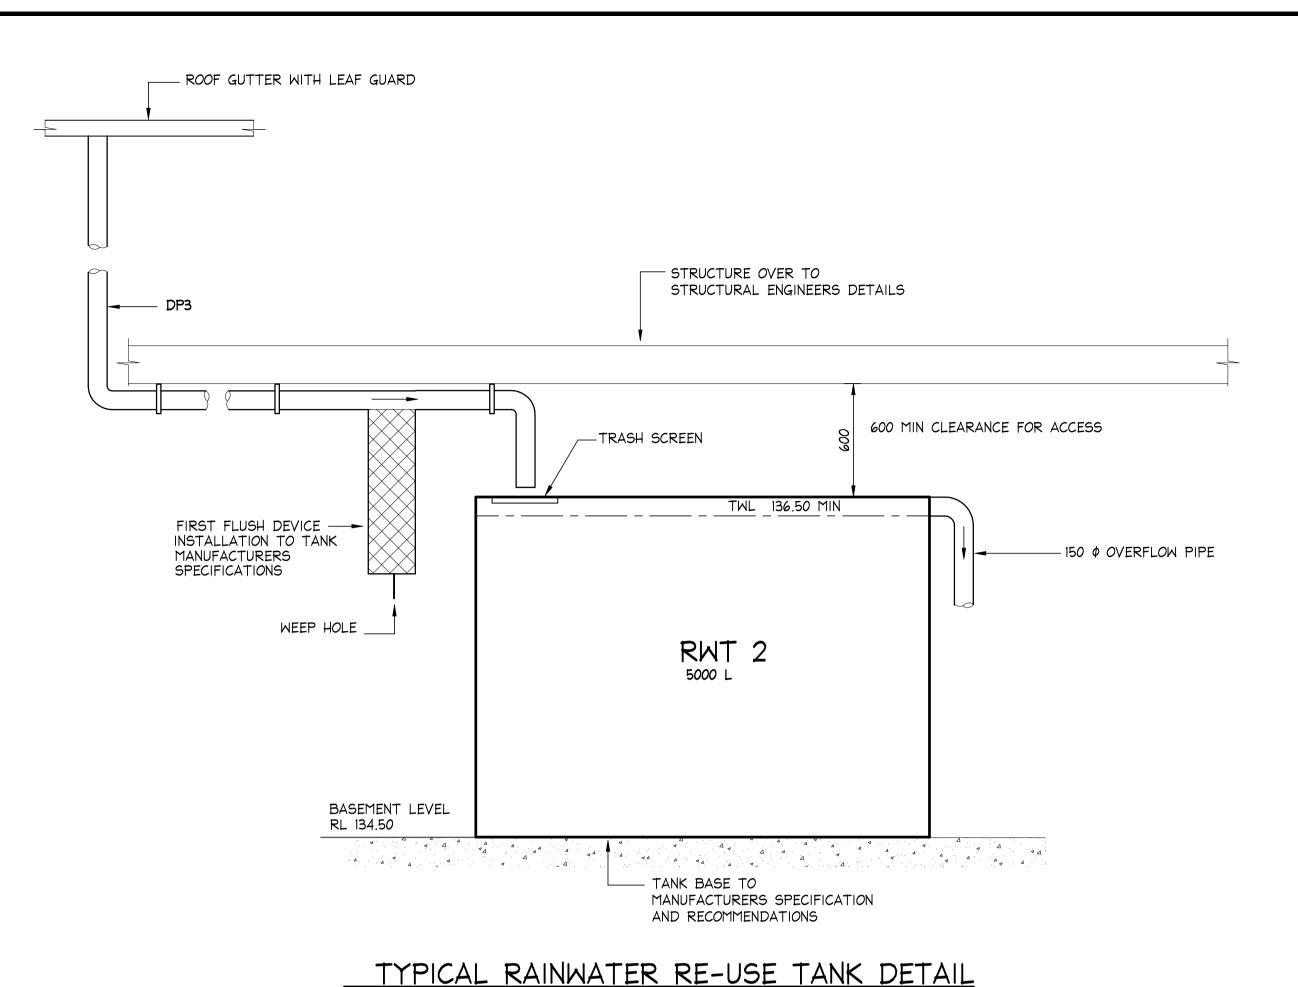

NOT TO SCALE

1.0.

410 JUMBO EVERGLAS SQUARELINE PLASTIC TRENCH OR APPROVED —

PERMANENT BIDIM A24

GEOTEXTILE FABRIC

PERMANENT BIDIM A24

I. DISPERSION TRENCH TO BE LAID ON A LEVEL CONTOUR.

EVENLY DISPERSE WATER DOWN HILL OF THE TRENCH

TRENCH NOTIFY ENGINEER FOR ALTERNATE DETAIL.

2. GROUND LEVEL ABOVE TRENCH MUST BE LEVEL SO AS TO

3. IF ROCK IS ENCOUNTERED DURING EXCAVATION FOR DISPERSION


GEOTEXTILE FABRIC

EQUIVALENT BY EVERHARD IND. PTY LTD.

NOTE: DISPERSION TRENCH






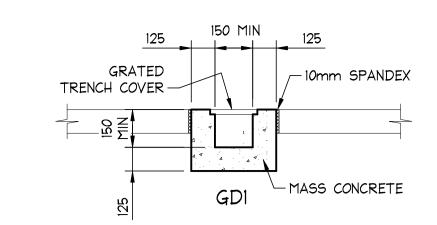

OR PRECAST GRATED DRAIN ALTERNATIVE POLYPROPYLENE PIT BY MANUFACTURER


TYPICAL GRATED DRAIN SCALE = 1 : 20

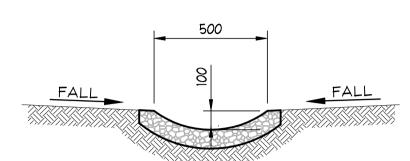

## ROCK LINED SWALE CHANNEL SCALE = N.T.S.

2000 MIN. 1% FALL TO PIT

> SWALE A,B,C DETAIL SCALE = N.T.S.

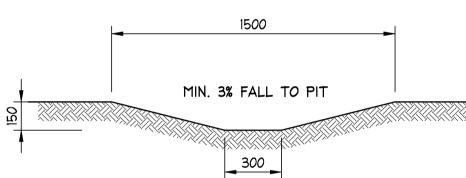


SWALE D,E DETAIL SCALE = N.T.S.


– 3 x 5mm Ø HOLES AND SCREW CAP FOR CLEANING 450x450 GRATE MAXI MESH SCREEN RH3030 & HANDLE BLEED LINE FROM IN-GROUND FIRST FLUSH GEOFABRIC -- Φ20mm WEEP BLUE METAL-HOLES AT 200 CTS

PRECAST OR CAST INSITU PIT REFER STORMWATER NOTES ALTERNATIVE POLYPROPYLENE PIT BY MANUFACTURER FLUSH OUT PIT 2 DETAIL

SCALE = 1 : 20

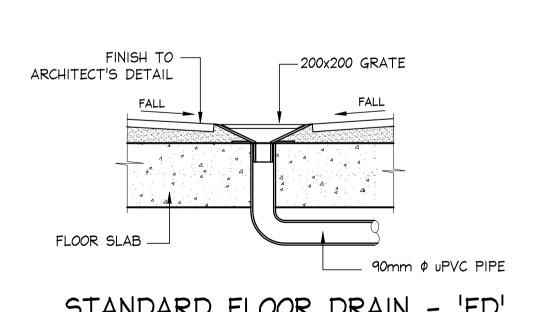

STANDARD FLOOR DRAIN - 'FD' SCALE = 1 : 10

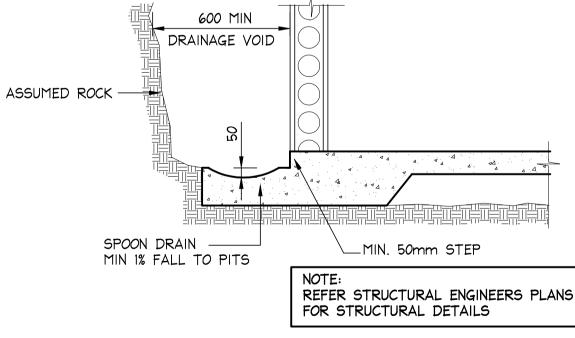

TYPICAL SPOON DRAIN DETAIL SCALE = 1 : 20

IF IN DOUBT ASK

DOCUMENT CERTIFICATION MC 24-02-2022 ISSUED FOR C.C. SUBMISSION Michael Wachjo MC REVISED 27-09-2021 B.E.(Civil), MIEAust. 05-07-2021 ISSUED FOR D.A. SUBMISSION НО (Director NB Consulting Engineers) Description: Issue:

6 000 (12 000 TOTAL)

GROUND LEVEL

COARSE SAND

BACKFILL

-225mm φ uPVC

PIT TO TRENCH

DISPERSION TRENCH LONGITUDINAL SECTION

SCALE = N.T.S.

\$420mm WEEP

GEOTEXTILE FILTER FABRIC

BIDIM A24 OR SIMILAR

HOLES AT 200 CTS

450x450 GRATE

MAXI MESH SCREEN RH3030 \$ HANDLE

INLET PIPE -

BLUE METAL

200mm DEEP SILT TRAF

A.C.N. 076 121 616 A.B.N. 24 076 121 616 **Sydney**: Ph: (02) 9984 7000 Fax: (02) 9984 7444

REPLACEABLE BIDIM A24

CONSOLIDATE SAND BACKFILL

WITH WATER IN 100mm LAYERS

PROVIDE 14mm BLUE METAL AGGREGATE

WRAPPED IN PERMANENT GEOTEXTILE FABRIC

GROUND LEVEL

GEOTEXTILE FILTER

SECTION X-X


SCALE = N.T.S.

Client: E: nb@nbconsulting.com.au W: www.nbconsulting.com.au

Drawing No: D03


Consulting Engineers
STRUCTURAL - CIVIL - STORMWATER - REMEDIAL

Architect: Drawn: ALTERATIONS AND ADDITIONS PRESTONPETERSON JUNE 2021 MC 13 MORGAN ROAD, BELROSE Drawing Title: Suite 207, 30 Fisher Road Dee Why N.S.W. 2099 STORMWATER MANAGEMENT 210575 Gold Coast: Ph: (07) 5631 4744 DAVID \$ JENNY AUSTIN Suite 1, 30B Griffith Street Coolangatta QLD 4225 DETAILS The copyright of this drawing remains with Northern Beaches Consulting Engineers Pty Ltd. Trading as NB Consulting Engineer

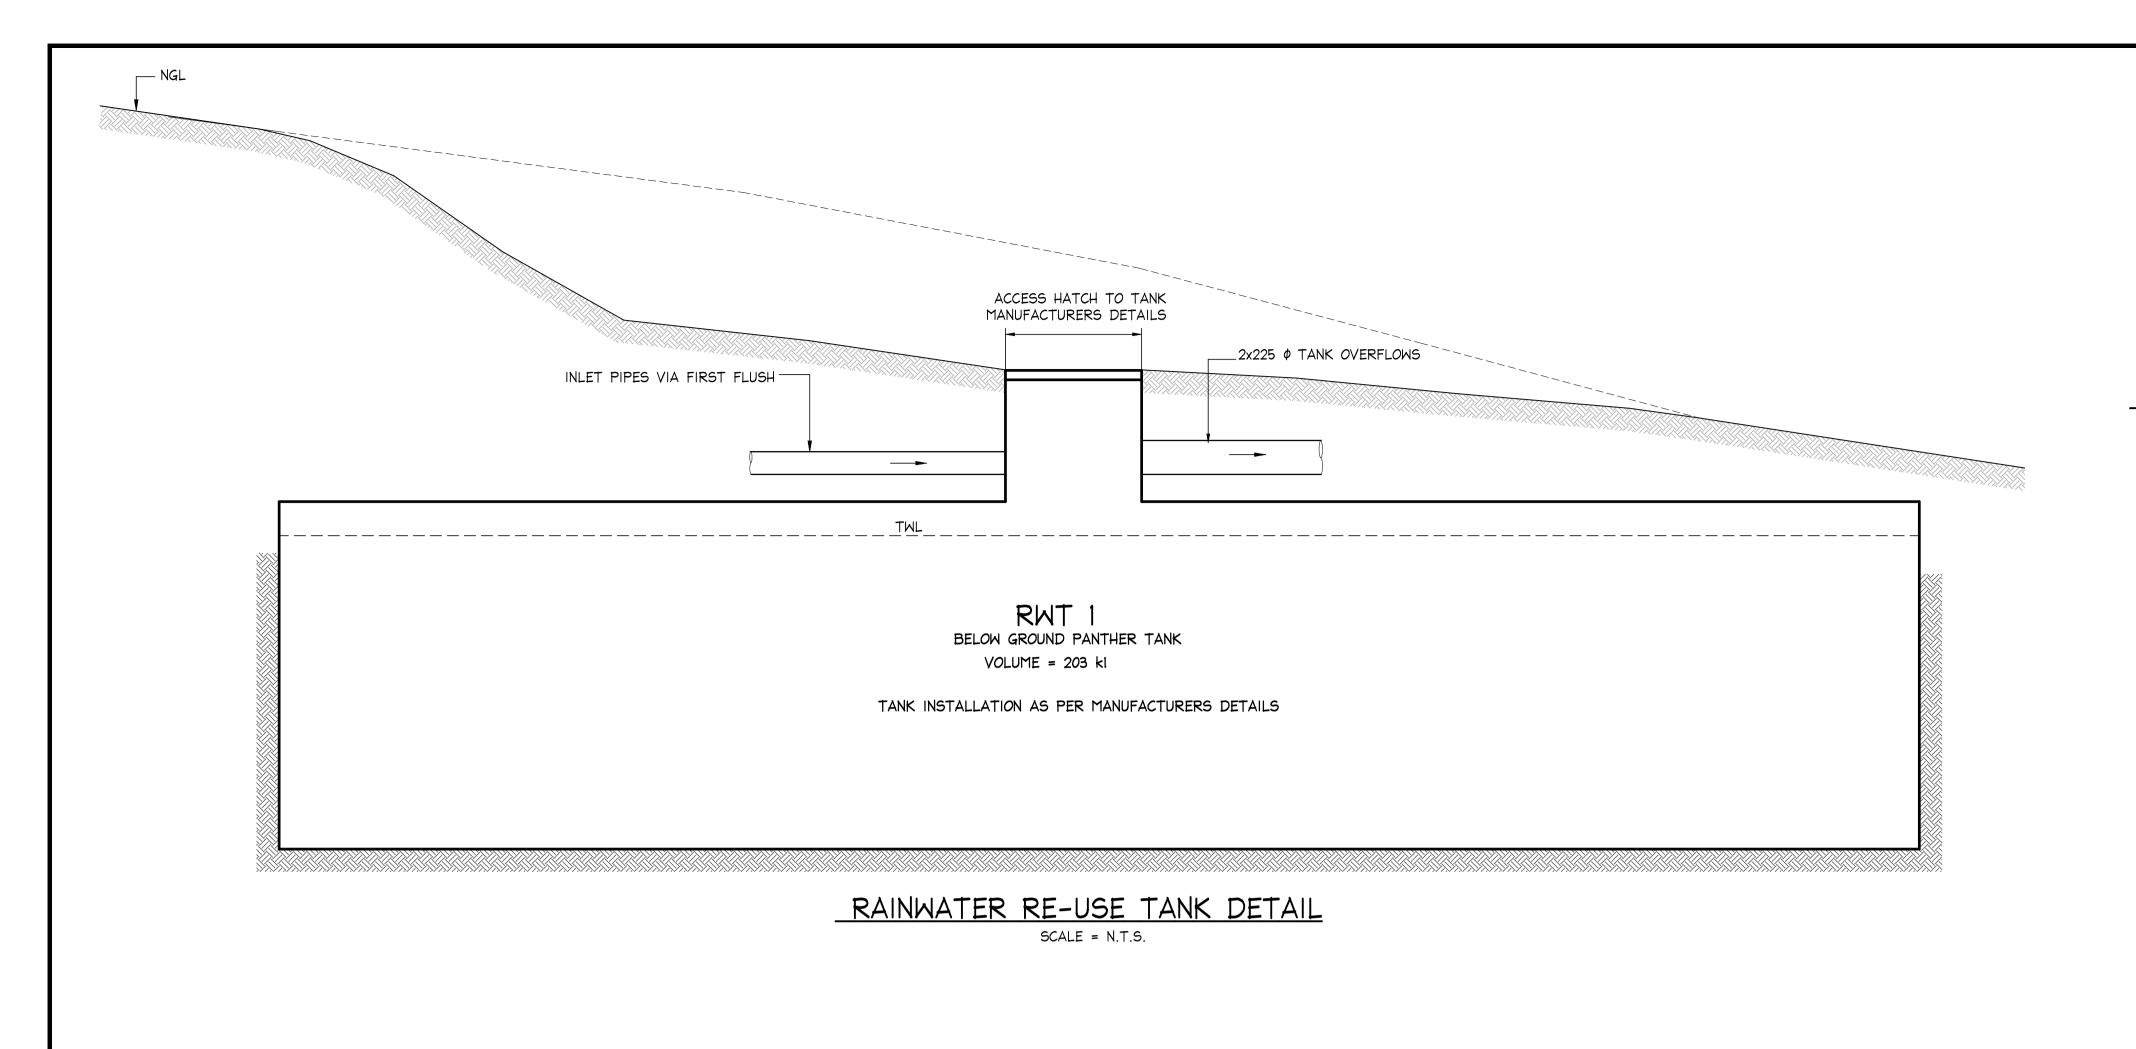





SIGN FOR RWT AND OUTLETS SCALE = N.T.S.

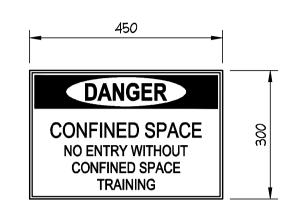


TANK ENTRY SIGN SCALE = N.T.S.

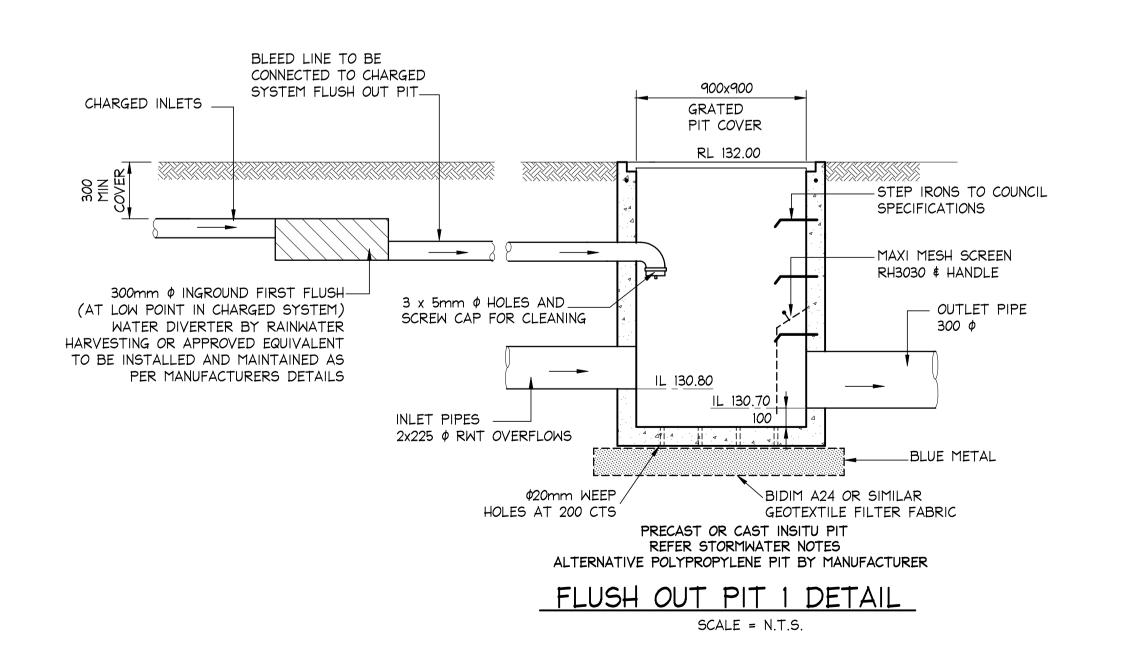

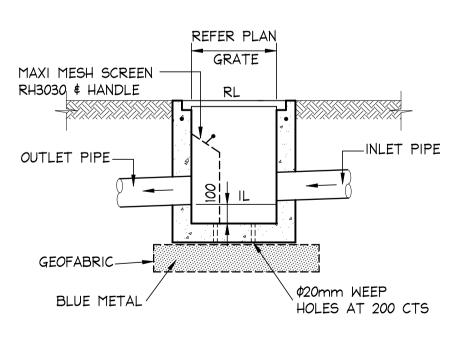

PRECAST OR CAST INSITU PIT REFER STORMWATER NOTES ALTERNATIVE POLYPROPYLENE PIT BY MANUFACTURER TYPICAL PIT DETAIL SCALE = N.T.S.

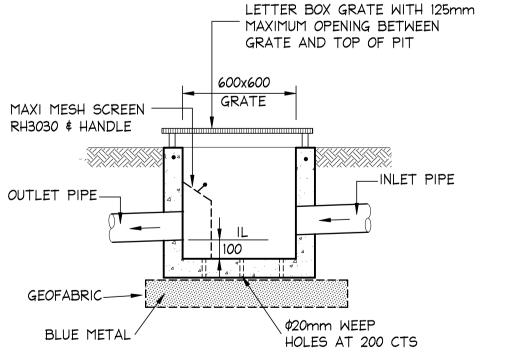

PRECAST OR CAST INSITU PIT REFER STORMWATER NOTES ALTERNATIVE POLYPROPYLENE PIT BY MANUFACTURER TYPICAL PIT DETAIL

SCALE = N.T.S.

IF IN DOUBT ASK

ISSUED FOR

CONSTRUCTION

CERTIFICATE

SUBMISSION ONLY

**						
					DOCUMENT CERTIFICATION	
					Date :3 Mar '22 Michael Wachjo	
24-02-2022	C	ISSUED FOR C.C. SUBMISSION	MC	НО	B.E.(Civil), MIEAust.	
Date:	Issue:	Description:	Ву:	Review:	(Director NB Consulting Engineers)  The copyright of this drawing remains with Northern Beaches Consulting Engineers Pty Ltd. Trading as NB Consulting Engineers	,

ON	Consulting Engineers
	STRUCTURAL - CIVIL - STORMWATER - REMEDIA A.C.N. 076 121 616 A.B.N. 24 076 121 616
_	<b>Sydney:</b> Ph: (02) 9984 7000 Fax: (02) 9984 7444 Suite 207, 30 Fisher Road Dee Why N.S.W. 2099
	Gold Coast: Ph: (07) 5631 4744

Consulting Engineers STRUCTURAL - CIVIL - STORMWATER - REMEDIAL A.C.N. 076 121 616 A.B.N. 24 076 121 616	Architect:
Sydney: Ph: (02) 9984 7000 Fax: (02) 9984 7444 Suite 207, 30 Fisher Road Dee Why N.S.W. 2099 Gold Coast: Ph: (07) 5631 4744	Client:
Suite 1, 30B Griffith Street Coolangatta QLD 4225 E:nb@nbconsulting.com.au W: www.nbconsulting.com.au	

PRESTONPETERSON	Project: ALTERATIONS AN 13 MORGAN ROAL
DAVID & IENNY ALICEN	Drawing Title: STORMWATER M

ALTERATIONS AND ADDITIONS 13 MORGAN ROAD, BELROSE
awing Title:

JUNE 2021

MC

MWATER MANAGEMENT 210575 DAVID & JENNY AUSTIN DETAILS