

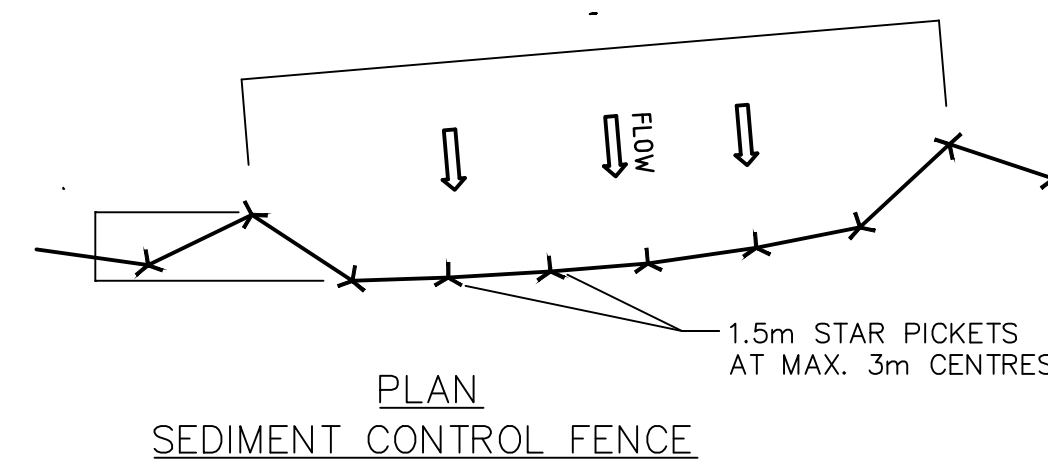
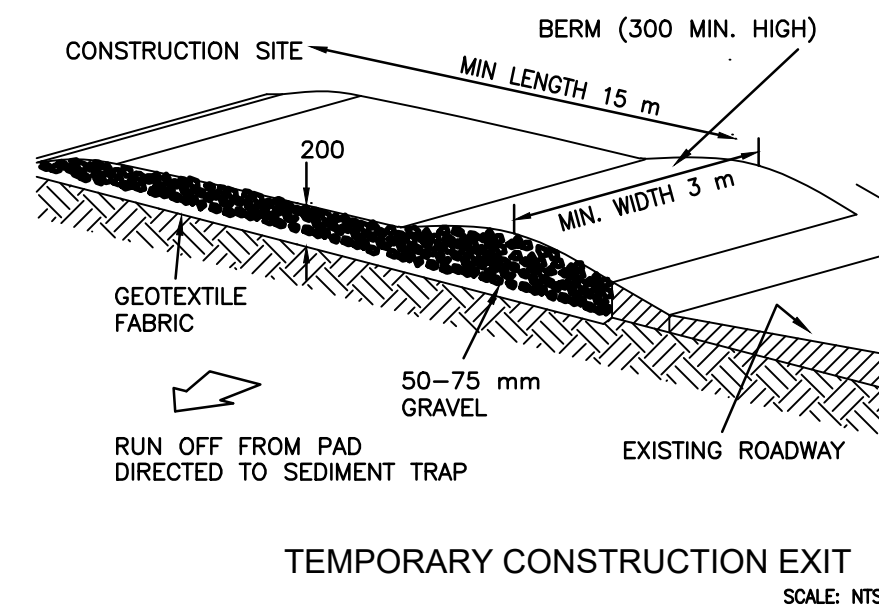


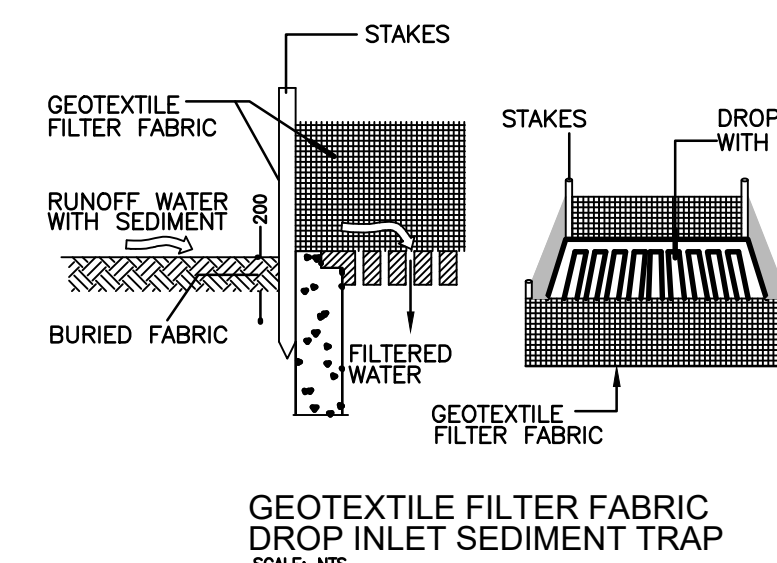

- ### CONSTRUCTION NOTES –
1. CONSTRUCT SEDIMENT FENCE AS CLOSE AS POSSIBLE TO PARALLEL TO THE CONTOURS OF THE SITE.
 2. DRIVE 1.5 METRE LONG STAR PICKETS INTO GROUND, 3 METRES APART.
 3. DIG A 150mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.
 4. BACKFILL TRENCH OVER BASE OF FABRIC.
 5. SELF SUPPORTING GEOTEXTILE TO UPSLOPE SIDE OF POSTS WITH WIRE TIES OR AS RECOMMENDED BY GEOTEXTILE MANUFACTURER.
 6. JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH 150mm OVERLAP.
 7. EXACT EXTENT OF SEDIMENT FENCE IS TO BE CONFIRMED DURING CONSTRUCTION WORKS

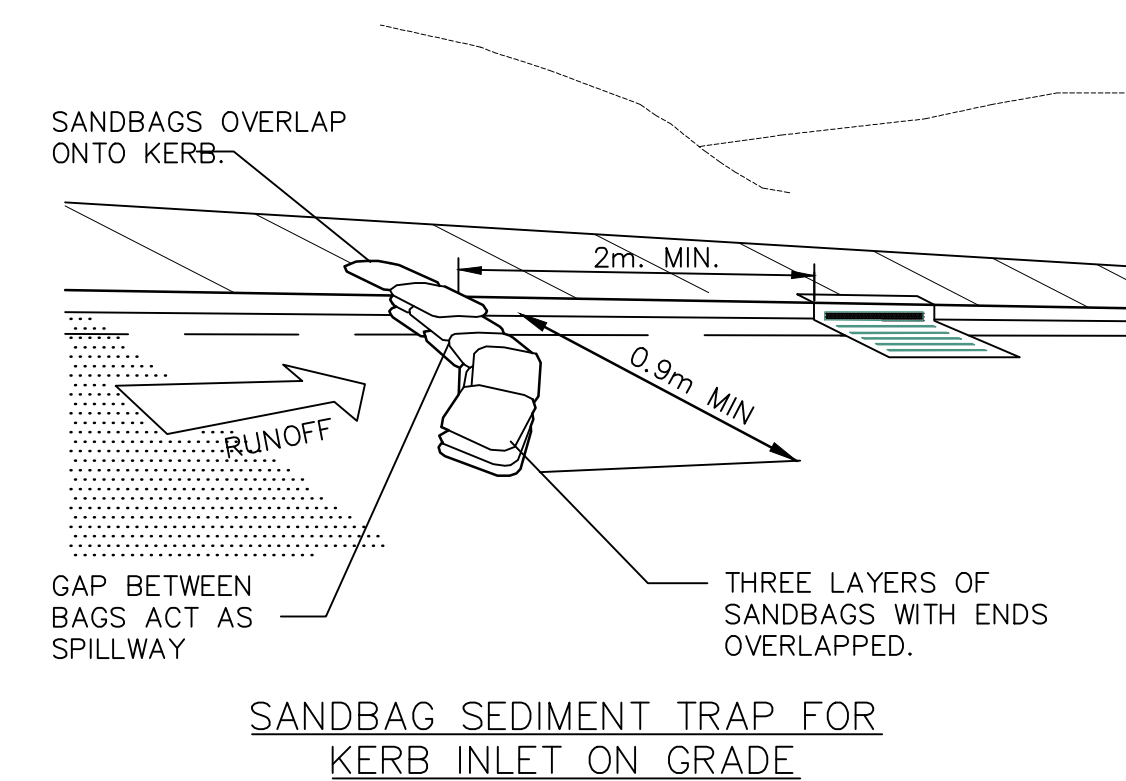

- 1) SILTATION PROTECTION DESCRIBED ABOVE SHALL BE MAINTAINED DURING THE COURSE OF CONSTRUCTION.
- 2) NEWLY CONSTRUCTED PITS SHALL BE PROTECTED FROM ANY SEDIMENT ENTRY.
- 3) ONCE IN PLACE, NO SILTATION PROTECTION SHALL BE REMOVED WITHOUT COUNCIL APPROVAL.
- 4) AFTER EACH STORM, ALL SEDIMENT TRAPS SHALL BE CLEANED AND REPLACED (IF REQUIRED) TO COUNCIL'S SATISFACTION.
- 5) OTHER METHODS OF SEDIMENT CONTROL AS MAY BE REQ'D BY THE COUNCIL SHALL BE COMPLIED WITH.

NTS

C	CONCEPT STORMWATER PLAN (FOR DA)	21/7/23	RH	RH
B	CONCEPT STORMWATER PLAN (FOR DA)	6/7/23	RH	RH
A	CONCEPT STORMWATER PLAN (FOR DA)	29/6/23	RH	RH
Revision	Amendment or reason for issue	Issue date	Drawing completed by	Designed & dwg. checked by



- HEINZ -
CONSULTING ENGINEERING
RADIMHEINZ@GMAIL.COM
PH: 0404-770980

Project ALTERATIONS AND ADDITIONS 38 BOWER STR MANLY	Drawing Title EROSION AND SEDIMENT CONTROL PLAN AND DETAILS.		
Client TRACEY & JAMES SMAIL	Scales 1:100	Client Project No. —	
Architect A&C Co.	Drawing No. 23S255-H04	Sheet 4 of 4	Revision C