
9-11 VICTORIA PARADE, MANLY

SITEWORKS AND DRAINAGE DESIGN MANLY COUNCIL LOT 1 DP 77358 & SP 31058 FOR APPROVAL



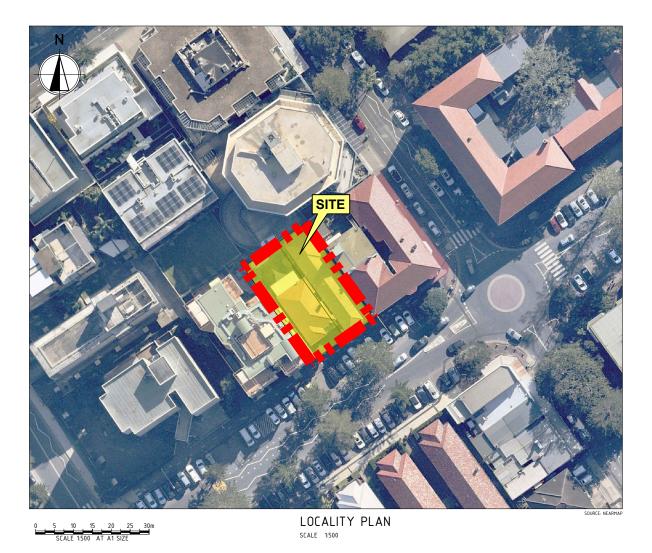

DRAWING INDEX

DRAWING No. DESCRIPTION

LOCALITY PLAN AND DRAWING INDEX CONCEPT STORMWATER MANAGEMENT PLAN EROSION AND SEDIMENT CONTROL PLAN EROSION AND SEDIMENT CONTROL DETAILS


								T
								1
								1
								1
								1
								1
A	01.09.20	ISSUED FOR APPROVAL OF MODIFICATION	AW					1
REV	DATE	DESCRIPTION	RVD	REV	DATE	DESCRIPTION	RVD	1
DEVICIONS						DEVICIONS		1


Sydney Office -L2, 8 Windmill St Sydney NSW 2000 P/+61 2 9770 3300 E/info@bgeeng.


9-11 VICTORIA PARADE

	FOR A	APPROVAL	LOCALITY PLAN AND	
DESIGNED	CHECKED	APPROVED	DIAWING INDEX	
BO	AW	ΔW		

S20059

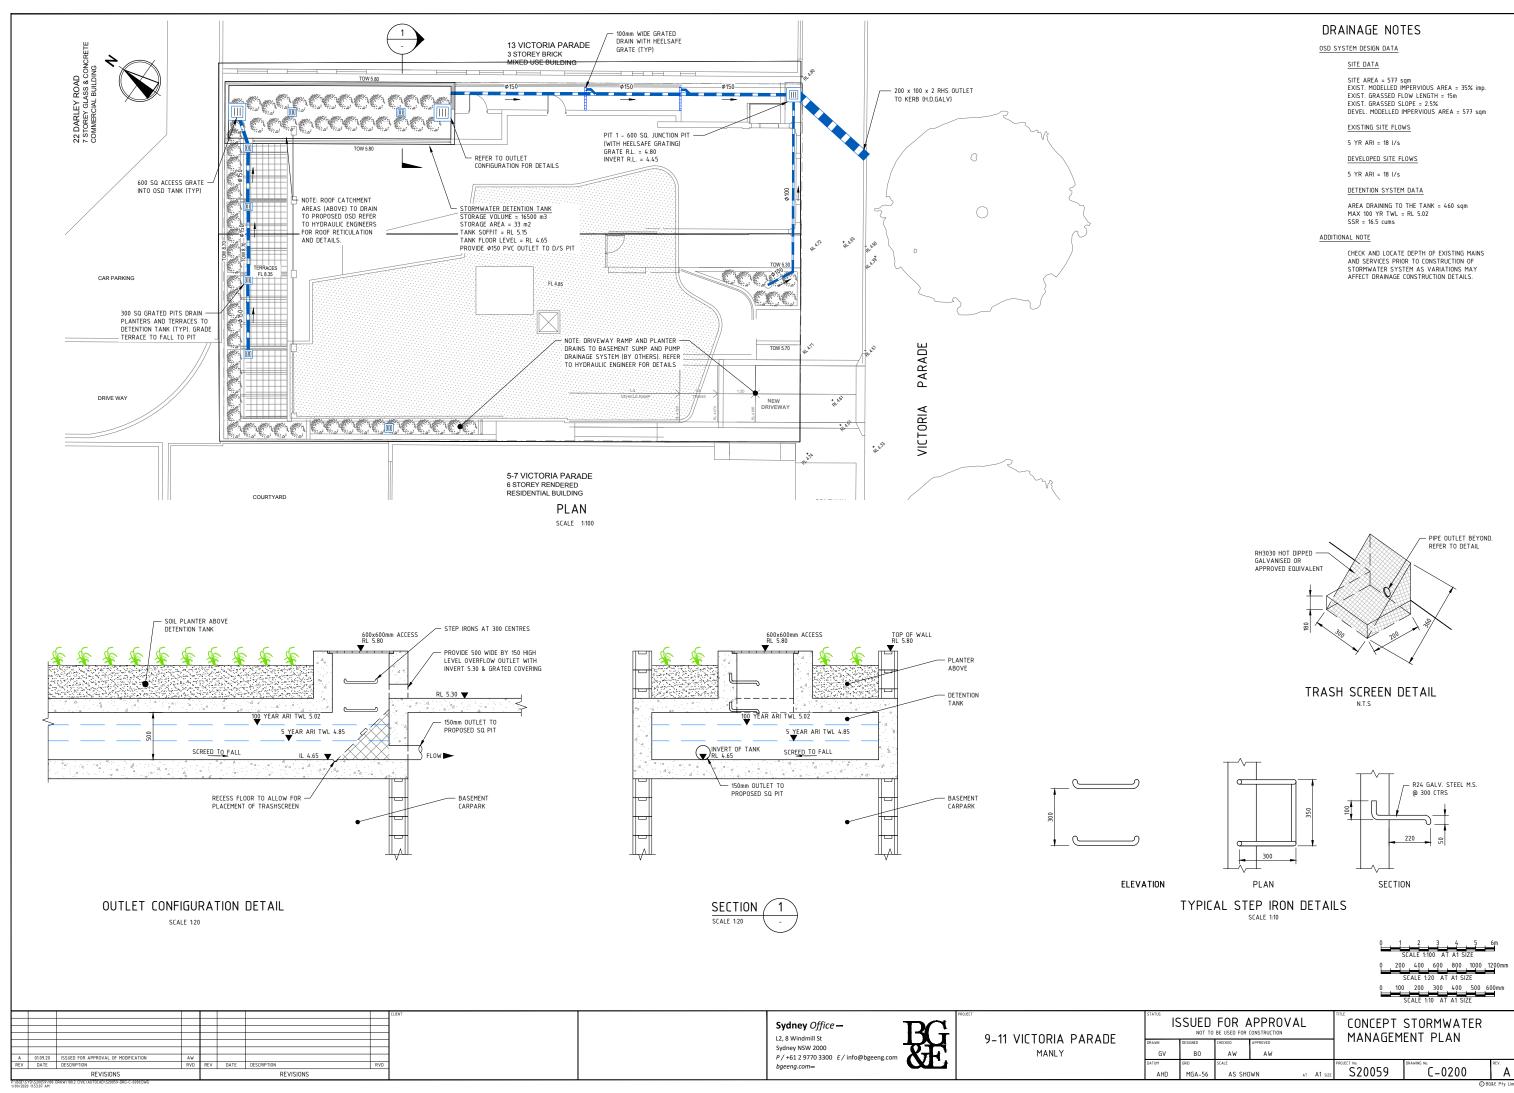

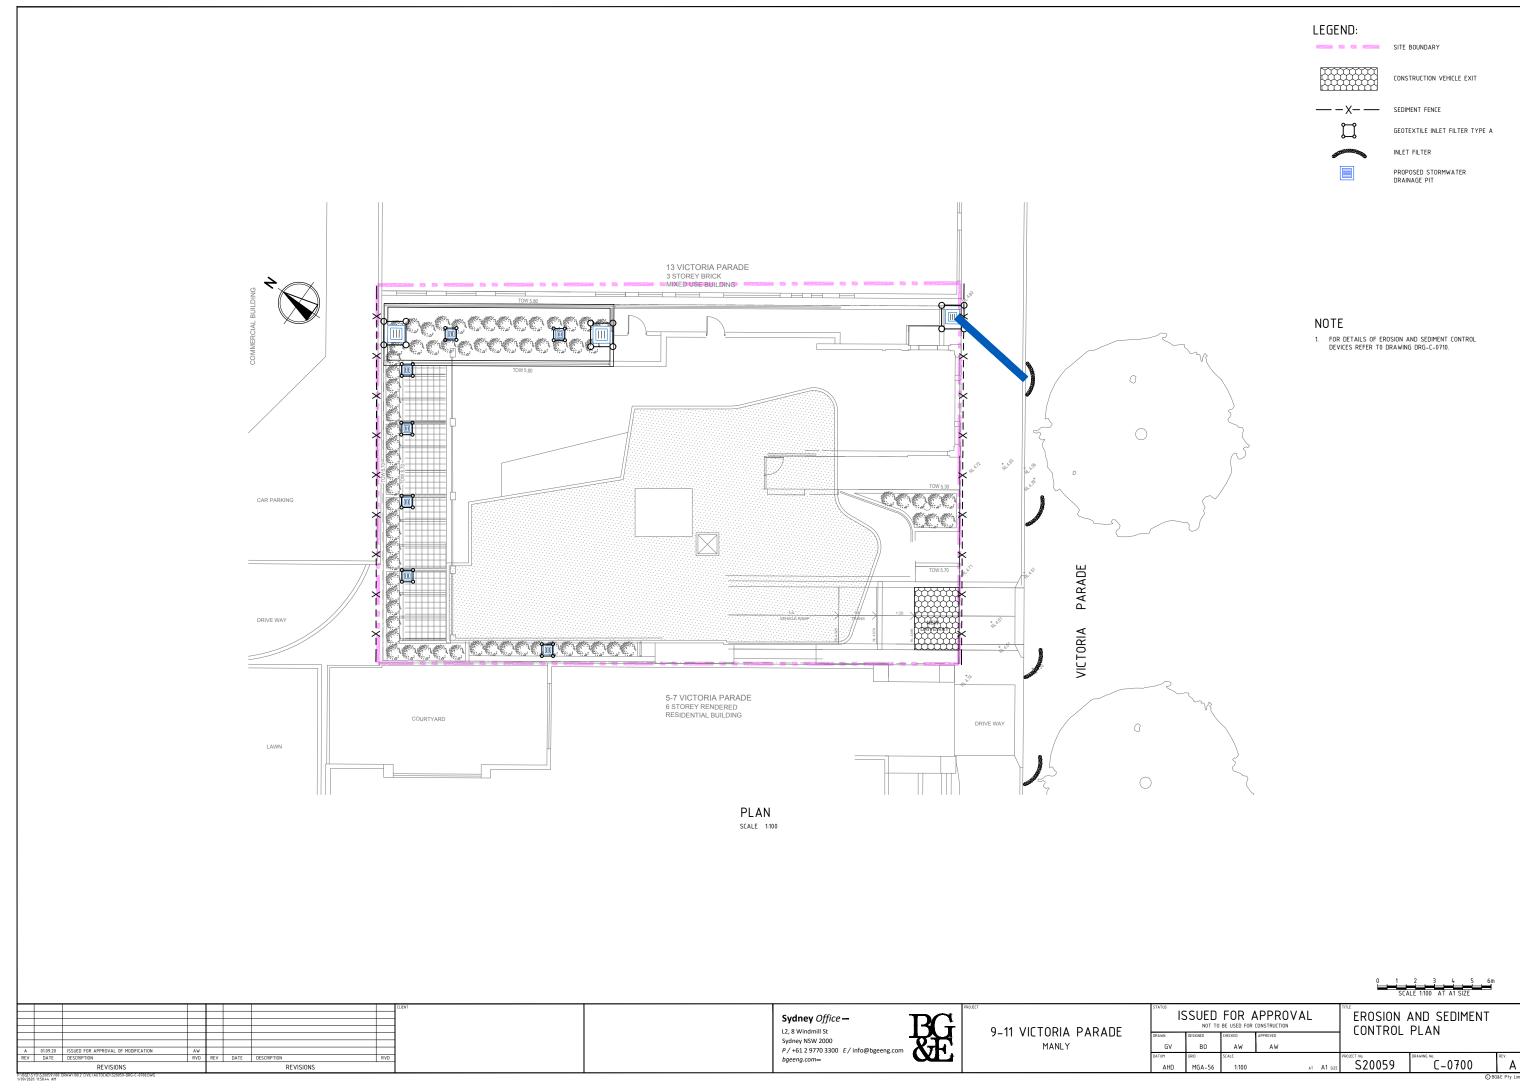




SECTION DETAIL





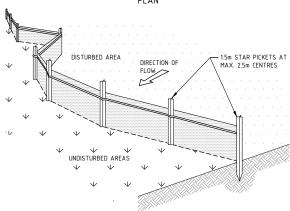



SEDIMENT FENCE CONSTRUCTION NOTES:

- CONSTRUCT SEDIMENT FENCES AS CLOSE AS POSSIBLE TO BEING PARALLEL TO THE CONTOURS OF THE SITE, BUT WITH SMALL RETURNS AS SHOWN IN THE DRAWING TO LIMIT THE CATCHMENT AREA OF ANY ONE SECTION. THE CATCHMENT AREA SHOULD BE SMALL ENOUGH TO LIMIT WATER FLOW IF CONCENTRATED AT ONE POINT TO 50 LITRES PER SECOND IN THE DESIGN STORM EVENT, USUALLY THE 10-YEAR EVENT.
- 2. CUT A 150mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE ENTRENCHED.
- DRIVE 1.5m LONG STAR PICKETS INTO GROUND AT 2.5m INTERVALS (MAX.) AT THE DOWNSLOPE EDGE OF THE TRENCH. ENSURE ANY STAR PICKETS ARE FITTED WITH SAFETY
- 4. FIX SELF-SUPPORTING GEOTEXTILE TO THE UPSLOPE SIDE OF THE POSTS ENSURING IT GOES TO THE BASE OF THE TRENCH. FIX THE GEOTEXTILE WITH WIRE TIES OR AS RECOMMENDED BY THE MANUFACTURER. ONLY USE GEOTEXTILE SPECIFICALLY PRODUCED FOR SEDIMENT FENCING. THE USE OF SHADE CLOTH FOR THIS PURPOSE IS NOT
- 5. JOIN SECTIONS OF FABRIC AT A SUPPORT POST WITH A 150mm OVERLAP.
- BACKFILL THE TRENCH OVER THE BASE OF THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE.

SEDIMENT FENCE


SCALE N.T.S



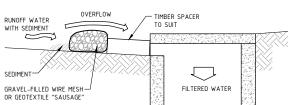

MESH & GRAVEL INLET FILTER CONSTRUCTION NOTES:

- 1. INSTALL FILTERS TO KERB INLETS ONLY AT SAG POINTS.
- FABRICATE A SLEEVE MADE FROM GEOTEXTILE OR WIRE MESH LONGER THAN THE LENGTH OF THE INLET PIT AND FILL IT WITH 25mm TO 50mm GRAVEL.
- 3. FORM AN ELLIPTICAL CROSS-SECTION ABOUT 150mm HIGH x 400mm WIDE.
- 4. PLACE THE FILTER AT THE OPENING LEAVING AT LEAST A 100mm SPACE BETWEEN IT AND THE KERB INLET. MAINTAIN THE OPENING WITH SPACER BLOCKS.
- 5. FORM A SEAL WITH THE KERB TO PREVENT SEDIMENT BYPASSING THE FILTER.
- 6. SANDBAGS FILLED WITH GRAVEL CAN SUBSTITUTE FOR THE MESH OR GEOTEXTILE PROVIDING THEY ARE PLACED SO THAT THEY CAN FIRMLY ABUT EACH OTHER AND SEDIMENT-LADEN WATERS CANNOT PASS BETWEEN.

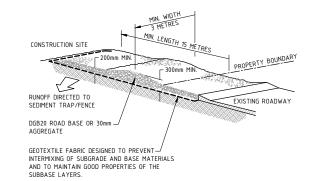

GEOTEXTILE MAY BE A WOVEN OR NEEDLE-PUNCHED PRODUCT WITH A MINIMUM CBR BURST STRENGTH (AS3706.4-90) OF 2500 N.

STABILISED SITE ACCESS CONSTRUCTION NOTES:

- STRIP THE TOPSOIL, LEVEL THE SITE AND COMPACT THE SUBGRADE.
- 2. COVER THE AREA WITH NEEDLE-PUNCHED GEOTEXTILE
- 3. CONSTRUCT A 200mm THICK PAD OVER THE GEOTEXTILE USING ROAD BASE OR 30mm
- ENSURE THE STRUCTURE IS AT LEAST 15 METRES LONG OR TO BUILDING ALIGNMENT AND AT LEAST 3 METRES WIDE.
- 5. WHERE A SEDIMENT FENCE JOINS ONTO THE STABILISED ACCESS, CONSTRUCT A HUMP IN THE STABILISED ACCESS TO DIVERT WATER TO THE SEDIMENT FENCE.

D SITE ACCESS

MESH 8	&	GRAVEL	INLET	FIL
SCALE N.T.S				

AVEL INLET FILTER	STABILISED
	SCALE N.T.S

								CLIE	
A	01.09.20	ISSUED FOR APPROVAL OF MODIFICATION	AW						
REV	DATE	DESCRIPTION	RVD	REV	DATE	DESCRIPTION	RVD		
05111010110					25.00.00				

Sydney Office -L2, 8 Windmill St Sydney NSW 2000

bgeeng.com-



9-11 VICTORIA PARADE MANLY

IS		FOR A	APPROV	AL	EROSION AND SEDIMENT			
٧N	DESIGNED	CHECKED	APPROVED			CONTINUL	DLIAILS	
GV	В0	AW	AW					
∧ HD	GRID	SCALE AC CHO	IWN		A1 cor	\$20059	C_0710	