

Nationwide House Energy Rating Scheme®

NatHERS® Certificate No. 0011773421-02

Generated on 23 Apr 2025 using AccuRate Home v1.3.3.23 SP2

Property

Address 3 Alexandra Crescent,
Bayview, NSW, 2104

Lot/DP Lot 2 DP 1016440

NCC class* 1a

Floor/all Floors 2 of 2 floors

Type New Home

Plans

Main plan Project 02402 16-04-25

Prepared by Scope Architects

Construction and environment

Assessed floor area [m2]*		Exposure type
Conditioned*	228.1	Suburban
Unconditioned*	12.7	
Total	240.8	NatHERS climate zone
Garage	36.0	56 Mascot (Sydney Airport)



Accredited assessor

Name Peter Waller

Business name BASIX Certificate Centre

Email peter@basixcertificatecentre.com.au

Phone 02 90292052

Accreditation No. 20322

Assessor Accrediting Organisation ABSA

Declaration of interest No

NCC Requirements

NCC provisions Volume Two

Strate/Territory variation Yes

National Construction Code (NCC) requirements


The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

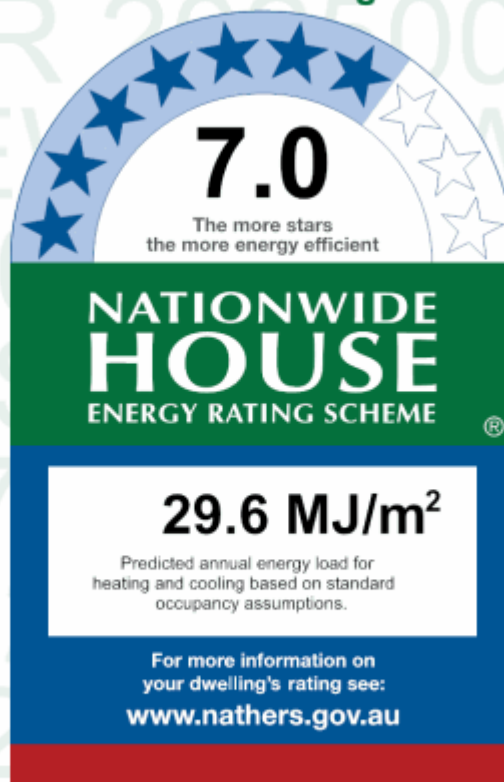

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	22.9	6.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	SF
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home
performance rating
generated for this
certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vFIIZfAol. When using either link, ensure you are visiting hstar.com.au



About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABC Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable



Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		Occupancy/Other
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	

Additional NCC requirements for thermal performance (not included in the NatHERS assessment)

Thermal bridging

Does the dwelling meet the NCC requirement for thermal bridging?

☐ ☐ ☐ ☐

Insulation installation method

Has the insulation been installed according to the NCC requirements?

☐ ☐ ☐

Building sealing

Does the dwelling meet the NCC requirements for Building Sealing?

☐ ☐ ☐ ☐

Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)

Appliances

Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?

☐ ☐ ☐ ☐ ☐

Additional NCC Requirements for Services (not included in the NatHERS assessment)

Does the lighting meet the artificial lighting requirements specified in the NCC?

☐ ☐ ☐ ☐

Does the hot water system meet the additional requirements specified in the NCC?

☐ ☐ ☐ ☐

Provisional values* check

Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?

☐ ☐ ☐ ☐

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

EW-001 is Hardies Axon © 9.0mm fibre cement ext on battens -10mm plasterb'd int-RFL+R2.7 bulk insul with a total

R Value of 3.22.

EW-004 is Rev BV © Scyon wall cladding+RFL+R2.7 +cavity + brick+ render, with a total R value of 3.52

Room schedule

Room	Zone Type	Area [m ²]
WC	Unconditioned	3.2
Pantry Laundry	Day time	9.8
Kitchen Living	Living/Kitchen	69.6
B1	Bedroom	12.6
Bath	Unconditioned	9.5
B2	Bedroom	12.6
B3	Bedroom	12.6
B4	Bedroom	23.2
WIR	Night time	7.9
Ensuite	Night time	6.2
TV Hall	Day time	33.8
Storage	Day time	3.8
Garage	Garage Conditioned	36

Window and glazed door type and performance

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-002-01 A	Aluminium B SG Clear	6.7	0.70	0.67	0.74
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E - Clear	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
PAR-005-01 W	Sliding Door DG 5-16-5	2.4	0.50	0.48	0.53
PAR-005-02 W	Sliding Door DG 6EA-16Ar-5	1.7	0.43	0.41	0.45



Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
WC	ALM-004-03 A	ASW1009	1000	900	Sliding	45	SW	None
Pantry Laundry	PAR-005-01 W	ASW1009	1000	900	Sliding	45	SW	None
Kitchen Living	PAR-005-02 W	ASD2452	2400	5200	Sliding	30	N	None
Kitchen Living	PAR-005-02 W	ASW1427	1400	2700	Sliding	30	E	None
Kitchen Living	PAR-005-02 W	ASD2442	2400	4200	Sliding	30	S	None
Kitchen Living	PAR-005-02 W	ASW1024	1030	2410	Sliding	30	SE	None
Kitchen Living	PAR-005-01 W	ASW1010	1030	1010	Sliding	30	SE	None
Kitchen Living	PAR-005-01 W	ASW1019	1030	1910	Sliding	30	SE	None
B1	PAR-005-01 W	ASD2421	2400	2100	Sliding	40	NW	None
Bath	ALM-004-03 A	ASW0618	600	1810	Sliding	30	NW	None
B2	PAR-005-01 W	ASD2421	2400	2100	Sliding	40	NW	None
B3	PAR-005-01 W	ASD2421	2400	2100	Sliding	40	NW	None
B4	PAR-005-01 W	ASD2432	2400	3200	Sliding	40	N	None
B4	PAR-005-01 W	ASW0732	700	3200	Sliding	40	N	None
B4	PAR-005-01 W	ASW0732	700	3200	Sliding	40	N	None
B4	PAR-005-01 W	ASW1026	1030	2650	Sliding	45	E	None
B4	PAR-005-01 W	ASW0726	700	2650	Sliding	45	E	None
WIR	PAR-005-01 W	ASW1014	1030	1400	Sliding	45	S	None
Ensuite	PAR-005-01 W	ASW0620	600	2050	Sliding	45	S	None
TV Hall	PAR-005-01 W	ASW1014	1030	1400	Sliding	40	SE	None
TV Hall	PAR-005-01 W	ASW1024	1030	2410	Sliding	45	SE	None
TV Hall	PAR-005-01 W	ASW1005	1030	500	Sliding	00	SE	None
TV Hall	ALM-004-03 A	ALW1408	1400	820	Louvre	90	SW	None
TV Hall	ALM-004-03 A	ALW1408	1400	820	Louvre	90	SW	None
Garage	ALM-002-01 A	ASW1026	1030	2650	Sliding	00	SW	None
Garage	ALM-002-01 A	ASW1018	1030	1800	Sliding	00	NE	None

* Refer to glossary.

Roof window* type and performance value

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* schedule

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* type and performance

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* schedule

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m ²]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door schedule

Location	Height [mm]	Width [mm]	Opening %	Orientation
Kitchen Living	2400	1100	100	SW
Kitchen Living	2400	900	100	SE
TV Hall	2400	900	100	NW
Garage	2300	5400	100	NW

External wall type

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-001	Fibre-cement sheet/Plasterboard	44.00	Light	Rockwool batt (k = 0.033): R2.7	Yes



Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-004	Fibre-cement sheet	44.00	Light	Rockwool batt (k = 0.033): R2.7	Yes

External wall schedule

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
WC	EW-004	2700	1800	SW	7200	Yes
Pantry Laundry	EW-004	2700	2300	SW	7200	Yes
Pantry Laundry	EW-004	2700	3300	NW	2100	Yes
Pantry Laundry	EW-004	2700	500	NE	14000	Yes
Kitchen Living	EW-004	2700	3200	NW	2700	Yes
Kitchen Living	EW-004	2700	1300	SW	14000	Yes
Kitchen Living	EW-004	2700	800	NW	1200	Yes
Kitchen Living	EW-004	2700	7800	N	3500	Yes
Kitchen Living	EW-004	2700	6500	E	600	Yes
Kitchen Living	EW-004	2700	5700	S	600	Yes
Kitchen Living	EW-004	2700	5600	SE	600	Yes
Kitchen Living	EW-004	6250	4200	SE	600	Yes
Kitchen Living	EW-004	2700	1200	SW	1200	Yes
Kitchen Living	EW-004	2700	3300	NW	6400	Yes
B1	EW-001	3100	3300	NW	1200	Yes
B1	EW-001	900	2000	SW	8700	Yes
Bath	EW-001	3300	2500	NW	1200	Yes
B2	EW-001	3400	3300	NW	1200	Yes
B3	EW-001	3600	3300	NW	1200	Yes
B4	EW-001	3750	7300	N	3500	Yes
B4	EW-001	3800	3700	E	600	Yes
WIR	EW-001	3800	2700	E	600	Yes
WIR	EW-001	3775	2700	S	600	Yes
Ensuite	EW-001	3725	2300	S	600	Yes
TV Hall	EW-001	3700	1100	NW	1200	Yes
TV Hall	EW-001	3700	500	S	600	Yes
TV Hall	EW-001	3500	5600	SE	600	Yes



Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
TV Hall	EW-001	3100	1100	SE	600	Yes
TV Hall	EW-001	3050	1400	SW	600	Yes
TV Hall	EW-001	3050	2400	SE	2100	Yes
TV Hall	EW-001	3000	2750	SW		No
TV Hall	EW-001	900	1400	NW	3500	Yes
Storage	EW-001	2100	700	SE	3350	Yes
Storage	EW-001	2100	1850	NW	1200	Yes
Garage	EW-001	3350	6000	SE	3350	Yes
Garage	EW-001	3500	6000	SW	600	Yes
Garage	EW-001	3350	6000	NW	600	Yes
Garage	EW-001	3200	3900	NE	24000	Yes
Garage	EW-001	1100	2100	NE		No

Internal wall type

Wall ID	Wall type	Area [m ²]	Bulk insulation
IW-001	Plasterboard	96.23	Glass fibre batt: R2.0
IW-002	Ceramic tile/Fibre-cement sheet/Plasterboard	53.93	Glass fibre batt: R2.0
IW-004	Plasterboard	4.20	Glass fibre batt: R2.0
IW-005	Glass	21.45	
IW-006	Fibre-cement sheet/Brick wall	14.58	Polyurethane rigid foamed aged: R1.5
IW-007	Ceramic tile/Brick wall	13.50	

Floor type

Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
WC/Outdoor Air	19mm Compresses Sheet + Cement bed + Tiles + R3.0 Under	3.20		R3.0	Ceramic tile
Pantry Laundry/Outdoor Air	19mm Compresses Sheet + Plywood + Timber + R3.0 Under	9.80		R3.0	
Kitchen Living/Outdoor Air	19mm Compresses Sheet + Plywood + Timber + R3.0 Under	69.60		R3.0	



Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
B1/Outdoor Air	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Villaboard ceiling under - R3.0 insul	12.60		R3.0	
Bath/Outdoor Air	as_FLOR-B014 #2016 © Framed flr with Ceramic Tile - Villaboard ceiling under - R3.0 bulk insul	9.50		R3.0	Ceramic tile
B2/Outdoor Air	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Villaboard ceiling under - R3.0 insul	3.00		R3.0	
B2/WC	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	1.00		R2.5	
B2/Pantry Laundry	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	8.60		R2.5	
B3/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	7.90		R2.5	
B3/Outdoor Air	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Villaboard ceiling under - R3.0 insul	4.70		R3.0	
B4/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	23.20		R2.5	
WIR/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	7.90		R2.5	
Ensuite/Kitchen Living	as_FLOR-B014 #2016 © Framed flr with Ceramic Tile - Plasterboard ceiling under - R2.5 bulk insul	6.20		R2.5	Ceramic tile
TV Hall/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	19.30		R2.5	
TV Hall/Outdoor Air	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Villaboard ceiling under - R3.0 insul	12.30		R3.0	



Location	Construction	Area [m ²]	Sub-floor ventilation	Added insulation [R-value]	Covering
TV Hall/WC	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	2.20		R2.5	
Storage/Outdoor Air	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Villaboard ceiling under - R3.0 insul	3.80		R3.0	
Garage/Outdoor Air	170mm Concrete Floor slab with Concrete finish (no insul) No Ceiling	36.00			

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
B2/WC	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
TV Hall/WC	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
B2/Pantry Laundry	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
B3/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
B4/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
WIR/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No
Ensuite/Kitchen Living	as_FLOR-B014 #2016 © Framed flr with Ceramic Tile - Plasterboard ceiling under - R2.5 bulk insul	R2.5	No
TV Hall/Kitchen Living	as_FLOR-B014 #2034 © Framed flr with timber floating floor - Plasterboard ceiling under - R2.5 insul	R2.5	No

Ceiling penetrations*

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
WC	1	Downlight	0	Sealed
Pantry Laundry	4	Downlight	0	Sealed
Kitchen Living	28	Downlight	0	Sealed
B1	5	Downlight	0	Sealed
Bath	4	Downlight	0	Sealed
B2	5	Downlight	0	Sealed



Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
B3	5	Downlight	0	Sealed
B4	9	Downlight	0	Sealed
WIR	3	Downlight	0	Sealed
Ensuite	3	Downlight	0	Sealed
TV Hall	14	Downlight	0	Sealed
Storage	2	Downlight	0	Sealed
Garage	14	Downlight	0	Sealed

Ceiling fans

Location	Quantity	Diameter [mm]
Kitchen Living	1	1400
B1	1	1400
B2	1	1400
B3	1	1400
B4	1	1400

Roof type

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
as_ROOF-A021 #E016 © Horiz pitch Colourbond steel roof + Anticon R1.0 insul with R5.0 bulk insul + 13mm Plasterb'd ceiling under	R6.0	44.00	Light

Thermal bridging schedule for steel frame elements

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
No Data Available				

Appliance schedule

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m² is used for lighting, therefore lighting is not included in the appliance schedule.



Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
		CER Zone			lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy Schedule

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery Schedule

System Type	Size [Battery Storage Capacity]
No Data Available	



Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the home's energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and

are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your home's rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the operability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheathing or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.