

9 December 2022

Hamptons Property Services Pty Ltd
Edgecliff Centre Suite 404 203-233 New South Head Road
EDGECLIFF NSW 2027

Dear Sir/Madam

Application Number: DA2022/0643
Address: Lot 2 DP 877793 , 25 The Corso, MANLY NSW 2095
Lot 1 DP 877793 , 27 The Corso, MANLY NSW 2095
Lot CP SP 12989 , 19 - 23 The Corso, MANLY NSW 2095
Proposed Development: Alterations and additions to the existing building to allow for
shop-top housing and a pub

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at www.northernbeaches.nsw.gov.au

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to council@northernbeaches.nsw.gov.au

Regards,



Rodney Piggott
Manager Development Assessments

NOTICE OF DETERMINATION

Application Number:	DA2022/0643
Determination Type:	Development Application

APPLICATION DETAILS

Applicant:	Hamptons Property Services Pty Ltd
Land to be developed (Address):	Lot 2 DP 877793 , 25 The Corso MANLY NSW 2095 Lot 1 DP 877793 , 27 The Corso MANLY NSW 2095 Lot CP SP 12989 , 19 - 23 The Corso MANLY NSW 2095
Proposed Development:	Alterations and additions to the existing building to allow for shop-top housing and a pub

DETERMINATION - APPROVED

Made on (Date)	07/12/2022
Consent to operate from (Date):	07/12/2022
Consent to lapse on (Date):	07/12/2027

Detail of Conditions

The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.

Note:

If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.

DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

1. **Approved Plans and Supporting Documentation**

The development must be carried out in compliance with the endorsed stamped plans and documentation listed below, except as amended by any other condition of consent:

a) Approved Plans

Architectural Plans - Endorsed with Council's stamp		
Drawing No.	Dated	Prepared By
DA-01/ Revision C	6 October 2022	durbach block jagers
DA-11/ Revision C	6 October 2022	durbach block jagers
DA-12/ Revision C	6 October 2022	durbach block jagers
DA-13/ Revision C	6 October 2022	durbach block jagers
DA-14/ Revision C	6 October 2022	durbach block jagers
DA-15/ Revision C	6 October 2022	durbach block jagers
DA-16/ Revision C	6 October 2022	durbach block jagers
DA-17/ Revision C	6 October 2022	durbach block jagers
DA-18/ Revision C	6 October 2022	durbach block jagers
DA-19/ Revision C	6 October 2022	durbach block jagers
DA-20/ Revision C	6 October 2022	durbach block jagers
DA-25/ Revision C	6 October 2022	durbach block jagers

Reports / Documentation – All recommendations and requirements contained within:		
Report No. / Page No. / Section No.	Dated	Prepared By
BASIX Certificate No. A454749	4 April 2022	Credwell Energy
Geotechnical Report	30 April 2019	GeoEnviro Consultancy
Acoustic Assessment for DA	6 April 2022	Renzo Tonin and Associates
BCA and Access Report	4 April 2022	AE&D
Construction Management Plan and Buildability Report	March 2022	IRIS Capital
Fire Engineering Statement	5 April 2022	GHD
Flood Report	5 May 2022	James Taylor and Associates
Heritage Impact Statement	April 2022	City Plan
Section J Report	4 April 2022	Credwell
Structural Impact	5 April 2022	James Taylor and Associates
Traffic Assessment	6 May 2022	Varga Traffic Planning

b) Any plans and / or documentation submitted to satisfy the Conditions of this consent.

c) The development is to be undertaken generally in accordance with the following:

Landscape Plans		
Drawing No.	Dated	Prepared By
Dwg: First and Third floor Plan/ 1 of 3/ Issue C	21 March 2022	Paul Scrivener
Dwg: Roof Level Plan/ 2 of 3/ Issue C	21 March 2022	Paul Scrivener
Dwg: Sections/ 3 of 3/ Issue C	21 March 2022	Paul Scrivener

Waste Management Plan		
Drawing No/Title.	Dated	Prepared By
Operational and Construction Waste Management Plan	March 2022	Wasteaudit

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

2. **Compliance with Other Department, Authority or Service Requirements**

The development must be carried out in compliance with all recommendations and requirements, excluding general advice, within the following:

Other Department, Authority or Service	EDMS Reference	Dated
Ausgrid	Ausgrid Referral Response	N/A

(NOTE: For a copy of the above referenced document/s, please see Application Tracking on Council's website www.northernbeaches.nsw.gov.au)

Reason: To ensure the work is carried out in accordance with the determination and the statutory requirements of other departments, authorities or bodies.

3. **Approved Land Use**

Nothing in this consent shall authorise the use of site/onsite structures/units/tenancies as detailed on the approved plans for any land use of the site beyond the definition of **shop top housing**, in accordance with the Dictionary of the Manly Local Environmental Plan 2013, as follows:

shop top housing means one or more dwellings located above the ground floor of a building, where at least the ground floor is used for commercial premises or health services facilities.

Any variation to the approved land use and/occupancy of any unit beyond the scope of the above definition will require the submission to Council of a new development application.

Reason: To ensure compliance with the terms of this consent.

4. **No Approval for external exhaust system**

No approval is granted under this Development Consent for any external exhaust system. A separate Development Application must be submitted to Council for approval prior to the use of the retail premises.

Reason: To ensure compliance with the relevant Local Environmental Plan.

5. Prescribed Conditions

- (a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - (i) showing the name, address and telephone number of the Principal Certifier for the work, and
 - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - (iii) stating that unauthorised entry to the work site is prohibited.Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifier for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
 - (i) in the case of work for which a principal contractor is required to be appointed:
 - A. the name and licence number of the principal contractor, and
 - B. the name of the insurer by which the work is insured under Part 6 of that Act,
 - (ii) in the case of work to be done by an owner-builder:
 - A. the name of the owner-builder, and
 - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must not be carried out unless the Principal Certifier for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.
- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
 - (i) protect and support the adjoining premises from possible damage from the excavation, and
 - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
 - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
 - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost

of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

6. General Requirements

(a) Unless authorised by Council:

Building construction and delivery of material hours are restricted to:

- 7.00 am to 5.00 pm inclusive Monday to Friday,
- 8.00 am to 1.00 pm inclusive on Saturday,
- No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) Should any asbestos be uncovered on site, its demolition and removal must be carried out in accordance with WorkCover requirements and the relevant Australian Standards.
- (c) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of an Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (d) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.
- (e) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (f) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (g) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (h) No skip bins, building materials, demolition or excavation waste of any nature, and no hoist, plant or machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (i) Demolition materials and builders' wastes are to be removed to approved

waste/recycling centres.

(j) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.

(k) Prior to the commencement of any development onsite for:

- i) Building/s that are to be erected
- ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
- iii) Building/s that are to be demolished
- iv) For any work/s that is to be carried out
- v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.

(l) A "Road Opening Permit" must be obtained from Council, and all appropriate charges paid, prior to commencement of any work on Council property. The owner/applicant shall be responsible for all public utilities and services in the area of the work, shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

(m) The works must comply with the relevant Ausgrid Network Standards and SafeWork NSW Codes of Practice.

(n) Requirements for new swimming pools/spas or existing swimming pools/spas affected by building works.

(1) Child resistant fencing is to be provided to any swimming pool or lockable cover to any spa containing water and is to be consistent with the following;

Relevant legislative requirements and relevant Australian Standards (including but not limited) to:

- (i) Swimming Pools Act 1992
 - (ii) Swimming Pools Amendment Act 2009
 - (iii) Swimming Pools Regulation 2018
 - (iv) Australian Standard AS1926 Swimming Pool Safety
 - (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
 - (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools.
- (2) A 'KEEP WATCH' pool safety and aquatic based emergency sign, issued by Royal Life Saving is to be displayed in a prominent position within the pool/spa area.
- (3) Filter backwash waters shall be conveyed to the Sydney Water sewerage system in sewered areas or managed on-site in unsewered areas in a manner that does not cause pollution, erosion or run off, is separate from the irrigation area for any wastewater system and is separate from any onsite stormwater management system.

- (4) Swimming pools and spas must be registered with the Division of Local Government.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

FEES / CHARGES / CONTRIBUTIONS

7. Policy Controls

Northern Beaches Section 7.12 Contributions Plan 2022

A monetary contribution of \$72,151.69 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan (as amended).

The monetary contribution is based on a development cost of \$7,215,169.00.

The total amount payable will be adjusted at the time the payment is made, in accordance with the provisions of the Northern Beaches Section 7.12 Contributions Plan (as amended).

Details demonstrating compliance, by way of written receipts issued by Council, are to be submitted to the Certifier prior to issue of any Construction Certificate or, if relevant, the Subdivision Certificate (whichever occurs first).

A copy of the Contributions Plan is available for inspection at 725 Pittwater Road, Dee Why or on Council's website at Northern Beaches Council - Development Contributions.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

8. Security Bond

A bond (determined from cost of works) of \$10,000 and an inspection fee in accordance with Council's Fees and Charges paid as security are required to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, and details demonstrating payment are to be submitted to the Certifier prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at www.northernbeaches.nsw.gov.au).

Reason: To ensure adequate protection of Council's infrastructure.

CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

9. **Stormwater Disposal**

The applicant is to demonstrate how stormwater from the new development within this consent is disposed of to an existing approved system or in accordance with Northern Beaches Council's WATER MANAGEMENT for DEVELOPEMT POLICY. Details by an appropriately qualified and practicing Civil Engineer demonstrating that the existing approved stormwater system can accommodate the additional flows, or compliance with the Council's specification are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for disposal and stormwater management arising from development.

10. **Flooding**

In order to protect property and occupants from flood risk the following is required:

Building Components and Structural Soundness – B3

All new electrical equipment, power points, wiring, fuel lines, sewerage systems or any other service pipes and connections must be waterproofed and/or located above the Flood Planning Level of 6.0m AHD. All existing electrical equipment and power points located below the Flood Planning Level must have residual current devices installed to cut electricity supply during flood events.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To reduce the impact of flooding and flood liability on owners and occupiers of flood-prone property and reduce public and private losses in accordance with Council and NSW Government policy.

11. **Photographic Archival Record**

A photographic archival record of the site is to made of all existing buildings and structures (including interiors and exteriors and their setting), generally in accordance with the guidelines issued by the NSW Heritage Division of the NSW Office of Environment & Heritage (OEH).

This record must be submitted and approved by the Certifying Authority prior to commencement of any demolition or works on-site.

The photographic record should be made using digital technology, submitted on archival quality CD-R disc, and should include:

- Location of property, date of survey and author of survey;
- A site plan at a scale of 1:200 showing all structures and major landscape elements;
- Floor plans of any buildings at a scale of 1:100;
- Photographs which document the site, cross-referenced in accordance with recognised archival recording practice to catalogue sheets. The extent of documentation will depend on the nature of the item.

Reason: To provide an archival photographic record of the site, including any buildings and landscape elements, prior to any works.

12. **Construction Traffic Management Plan**

As a result of the site constraints, limited vehicle access and parking, a Construction Traffic Management Plan (CTMP) and report shall be prepared by an RMS accredited person and submitted to and approved by the Northern Beaches Council Traffic Team prior to issue of any Construction Certificate.

Due to heavy traffic congestion throughout the town centre, truck movements will be restricted during the major commuter peak times being 8.00-9.30am and 4.30-6.00pm. Truck movements and sizes must be agreed with Council's Traffic Engineer prior to submission of the CTMP. Swept path plots must be provided in the CTMP to demonstrate that the largest truck serving the construction site can enter and exit from Whistler Street in a forwards direction and manoeuvre through the external Whistler Street carpark with all parking spaces occupied.

The CTMP must address following:

- The proposed phases of construction works on the site, and the expected duration of each construction phase
- The proposed order in which works on the site will be undertaken, and the method statements on how various stages of construction will be undertaken
- Make provision for all construction materials to be stored on site, at all times
- The proposed areas within the site to be used for the storage of excavated materials, construction materials and waste containers during the construction period
- The proposed method of access to and egress from the site for construction vehicles, including access routes and truck routes through the Council area and the location and type of temporary vehicular crossing for the purpose of minimising traffic congestion and noise in the area, with no access across public parks or reserves being allowed
- The proposed method of loading and unloading excavation and construction machinery, excavation and building materials, formwork and the erection of any part of the structure within the site. Wherever possible mobile cranes should be located wholly within the site
- Make provision for parking onsite. All Staff and Contractors are to use the basement parking once available
- Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site are not permitted unless approved by Council prior
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for any activities involving the management of vehicle and pedestrian safety
- The proposed manner in which adjoining property owners will be kept advised of the timeframes for completion of each phase of development/construction process. It must also specify that a minimum Fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measure
- Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes and concrete pumps, structures proposed on the footpath areas (hoardings, scaffolding or shoring) and any tree protection zones around Council street trees
- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the CTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities, such as (but not limited to) concrete pours, crane lifts and dump truck routes. These communications must be documented and submitted to Council prior to work commencing on site

- The proposed method/device to remove loose material from all vehicles and/or machinery before entering the road reserve, any run-off from the washing down of vehicles shall be directed to the sediment control system within the site
- Specify that the roadway (including footpath) must be kept in a serviceable condition for the duration of construction. At the direction of Council, undertake remedial treatments such as patching at no cost to Council
- The proposed method of support to any excavation adjacent to adjoining properties, or the road reserve. The proposed method of support is to be designed and certified by an appropriately qualified and practising Structural Engineer, or equivalent
- Proposed protection for Council and adjoining properties
- The location and operation of any on site crane

Consideration should be given to permitting access by construction vehicles up to and including vehicles of 8.8m in length subject to the submission of swept path plots to demonstrate that they can safely access and maneuver to and from the site via Whistler St and the trafficable portion of Market Lane with all available parking spaces occupied.

The CTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – “Manual of Uniform Traffic Control Devices”, RMS’ Manual – “Traffic Control at Work Sites”.

All fees and charges associated with the review of this plan is to be in accordance with Council’s Schedule of Fees and Charges and are to be paid at the time that the Construction Traffic Management Plan is submitted.

Reason: To ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems.

13. **Amendments to the approved plans**

The following amendments are to be made to the approved plans:

- The south facing kitchen window from apartment A2.02 is to have a minimum sill height of 1.6m above finished floor level or be fixed and frosted below 1.6m

Details demonstrating compliance are to be submitted to the Certifier prior to the issue of the Construction Certificate.

Reason: To ensure development minimises unreasonable impacts upon surrounding land.

14. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in the Geotechnical Report referenced in Condition 1 of this consent are to be incorporated into the construction plans.

Details demonstrating compliance are to be submitted to the Certifier prior to the issue of a Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

15. **Building Code of Australia Fire Safety Requirements**

The Building Code of Australia fire safety measures for the building as detailed and

recommended in the BCA and Accessibility Compliance Assessment Report by AED, dated 4/4/2022, Report No. 11784.1 Rev, 2.0 and the Fire Engineering Statement by GHD Ref 12553045 Rev. 0 dated 5/4/2022, including any proposed Performance Solutions are to be considered as part of the assessment of the Construction Certificate. Details demonstrating compliance are to be provided to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure adequate provision is made for Health, Amenity, access and Fire safety for building occupant health and safety.

16. **Building Code of Australia Access**

Access and facilities to and within the building are to be provided for Persons with a Disability. In this regard the recommendations contained in the BCA and Accessibility Compliance Assessment Report prepared by AED dated 4/4/2022, Report No. 11784.Rev 2.0 is to be taken into consideration as part of the assessment of the Construction Certificate. Details are to be provided to the Certifying Authority prior to the issue of the Construction Certificate and be implemented prior to occupation of the building.

Reason: To ensure adequate provision is made for access to and within the building for Persons with a disability.

17. **Interpretation of original layout**

Prior to issue of a construction certificate, a Heritage Interpretation Plan is to be submitted for approval by Northern Beaches Council to acknowledge the heritage of the development site as a whole providing policies, strategies, and detailed advice for interpretation of the original room layouts of the existing Inter-War flat building "The Exeter Flats".

It is to be based on research, analysis and plans to communicate the significance of the place to the intended audience. Interpretation may be a combination of the treatment and fabric of the place, the use of the place, and the use of interpretative media, such as events, activities, signs and publication.

The Interpretation Plan should identify key themes, storylines and audiences and provides recommendations about interpretation media to be located within the common lobby of the 'Exeter Flats'.

The Heritage Interpretation Plan should be prepared by a suitably qualified consultant in accordance with NSW Heritage Council guidelines Interpreting Heritage places and Items {2005} and Heritage Interpretation Policy {2005}, and overseen by a member or associate of either Interpretation Australia or ICOMOS International Scientific Committee on Interpretation and Presentation of Historic Sites {ICIP}.

Reason: interpretation of the original room layouts of the existing Inter-War flat building "The Exeter Flats" and overall development site.

18. **Mechanical Ventilation Provisions for Retail Tenancies**

Prior to the issuing of any Construction Certificate, certification is to be provided from a suitably qualified professional that the building's design and construction will provide adequate provisions to the retail tenancy for mechanical ventilation to be installed for any future uses that require mechanical ventilation e.g. food premises. The certification is to consider that the

buildings provisions for mechanical ventilation are satisfactory to:

- Prevent potential amenity issues including noise and odour for occupants of the building and surrounding premises; and
- Allow compliance with relevant legislation and standards including Building Code of Australia, AS1668.1 "The use of ventilation and air conditioning in buildings Fire and smoke control in buildings" and AS1668.2 "The use of ventilation and air conditioning in buildings Mechanical ventilation in buildings".

Certification is to be submitted to the satisfaction of the Principal Certifying Authority.

Reason: To protect the amenity of building occupants and neighbouring properties.

19. **Noise - Design of Mechanical Plant**

Prior to the issue of a Construction Certificate, the design and location of the mechanical ventilation is to be provided to the Principal Certifying Authority. An acoustic assessment is to be undertaken by a suitably qualified professional such as an acoustic engineer to determine acoustic treatments to control noise emissions from all mechanical plant noise in accordance with recommendations in Acoustic Report prepared by Renzo Tonin & Associates dated 6 April 2022 (TM424-01D02 Acoustic Report for DA Apartments (r3)).

Any design recommendations made by the consultant must be implemented into the plans prior to issuing the Construction Certificate in order to achieve compliance with noted conditions of this consent.

Details demonstrating compliance are to be submitted to the satisfaction of the Principal Certifying Authority.

Reason: To protect surrounding premises from any noise generated by the operation of the development.

20. **Acoustic Report Recommendations**

Prior to the issuing of any Construction Certificate, documentation is to be submitted to the satisfaction of the Principal Certifying Authority that recommendations within the acoustic report by Renzo Tonin & Associates dated 6 April 2022 (TM424-01D02 Acoustic Report for DA Apartments (r3)) have been implemented/incorporated into the design of the premises.

Reason: To protect acoustic amenity of building occupants and surrounding premises.

21. **Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifier prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

22. **Sydney Water "Tap In"**

The approved plans must be submitted to the Sydney Water Tap in service, prior to works commencing, to determine whether the development will affect any Sydney Water assets and/or easements. The appropriately stamped plans must then be submitted to the Certifier demonstrating the works are in compliance with Sydney Water requirements.

Please refer to the website www.sydneywater.com.au for:

- “Tap in” details - see <http://www.sydneywater.com.au/tapin>
- Guidelines for Building Over/Adjacent to Sydney Water Assets.

Or telephone 13 000 TAP IN (1300 082 746).

Reason: To ensure compliance with the statutory requirements of Sydney Water.

23. **Waste and Recycling Requirements**

Details demonstrating compliance with Northern Beaches Waste Management Guidelines, are to be submitted to and approved by the Certifying Authority prior to the issue of any Construction Certificate.

Note: If the proposal, when compliant with the Northern Beaches Waste Management Guidelines, causes inconsistencies with other parts of the approval i.e. architectural or landscaped plans, a modification(s) to the development may be required.

Reason: To ensure adequate and appropriate waste and recycling facilities are provided.

CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

24. **Work Zones and Permits**

Prior to commencement of the associated works, the applicant shall obtain a Work Zone Permit where it is proposed to reserve an area of road pavement for the parking of vehicles associated with a construction site.

A separate application is required with a Traffic Management Plan for standing of construction vehicles in a trafficable lane

Reason: To ensure Work zones are monitored and installed correctly.

25. **Demolition Traffic Management Plan**

As a result of the site constraints, limited vehicle access and parking, a Demolition Traffic Management Plan (DTMP) shall be prepared by an suitably accredited person and submitted to and approved by the Northern Beaches Council Traffic Team prior to commencing any demolition work.

Due to heavy traffic congestion throughout the area, truck movements will be restricted during the major commuter peak times being 8.00-9.30am and 4.30-6.00pm. Truck movements and sizes must be agreed with Council’s Traffic Engineer prior to submission of the DTMP. Swept path plots must be provided in the CTMP to demonstrate that the largest truck serving the construction site can enter and exit from Whistler Street in a forwards direction and manoeuvre through the external Whistler Street carpark with all parking spaces occupied.

The DTMP must:-

- Make provision for all construction materials to be stored on site, at all times.
- The DTMP is to be adhered to at all times during the project.
- Specify construction truck routes and truck rates. Nominated truck routes are to be distributed over the surrounding road network where possible.
- Provide for the movement of trucks to and from the site, and deliveries to the site. Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site is not permitted unless prior approval is granted by Council’s Traffic Engineers.
- Include a Traffic Control Plan prepared by an RMS accredited traffic controller for any

- activities involving the management of vehicle and pedestrian traffic.
- Specify that a minimum fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measures.
- Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes, structures proposed on the footpath areas (hoardings, scaffolding or temporary shoring) and extent of tree protection zones around Council street trees.
- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the DTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities. These communications must be documented and submitted to Council prior to work commencing on site.
- Specify spoil management process and facilities to be used on site.
- Specify that the roadway (including footpath) must be kept in a serviceable condition for the duration of demolition. At the direction of Council, the applicant is to undertake remedial treatments such as patching at no cost to Council.

The DTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – “Manual of Uniform Traffic Control Devices”, RMS’ Manual – “Traffic Control at Work Sites”.

All fees and charges associated with the review of this plan is to be in accordance with Council’s Schedule of Fees and Charges and are to be paid at the time that the Demolition Traffic Management Plan is submitted.

Reason: This condition is to ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems. The DTMP is intended to minimise impact of construction activities on the surrounding community, in terms of vehicle traffic (including traffic flow and parking) and pedestrian amenity adjacent to the site.

26. **Pre-Construction Dilapidation Report**

Dilapidation reports, including photographic surveys, of the following adjoining properties must be provided to the Principal Certifier prior to any works commencing on the site (including demolition or excavation). The reports must detail the physical condition of those properties listed below, both internally and externally, including walls, ceilings, roof, structural members and other similar items.

Properties: 17 The Corso, Manly

The dilapidation report is to be prepared by a suitably qualified person. A copy of the report must be provided to Council, the Principal Certifier and the owners of the affected properties prior to any works commencing.

In the event that access for undertaking the dilapidation report is denied by an adjoining owner, the applicant must demonstrate, in writing that all reasonable steps have been taken to obtain access. The Principal Certifier must be satisfied that the requirements of this condition have been met prior to commencement of any works.

Note: This documentation is for record keeping purposes and may be used by an applicant or affected property owner to assist in any action required to resolve any civil dispute over damage arising from the works.

Details demonstrating compliance are to be submitted to the Principal Certifier prior to the

commencement of any works on site.

Reason: To maintain proper records in relation to the proposed development.

CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

27. **Implementation of Demolition Traffic Management Plan**

All works and demolition activities are to be undertaken in accordance with the approved Demolition Traffic Management Plan (DTMP). All controls in the DTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the DTMP be impacted by surrounding major development not encompassed in the approved DTMP, the DTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved DTMP is to be kept onsite at all times and made available to the accredited certifier or Council on request.

Reason: To ensure compliance and Council's ability to modify the approved Construction Traffic Management Plan where it is deemed unsuitable during the course of the project.

28. **Implementation of Construction Traffic Management Plan**

All works and construction activities are to be undertaken in accordance with the approved Construction Traffic Management Plan (CTMP). All controls in the CTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the CTMP be impacted by surrounding major development not encompassed in the approved CTMP, the CTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved CTMP is to be kept onsite at all times and made available to Council on request.

Reason: To ensure compliance of the developer/builder in adhering to the Construction Traffic Management procedures agreed and are held liable to the conditions of consent.

29. **Ongoing Management**

The applicant shall be responsible in ensuring that the road reserve remains in a serviceable state during the course of the demolition and building works.

Reason: To ensure public safety.

30. **Geotechnical Requirements**

All recommendations (if any) included in the Geotechnical Report referenced in Condition 1 of this consent are required to be complied with during works.

Reason: To ensure geotechnical risk is mitigated appropriately.

31. **Survey Certificate**

A survey certificate prepared by a Registered Surveyor at the following stages of construction:

(a) Commencement of perimeter walls columns and or other structural elements to ensure the wall or structure, to boundary setbacks are in accordance with the approved details.

(b) At ground level to ensure the finished floor levels are in accordance with the approved levels, prior to concrete slab being poured/flooring being laid.

(c) At completion of the roof frame confirming the finished roof/ridge height is in accordance with levels indicated on the approved plans.

Details demonstrating compliance are to be submitted to the Principal Certifier.

Reason: To determine the height of buildings under construction comply with levels shown on approved plans.

32. **Waste/Recycling Requirements (Waste Plan Submitted)**

During demolition and/or construction the proposal/works shall be generally consistent with the submitted Waste Management Plan titled dated [INSERT].

Reason: To ensure waste is minimised and adequate and appropriate waste and recycling facilities are provided.

33. **Waste/Recycling Requirements (Materials)**

During demolition and/or construction the following materials are to be separated for recycling: timber, bricks, tiles, plasterboard, metal, concrete, and evidence of disposal for recycling is to be retained on site.

Reason: To ensure waste is minimised and recovered for recycling where possible.

CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

34. **Landscape Completion**

Landscape works to be implemented in accordance with the approved Landscape Plans.

Prior to the issue of an Occupation Certificate, details from a landscape architect shall be submitted to the Principal Certifier, certifying that the landscape works have been completed in accordance with any conditions of consent.

Reason: Environmental amenity.

35. **Stormwater Disposal**

The stormwater drainage works shall be certified as compliant with all relevant Australian Standards and Council's Water Management for Development Policy by a Civil Engineer. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater arising from the development.

36. **Geotechnical Certification Prior to Occupation Certificate**

A Geotechnical Engineer or Engineering Geologist is to provide written confirmation that they have inspected the site during construction or reviewed information relating to the construction and that they are satisfied that development referred to in the development consent has been constructed in accordance with the intent of the Geotechnical Report referenced in Condition 1 of this consent.

Written certification is to be provided to the Principal Certifier prior to the issue of the Occupation Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

37. Environmental Reports Certification

Written certification from a suitably qualified person(s) shall submit to the Principal Certifier and Northern Beaches Council, stating that all the works/methods/procedures/control measures/recommendations approved by Council in the following reports have been completed:

Report No. / Page No. / Section No.	Dated	Prepared By
BASIX Certificate No. A454749	4 April 2022	Credwell Energy
Geotechnical Report	30 April 2019	GeoEnviro Consultancy
Acoustic Assessment for DA	6 April 2022	Renzo Tonin and Associates
BCA and Access Report	4 April 2022	AE&D
Construction Management Plan and Buildability Report	March 2022	IRIS Capital
Fire Engineering Statement	5 April 2022	GHD
Flood Report	5 May 2022	James Taylor and Associates
Heritage Impact Statement	April 2022	City Plan
Section J Report	4 April 2022	Credwell
Structural Impact	5 April 2022	James Taylor and Associates
Traffic Assessment	6 May 2022	Varga Traffic Planning

Details demonstrating compliance are to be submitted to the Principal Certifier prior to the issue of an Occupation Certificate.

Reason: To ensure compliance with standards.

38. Acoustic Report Certification

Prior to any occupation certificate being issued, a further acoustic assessment is to be undertaken by a suitably qualified professional such as an acoustic engineer to confirm compliance with recommendations within the Acoustic Report by Renzo Tonin & Associates dated 6 April 2022 (TM424-01D02 Acoustic Report for DA Apartments (r3)).

Any recommendations made by the consultant must be implemented prior to issuing the Occupation Certificate in order to achieve compliance with noted conditions of this consent.

The updated acoustic assessment is to be submitted to the satisfaction of the Principal Certifying Authority.

Reason: To protect acoustic amenity of building occupants and surrounding premises.

39. Garbage and Recycling Facilities

All internal walls of the waste rooms shall be rendered to a smooth surface, coved at the floor/wall intersection, graded and appropriately drained to the sewer with a tap in close proximity to facilitate cleaning.

Waste room floors shall be graded and drained to an approved Sydney Water drainage system.

Waste rooms shall be clear of any other services or utilities infrastructure such as gas, electricity air-conditioning, plumbing, piping ducting or equipment.

Reason: To prevent pollution of the environment, provide a safe workplace for contractors and residents and to protect the amenity of the area.

40. **Waste and Recycling Facilities Certificate of Compliance**

The proposal shall be constructed in accordance with the Northern Beaches Waste Management Guidelines.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste and recycling facilities are provided.

41. **Waste/Recycling Compliance Documentation**

Evidence of disposal for recycling from the construction/demolition works shall be submitted to the Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste is minimised and recycled.

42. **Positive Covenant for Council and Contractor Indemnity**

A positive covenant shall be created on the title of the land prior to the issue of an Interim/Final Occupation Certificate requiring the proprietor of the land to provide access to the waste storage facilities. The terms of the positive covenant are to be prepared to Council's requirements, (Appendix E of the Waste Management Guidelines), at the applicant's expense and endorsed by Council prior to lodgement with NSW Land Registry Services. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

Reason: To ensure ongoing access for servicing of waste facilities.

43. **Authorisation of Legal Documentation Required for Waste Services**

The original completed request form (NSW Land Registry Services form 13PC) must be submitted to Council for authorisation prior to the issue of the Interim/Final Occupation Certificate. A copy of the work-as-executed plan (details overdrawn on a copy of the approved plan) must be included with the above submission. Where required by Council or the Certifying Authority, a Compliance Certificate shall also be provided in the submission to Council.

If Council is to issue the Compliance Certificate for these works, the fee is to be in accordance with Council's Fees and Charges.

Reason: To create encumbrances on the land.

ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

44. **Landscape Maintenance**

If any landscape materials/components or planting under this consent fails, they are to be replaced with similar materials/components. If any plants under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plans and any conditions of consent.

Reason: To maintain local environmental amenity.

45. **Collection of commercial/retail waste bins and materials.**

Commercial/retail waste and recycling bins and other waste materials are not to be placed on public land in Market Place for collection.

All arrangements for removal of commercial/retail waste from the building will include collection from the commercial/retail waste storage room within the property.

Empty bins must not be left on Market Place after collection.

Reason: To maintain the amenity of Market Place..

46. **Geotechnical Recommendations**

Any ongoing recommendations of the risk assessment required to manage the hazards identified in the Geotechnical Report referenced in Condition 1 of this consent are to be maintained and adhered to for the life of the development.

Reason: To ensure geotechnical risk is mitigated appropriately.

47. **Collection of Residential Waste and Recycling Bins**

Residential waste and recycling bins are not to be placed on public land in Market Place for collection.

Council will provide a "wheel out/wheel in service" from the bin storage room within the property.

The property owner/manager is to ensure that access to the residential bin storage room is unimpeded from 5.00am to 6.00pm on the scheduled day of collection.

Reason: To maintain the amenity of Market Place.

48. **Commercial Waste and Recycling Storage**

Commercial waste and recycling material/storage bins must be stored in a separate area to the residential waste and recycling material/storage bins as shown on the approved plans.

Reason: To ensure that commercial waste and residential waste is not mixed and is properly managed.

49. **Resident Parking Permits**

Any residents and/or tenants of the subject site are not eligible for resident parking permits even if they reside in a Permit Parking Scheme area. This condition is to be provided on the property Title.

Reason: to encourage sustainable transport alternatives and ensure that residents/tenants are aware that they are not entitled to a permit

50. **Restriction on size of delivery and service vehicles**

Service and Delivery Vehicles accessing the site from Whistler Street and/or parking in Market Lane are not to exceed 6m in length

Reason: 6m length limit on vehicle access to Whistler Street

Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application must be lodged on the NSW Planning portal within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

NOTE: A fee will apply for any request to review the determination.

Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

Signed On behalf of the Consent Authority




Name Rodney Piggott, Manager Development Assessments

Date 07/12/2022

GENERAL ADVICE

Advisory Notes (General)

Where are you in the development process?

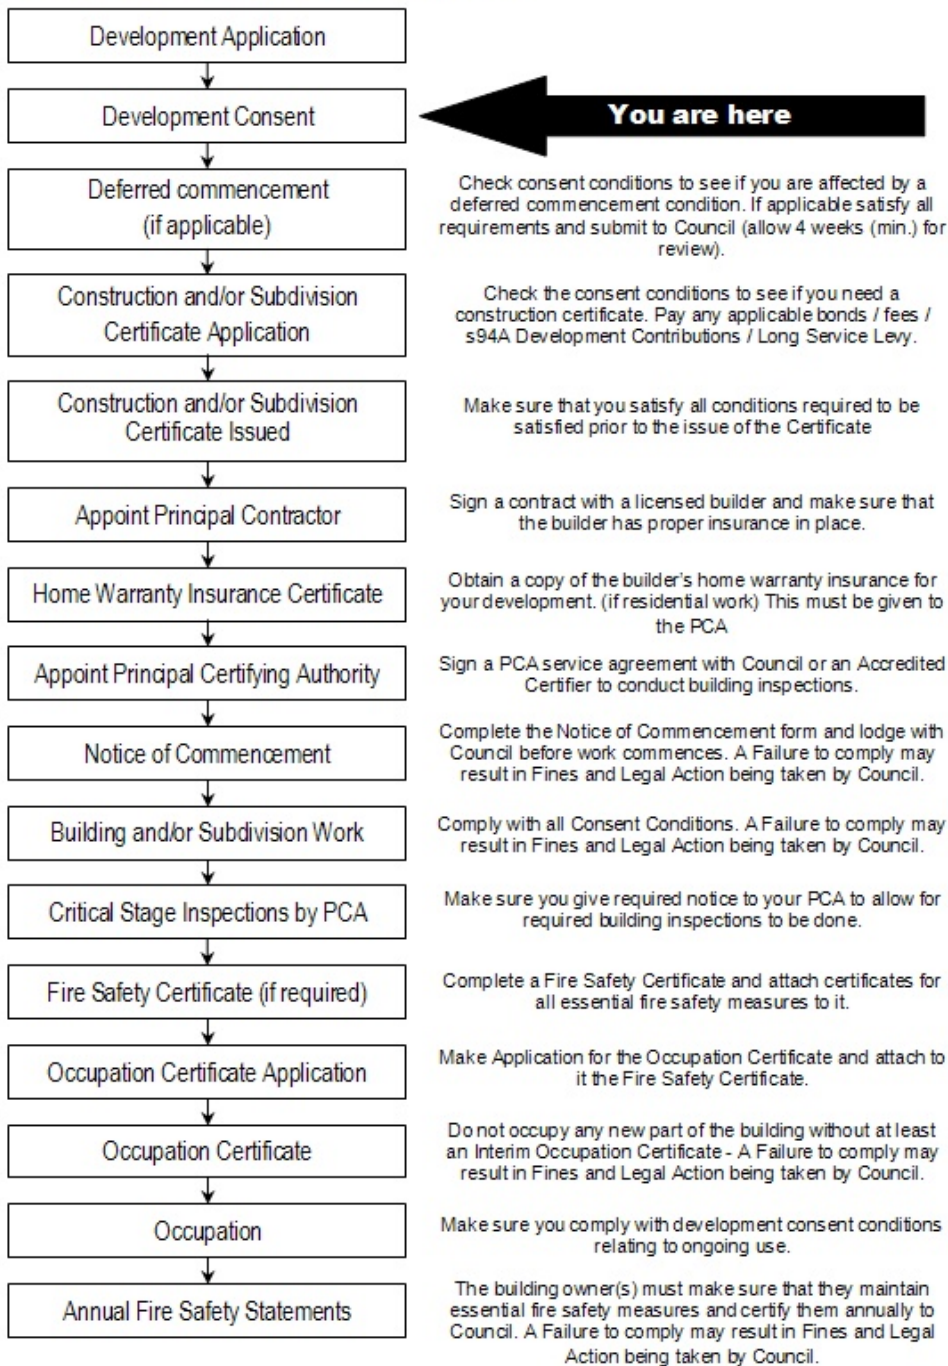

Note: The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Building Certification

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Certification Services

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site www.northernbeaches.nsw.gov.au or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

Charges Associated with the Development Consent

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

Bonds are released after:

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
 - the development is complete
 - damage has not been caused to council assets during the works
 - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

Acceptable Form of Security Bonds

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

Modifications to the consent

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

Other Matters not detailed within the Notice of Determination

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

Dial Before You Dig

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at www.1100.com.au or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

Telecommunications Act 1997 (Commonwealth)

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

Model

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

Trade waste agreement

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

Waste collection

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

Aboriginal Heritage

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

On-Site Sewage Management System

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

Cost of Works

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

Relocation of stormwater drainage

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

Tree preservation

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

Storage bins on footpath and roadway

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.

Protection of Public Places

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
 - (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

Road Opening Permit

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

Special Permits

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone. Other permits may include out of construction hours permits.

Licensing requirements for removal of bonded asbestos

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

Pool Access

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

Dewatering

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

Requirement to Notify about New Contamination Evidence

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

Flood Evacuation Plan

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

Utility Service Requirements

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

Plant & Equipment Kept Within Site

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

Lighting

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

Silt and Sediment Control

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

Maintenance of Sediment and Erosion Control Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

Installation and Maintenance of Sediment and Erosion Control

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

Dividing Fences Act 1991

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

OTHER MATTERS

Child Care Centres

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

Disability Access

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

Food Premises

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at www.foodnotify.nsw.gov.au or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

Wheel washing facility

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

Monitoring State of Roadways

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

Storage of Dangerous Goods

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

Storage of Flammable and Combustible Liquids

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

Noise and Vibration

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

Hairdressing/Beauty Treatment/ Skin penetration Requirements

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.

- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

Food Premises Construction Requirements

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

Legionella Control

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

Pool/Spa Safety

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

Grease Trap

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

Bandicoot/Penguin

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.