

23 April 2020



Stable Innovations Pittwater Shores Pty Ltd  
Lifestyle Working Building 33/117 Old Pittwater Road  
BROOKVALE NSW 2100

Dear Sir/Madam

**Application Number:** DA2019/1280  
**Address:** Lot 3B DP 164259 , 62 Beaconsfield Street, NEWPORT NSW 2106  
Lot 4A DP 159498 , 11 Queens Parade, NEWPORT NSW 2106  
Lot 3A DP 164259 , 9 Queens Parade, NEWPORT NSW 2106  
Lot 2 DP 209106 , 7 Queens Parade, NEWPORT NSW 2106  
Lot 5A DP 158658 , 13 Queens Parade, NEWPORT NSW 2106  
Lot 4B DP 159498 , 60 Beaconsfield Street, NEWPORT NSW 2106  
**Proposed Development:** Demolition works and construction of a multi unit housing  
development with associated carparking and landscaping

Please find attached the Notice of Determination for the above mentioned Application.

Please be advised that a copy of the Assessment Report associated with the application is available on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

Please read your Notice of Determination carefully and the assessment report in the first instance.

If you have any further questions regarding this matter please contact the undersigned on 1300 434 434 or via email quoting the application number, address and description of works to [council@northernbeaches.nsw.gov.au](mailto:council@northernbeaches.nsw.gov.au)

Regards,



Steven Findlay  
**Manager Development Assessments**

## NOTICE OF DETERMINATION

<b>Application Number:</b>	DA2019/1280
<b>Determination Type:</b>	Development Application

### APPLICATION DETAILS

<b>Applicant:</b>	Stable Innovations Pittwater Shores Pty Ltd
<b>Land to be developed (Address):</b>	Lot 3B DP 164259 , 62 Beaconsfield Street NEWPORT NSW 2106 Lot 4A DP 159498 , 11 Queens Parade NEWPORT NSW 2106 Lot 3A DP 164259 , 9 Queens Parade NEWPORT NSW 2106 Lot 2 DP 209106 , 7 Queens Parade NEWPORT NSW 2106 Lot 5A DP 158658 , 13 Queens Parade NEWPORT NSW 2106 Lot 4B DP 159498 , 60 Beaconsfield Street NEWPORT NSW 2106
<b>Proposed Development:</b>	Demolition works and construction of a multi unit housing development with associated carparking and landscaping

### DETERMINATION - APPROVED

<b>Made on (Date)</b>	15/04/2020
<b>Consent to operate from (Date):</b>	23/04/2020
<b>Consent to lapse on (Date):</b>	23/04/2025

### Detail of Conditions

*The conditions, which have been applied to the consent, aim to ensure that the Environmental Impacts of Development are minimised and the Health and Safety of the community is maintained in accordance with the relevant standards and the Building Code of Australia.*

### Note:

*If the works are to be certified by a Private Certifying Authority, then it is the certifier's responsibility to ensure all outstanding fees and bonds have been paid to Council prior to the issue of the Construction Certificate or as otherwise specified by Consent conditions.*

## DEVELOPMENT CONSENT OPERATIONAL CONDITIONS

1. **Approved Plans and Supporting Documentation**

The development must be carried out in compliance (except as amended by any other condition of consent) with the following:

a) Approved Plans

<b>Architectural Plans - Endorsed with Council's stamp</b>		
<b>Drawing No.</b>	<b>Dated</b>	<b>Prepared By</b>
10708_DA002 Issue A (Demolition Plan)	06/11/2019	nettletontribe
10708_DA003 Issue G (Site/Roof Plan)	03/02/2020	nettletontribe
10708_DA004 Issue J (Beaconsfield St Ground Level Plan)	03/02/2020	nettletontribe
10708_DA005 Issue J (Beaconsfield Level 1 Plan & Queens Parade Basement Level Plan)	03/02/2020	nettletontribe
10708_DA006 Issue H (Beaconsfield Level 2 Plan & Queens Parade Ground Level Plan)	03/02/2020	nettletontribe
10708_DA007 Issue F (Beaconsfield Roof Plan & Queens Parade Level 1 Plan)	03/02/2020	nettletontribe
10708_DA020 Issue E (Elevations - Sheet 1)	03/02/2020	nettletontribe
10708_DA021 Issue D (Elevations - Sheet 2)	03/02/2020	nettletontribe
10708_DA030 Issue F (Sections)	03/02/2020	nettletontribe
10708_DA043 Issue C (Adaptable Unit Plan - Type Q1)	12/11/2019	nettletontribe
10708_DA044 Issue C (Adaptable Unit Plan - Type B1)	12/11/2019	nettletontribe
10708_DA045 Issue C (Adaptable Unit Plan - Type B2)	12/11/2019	nettletontribe
10708_DA060 Issue C (Waste Management Detail Plan)	03/02/2020	nettletontribe
10708_DA061 Issue C (Rear Boundary Detail)	03/02/2020	nettletontribe
10708_DA062 Issue A (Western Boundary Detail)	03/02/2020	nettletontribe
10708_DA075 Issue C (Landscape Area Plan)	03/02/2020	nettletontribe

<b>Engineering Plans</b>		
<b>Drawing No.</b>	<b>Dated</b>	<b>Prepared By</b>
D01 - A (Site/Roof Drainage Plan)	08/11/2019	NB Consulting Engineers

D02 - A (Level 2 Drainage Plan)	08/11/2019	NB Consulting Engineers
D03 - A (Level 1 Drainage Bio-retention Inlet Plan)	08/11/2019	NB Consulting Engineers
D04 - A (Level 1 Drainage Bio-retention Onlet and OSD Plan)	08/11/2019	NB Consulting Engineers
D05 - A (Ground Level Drainage Plan)	08/11/2019	NB Consulting Engineers
D06 - A (Music Catchment Plan)	08/11/2019	NB Consulting Engineers
D07 - A (Stormwater Management Notes and Calculations )	08/11/2019	NB Consulting Engineers
D08 - A (Stormwater Management Details)	08/11/2019	NB Consulting Engineers

**Reports / Documentation – All recommendations and requirements contained within:**

Report No. / Page No. / Section No.	Dated	Prepared By
BASIX Certificate (1054289M)	11 November 2019	Eco Certificates Pty Ltd
NATHERS Certificate (0004346360)	11 November 2019	Eco Certificates Pty Ltd
Geotechnical Report (32714Brpt)	29 October 2019	JKGeotechnics
Arboricultural Report	13 November 2019	Footprint Green Pty Ltd
Traffic and Transport Assessment Issue B	November 2019	Transport and Traffic Planning Associates
Disability Access Report (J000378)	14 November 2019	Cheung Access Pty Ltd
Fire Engineering Statement (12520813)	08 November 2019	GHD Pty Ltd
Construction Management Plan Rev.1.2	February 2020	Auswide Consulting
BCA 2019 Indicative Compliance Report Design Phase Issue 1	12 November 2019	Building Certificates Australia

c) Any plans and / or documentation submitted to satisfy the Conditions of this consent.

d) The development is to be undertaken generally in accordance with the following:

<b>Landscape Plans</b>		
Drawing No.	Dated	Prepared By
L.SK.01 (Landscape Sketch Plan - GF)	14/11/19	Scape Design
L.SK.02 (Landscape Sketch Plan - Roof)	14/11/19	Scape Design
L.SK.03 (Landscape Planting Plan - GF)	14/11/19	Scape Design
L.SK.04 (Landscape Planting Plan -	14/11/19	Scape Design

Roof)		
L.SK.06 (Detailed Plan 1)	14/11/19	Scape Design
L.SK.07 (Detailed Plan 2)	14/11/19	Scape Design
L.SK.08 (Landscape Sections)	14/11/19	Scape Design

<b>Waste Management Plan</b>		
<b>Drawing No/Title.</b>	<b>Dated</b>	<b>Prepared By</b>
Waste Management Plan	14/11/19	Stable Innovations Pittwater Shores

In the event of any inconsistency between conditions of this consent and the drawings/documents referred to above, the conditions of this consent will prevail.

Reason: To ensure the work is carried out in accordance with the determination of Council and approved plans.

## 2. Prescribed Conditions

- (a) All building works must be carried out in accordance with the requirements of the Building Code of Australia (BCA).
- (b) BASIX affected development must comply with the schedule of BASIX commitments specified within the submitted BASIX Certificate (demonstrated compliance upon plans/specifications is required prior to the issue of the Construction Certificate);
- (c) A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - (i) showing the name, address and telephone number of the Principal Certifying Authority for the work, and
  - (ii) showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - (iii) stating that unauthorised entry to the work site is prohibited.

Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
- (d) Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the following information:
  - (i) in the case of work for which a principal contractor is required to be appointed:
    - A. the name and licence number of the principal contractor, and
    - B. the name of the insurer by which the work is insured under Part 6 of that Act,
  - (ii) in the case of work to be done by an owner-builder:
    - A. the name of the owner-builder, and
    - B. if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.

If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under becomes out of date, further work must

not be carried out unless the Principal Certifying Authority for the development to which the work relates (not being the Council) has given the Council written notice of the updated information.

- (e) Development that involves an excavation that extends below the level of the base of the footings of a building on adjoining land, the person having the benefit of the development consent must, at the person's own expense:
- (i) protect and support the adjoining premises from possible damage from the excavation, and
  - (ii) where necessary, underpin the adjoining premises to prevent any such damage.
  - (iii) must, at least 7 days before excavating below the level of the base of the footings of a building on an adjoining allotment of land, give notice of intention to do so to the owner of the adjoining allotment of land and furnish particulars of the excavation to the owner of the building being erected or demolished.
  - (iv) the owner of the adjoining allotment of land is not liable for any part of the cost of work carried out for the purposes of this clause, whether carried out on the allotment of land being excavated or on the adjoining allotment of land.

In this clause, allotment of land includes a public road and any other public place.

Reason: Legislative requirement.

### 3. **General Requirements**

- (a) Unless authorised by Council:  
Building construction and delivery of material hours are restricted to:
- 7.00 am to 5.00 pm inclusive Monday to Friday,
  - 8.00 am to 1.00 pm inclusive on Saturday,
  - No work on Sundays and Public Holidays.

Demolition and excavation works are restricted to:

- 8.00 am to 5.00 pm Monday to Friday only.

(Excavation work includes the use of any excavation machinery and the use of jackhammers, rock breakers, excavators, loaders and the like, regardless of whether the activities disturb or alter the natural state of the existing ground stratum or are breaking up/removing materials from the site).

- (b) Should any asbestos be uncovered on site, its demolition and removal must be carried out in accordance with WorkCover requirements and the relevant Australian Standards.
- (c) At all times after the submission the Notice of Commencement to Council, a copy of the Development Consent and Construction Certificate is to remain onsite at all times until the issue of a final Occupation Certificate. The consent shall be available for perusal of any Authorised Officer.
- (d) Where demolition works have been completed and new construction works have not commenced within 4 weeks of the completion of the demolition works that area affected by the demolition works shall be fully stabilised and the site must be maintained in a safe and clean state until such time as new construction works commence.



- (e) Onsite toilet facilities (being either connected to the sewer or an accredited sewer management facility) for workers are to be provided for construction sites at a rate of 1 per 20 persons.
- (f) Prior to the release of the Construction Certificate, payment of the Long Service Levy is required. This payment can be made at Council or to the Long Services Payments Corporation. Payment is not required where the value of the works is less than \$25,000. The Long Service Levy is calculated on 0.35% of the building and construction work. The levy rate and level in which it applies is subject to legislative change. The applicable fee at the time of payment of the Long Service Levy will apply.
- (g) The applicant shall bear the cost of all works associated with the development that occurs on Council's property.
- (h) No skip bins, building materials, demolition or excavation waste of any nature, and no hoist, plant or machinery (crane, concrete pump or lift) shall be placed on Council's footpaths, roadways, parks or grass verges without Council Approval.
- (i) Demolition materials and builders' wastes are to be removed to approved waste/recycling centres.
- (j) No trees or native shrubs or understorey vegetation on public property (footpaths, roads, reserves, etc.) or on the land to be developed shall be removed or damaged during construction unless specifically approved in this consent including for the erection of any fences, hoardings or other temporary works.
- (k) Prior to the commencement of any development onsite for:
  - i) Building/s that are to be erected
  - ii) Building/s that are situated in the immediate vicinity of a public place and is dangerous to persons or property on or in the public place
  - iii) Building/s that are to be demolished
  - iv) For any work/s that is to be carried out
  - v) For any work/s that is to be demolished

The person responsible for the development site is to erect or install on or around the development area such temporary structures or appliances (wholly within the development site) as are necessary to protect persons or property and to prevent unauthorised access to the site in order for the land or premises to be maintained in a safe or healthy condition. Upon completion of the development, such temporary structures or appliances are to be removed within 7 days.
- (l) A "Road Opening Permit" must be obtained from Council, and all appropriate charges paid, prior to commencement of any work on Council property. The owner/applicant shall be responsible for all public utilities and services in the area of the work, shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.
- (m) Requirements for new swimming pools/spas or existing swimming pools/spas affected by building works.
  - (1) Child resistant fencing is to be provided to any swimming pool or lockable cover to any spa containing water and is to be consistent with the following;  
  
Relevant legislative requirements and relevant Australian Standards (including but not limited) to:
    - (i) Swimming Pools Act 1992
    - (ii) Swimming Pools Amendment Act 2009
    - (iii) Swimming Pools Regulation 2008
    - (iv) Australian Standard AS1926 Swimming Pool Safety

- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools.
- (2) A 'KEEP WATCH' pool safety and aquatic based emergency sign, issued by Royal Life Saving is to be displayed in a prominent position within the pool/spa area.
- (3) Filter backwash waters shall be conveyed to the Sydney Water sewerage system in sewered areas or managed on-site in unsewered areas in a manner that does not cause pollution, erosion or run off, is separate from the irrigation area for any wastewater system and is separate from any onsite stormwater management system.
- (4) Swimming pools and spas must be registered with the Division of Local Government.

Reason: To ensure that works do not interfere with reasonable amenity expectations of residents and the community.

## FEES / CHARGES / CONTRIBUTIONS

### 4. Policy Controls

Northern Beaches 7.12 Contributions Plan 2019

A monetary contribution of \$192,139.42 is payable to Northern Beaches Council for the provision of local infrastructure and services pursuant to section 7.12 of the Environmental Planning & Assessment Act 1979 and the Northern Beaches Section 7.12 Contributions Plan 2019. The monetary contribution is based on a development cost of \$19,213,942.00.

The monetary contribution is to be paid prior to the issue of the first Construction Certificate or Subdivision Certificate whichever occurs first, or prior to the issue of the Subdivision Certificate where no Construction Certificate is required. If the monetary contribution (total or in part) remains unpaid after the financial quarter that the development consent is issued, the amount unpaid (whether it be the full cash contribution or part thereof) will be adjusted on a quarterly basis in accordance with the applicable Consumer Price Index. If this situation applies, the cash contribution payable for this development will be the total unpaid monetary contribution as adjusted.

The proponent shall provide to the Certifying Authority written evidence (receipt/s) from Council that the total monetary contribution has been paid.

The Northern Beaches Section 7.12 Contributions Plan 2019 may be inspected at 725 Pittwater Rd, Dee Why and at Council's Customer Service Centres or alternatively, on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)

This fee must be paid prior to the issue of the Construction Certificate. Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To provide for contributions in accordance with the Contribution Plan to fund the provision of new or augmented local infrastructure and services.

### 5. Security Bond



A bond (determined from cost of works) of \$10,000 and an inspection fee in accordance with Council's Fees and Charges paid as security to ensure the rectification of any damage that may occur to the Council infrastructure contained within the road reserve adjoining the site as a result of construction or the transportation of materials and equipment to and from the development site.

An inspection fee in accordance with Council adopted fees and charges (at the time of payment) is payable for each kerb inspection as determined by Council (minimum (1) one inspection).

All bonds and fees shall be deposited with Council prior to Construction Certificate or demolition work commencing, details demonstrating payment are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

To process the inspection fee and bond payment a Bond Lodgement Form must be completed with the payments (a copy of the form is attached to this consent and alternatively a copy is located on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au)).

Reason: To ensure adequate protection of Council's infrastructure.

6. **Construction, Excavation and Associated Works Security Bond (Road works)**

The applicant is to lodge a bond with Council of \$75000.00 as security against any damage or failure to complete the construction of Kerb & gutter and concrete footpath reconstruction works as part of this consent.

Details confirming payment of the bond are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: Protection of Council's Infrastructure.

## CONDITIONS TO BE SATISFIED PRIOR TO THE ISSUE OF THE CONSTRUCTION CERTIFICATE

7. **On slab landscape planting and associated works**

- a) Details shall be submitted to the Certifying Authority prior to the issue of the Construction Certificate indicating the proposed method of waterproofing to all internal walls and slab, and drainage of the concrete slab over which soil and planting is being provided.
- b) Landscape treatment details shall be submitted to the Certifying Authority prior to the issue of the Construction Certificate indicating the proposed soil volume, soil type, planting, automatic irrigation, services connections, and maintenance activity schedule.
- c) The following soil depths are required in order to be counted as landscaping:
  - 300mm for lawn
  - 600mm for shrubs
  - 1metre for trees

Reason: To ensure appropriate and secure waterproofing and drainage is installed to direct water flow into the drainage system, and away from habitable areas.

8. **Geotechnical Report Recommendations have been Incorporated into Designs and Structural Plans**

The recommendations of the risk assessment required to manage the hazards as identified in

the Geotechnical Report prepared by JKGeotechnics dated 29 October 2019 are to be incorporated into the construction plans. Prior to issue of the Construction Certificate, Form 2 of the Geotechnical Risk Management Policy for Pittwater (Appendix 5 of P21 DCP) is to be completed and submitted to the Accredited Certifier. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

#### 9. **Detailed Design of Stormwater Treatment Measures**

A certificate from a Civil Engineer, stating that the stormwater treatment measures have been designed in accordance with the plans prepared by NB Consulting Engineers dated October 2019.

The certificate shall be submitted to the Certifying Authority prior to the release of the Construction Certificate.

Reason: Protection of the receiving environment

#### 10. **BCA Report (Class 2-9)**

A 'Building Code of Australia (BCA) Assessment Report' / 'Fire Audit Report' from an appropriately qualified Accredited Certifier\* will need to be submitted with the Construction Certificate application addressing the following:

The report is to detail the extent to which the proposed building does or does not comply with the deemed-to-satisfy provisions of Sections C, D, E and F of the Building Code of Australia. The report is to also provide recommendations with respect to the building works required to ensure that the specified measures and facilities for the proposed development are appropriate for its intended use to:

- i) restrict the spread of fire from the building to other buildings nearby, and
- ii) protect persons using the building, and to facilitate their egress from the building in the event of fire, and
- iii) where appropriate, provide access for persons with a disability, and
- iv) provide facilities and services appropriate for the development

\*To be regarded as an "appropriately qualified accredited certifier" the certifier must hold the relevant level of accreditation that would enable the certifier to issue a construction certificate for the subject building.

The 'Building Code of Australia (BCA) Assessment Report' / 'Fire Audit Report' is to be submitted to the Certifying Authority with the Construction Certificate application.

Reason: To ensure adequate provision is made for Health, Amenity, access and Fire safety for building occupant health and safety.

#### 11. **On-site Stormwater Detention Details**

The Applicant is to provide a certification of drainage plans detailing the provision of on-site stormwater detention in accordance with Northern Beaches Council's PITTWATER DCP21. and

generally in accordance with the concept drainage plans prepared by NB Consulting Engineers, drawing number D01 to D08 issue A (1909119), dated 09-11-2019. Detailed drainage plans are to be prepared by a suitably qualified Civil Engineer, who has membership to the Institution of Engineers Australia, National Professional Engineers Register (NPER) and registered in the General Area of Practice for civil engineering.

Detailed drainage plans, including engineering certification, are to be submitted to the Certifying Authority for approval prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for the disposal of stormwater and stormwater management arising from the development.

12. **Submission Roads Act Application for Civil Works in the Public Road**

The Applicant is to submit an application for approval for Infrastructure works on Council's roadway. Engineering plans for the new development works within the road reserve and this development consent are to be submitted to Council for approval under the provisions of Sections 138 and 139 of the Roads Act 1993.

The application is to include four (4) copies of Civil Engineering plans for the design of concrete footpath, kerb & gutter and vehicular crossings which are to be generally in accordance with the Council's specification for engineering works - AUS-SPEC #1. The plan shall be prepared by a qualified civil engineer. The design must include the following information:

1. Construction of 2.5 metres wide concrete footpath fronting both Beaconsfield Street and Queens Parade.
2. The nature reserve shall be regarded to provide a 4 percent cross fall. If services are encountered the graded may have to be revised subject to detail assessment during the preparation of the design and construction plan.
3. Retaining wall required shall be constructed wholly within the private property.
4. The vehicular crossings 6.0 metres wide on both road frontages in accordance with Northern Beaches Council vehicular crossing profile.
5. Design plan with levels, longitudinal grades and cross-section for both driveways.
6. Design and sectional plans for the 2.5 footpath and regrading nature reserve along both Beaconsfield Street and Queens Parade.
7. All trees that are to be protected and not permitted to be removed must be clearly marked in the design plan. Tree protection measures are to be provided.
8. Removal of existing Kerb & Gutter fronting both Beaconsfield Street and Queens Parade and reconstructed to Council standard lay backs and kerb & gutter.
9. Line marking are required to be provided where required for traffic management.

The fee associated with the assessment and approval of the application is to be in accordance with Council's Fee and Charges.

An approval is to be submitted to the Certifying Authority prior to the issue of the Construction Certificate

Reason: To ensure engineering works are constructed in accordance with relevant standards and Council's specification.

13. **Structural Adequacy and Excavation Work**

Excavation work is to ensure the stability of the soil material of adjoining properties, the

protection of adjoining buildings, services, structures and / or public infrastructure from damage using underpinning, shoring, retaining walls and support where required. All retaining walls are to be structurally adequate for the intended purpose, designed and certified by a Structural Engineer, except where site conditions permit the following:

- (a) maximum height of 900mm above or below ground level and at least 900mm from any property boundary, and
- (b) Comply with AS3700, AS3600 and AS1170 and timber walls with AS1720 and AS1170.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the Construction Certificate.

Reason: To provide public and private safety.

14. **Shoring of Council's Road Reserve (Temporary road anchors)**

Should the proposal require shoring to support an adjoining property or Council land, the Applicant shall provide the adjoining properties with engineering drawings, detailing the proposed shoring works for their consideration and approval.

Written approval from Council under Section 138 of the Roads Act 1993 is required if temporary ground anchors are to be used within Council's road reserve. The Owner's approval is to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that owners consent is obtained for ancillary works, and to ensure the protection of adjoining properties and Council land.

15. **Stormwater Drainage Application**

The applicant is to provide a stormwater drainage application under Section 68 of the Local Government Act 1993 to Council for approval. The submission is to include four (4) copies of Civil Engineering plans for the design of the of stormwater pipe connection to Council's pit located in Beaconsfield Street which are to be generally in accordance with the civil design approved with the Development Application and Council's specification for engineering works - AUS-SPEC #1. The form can be found on Council's website at [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au) > Council Forms > Stormwater Drainage Application Form.

The fee associated with the assessment and approval of the application is to be in accordance with Council's Fees and Charges. Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure appropriate provision for disposal and maintenance stormwater management, arising from the development.

16. **Compliance with Standards**

The development is required to be carried out in accordance with all relevant Australian Standards.

Details demonstrating compliance with the relevant Australian Standard are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure the development is constructed in accordance with appropriate standards.

17. **External Colours and Materials (Industrial, Commercial, Mixed & Apartment Buildings)**

- (a) External Glazing - The reflectivity index of external glazing for windows, walls or roof finishes

of the proposed development is to be no greater than 20% (expressed as a per centum of the reflected light falling upon any surface).

(b) External Roofing - The external finish to the roof shall have a medium to dark range in order to minimise solar reflections to neighbouring properties. Light colours such as off white, cream, silver or light grey colours are not permitted.

(c) Anti Graffiti Coating - The finishes of the walls adjoining <STREET NAME> must be finished in heavy duty long life, ultra violet resistant coating with a high resistance to solvents and chemicals as an anti-graffiti coating easily cleaned by solvent wipe.

Details demonstrating compliance are to be submitted to the Certifying Authority prior to the issue of the Construction Certificate.

Reason: To ensure that excessive glare or reflectivity nuisance from glazing does not occur as a result of the development. (DACPLC04)

18. **Construction Traffic Management Plan.**

As a result of the site constraints, limited vehicle access and parking, a Construction Traffic Management Plan (CTMP) and report shall be prepared by an RMS accredited person and submitted to and approved by the Northern Beaches Council Traffic Team prior to issue of any Construction Certificate.

Due to heavy traffic congestion during school drop-off and pick-up times, truck movements will not be permitted between the hours of 8.30am – 9.45am and 3.00pm – 4.00pm on school days.

The CTMP must address following:

- The proposed phases of construction works on the site, and the expected duration of each construction phase;
- The proposed order in which works on the site will be undertaken, and the method statements on how various stages of construction will be undertaken;
- Make provision for all construction materials to be stored on site, at all times;
- The proposed areas within the site to be used for the storage of excavated materials, construction materials and waste containers during the construction period;
- The proposed method of access to and egress from the site for construction vehicles, including access routes and truck routes through the Council area and the location and type of temporary vehicular crossing for the purpose of minimising traffic congestion and noise in the area, with no access across public parks or reserves being allowed;
- The proposed method of loading and unloading excavation and construction machinery, excavation and building materials, formwork and the erection of any part of the structure within the site. Wherever possible mobile cranes should be located wholly within the site;
- Make provision for parking onsite. All Staff and Contractors are to use the basement parking once available.
- Temporary truck standing/ queuing locations in a public roadway/ domain in the vicinity of the site are not permitted unless approved by Council prior.
- Include a Traffic Control Plan prepared by a person with suitable RMS accreditation for any activities involving the management of vehicle and pedestrian traffic.
- The proposed manner in which adjoining property owners will be kept advised of the timeframes for completion of each phase of development/construction process. It must also specify that a minimum Fourteen (14) days notification must be provided to adjoining property owners prior to the implementation of any temporary traffic control measure.

- Include a site plan showing the location of any site sheds, location of requested Work Zones, anticipated use of cranes and concrete pumps, structures proposed on the footpath areas (hoardings, scaffolding or shoring) and any tree protection zones around Council street trees.
- Take into consideration the combined construction activities of other development in the surrounding area. To this end, the consultant preparing the CTMP must engage and consult with developers undertaking major development works within a 250m radius of the subject site to ensure that appropriate measures are in place to prevent the combined impact of construction activities, such as (but not limited to) concrete pours, crane lifts and dump truck routes. These communications must be documented and submitted to Council prior to work commencing on site.
- The proposed method/device to remove loose material from all vehicles and/or machinery before entering the road reserve, any run-off from the washing down of vehicles shall be directed to the sediment control system within the site;
- Specify that the roadway (including footpath) must be kept in a serviceable condition for the duration of construction. At the direction of Council, undertake remedial treatments such as patching at no cost to Council.
- The proposed method of support to any excavation adjacent to adjoining properties, or the road reserve. The proposed method of support is to be designed and certified by an appropriately qualified and practising Structural Engineer, or equivalent;
- Proposed protection for Council and adjoining properties; and
- The location and operation of any on site crane.

The CTMP shall be prepared in accordance with relevant sections of Australian Standard 1742 – “Manual of Uniform Traffic Control Devices”, RMS’ Manual – “Traffic Control at Work Sites”.

All fees and charges associated with the review of this plan is to be in accordance with Council’s Schedule of Fees and Charges and are to be paid at the time that the Construction Traffic Management Plan is submitted.

Reason: To ensure public safety and minimise any impacts to the adjoining pedestrian and vehicular traffic systems. Confirming appropriate measures have been considered for site access, storage and the operation of the site during all phases of the construction process in a manner that respects adjoining owner’s property rights and protects amenity in the locality, without unreasonable inconvenience to the community. The CTMP is intended to minimise impact of construction activities on the surrounding community, in terms of vehicle traffic (including traffic flow and parking) and pedestrian amenity adjacent to the site. (DACTRCPC1)

19. **Vehicular Swept Paths.**

Vehicular manoeuvring paths must be provided to demonstrate all vehicles can enter or depart the site in a forward direction without encroaching on required car parking spaces. The drawings must be compliant with Australian/New Zealand Standard AS/NZS 2890.1:2004 - Parking facilities - Off-street car parking. Drawings must be submitted with the Construction Certificate application.

Reason: To ensure compliance with Australian Standards relating to manoeuvring, access and parking of vehicles. (DACTRCPC2)

20. **Waste and Recycling Requirements**

Details demonstrating compliance with Northern Beaches Council Development Control Plan – Part C9 Waste Management, including the required Northern Beaches Waste Management Plan, are to be submitted to and approved by the Certifying Authority prior to the issue of any Construction Certificate.

Note: If the proposal, when compliant with Northern Beaches Development Control Plan – Part C9 Waste Management, causes inconsistencies with other parts of the approval i.e. architectural or landscaped plans a modification(s) to the development may be required.

Reason: To ensure adequate and appropriate waste and recycling facilities are provided. (DACWTC01)

## CONDITIONS THAT MUST BE ADDRESSED PRIOR TO ANY COMMENCEMENT

### 21. **Pre-Construction Dilapidation Report**

Dilapidation reports, including photographic surveys, of the following adjoining properties must be provided to the Principal Certifying Authority prior to any works commencing on the site (including demolition or excavation). The reports must detail the physical condition of those properties listed below, both internally and externally, including walls, ceilings, roof, structural members and other similar items.

- 5 Kaliny Street, Newport;
- 58 Beaconsfield Street, Newport;
- 15-17 Queens Parade, Newport; and
- 54 Beaconsfield Street, Newport

The dilapidation report is to be prepared by a suitably qualified person. A copy of the report must be provided to Council, the Principal Certifying Authority and the owners of the affected properties prior to any works commencing.

In the event that access for undertaking the dilapidation report is denied by an adjoining owner, the applicant must demonstrate, in writing that all reasonable steps have been taken to obtain access. The Principal Certifying Authority must be satisfied that the requirements of this condition have been met prior to commencement of any works.

Note: This documentation is for record keeping purposes and may be used by an applicant or affected property owner to assist in any action required to resolve any civil dispute over damage arising from the works.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the commencement of any works on site.

Reason: To maintain proper records in relation to the proposed development.

### 22. **Tree trunk, branch and root protection**

(a) Existing trees which must be retained

i) All trees not indicated for removal on Existing Tree Plan Dwg. No. L.SK.05 dated 14/11/19 prepared by Scape Design, unless exempt under relevant planning instruments or legislation

ii) Trees located on adjoining private land

(b) Tree protection

i) No tree roots greater than 25mm diameter are to be cut from protected trees unless authorised by the Project Arborist on site.

ii) All structures are to bridge tree roots greater than 50mm diameter unless directed

otherwise by the Project Arborist on site.

- iii) All tree protection to be in accordance with the recommendations of the Arboricultural Impact Assessment dated 13 November 2019 prepared by Footprint Green and AS4970-2009 Protection of trees on development sites, with particular reference to Section 4 Tree Protection Measures.
- iv) All tree pruning within the subject site is to be in accordance with relevant planning controls and AS 4373 Pruning of amenity trees
- v) All tree protection measures, including fencing, are to be in place prior to commencement of works.

Reason: To ensure compliance with the requirement to retain and protect significant planting on the site.

23. **Project Arborist**

- i) A Project Arborist with minimum qualification AQF Level 5 is to be appointed prior to commencement of works.
- ii) The Project Arborist is to oversee all tree protection measures, removals and works adjacent to protected trees as outlined in the the Arboricultural Impact Assessment dated 13 November 2019 prepared by Footprint Green and AS4970-2009 Protection of trees on development sites.
- iii) The Project Arborist is to ensure compliance as relevant with any other environmental requirements conditioned under this consent.

Reason: to ensure protection of vegetation proposed for retention on the site.

24. **Tree removal within the road reserve**

- i) This consent includes approval to remove trees located within the road reserve as indicated on Existing Tree Plan Dag No. L.SK.05 dated 14/11/19 prepared by Scape Design
- ii) Removal of approved trees in the road reserve shall only be undertaken by a Council approved tree contractor.
- iii) Details of currently approved tree contractors can be obtained from Northern Beaches Council Public Trees Section prior to removal.

Reason: Public liability

## CONDITIONS TO BE COMPLIED WITH DURING DEMOLITION AND BUILDING WORK

25. **Road Reserve**

The applicant shall ensure the public footways and roadways adjacent to the site are maintained in a safe condition at all times during the course of the work.

Reason: Public Safety.

26. **Removing, Handling and Disposing of Asbestos**

Any asbestos material arising from the demolition process shall be removed and disposed of in accordance with the following requirements:

- o Work Health and Safety Act;
- o Work Health and Safety Regulation;
- o Code of Practice for the Safe Removal of Asbestos [NOHSC:2002 (1998)];
- o Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)];
- o Clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005; and



- The demolition must be undertaken in accordance with Australian Standard AS2601 – The Demolition of Structures.

Reason: For the protection of the environment and human health.

27. **Survey Certificate**

A survey certificate prepared by a Registered Surveyor at the following stages of construction:

(a) Commencement of perimeter walls columns and or other structural elements to ensure the wall or structure, to boundary setbacks are in accordance with the approved details.

(b) At ground level to ensure the finished floor levels are in accordance with the approved levels, prior to concrete slab being poured/flooring being laid.

(c) At completion of the roof frame confirming the finished roof/ridge height is in accordance with levels indicated on the approved plans.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority.

Reason: To determine the height of buildings under construction comply with levels shown on approved plans.

28. **Installation and Maintenance of Sediment Control**

Prior to any works commencing on site, including demolition, sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: Soils and Construction' (2004). Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site.

29. **Implementation of Construction Traffic Management Plan**

All works and construction activities are to be undertaken in accordance with the approved Construction Traffic Management Plan (CTMP). All controls in the CTMP must be maintained at all times and all traffic management control must be undertaken by personnel having appropriate RMS accreditation. Should the implementation or effectiveness of the CTMP be impacted by surrounding major development not encompassed in the approved CTMP, the CTMP measures and controls are to be revised accordingly and submitted to Council for approval. A copy of the approved CTMP is to be kept onsite at all times and made available to Council on request.

Reason: to ensure compliance of the developer/builder in adhering to the Construction Traffic Management procedures agreed and are held liable to the conditions of consent. (DACTREDW1)

30. **Substitution of Stormwater Treatment Measure**

The substitution of an "equivalent" device for the stormwater treatment measure approved in the Development Application process must first be approved by the Principal Certifying Authority.

Details must be submitted to the Principal Certifying Authority for approval prior to installation.

Reason: To ensure stormwater is appropriately managed.

**31. Installation and Maintenance of Sediment and Erosion Control**

All Site drainage and sediment and erosion control works and measures as described in the Soil and Water Management Plan and any other pollution controls, as required by these conditions shall be implemented prior to commencement of any other works at the Site.

Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and vegetation cover has been re-established across 70 percent of the site, and the remaining areas have been stabilised with ongoing measures such as jute mesh or matting.

Reason: Protection of the receiving environment

**32. Dewatering Management**

Discharge must achieve the following water quality targets in addition to any conditions/documentation of this consent and legislation including Protection of The Environment Operations Act 1997 and Contaminated Lands Act 1997.

Parameter	Criterion	Method	Time Prior to Discharge
Oil and grease	No visible	Visual inspection	<1 hour
pH	6.5- 8.5	Probe/meter	<1 hour
Total Suspended Solids (TSS)	<50mg/L	Meter/grab sample measures as NTU	<1 hour

*NOTE: The correlation between NTU and TSS must be established by a NATA accredited laboratory prior to the commencement of dewatering activities.*

All records of water discharges and monitoring results are to be documented and kept on site. Copies of all records shall be provided to the appropriate regulatory authority, including Council, upon request.

Tailwater must be discharged to the nearest stormwater pit in accordance with Council's Auspec1 Design Manual and must not spread over any road, footpath and the like. Discharge to the kerb and gutter will not be accepted.

Reason: Protection of the receiving environment.

**33. Protection of stormwater treatment measures during construction**

Until the development site has been fully stabilised in 90 percent of the catchment area for the stormwater treatment measures, measures that incorporate filter media and plantings must not be completed nor filter devices installed. Alternatively, completed/installed stormwater treatment measures must be kept offline until this milestone is reached.

Reason: Protection of stormwater treatment measures.

**34. Waste/Recycling Requirements (Waste Plan Submitted)**

During demolition and/or construction the proposal/works shall be generally consistent with the

submitted Waste Management Plan titled [INSERT] and dated [INSERT].

Reason: To ensure waste is minimised and adequate and appropriate waste and recycling facilities are provided. (DACWTE01)

35. **Waste/Recycling Requirements (Materials)**

During demolition and/or construction the following materials are to be separated for recycling – timber – bricks – tiles – plasterboard – metal – concrete, and evidence of disposal for recycling is to be retained on site.

Reason: To ensure waste is minimised and recovered for recycling where possible. (DACWTE02)

## CONDITIONS WHICH MUST BE COMPLIED WITH PRIOR TO THE ISSUE OF THE OCCUPATION CERTIFICATE

36. **Landscape completion certification**

a) Prior to the issue of an Occupation Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the landscape works have been completed in accordance with the approved landscape plan and inclusive of any conditions of consent.

b) Prior to the issue of an Occupation Certificate, a landscape report prepared by a landscape architect or landscape designer shall be submitted to the Certifying Authority, certifying that the landscape works have been established and maintained in accordance with the approved landscape plan.

Reason: To ensure that the landscape treatments are installed to provide landscape amenity.

37. **Condition of retained vegetation**

Prior to the issue of an Occupation Certificate, a report prepared by the Project Arborist shall be submitted to the Certifying Authority, assessing the health and impact of trees and vegetation required to be retained as a result of the proposed development, including the following information:

- a) Compliance to Arborist recommendations for tree protection and excavation works.
- b) Extent of damage sustained by vegetation as a result of the construction works.
- c) Any subsequent remedial works required to ensure the long term retention of the vegetation.

Reason: To ensure compliance with the requirement to retain and protect significant planting on development sites.

38. **Certification for the Installation of Stormwater Quality System**

A certificate from a Civil Engineer, who has membership to Engineers Australia and the National Engineers Register must be provided, stating that the stormwater treatment measures have been installed in accordance with the plans prepared by NB Consulting Engineers dated October 2019. The certificate must confirm that stormwater treatment devices are completed, online, in good condition and are not impacted by sediment.

The certificate shall be submitted to the Principal Certifying Authority prior to the release of the Occupation Certificate.

Reason: Protection of the receiving environment.

39. **Stormwater Treatment Measures Operation and Maintenance Plan**

An Operation and Maintenance Plan is to be prepared to ensure the proposed stormwater treatment measures remain effective.

The Plan must be attached to the Positive Covenant (and the community or strata management statement if applicable) and contain the following:

1. Detail on the stormwater treatment measures:
  - a) Work as executed drawings
  - b) Intent of the stormwater treatment measures including modelled pollutant removal rate
  - c) Site detail showing catchment for each device
  - d) Vegetation species list associated with each type of vegetated stormwater treatment measure
  - e) Impervious area restrictions to maintain the water balance for the site
  - f) Funding arrangements for the maintenance of all stormwater treatment measures
  - g) Identification of maintenance and management responsibilities
  - h) Maintenance and emergency contact information
2. Maintenance schedule and procedure - establishment period of one year following commissioning of the stormwater treatment measure
  - a) Activity description, and duration and frequency of visitsAdditionally for vegetated devices:
  - b) Monitoring and assessment to achieve an 80 percent survival rate for plantings
  - c) Management of weeds, pests and erosion, with weed and sediment cover limited to 10 percent
3. Maintenance schedule and procedure - ongoing
  - a) Activity description, and duration and frequency of visits
  - b) Routine maintenance requirements
  - c) Work Health and Safety requirements
  - d) Waste management and disposal
  - e) Traffic control (if required)
  - f) Renewal, decommissioning and replacement timelines and activities of all stormwater treatment measures
  - g) Requirements for inspection and maintenance records, noting that these records are to be maintained for a minimum of 10 years

Details demonstrating compliance shall be submitted to the Principal Certifying Authority prior to the release of the Occupation Certificate.

Reason: Protection of the receiving environment.

40. **Works as Executed Drawings - Stormwater Quality System**

Works as Executed Drawings for the stormwater quality system must be prepared in accordance with Council's Guideline for Preparing Works as Executed Data for Council Stormwater Assets.

The drawings shall be submitted to the Principal Certifying Authority prior to the release of the Occupation Certificate.

Reason: Protection of the receiving environment.

41. **Post-Construction Dilapidation Report**

Post-Construction Dilapidation Reports, including photos of any damage evident at the time of inspection, must be submitted after the completion of works. The report must:

- Compare the post-construction report with the pre-construction report,
- Clearly identify any recent damage and whether or not it is likely to be the result of the development works,
- Should any damage have occurred, suggested remediation methods.

Copies of the reports must be given to the property owners referred to in the Pre-Construction Dilapidation Report Condition. Copies must also be lodged with Council.

Details demonstrating compliance with this condition are to be submitted to the Principal Certifying Authority prior to the issuing of any Occupation Certificate.

Reason: To maintain proper records in relation to the proposed development.

42. **Consolidation of Lots**

Lot 3B DP 164259, Lot 4A DP 159498, Lot 3A DP 164259, Lot 2 DP 209106, Lot 5A DP 158658, and Lot 4B DP 159498 must be consolidated as one (1) allotment and registered on a survey plan (prepared and signed by a Registered Surveyor) with the NSW Land Registry Services.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any Occupation Certificate.

Reason: To ensure development is not constructed over property boundaries

43. **Positive Covenant for the Maintenance of Stormwater Pump-out Facilities**

The Applicant shall lodge the Legal Documents Authorisation Application with the original completed request forms (NSW Land Registry standard forms 13PC and/or 13RPA) to Council and a copy of the Works-as-Executed plan (details overdrawn on a copy of the approved drainage plan), hydraulic engineers' certification.

The Applicant shall create on the Title a positive covenant in respect to the ongoing maintenance of the pump-out facility on the property being developed. Northern Beaches Council shall be nominated in the instrument as the only party authorised to release, vary or modify the instrument. Northern Beaches Council's delegate shall sign these documents prior to the submission to the NSW Land Registry Services. Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of the final Occupation Certificate.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction for on-site storm water detention as to user is to be submitted.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure adequate provision is made for the stormwater pump out system to be maintained to an appropriate operational standard.

44. **Positive Covenant and Restriction as to User for On-site Stormwater Disposal Structures**

The Applicant shall lodge the Legal Documents Authorisation Application with the original completed request forms (NSW Land Registry standard forms 13PC and/or 13RPA) to Council and a copy of the Works-as-Executed plan (details overdrawn on a copy of the approved drainage plan), hydraulic engineers' certification.

The Applicant shall create on the Title a restriction on the use of land and a positive covenant in respect to the ongoing maintenance and restriction of the on-site stormwater disposal structures within this development consent. The terms of the positive covenant and restriction are to be prepared to Council's standard requirements at the applicant's expense and endorsed by Northern Beaches Council's delegate prior to lodgement with the NSW Land Registry Services. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction for on-site storm water detention as to user is to be obtained from LRS.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of final Occupation Certificate.

Reason: To ensure the on-site stormwater disposal system is maintained to an appropriate operational standard.

45. **Positive Covenant, Restriction as to User and Registration of Encumbrances for Stormwater Treatment Measures**

A positive covenant shall be created on the title of the land requiring the proprietor of the land to maintain the stormwater treatment measures in accordance with the standard requirements of Council, the manufacturer and as required by the Stormwater Treatment Measures Operation and Maintenance Plan.

A restriction as to user shall be created on the title over the stormwater treatment measures, restricting any alteration to the measures.

The terms of the positive covenant and restriction as to user are to be prepared to Council's standard requirements (available from Council) at the applicant's expense and endorsed by the Northern Beaches Council's delegate prior to lodgement with the Department of Lands. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

A copy of the certificate of title demonstrating the creation of the positive covenant and restriction as to user is to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To identify encumbrances on land, ensure ongoing maintenance, and ensure modification to the stormwater treatment measures is not carried out without Council's approval.

46. **Strata Management Statement - stormwater treatment measures**

The Strata Management Statement must specifically list the stormwater treatment measures that will be maintained under strata title. The statement must also include the Stormwater Treatment Measure Operation and Maintenance Plan.

Details demonstrating compliance shall be submitted to the Principal Certifying Authority prior to the release of the Occupation Certificate.

Reason: To ensure maintenance of all stormwater management assets and protection of the receiving environment.

47. **Geotechnical Certification Prior to Occupation Certificate**

The Applicant is to submit the completed Form 3 of the Geotechnical Risk Management Policy (Appendix 5 of P21 DCP) to the Principal Certifying Authority prior to issue of the Occupation Certificate.

Reason: To ensure geotechnical risk is mitigated appropriately.

48. **Works as Executed plan and certification of Council Road and Footpath Works.**

The Applicant shall submit a suitably qualified Civil Engineer's certification that the completed footpath, kerb & gutter and crossing works have been constructed in accordance with this consent and the approved Section 138 Road Act approved plans. Works as Executed plan details overdrawn in red on a copy of the approved road works plan and certified by a registered surveyor in relation to boundaries.

Reason: To ensure compliance of road works with Council's specification for engineering works

49. **Required Planting**

i) Trees shall be planted in accordance with the following:

Minimum No. of Trees Required.	Species	Location	Minimum Pot Size
All trees	As indicated on Landscape Plan Dwg. No. L.SK.03 dated 14/11/19 prepared by Scape Design	As indicated on the Landscape Plan	As indicated on the Landscape Plan

ii) Additional street tree planting - Plant two additional *Hibiscus tileaceus* in the Beaconsfield Street road reserve, one each forward of Units 12(A) and 14(A)

iii) All street trees shall be a minimum planting size of 75 litres, and shall meet the requirements of Natspec - Specifying Trees,

iv) All street trees shall be planted into a prepared planting hole a minimum of 1m x 1m x 600mm depth, backfilled with a sandy loam mix or approved similar, and mulched to 75mm depth minimum,

v) Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To maintain environmental amenity.

50. **Garbage and Recycling Facilities**

All internal walls of the storage area shall be rendered to a smooth surface, covered at the floor/wall intersection, graded and appropriately drained to the sewer with a tap in close proximity to facilitate cleaning.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To prevent pollution of the environment and to protect the amenity of the area. (DACPLF03)

51. **Unit Numbering for Multi Unit Developments (Residential, Commercial and Industrial)**

The units within the development are to be numbered in accordance with the Australia Post

#### Address Guidelines

([https://auspost.com.au/content/dam/auspost\\_corp/media/documents/Appendix-01.pdf](https://auspost.com.au/content/dam/auspost_corp/media/documents/Appendix-01.pdf)).

In this regard, the numbering is to be as per the Unit Numbering for Multi Unit Development Table available on Council's website Unit Numbering for Multi-Unit Developments Form

External directional signage is to be erected on site at driveway entry points and on buildings and is to reflect the numbering in the table provided. Unit numbering signage is also required on stairway access doors and lobby entry doors.

It is essential that all signage throughout the complex is clear to assist emergency service providers in locating a destination within the development with ease and speed, in the event of an emergency.

Details are to be submitted with any Interim/Final Occupation Certificate or Strata Subdivision Certificate certifying that the numbering has been implemented in accordance with this condition and the Unit Numbering for Multi Unit Development Table.

Reason: To ensure consistent numbering for emergency services access.

#### 52. **Undergrounding of Telecommunications Services**

Arrangements are to be made for the provision of underground telecommunications services to the building.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: Provision of telecommunication facilities in a manner that facilitates the future underground provision of cable services. (DACPLF06)

#### 53. **Sydney Water**

A Section 73 Compliance Certificate under the Sydney Water Act 1994 must be obtained from Sydney Water Corporation.

Application must be made through an authorised Water Servicing Co-ordinator. Please refer to the Building Developing and Plumbing section of the web site [www.sydneywater.com.au](http://www.sydneywater.com.au) <<http://www.sydneywater.com.au>> then refer to "Water Servicing Coordinator" under "Developing Your Land" or telephone 13 20 92 for assistance.

Following application a "Notice of Requirements" will advise of water and sewer infrastructure to be built and charges to be paid. Please make early contact with the Co-ordinator, since building of water/sewer infrastructure can be time consuming and may impact on other services and building, driveway or landscape design.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure compliance with the statutory requirements of Sydney Water.

#### 54. **Signage and Linemarking – External.**

A plan demonstrating the proposed signage and line marking within Council's Public Domain shall be prepared by a suitably qualified person and submitted to and approved by the Local Traffic Committee prior to the issue of any Occupation Certificate.



Note: The applicant is advised that the plan will require approval by the local Traffic Committee if the proposal requires change in existing parking conditions and hence, adequate time should be allowed for this process

Reason: To ensure consistent parking amenity. (DACTRFPOC1)

55. **Basement Garage Traffic Signal System.**

To prevent conflicting vehicle flows on the internal basement garage ramp and avoid vehicles having to reverse up/ down the ramp, a traffic signal system must be installed at each ramp entry, designed to warn drivers about to enter the road of any conflicting vehicle approaching.

The signal system must;

- be clearly visible from ramp entrances and where applicable the on street waiting space,
- is to clearly indicate to an approaching driver, by way of red light or wording, that an opposing vehicle has entered the ramp,
- Incorporate linemarking to delineate traffic flow and nominate waiting bay locations to allow vehicles to overtake another.

Details of the system, including the system operation, components and placement within the development, must be specified by a practising Traffic Engineer. This engineer is to submit a compliance certificate to the Accredited Certifier that the system has been installed and operating as designed, in accordance with the requirements of this condition, prior to the issue of any Occupation Certificate issued for the development.

Reason: To ensure no vehicle conflicts within the basement carpark (DACTRFPOC2)

56. **Waste and Recycling Facilities Certificate of Compliance**

The proposal shall be constructed in accordance with Northern Beaches Development Control Plan – Part C9 Waste Management

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste and recycling facilities are provided. (DACWTF01)

57. **Waste/Recycling Compliance Documentation**

Evidence of disposal for recycling from the construction/demolition works shall be submitted to the Certifying Authority prior to the issue of any interim / final Occupation Certificate.

Reason: To ensure waste is minimised and recycled. (DACWTF02)

58. **Positive Covenant for Waste Services**

A positive covenant shall be created on the title of the land requiring the proprietor of the land to provide access to the waste storage facilities prior to the issue of an Interim/Final Occupation Certificate. The terms of the positive covenant are to be prepared to Council's standard requirements, (available from Northern Beaches Council), at the applicant's expense and endorsed by Council prior to lodgement with the Department of Lands. Northern Beaches Council shall be nominated as the party to release, vary or modify such covenant.

Reason: To ensure ongoing access for servicing of waste facilities (DACWTF03)

59. **Authorisation of Legal Documentation Required for Waste Services**

The original completed request form (Department of Lands standard form 13PC) must be submitted to Council for authorisation prior to the issue of the Interim/Final Occupation Certificate. A copy of the work-as-executed plan (details overdrawn on a copy of the approved plan) must be included with the above submission. Where required by Council or the Certifying Authority, a Compliance Certificate shall also be provided in the submission to Council.

If Council is to issue the Compliance Certificate for these works, the fee is to be in accordance with Council's Fees and Charges.

Reason: To create encumbrances on the land. (DACWTF04)

## ON-GOING CONDITIONS THAT MUST BE COMPLIED WITH AT ALL TIMES

60. **Undesirable Trees**

Leighton Green Cypress Cupressocyparis leylandii or any of its cultivars, must not be planted on the site for the life of the development. In the event of any inconsistency between this condition and the development application documents, this condition will prevail to the extent of the inconsistency.

Reason: To reduce the potential for adverse amenity effects such as overshadowing, loss of views, and loss of plant diversity.

61. **Maintenance of Stormwater Treatment Measures**

Stormwater treatment measures must be maintained at all times in accordance with the Stormwater Treatment Measure Operation and Maintenance Plan, manufacturer's specifications and as necessary to achieve the required stormwater quality targets for the development.

Vegetated stormwater treatment measures must maintain an 80 percent survival rate of plantings and limit weed cover to no more than 10 percent of the total area of the stormwater treatment measure.

Northern Beaches Council reserves the right to enter the property and carry out appropriate maintenance of the device at the cost of the property owner.

Reason: Protection of the receiving environment

62. **Condition for on going - Waste service**

Waste services for bins- Building management to take bins to the collection points on Beaconsfield Street and Queens Parade on the night before the collection day. Bins are to be returned to the bin stores once waste service has been completed.

Bulky good store- Building management to take bulky goods from the store room to kerb side the night prior to the booked collection date. Complex booking only, not individual unit bookings.

Reason: To assist with the waste service collection.(DACHEGOG1)

63. **Landscape maintenance**

i) Trees shrubs and groundcovers required to be planted under this consent are to be mulched, watered and fertilized as required at the time of planting.

- ii) If any tree, shrub or groundcover required to be planted under this consent fails, they are to be replaced with similar species to maintain the landscape theme and be generally in accordance with the approved Landscape Plan.
- iii) Shrub and groundcover planting located in the Beaconsfield Road and Queens Parade road reserves as indicated on the approved Landscape Plans is to be maintained by the relevant property owners/body corporate.

Reason: To maintain local environmental amenity.

64. **Visitors Sign**

A sign, legible from the street, shall be permanently displayed to indicate that visitor parking is available on the site and the visitor car parking spaces shall be clearly marked as such.

Details demonstrating compliance are to be submitted to the Principal Certifying Authority prior to the issue of any interim / final Occupation Certificate.

**Reason:** To ensure that visitors are aware that parking is available on site and to identify those spaces to visitors. (DACPLG04)

65. **Loading and Unloading**

All loading and unloading of vehicles and the delivery of goods must be carried out wholly within the site.

Reason: To ensure that deliveries can occur safely within the site and does not adversely affect traffic or pedestrian safety and amenity. (DACPLG20)

## Right to Review by the Council

You may request Council to review this determination of the application under Division 8.2 of the Environmental Planning & Assessment Act 1979. Any Division 8.2 Review of Determination application should be submitted to Council within 3 months of this determination, to enable the assessment and determination of the application within the 6 month timeframe.

*NOTE: A fee will apply for any request to review the determination.*

## Right of Appeal

If you are dissatisfied with this decision Division 8.3 of the Environmental Planning & Assessment Act 1979 may give you the right to appeal to the Land and Environment Court within 6 months after the date on which you receive this notice.

**Signed**            On behalf of the Consent Authority



---


Name                Steven Findlay, Manager Development Assessments

Date                 15/04/2020

## GENERAL ADVICE

# Advisory Notes (General)

**Where are you in the development process?**

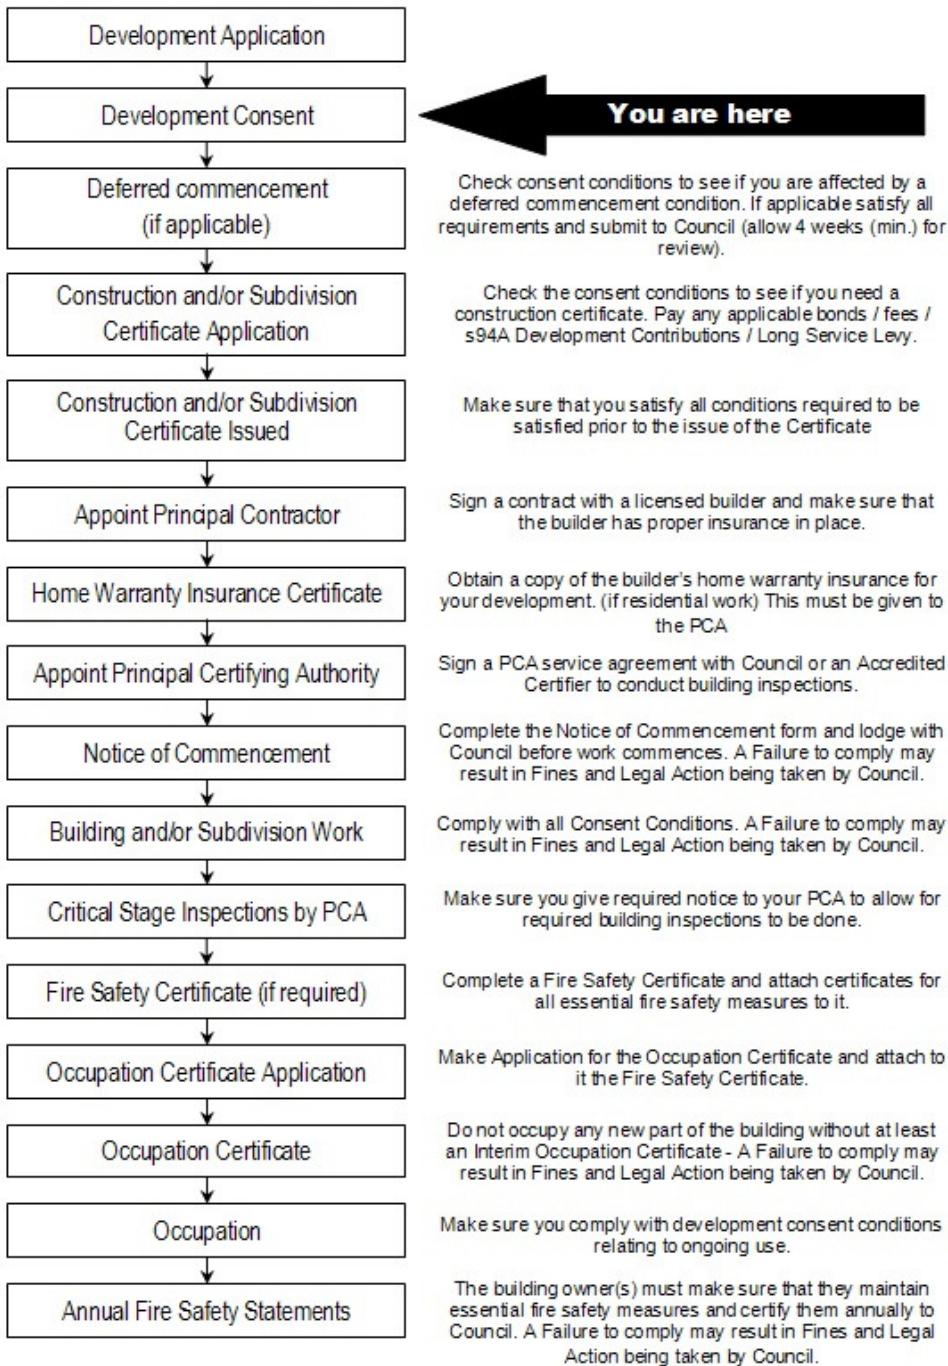

*Note: The advice within this document is provided in good faith as a guide to assist applicants understand the broad process and will not detail every step or every requirement for demolition, building construction works or subdivision required or business operating requirements under New South Wales or Commonwealth Legislation. If you require clarification or have any questions, please contact your Certifier or Council's Planning and Development Enquiries Team.*

The attached Notice of Determination includes conditions of consent which must be complied with.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

## **Building Certification**

The Environmental Planning and Assessment Act 1979 provides that:

- Building work cannot occur unless a construction certificate has been issued;
- Occupation of building works cannot occur unless an occupation certificate has been issued
- Subdivision cannot be registered until a subdivision certificate has been issued
- Mandatory Inspection for building work must be completed

Please refer to process chart for more detail.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

## **Certification Services**

Construction Certificates / Occupation Certificates / Subdivision Certificates / Strata Certificates, can be issued by Council or an accredited private certifier (Note Council must be the Principal Certifying Authority (PCA) for subdivisions).

Council is well placed to provide Certification Services. Council can issue Construction Certificates and act as your Principle Certifying Authority at competitive rates. Please visit our web site [www.northernbeaches.nsw.gov.au](http://www.northernbeaches.nsw.gov.au) or speak to our Customer Service Officers if you have any further questions about our Certification Services or if you wish to use Council as your certifier.

## **Charges Associated with the Development Consent**

All bonds, fees, Development Contributions or the Long Service Levy detailed within the Notice of Determination are required to be paid prior to the issuing of any Construction Certificate.

## **Bonds are released after:**

1. 'Final Occupation Certificate' has been received by Council; and
2. Final inspection by a Council Officer where:
  - the development is complete
  - damage has not been caused to council assets during the works
  - conditions of development consent have been met.

The bond will be released to the person or business who paid the bond to Council (The name that appears on the original receipt)

## **Acceptable Form of Security Bonds**

Council will accept bank guarantee (in a form acceptable to Council) in lieu of cash and is required prior to the issue of a construction certificate.

## **Modifications to the consent**

If you seek to make any changes to the development (which may include internal / external configuration of the building, variation to facades, site layout or any changes to the proposed operation or use), the modifications may require the submission and approval of an application to modify the development consent prior to the issuing of a Construction Certificate and prior to the works being

carried out. The proposed changes should be discussed with the PCA.

(Note: A failure to gain approval prior to the works being carried out is a serious breach of the Environmental Planning & Assessment Act 1979 which attracts penalties and may also result in legal action.)

### **Other Matters not detailed within the Notice of Determination**

The Notice of Determination does not stipulate every requirement that must be completed to satisfy New South Wales and Commonwealth legislation.

You should check, as may be relevant, with other authorities including but not limited to:

- Workcover NSW for work safety and asbestos requirements
- Sydney Water – Quick Check Agent for the provision of water and sewer services
- Energy & Gas suppliers for utility services
- Department of Fair Trading for advice about builders and licensing
- Building Professionals Board for advice about private certifiers
- NSW Roads and Maritime Services for works on state roads only
- Human Rights and Equal Opportunity Commission for access issues
- NSW Land and Property Information for Land Title matters
- Australia Post for the positioning and dimensions of mail boxes in new commercial and residential developments;

### **Dial Before You Dig**

Underground assets may exist in the area that is subject to your application. In the interests of health and safety and in order to protect damage to third party assets please contact Dial before you dig at [www.1100.com.au](http://www.1100.com.au) or telephone on 1100 before excavating or erecting structures (This is the law in NSW). If alterations are required to the configuration, size, form or design of the development upon contacting the Dial before You Dig service, an amendment to the development consent (or a new development application) may be necessary. Individuals owe asset owners a duty of care that must be observed when working in the vicinity of plant or assets. It is the individual's responsibility to anticipate and request the nominal location of plant or assets on the relevant property via contacting the Dial before you dig service in advance of any construction or planning activities.

### **Telecommunications Act 1997 (Commonwealth)**

Telstra (and its authorised contractors) are the only companies that are permitted to conduct works on Telstra's network and assets. Any person interfering with a facility or installation owned by Telstra is committing an offence under the Criminal Code Act 1995 (Cth) and is liable for prosecution. Furthermore, damage to Telstra's infrastructure may result in interruption to the provision of essential services and significant costs. If you are aware of any works or proposed works which may affect or impact on Telstra's assets in any way, you are required to contact :Telstra's Network Integrity Team on Phone Number 1800810443.

(1) if the development is likely to disturb or impact upon telecommunications infrastructure, written confirmation from the service provider that they have agreed to the proposed works must be submitted

to the Principal Certifying Authority prior to the issue of a Construction Certificate or any works commencing, whichever occurs first; and

(2) The arrangements and costs associated with any adjustment to telecommunications infrastructure shall be borne in full by the applicant/developer.

### **Model**

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

### **Trade waste agreement**

A Trade Waste Agreement must be obtained from Sydney Water prior to the discharge of trade wastewater to the sewer system. Trade wastewater is defined as 'discharge water containing any substance produced through industrial or commercial activities or operation on the premises'.

### **Waste collection**

Liquid and solid wastes generated on the site must be collected, transported and disposed of in accordance with the requirements of the Protection of the Environment Operations Act 1997. Records must be kept of all waste disposal from the site.

Material to be removed from the site must be source separated on site to maximise recycling, and the material disposed of to an appropriate disposal and recycling facility in accordance with the approved Waste Management Plan.

### **Aboriginal Heritage**

If in undertaking excavation or works and any Aboriginal site or object is, or is thought to have been found, all works are to cease immediately and the applicant is to contact the Aboriginal Heritage Officer for Warringah Council, and the Cultural Heritage Division of the Department of Environment and Climate Change (DECC).

### **On-Site Sewage Management System**

This approval does not authorise the installation or operation of a new or modification of an existing on-site wastewater management system. An On-Site Sewage Management System must not be installed or operated unless an 'Approval to Install an On Site Sewage Management System' is obtained from Warringah Council.

### **Cost of Works**

The applicant shall bear the cost of all works associated with the development that occurs on Council's property.

### **Relocation of stormwater drainage**

Council is not responsible for the cost of relocating Council's stormwater drainage pipes through the subject property.

### **Tree preservation**

Where tree work has not been approved by this Development Consent the developer is notified that a general Tree Preservation Order applies to all trees in the Northern Beaches Local Government Area. This order prohibits the ringbarking, cutting down, topping, lopping, pruning, transplanting, injuring, or wilful destruction of such trees except without the prior written consent of Council.

### **Storage bins on footpath and roadway**

Approval is required from Council prior to the placement of any storage bin on Council's footpath and/or roadway.



### **Protection of Public Places**

- (1) If the work involved in the erection or demolition of a building:
- (a) is likely to cause pedestrian or vehicular traffic in a public place to be obstructed or rendered inconvenient; or
  - (b) building involves the enclosure of a public place,

a hoarding and site fencing must be erected between the work site and the public place.

- (2) If necessary, an awning is to be erected, sufficient to prevent any substance from, or in connection with, the work falling into the public place.
- (3) The work site must be kept lit between sunset and sunrise if it is likely to be hazardous to persons in the public place.
- (4) Any such hoarding, fence or awning is to be removed when the work has been completed.
- (5) No access across public reserves or parks is permitted.

Note: Prior to the erection of any temporary fence or hoarding over property owned or managed by Council, written approval must be obtained.

### **Road Opening Permit**

The developer/applicant is to obtain a "Road Opening Permit" from Council and pay all appropriate charges prior to commencement of any work on Council property. The developer/applicant shall be responsible for all public utilities and services in the area of the work, and as such shall notify all relevant Authorities, and bear all costs associated with any repairs and/or adjustments as those Authorities may deem necessary.

### **Special Permits**

Unless otherwise specifically approved in writing by Council, all works, processes, storage of materials, loading and unloading associated with the development are to occur entirely on the property. The applicant, owner or builder must apply for specific permits available from Council. A minimum of forty-eight (48) hours notice is required for all permits except work zones, which may require additional assessment time.

- Permit for on-street mobile plant

Restrictions apply to the hours of operation and the area of operation for on street mobile plant equipment (for example cranes, concrete pumps, cherry pickers). Separate permits are required for each occasion and each piece of equipment. It is the responsibility of the applicant, owner and builder to take whatever steps are necessary to ensure that the use of any equipment does not violate adjoining property owner's rights.

- Hoarding Permit

Permits are required to erect Class A, Class B and Class C hoardings. If an 'A' Class hoarding is to alienate a section of Council's property, that section will require a permit for the occupation of Council's property.

- Storage of building materials and building waste containers (skips) on Council's property

Permits to utilise Council property for the storage of building materials and building waste containers (skips) are required for each location. Failure to obtain the relevant permits will result in the building materials or building waste containers (skips) being impounded by Council with no additional notice being given.

- Kerbside restrictions, work zones

Existing kerbside restrictions apply. An application must be made to Council for the alteration of existing kerbside restrictions or the provision of a construction zone.

Other permits may include out of construction hours permits.

### **Licensing requirements for removal of bonded asbestos**

Anyone who removes, repairs or disturbs bonded asbestos must hold a bonded or a friable asbestos licence, or a demolition licence in accordance with Workcover requirements and the Occupational Health and Safety Act 2000.

### **Pool Access**

Access to pools are required to be restricted by a child resistant barrier in accordance with the regulations prescribed in all relevant Acts, Regulations and Australian Standards including:

- (i) Swimming Pools Act 1992;
- (ii) Swimming Pools Amendment Act 2012;
- (iii) Swimming Pools Regulation 2008
- (iv) Australian Standard AS1926 Swimming Pool Safety
- (v) Australian Standard AS1926.1 Part 1: Safety barriers for swimming pools
- (vi) Australian Standard AS1926.2 Part 2: Location of safety barriers for swimming pools

It is your responsibility as a land owner to ensure any fencing is maintained.

### **Dewatering**

Where dewatering works are required on the development site during construction, the developer/applicant must apply for and obtain a bore license from the NSW Department of Water and Energy. The bore license must be obtained prior to commencement of dewatering works.

### **Requirement to Notify about New Contamination Evidence**

Any new information revealed during works that has the potential to alter previous conclusions about site contamination or hazardous materials shall be immediately notified to Council and the Principal Certifying Authority.

### **Flood Evacuation Plan**

If your site is on flood prone land you may wish to consider the preparation of a flood evacuation plan.

Generally a Flood Evacuation Plan would be prepared by suitably qualified Engineer (e.g. Hydraulic) with a number of years experience in flood management and who is eligible for Membership to the Australian Institute of Engineers.

Some matters that you may wish to consider (but not limited to) include:

- (i) a route of evacuation to higher ground and / or point of shelter
- (ii) depth of water for a Possible Maximum Flood event surrounding the building
- (iii) details of 'last chance' evacuation water levels / times for evacuation prior to floodwaters surrounding the building
- (iv) provide details of flood warning systems and protocols
- (v) details of how this information will be distributed and people educated for users of the site.

You may seek to discuss this with the State Emergency Service of NSW.

### **Utility Service Requirements**

Where development requires the installation of, or the relocation of utility services being (but not limited to) gas, water, electricity and telecommunications, the installation of, or the relocation of utility services shall be conducted in accordance with the requirements of the relevant service provider / authority (unless stipulated by any other condition of the consent or will result in damage to threatened or endangered species defined under the Threatened Species Conservation Act 1995).

### **Plant & Equipment Kept Within Site**

All plant and equipment used in the erection of the building, including concrete pumps, wagons, lifts, mobile cranes, etc, shall be situated within the boundaries of the site and so placed that all concrete slurry, water, debris and the like shall be discharged onto the building site, and is to be contained within the site boundaries. This does not prevent any requirement to comply with the Protection of the Environment Operations Act.

### **Lighting**

Illumination of the site is to be arranged in accordance with the requirements of Australian Standard 4282 - 1997 Control of the obtrusive effects of outdoor lighting so as not to impact upon the amenity of the occupants of adjoining and nearby residential premises.

### **Silt and Sediment Control**

During any onsite demolition, excavation and construction works, the site should be maintained in accordance with "The Blue Book - Managing Urban Stormwater (MUS): Soils and Construction".

In managing the site provision shall be made throughout the period of works to prevent transmission of soil to the public road, drainage system, any riparian lands or off site in any manner. Upon completion of the development, any measures to prevent the transition of soil off site to remain in place until the site is stabilised.

A failure to prevent the transmission of silt and sediment and / or causing, water pollution, air pollution, noise pollution or land pollution may result in a breach of the Protection of the Environment Operations Act and orders, penalties and prosecutions may occur.

**Maintenance of Sediment and Erosion Control** Erosion and sediment controls are to be adequately maintained and monitored at all times, particularly after periods of rain.

Reason: To avoid erosion and sedimentation impacts that will result in an adverse change in watercourse or riparian land condition

### **Installation and Maintenance of Sediment and Erosion Control**

Sediment and erosion controls must be installed in accordance with Landcom's 'Managing Urban Stormwater: soils and construction (2004).

Techniques used for erosion and sediment control on site are to be adequately maintained and monitored at all times, particularly after periods of rain, and shall remain in proper operation until all development activities have been completed and the site is sufficiently stabilised with vegetation.

Reason: To protect the surrounding environment from the effects of sedimentation and erosion from the site

### **Dividing Fences Act 1991**

The construction and maintenance of side boundary fences is to be agreed upon by all adjoining property owners of the fence. Works are to be in accordance with the Dividing Fences Act 1991.

### **OTHER MATTERS**

### **Child Care Centres**

A license to operate a child care centre must be obtained from the NSW Department of Community Services prior to the commencement of the use of the child care centre.

### **Disability Access**

This decision does not ensure compliance with the Commonwealth Disability Discrimination Act 1992. Applicants are strongly advised to investigate their requirements under that Act

### **Food Premises**

Food premises are required to comply with the requirements of the Food Act 2003, the Food Standards Code and Australian Standards.

The proprietor of a food business must notify the NSW Food Authority of the details of the business. Notification may be done either online at [www.foodnotify.nsw.gov.au](http://www.foodnotify.nsw.gov.au) or by lodging a completed NSW Food Authority notification form to the NSW Food Authority or Council.

### **Wheel washing facility**

All trucks leaving the site, having had access to unpaved or contaminated areas, shall depart via a wheel wash facility in order to prevent mud, dust or debris from being deposited on Council's roads. The wheel wash facility shall be constructed prior to any truck movements occurring. Water from the wheel wash facility must not cause pollution. Any direction of Council with regard to cleaning trucks or the clean up of road pavements adjoining the site shall be complied with immediately.

### **Monitoring State of Roadways**

The applicant shall monitor the state of roadways leading to and from the site and shall take all necessary steps to clean up any adversely impacted road pavements as directed by Council.

### **Storage of Dangerous Goods**

Prior to the storage of any "dangerous goods" on the premises, a copy of a license obtained from the Chemical Safety Branch of Work Cover Authority must be submitted to Council.

### **Storage of Flammable and Combustible Liquids**

Flammable and combustible liquids must be stored in accordance with Australian Standard 1940 The Storage and Handling of Flammable and Combustible Liquids.

### **Noise and Vibration**

The premises, including operation of vehicles, shall be conducted so as to avoid offensive noise or vibration and cause no interference to adjoining or nearby occupants. Special precautions must be taken to avoid nuisance in neighbouring residential areas, particularly from machinery, vehicles, warning sirens, public address systems and the like.

### **Hairdressing/Beauty Treatment/ Skin penetration Requirements**

The premises must comply with the following requirements before the commencement of business:

- i) A hand wash basin with warm water delivered through a common spout must be provided in the treatment area. The hand wash basin must be provided with liquid soap and paper towel.
- ii) The wall behind the hand wash basin from the floor to a height of 450mm above the top of the washbasin and from the centre of the washbasin to a distance of 140mm beyond each side of the wash basin, must be finished with a material that is durable, smooth, impervious to moisture and capable of being easily cleaned (eg tiles).
- iii) The premises must be provided with washing, drainage, ventilation and lighting that are adequate for the carrying out of hairdressing/beauty treatment/skin penetration procedures.
- iv) The floor coverings must be smooth and impervious.

- v) All furniture, shelves and fittings must be constructed of, or covered with a material that is smooth, impervious to moisture and capable of being easily cleaned.
- vi) Adequate lockers must be provided for the storage of employees clothing and personal effects.
- vii) The premises must be provided with facilities that are adequate for the purpose of storing of hairdressing/beauty treatment/skin penetration appliance and utensils.
- viii) The premises must be provided with a sink sullied with hot and cold water for washing equipment.

### **Food Premises Construction Requirements**

The food premises must comply with the following specific construction requirements:

Solid walls must be provided in all food handling areas (solid includes brick, cement and foam filled preformed panels);

- ix) Walls in food preparation and wash up areas must be finished with a smooth and impervious surface to a height of at least 2 metres.
- x) Hand wash basins must be provided with warm water delivered through a common spout with taps that are hands free operation;
- xi) Coving with a radius of 25mm must be provided between all floor and wall joints in food handling areas;
- xii) The open space between the top of the coolroom and the ceiling must be fully enclosed and kept insect and pest proof;
- xiii) The coolroom must be able to be opened from the inside with out a key and fitted with an alarm that can only be operated from within the coolroom;
- xiv) The doors to the toilet air lock and toilet compartment must be tight fitting and self closing;
- xv) The rear external door must be self closing or be provided with a fly screen that is self closing;
- xvi) Where cooking or extensive heating processes or such other processes as may be specified are carried out in food preparation areas, an approved mechanical ventilation system shall be installed and operated in accordance with AS 1668 part 1 & 2.

### **Legionella Control**

Cooling towers, warm water systems, water cooling systems must be registered with the Council. Details of registration are to be provided to the Council prior to operation.

### **Pool/Spa Safety**

Owners of properties with swimming pools and spa's must meet safety compliance and registration requirements. Provisions also apply when renting/selling properties. Details are available from the Division of Local Government.

### **Grease Trap**

Contact Sydney Water to determine what trade waste provisions you are required to provide to your food premises. Should a grease trap be required by Sydney Water, it must be located in an area that is easily accessible for the removal of waste water and must not be installed in any kitchen, food preparation or food stage area. The design and location of the grease trap should also not impede on any commercial right of way or pedestrian access.

### **Bandicoot/Penguin**

Long-nosed Bandicoots & Little Penguins – Best Practices for Residents Residents are encouraged to follow a number of *Best Practices* to assist with the protection and management of the endangered populations of Long-nosed Bandicoots and Little Penguins:

- Long-nosed Bandicoots, Little Penguins and other native animals should never be fed as it may cause them nutritional problems, hardship if supplementary feeding is stopped, and it may increase predation.
- Feral cats or foxes should never be fed or food left out where they can access it, such as rubbish bins without lids or pet food bowls, as these animals present a significant threat to Long-nosed Bandicoots, Little Penguins and other wildlife.
- The use of insecticides, fertilisers, poisons and/or baits should be avoided on the property.

Garden insects will be kept in low numbers if Long-nosed Bandicoots are present.

- When the North Head Long-nosed Bandicoot Recovery Plan is released it should be implemented where relevant.
- Dead Long-nosed Bandicoots or Little Penguins should be reported by phoning Manly Council on 9976 1500 or Department of Environment and Conservation on 9960 6266.
- Please drive carefully as vehicle related injuries and deaths of Long-nosed Bandicoots and Little Penguins have occurred in the area. Care should also be taken at night in the drive way when moving cars as bandicoots will seek shelter beneath vehicles.
- Cat/s and or dog/s that currently live on the property should be kept indoors at night to avoid disturbance/death of native animals. Ideally, when the current cat/s and/or dog/s that live on the property no longer reside on the property it is recommended that they not be replaced by new dogs or cats.
- Report all sightings of feral rabbits, feral or stray cats and/or foxes to N B Council.