


CONSTRUCTION NOTES

1. CONSTRUCTION SEQUENCE MUST BE AS CLOSE AS POSSIBLE TO PARALLEL TO THE CONTOURS OF THE SITE
2. DRIVE 1.5m LONG STAY PICKETS INTO GROUND 25m APART (MAX)
3. DIG A 150mm DEEP TRENCH ALONG THE UPSLOPE LINE OF THE FENCE FOR THE BOTTOM OF THE FABRIC TO BE INSTALLED
4. FIX SELF-SUPPORTING GEOTEXTILE TO THE UPSLOPE SIDE OF POSTS WITH WIRE TIES OR AS RECOMMENDED BY GEOTEXTILE MANUFACTURER.
5. JOIN SECTION OF FABRIC AT A SUPPORT POST WITH A 150mm OVERLAP
6. BACKFILL THE TRENCHWORK TO THE BASE OF THE FABRIC AND COMPACT IT THOROUGHLY OVER THE GEOTEXTILE

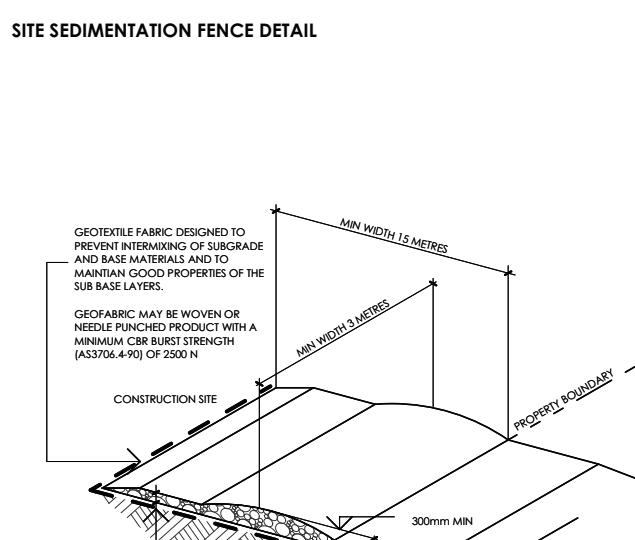


CONSTRUCTION NOTES

1. STRIP TOPSOIL AND LEVEL SITE
2. COMPACT SUBGRADE
3. COVER AREA WITH NEEDLE-PUNCHED GEOTEXTILE.
4. CONSTRUCT 200MM THICK PAD OVER EXISTING USED ROADBASE OR 30MM AGGREGATE. MINIMUM LENGTH 15M OR TO BUILDING ALIGNMENT. MINIMUM WIDTH 3m.
5. CONSTRUCT HUMP IMMEDIATELY WITHIN BOUNDARY TO DIVERT WATER TO A SEWAGE FENCE OR OTHER TRAP.

STABILISED SITE ACCESS

B	PRELIMINARY CLIENT ISSUE	10.12.2024
A	PRELIMINARY SUBDIVISION ISSUE	20.11.2024
Issue	Amendment	Date

Proposed Subdivision
at
40 Bungan Head Road,
Newport
for
Megaptera

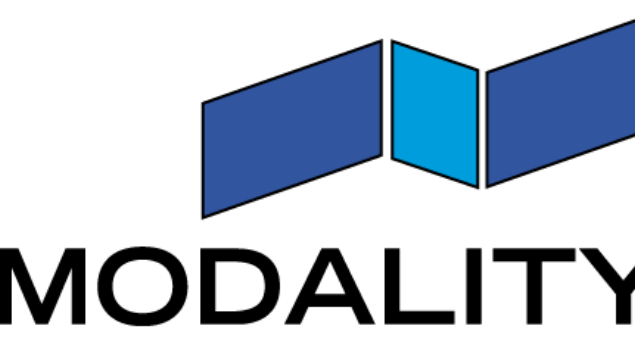

Site Management Plan

The property in this drawing and in the concepts remain with the drawings owner. Any unauthorised use of this drawing, as to the whole or part may render the user liable to an action for damages. Consequential events or damages arising from unwarranted or unauthorised use shall not render the original creator or its associated companies liable.

Project No:	2139	Date:	Nov 2024	Issue
Drawing No:	SD 04	Scale:	1:100	B
		Date Plotted:	17/01/2025	