


NOTES

EROSION AND SEDIMENT CONTROL

- 1.0 TEMPORARY SEDIMENTATION AND EROSION CONTROLS ARE TO BE CONSTRUCTED PRIOR TO COMMENCEMENT OF ANY WORK TO ELIMINATE THE DISCHARGE OF SEDIMENT FROM THE SITE.
- 2.0 THE EROSION & SEDIMENT CONTROL DEVICES ARE TO BE EFFECTIVELY MAINTAINED AT ALL TIMES DURING THE COURSE OF CONSTRUCTION AND SHALL NOT BE REMOVED UNTIL THE SITE HAS BEEN STABILISED OR LANDSCAPED TO THE PRINCIPAL CERTIFYING AUTHORITY'S SATISFACTION.
- 3.0 ALL STORMWATER INLET PITS ARE TO BE PROTECTED WITH GRAVEL SAUSAGES (BLUE METAL WRAPPED IN GEOTEXTILE FABRIC) OR FILTER FABRIC DROP INLET SEDIMENT TRAPS.
- 4.0 STOCKPILED MATERIALS SHALL BE KEPT WITHIN THE SITE BOUNDARIES IN A LOCATION NOT VULNERABLE TO CONCENTRATED SURFACE RUNOFF.
- 5.0 THE EROSION AND SEDIMENT CONTROL ARE TO BE IN ACCORDANCE WITH CHAPTER 2.2 OF LANDCOM'S MANAGING URBAN STORMWATER: SOILS AND CONSTRUCTION - VOLUME 1, 4TH EDITION (2004) (BLUE BOOK).



WASTE MANAGEMENT

- 6.0 THIS PLAN IS TO READ IN CONJUNCTION WITH THE WRITTEN 'WASTE MANAGEMENT PLAN'.

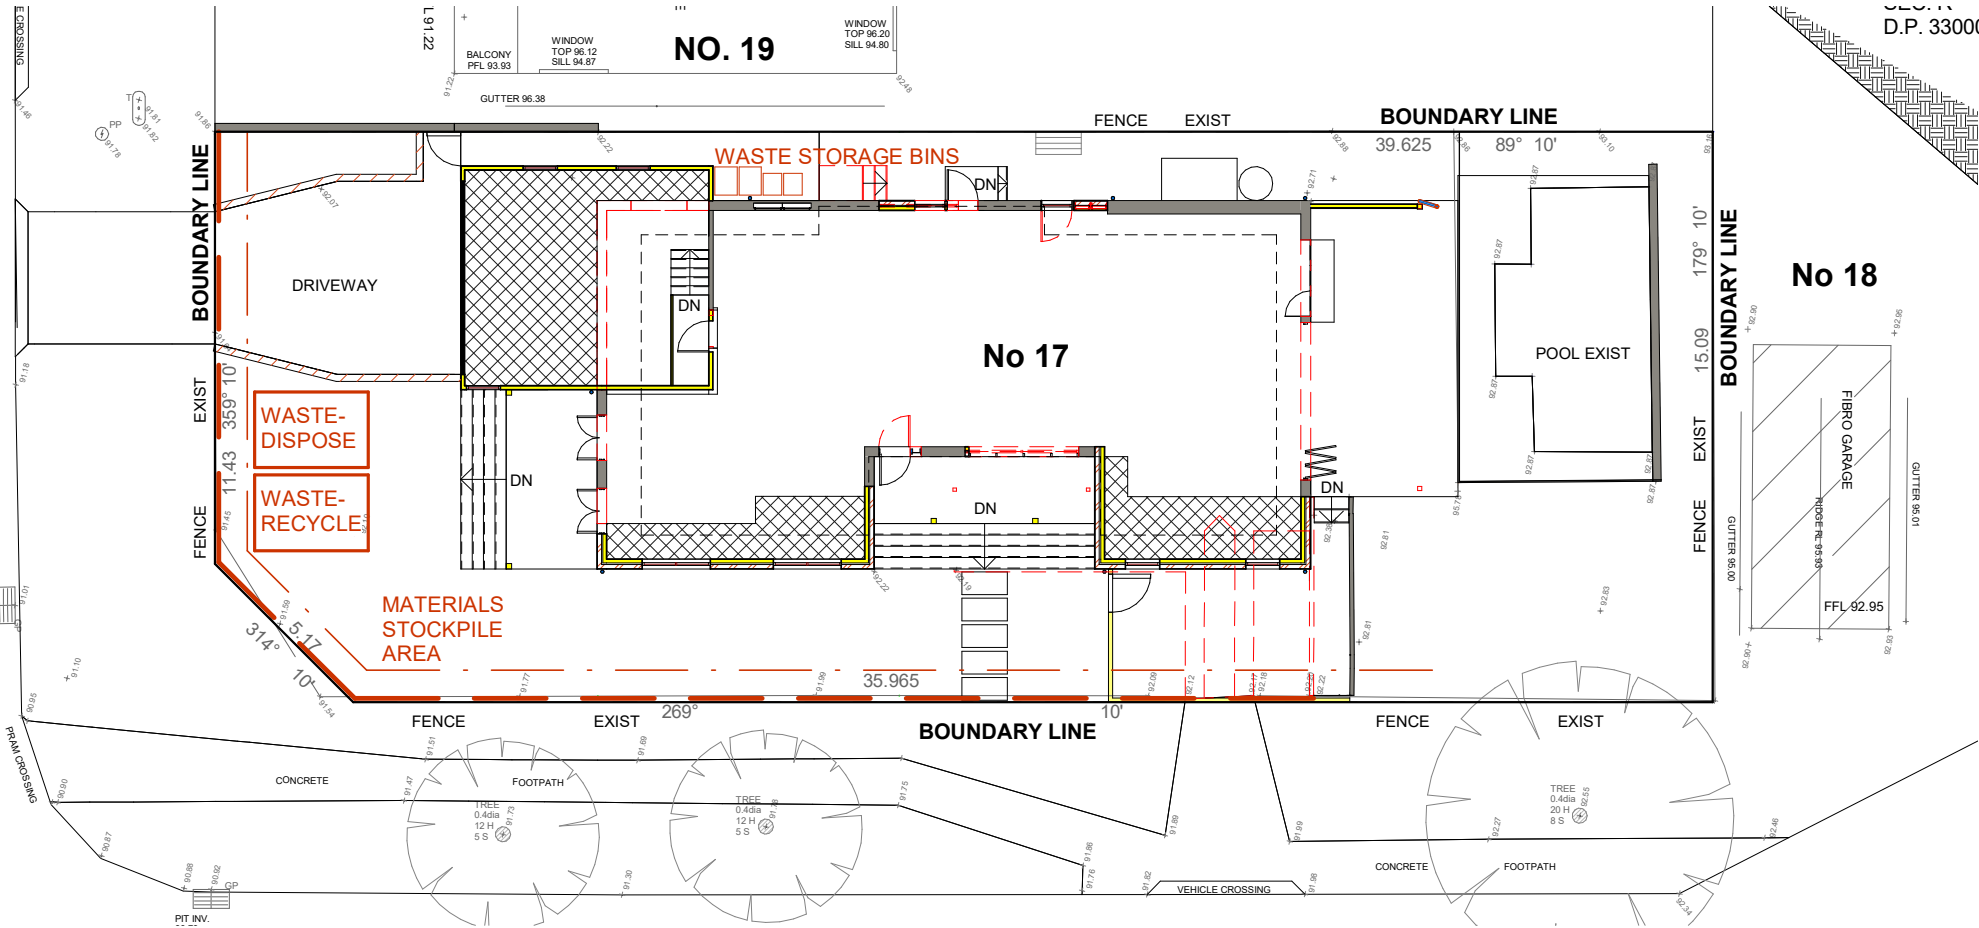

Erosion & Sediment Control and Waste Management Plan

1 : 200



Notes:
1.0 Refer to the Notes DA1000 (current revision) for relevant notes.

LEGEND

- CONSTRUCTION SECURITY FENCE WITH FABRIC FOR DUST CONTROL
- EXIST WALLS TO BE DEMOLISHED
- SEDIMENT CONTROL SILT FENCE

ISSUE DETAILS


- ISSUE FOR DA APPROVAL 06/08/19
A FINAL DA ISSUE 22/11/19

applicant: Jessica and Simon Hill

project 19/095


17 Fuller Street, Collaroy Plateau, NSW 2097
Lot 15, DP 26140

Erosion & Sediment Control and Waste Management Plan
date Apr 2019 scale As indicated dwg no DA2004A

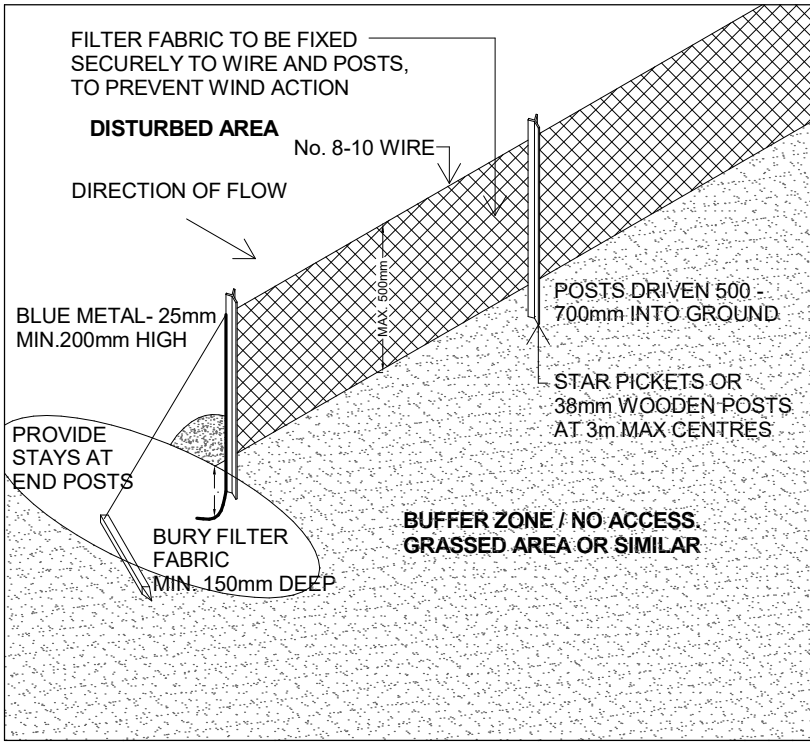

SILT FENCE DETAIL (TYPICAL)

Not To Scale.

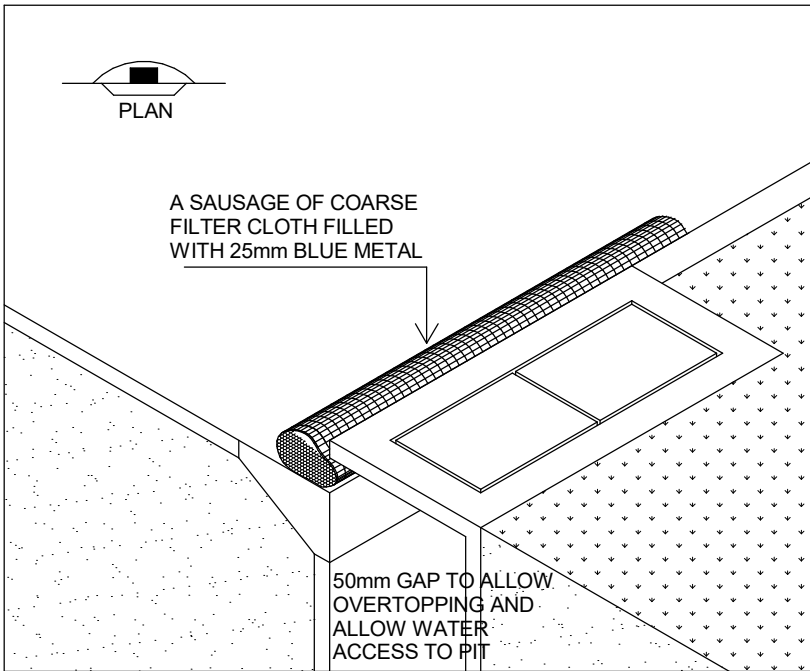

KERB INLET CONTROL (LOCATION TO BE DETERMINED ON SITE BY MAIN CONTRACTOR)

Not To Scale.