

### Sekisui House Proposed Residential Development

To be built at **Lot 3 Blackbutts Road, Frenchs Forest NSW 2086**

Issue	File Ref	Description	Author	Date
A	#2401292	NatHERS Thermal Comfort and BASIX Assessment	CB/HE	23/04/2025

This report has been prepared by Efficient Living Pty Ltd on behalf of our client Sekisui House. Efficient Living prepares all reports in accordance with the BASIX Thermal Comfort Protocol and is backed by professional indemnity insurance. This report takes into account our Client's instructions and preferred building inclusions.

If there is a change to this specification during design or construction phases, please contact Efficient Living and quote the above file reference for advice, and to obtain an updated Certificate if required.



---

BASIX Inclusions – extra notes:

There are a few inclusions set in the BASIX Portal which are not showing correctly in the BASIX Certificate. These items have been flagged with BASIX as errors. The correct inclusions should be as follows (shown in bold text):

Ventilation

At least 1 Bathroom: individual fan, ducted to façade or roof; Operation control: **interlocked to light / timer off**

# Nationwide House Energy Rating Scheme®

## NatHERS® Certificate No. #HR-3P9V3S-01

Generated on 23 Apr 2025 using Hero 4.1 (Chenath v3.23)

### Property

**Address** Lot 3, Blackbutts Rd, Frenchs Forest, NSW, 2086  
**Lot/DP** Lot 3/unreg  
**NCC Class\*** 1a  
**Floor/all Floors** 1 of 2 floors  
**Type** New

### Plans

**Main Plan** NM105562- REV04 14.03.2025  
**Prepared by** SEKISUI HOUSE SERVICES PTY LIMITED

### Construction and environment

<b>Assessed floor area (m²)*</b>		<b>Exposure Type</b>
<b>Conditioned*</b>	217.8	Suburban
<b>Unconditioned*</b>	19.9	<b>NatHERS climate zone</b>
<b>Total</b>	272.3	56 - Mascot AMO
<b>Garage</b>	34.7	



### Accredited assessor

**Name** Haylea Edwards  
**Business name** haylea@efficientliving.com.au  
**Email** haylea@efficientliving.com.au  
**Phone** +61 9970 6181  
**Accreditation No.** 10213  
**Assessor Accrediting Organisation** HERA  
**Declaration of interest** No Conflict of Interest

### NCC Requirements

**BCA provisions** Volume 2  
**State/Territory variation** Yes


#### National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J2D2(2)(a) and (3) of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at [www.abcb.gov.au](http://www.abcb.gov.au).

### Thermal performance star rating

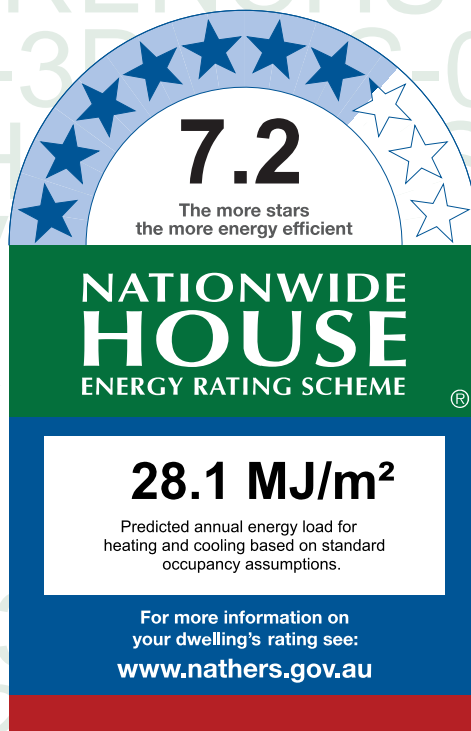

### Thermal performance (MJ/m²)

Limits taken from ABCB Standard 2022

	Heating	Cooling
<b>Modelled</b>	12.3	15.8
<b>Load limits</b>	25	18

#### Features determining load limits

Floor type  
(lowest conditioned area) CSOG  
NCC climate zone 1 or 2 N  
Outdoor living area N  
Outdoor living area ceiling fan N

### Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

### Verification

To verify this certificate, scan the QR code or visit  
<http://www.hero-software.com.au/pdf/HR-3P9V3S-01>.

When using either link, ensure you are visiting <http://www.hero-software.com.au>



\* Refer to glossary.



Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

## About the ratings

### Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

### Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value\* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

## Heating and Cooling Load Limits

### Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

### Setting options:

Floor type:

- CSOG - Concrete Slab on Ground
- SF - Suspended Floor (or a mixture of CSOG and SF)
- NA - Not Applicable

NCC climate Zone 1 or 2:

- Yes
- No
- NA - Not Applicable

Outdoor living area:

- Yes
- No
- NA - Not Applicable

Outdoor living area ceiling fan:

- Yes
- No
- NA - Not Applicable



## Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

## Predicted Whole of Home annual impact by appliance

Shows the contribution each appliance has on the home's annual energy use, greenhouse gas emissions and cost without solar.

### Energy use:

No Whole of Home performance assessment conducted for this certificate.

### Greenhouse gas emissions:

No Whole of Home performance assessment conducted for this certificate.

### Cost:

No Whole of Home performance assessment conducted for this certificate.



## Certificate check

The checklist covers important items impacting the dwelling's ratings.

It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and who should check each item.

It is not mandatory to complete this checklist.

Approval stage		Construction stage		
Assessor checked	Consent authority/ surveyor checked	Builder checked	Consent authority/ surveyor checked	Occupancy/other

### Genuine certificate check

Does this Certificate match the one available at the web address or QR code verification link on the front page?

☐☐☐☐

Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?

☐☐☐☐

### Thermal performance check

#### Windows and glazed doors

Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?

☐☐☐☐☐

Does the installed windows meet the substitution tolerances (AFRC\* based SHGC\* and U-values\*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?

☐☐☐

#### External walls

Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'External wall type table' on this Certificate?

☐☐☐☐☐

Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?

☐☐☐☐☐

#### Floor

Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?

☐☐☐☐☐

#### Ceiling penetrations\*

Does the 'quantity' and 'type' of ceiling penetrations\* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?

☐☐☐☐☐

#### Ceiling

Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?

☐☐☐☐☐

#### Roof

Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?

☐☐☐☐☐

#### Apartment entrance doors (NCC Class 2 assessments only)

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

☐☐☐☐

#### Exposure\*

Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

☐☐☐☐

#### Heating and cooling load limits\*

Do the load limits settings (shown on page 1) match what is shown on the NatHERS-stamped plans?

☐☐☐☐☐

\* Refer to glossary.

## Certificate check

Continued

Approval stage		Construction stage		
Assessor checked	Consent authority/ surveyor checked	Builder checked	Consent authority/ surveyor checked	Occupancy/other

### Additional NCC requirements for thermal performance (not included in the NatHERS assessment)

#### Thermal bridging

Does the dwelling meet the NCC requirement for thermal bridging?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--	--------------------------	--------------------------	--------------------------	--------------------------

#### Insulation installation method

Has the insulation been installed according to the NCC requirements?			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--	--	--------------------------	--------------------------	--------------------------

#### Building sealing

Does the dwelling meet the NCC requirements for Building Sealing?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
---	--	--------------------------	--------------------------	--------------------------	--------------------------

### Whole of Home performance check (not applicable if a Whole of Home assessment is not conducted)

#### Appliances

Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
---	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
---	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

### Additional NCC Requirements for Services (not included in the NatHERS assessment)

Does the lighting meet the artificial lighting requirements specified in the NCC?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
---	--	--------------------------	--------------------------	--------------------------	--------------------------

Does the hot water system meet the additional requirements specified in the NCC?		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
--	--	--------------------------	--------------------------	--------------------------	--------------------------

#### Provisional values\* check

Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	<input type="checkbox"/>	<input type="checkbox"/>			
--	--------------------------	--------------------------	--	--	--

#### Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

## Additional Notes

### Provisional Inclusions:

Roof default colour medium

Default colour modelled to external walls, windows frames and floor finishes

Waffle pod 225mm thick

Sealed and insulated Downlights 1 per 5m<sup>2</sup> ceiling penetration diameter 150mm

Sealed and insulated Exhaust fans ceiling penetration diameter 200mm

Windows modelled as a proxy to match window manufacturer U-value and SHGC

Floor coverings: bare concrete to garage, carpet to bedrooms and first floor living areas, tiles to remainder of the house

Page 2 - Whole of home and Appliance check list on this NatHERS Certificate is not applicable in NSW as energy is covered by BASIX.

Insulation is applied to the conditioned envelope of the house; this includes; external walls of habitable rooms, the wall between the garage and the house and any vertical walls adjacent to roof space. Unless noted otherwise garage external walls do not require insulation.

- Windows areas may be split into varying sash types in the model
- Raked ceilings under 10 degrees are modelled as flat ceiling
- Sisalation / sarking is only shown in certificate where it provides a reflective air-space
- No insulation clearance modeled as IC rated downlights are nominated

## Room schedule

Room	Zone Type	Area (m <sup>2</sup> )
WIL	Day Time	3.94
KITCHEN/LIVING/DINING	Kitchen/Living	51.75
LOUNGE	Living	14.19
GST ENS	Night Time	4.79
GUEST	Bedroom	9.69
GST WIR	Night Time	2.19
PDR	Unconditioned	2.64
LAUNDRY	Unconditioned	6.86
BUTLER'S PANTRY	Day Time	3.87
GARAGE	Garage	34.65
WIR	Night Time	8.33
PRINCIPAL SUITE	Bedroom	21.12
RUMPUS/STAIRS	Living	37.65
BED 4	Bedroom	12.57
PDR	Unconditioned	3.21
BATH	Unconditioned	7.15



### Room schedule

Room	Zone Type	Area (m²)
BED 2	Bedroom	12.96
ENSUITE	Night Time	10.16
ENTRY/STAIRS/PASS	Day Time	22.69
BED 3	Bedroom	12.44

### Window and glazed door type and performance

#### Default\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	SHGC substitution tolerance ranges	
				lower limit	upper limit
None					

#### Custom\* windows

Window ID	Window Description	Maximum U-value*	SHGC*	SHGC substitution tolerance ranges	
				lower limit	upper limit
WID-101-012	Horizon Awning Window	3.17	0.45	0.43	0.47
WID-106-028	Horizon Fixed Window	2.08	0.54	0.52	0.57
WID-111-005	Ascend Stacking Door	2.93	0.48	0.46	0.50
WID-122-017	Paragon Entry Door	3.92	0.51	0.49	0.54

### Window and glazed door schedule

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orient-ation	Shading device*
BATH	WID-101-012	W205	1000	850	Awning	90	E	None
BED 2	WID-101-012	W203	860	2650	Awning	10	S	None
BED 3	WID-101-012	W207	1030	2650	Awning	5	N	None
BED 4	WID-101-012	W208	1030	850	Awning	10	W	None
BED 4	WID-101-012	W209	1030	850	Awning	10	W	None
BUTLER'S PANTRY	WID-106-028	W102	600	1570	Fixed	0	E	None
ENSUITE	WID-101-012	W202	1200	1210	Awning	90	S	None
ENTRY/STAIRS/PASS	WID-111-005	D103	2510	3010	Sliding Door	60	W	None



## Window and glazed door *schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orient-ation	Shading device*
GUEST	WID-101-012	W105	2050	610	Awning	60	N	None
GUEST	WID-101-012	W106	2050	610	Awning	60	N	None
KITCHEN/LIVING/DINING	WID-111-005	D104	2510	4550	Sliding Door	59	W	None
KITCHEN/LIVING/DINING	WID-101-012	W10	2050	2650	Awning	26	N	None
KITCHEN/LIVING/DINING	WID-106-028	W103	600	3010	Fixed	0	E	None
KITCHEN/LIVING/DINING	WID-101-012	W101	2050	1210	Awning	60	S	None
LAUNDRY	WID-122-017	D101	2120	900	Casement	90	E	None
LOUNGE	WID-101-012	W108	2050	1570	Awning	27	S	None
LOUNGE	WID-101-012	W107	2050	1570	Awning	27	N	None
PDR	WID-101-012	W104	1030	610	Awning	90	E	None
PDR	WID-101-012	W206	1000	610	Awning	90	E	None
PRINCIPAL SUITE	WID-101-012	W211	1030	2650	Awning	45	N	None
PRINCIPAL SUITE	WID-101-012	W201	1200	1210	Awning	10	S	None
RUMPUS/STAIRS	WID-101-012	W204	600	2650	Awning	45	E	None
RUMPUS/STAIRS	WID-106-028	W210	600	3010	Fixed	0	W	None
WIR	WID-106-028	W212	1460	490	Fixed	0	N	None

## Roof window *type and performance value*

### Default\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	SHGC substitution tolerance ranges	
				lower limit	upper limit
None					

### Custom\* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	SHGC substitution tolerance ranges	
				lower limit	upper limit
None					

\* Refer to glossary.

## Roof window schedule

Location	Window ID	Window no.	Opening %	Height (mm)	Width (mm)	Orientation	Outdoor shade	Indoor shade
----------	-----------	------------	-----------	-------------	------------	-------------	---------------	--------------

None

## Skylight type and performance

Skylight ID	Skylight description
-------------	----------------------

None

## Skylight schedule

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m <sup>2</sup> )	Orientation	Outdoor shade	Diffuser	Shaft Reflectance
----------	-------------	--------------	----------------------------	------------------------	-------------	---------------	----------	-------------------

None

## External door schedule

Location	Height (mm)	Width (mm)	Opening %	Orientation
ENTRY/STAIRS/PASS	2360	1275	90	N
GARAGE	2265	4817	90	W

## External wall type

Wall ID	Wall Type	Solar absorptance	Wall Colour	Bulk insulation (R-value)	Reflective wall wrap*
Sekisui Nichiha Cladding Walls-A	Sekisui Nichiha Cladding Walls - Fibre-Cement Clad Battened (Refl Cavity) Stud Wall	0.50	Medium	3.10	Yes
Sekisui Nichiha Cladding Walls-B	Sekisui Nichiha Cladding Walls - Fibre-Cement Clad Battened (Refl Cavity) Stud Wall	0.50	Medium	0.00	Yes

## External wall schedule

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* projection (mm)	Vertical shading feature
BATH	Sekisui Nichiha Cladding Walls-A	2510	3394	E	445	Yes
BED 2	Sekisui Nichiha Cladding Walls-A	2510	3168	E	445	Yes
BED 2	Sekisui Nichiha Cladding Walls-A	2000	4092	S	460	Yes
BED 2	Sekisui Nichiha Cladding Walls-A	2510	2087	W	9723	Yes
BED 3	Sekisui Nichiha Cladding Walls-A	2510	3482	N	442	Yes

## External wall *schedule*

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* projection (mm)	Vertical shading feature
BED 3	Sekisui Nichiha Cladding Walls-A	2510	3765	E	445	Yes
BED 3	Sekisui Nichiha Cladding Walls-A	1985	596	W	2484	Yes
BED 4	Sekisui Nichiha Cladding Walls-A	1850	4370	W	442	Yes
BED 4	Sekisui Nichiha Cladding Walls-A	2510	341	N		No
BED 4	Sekisui Nichiha Cladding Walls-A	1970	2536	N	1038	Yes
BUTLER'S PANTRY	Sekisui Nichiha Cladding Walls-A	2510	1956	E		Yes
ENSUITE	Sekisui Nichiha Cladding Walls-A	2510	2922	S	2547	Yes
ENTRY/STAIRS/PASS	Sekisui Nichiha Cladding Walls-A	2510	3916	W		Yes
ENTRY/STAIRS/PASS	Sekisui Nichiha Cladding Walls-A	2510	1685	N		Yes
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	313	W		No
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	1799	N		Yes
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	5882	E	220	Yes
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	5891	S		Yes
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	5252	W	589	Yes
GARAGE	Sekisui Nichiha Cladding Walls-B	2550	317	W		No
GST ENS	Sekisui Nichiha Cladding Walls-A	2510	757	N	1449	Yes
GST ENS	Sekisui Nichiha Cladding Walls-A	2510	1505	W	5202	Yes
GST ENS	Sekisui Nichiha Cladding Walls-A	2510	436	N		No
GST ENS	Sekisui Nichiha Cladding Walls-A	2510	319	N	588	Yes
GST WIR	Sekisui Nichiha Cladding Walls-A	2510	1298	E		Yes
GUEST	Sekisui Nichiha Cladding Walls-A	2510	3058	N	588	Yes
GUEST	Sekisui Nichiha Cladding Walls-A	2510	3169	E		Yes
KITCHEN/LIVING /DINING	Sekisui Nichiha Cladding Walls-A	2510	4979	W	2955	Yes
KITCHEN/LIVING /DINING	Sekisui Nichiha Cladding Walls-A	2510	3909	N		Yes
KITCHEN/LIVING /DINING	Sekisui Nichiha Cladding Walls-A	2510	4979	E		Yes

\* Refer to glossary.

## External wall *schedule*

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* projection (mm)	Vertical shading feature
KITCHEN/LIVING /DINING	Sekisui Nichiha Cladding Walls-A	2510	5675	S		Yes
KITCHEN/LIVING /DINING	Sekisui Nichiha Cladding Walls-A	2510	626	S		No
LAUNDRY	Sekisui Nichiha Cladding Walls-A	2510	1971	E		Yes
LOUNGE	Sekisui Nichiha Cladding Walls-A	2510	3751	W		Yes
LOUNGE	Sekisui Nichiha Cladding Walls-A	2510	330	N		No
LOUNGE	Sekisui Nichiha Cladding Walls-A	2510	886	E	1641	Yes
LOUNGE	Sekisui Nichiha Cladding Walls-A	2510	3782	S		Yes
LOUNGE	Sekisui Nichiha Cladding Walls-A	2510	3452	N	2068	Yes
PDR	Sekisui Nichiha Cladding Walls-A	2510	1562	E		Yes
PDR	Sekisui Nichiha Cladding Walls-A	2510	1529	E	445	Yes
PRINCIPAL SUITE	Sekisui Nichiha Cladding Walls-A	2510	4666	N	727	Yes
PRINCIPAL SUITE	Sekisui Nichiha Cladding Walls-A	2510	2571	S	747	Yes
PRINCIPAL SUITE	Sekisui Nichiha Cladding Walls-A	2510	758	S	747	Yes
PRINCIPAL SUITE	Sekisui Nichiha Cladding Walls-A	2510	752	S		No
RUMPUS/STAIRS	Sekisui Nichiha Cladding Walls-A	2510	3812	E	445	Yes
RUMPUS/STAIRS	Sekisui Nichiha Cladding Walls-A	2510	3906	W	7331	Yes
WIL	Sekisui Nichiha Cladding Walls-A	2510	1956	W		Yes
WIR	Sekisui Nichiha Cladding Walls-A	2510	4979	W	729	Yes
WIR	Sekisui Nichiha Cladding Walls-A	2510	325	N		No
WIR	Sekisui Nichiha Cladding Walls-A	2510	1349	S	747	Yes
WIR	Sekisui Nichiha Cladding Walls-A	2510	325	S		No
WIR	Sekisui Nichiha Cladding Walls-A	2510	1349	N	727	Yes

## Internal wall *type*

Wall ID	Wall Type	Area (m <sup>2</sup> )	Bulk insulation
INT-PB	Internal Plasterboard Stud Wall	141.5	0.00



## Internal wall type

Wall ID	Wall Type	Area (m <sup>2</sup> )	Bulk insulation
INT-PB	Internal Plasterboard Stud Wall	8.2	2.50
INT-PB-EXP1	Internal Plasterboard Stud Wall (exposed 1 side)	6.7	3.10

## Floor type

Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
BATH	TIMB-001: Suspended Timber Floor	7.2	N/A	0.15	Tile (8mm)
BED 2	TIMB-001: Suspended Timber Floor	12.9	N/A	0.15	Carpet
BED 3	TIMB-001: Suspended Timber Floor	10.4	N/A	0.15	Carpet
BED 3	TIMB-002: Suspended Timber Floor - Lined Below	2.1	N/A	4.00	Carpet
BED 4	TIMB-001: Suspended Timber Floor	9.8	N/A	0.15	Carpet
BED 4	TIMB-002: Suspended Timber Floor - Lined Below	2.7	N/A	4.00	Carpet
BUTLER'S PANTRY	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	3.9	N/A	0.59	Tile (8mm)
ENSUITE	TIMB-001: Suspended Timber Floor	10.2	N/A	0.15	Tile (8mm)
ENTRY/STAIRS/PASS	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	22.7	N/A	0.59	Tile (8mm)
GARAGE	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	34.7	N/A	0.59	Exposed
GST ENS	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	4.8	N/A	0.59	Tile (8mm)
GST WIR	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	2.2	N/A	0.59	Tile (8mm)
GUEST	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	9.7	N/A	0.59	Carpet
KITCHEN/LIVING/DINING	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	51.7	N/A	0.59	Tile (8mm)
LAUNDRY	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	6.9	N/A	0.59	Tile (8mm)
LOUNGE	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	14.2	N/A	0.59	Tile (8mm)
PDR	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	2.6	N/A	0.59	Tile (8mm)
PDR	TIMB-001: Suspended Timber Floor	3.1	N/A	0.15	Tile (8mm)
PRINCIPAL SUITE	TIMB-001: Suspended Timber Floor	16.7	N/A	0.15	Carpet
PRINCIPAL SUITE	TIMB-002: Suspended Timber Floor - Lined Below	4.4	N/A	4.00	Carpet
RUMPUS/STAIRS	TIMB-001: Suspended Timber Floor	37.7	N/A	0.15	Carpet



## Floor type

Location	Construction	Area (m <sup>2</sup> )	Sub-floor ventilation	Added insulation (R-value)	Covering
WIL	WAFFLE-85: Concrete Waffle Pod Slab on Ground (85mm)	3.9	N/A	0.59	Tile (8mm)
WIR	TIMB-002: Suspended Timber Floor - Lined Below	8.3	N/A	4.00	Carpet

## Ceiling type

Location	Construction	Bulk insulation (R-value)	Reflective wrap*
BATH	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
BED 2	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
BED 3	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
BED 4	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
ENSUITE	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
GARAGE	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	0.00	Yes
LOUNGE	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
PDR	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
PRINCIPAL SUITE	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
RUMPUS/STAIRS	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes
WIR	ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	6.00	Yes

## Ceiling penetrations\*

Location	Quantity	Type	Diameter (mm)	Sealed /unsealed
BATH	1	Exhaust Fan	200	Sealed
BATH	1	Downlight	150	Sealed
BED 2	2	Downlight	150	Sealed
BED 3	2	Downlight	150	Sealed
BED 4	2	Downlight	150	Sealed
BUTLER'S PANTRY	1	Downlight	150	Sealed
ENSUITE	1	Exhaust Fan	200	Sealed

\* Refer to glossary.

## Ceiling penetrations\*

Location	Quantity	Type	Diameter (mm)	Sealed /unsealed
ENSUITE	2	Downlight	150	Sealed
ENTRY/STAIRS/PASS	2	Downlight	150	Sealed
GST ENS	1	Exhaust Fan	200	Sealed
GST ENS	1	Downlight	150	Sealed
GST WIR	1	Downlight	150	Sealed
GUEST	2	Downlight	150	Sealed
KITCHEN/LIVING/DINING	1	Exhaust Fan	200	Sealed
KITCHEN/LIVING/DINING	10	Downlight	150	Sealed
LAUNDRY	1	Downlight	150	Sealed
LOUNGE	3	Downlight	150	Sealed
PDR	2	Exhaust Fan	200	Sealed
PDR	2	Downlight	150	Sealed
PRINCIPAL SUITE	4	Downlight	150	Sealed
RUMPUS/STAIRS	7	Downlight	150	Sealed
WIL	1	Downlight	150	Sealed
WIR	2	Downlight	150	Sealed

## Ceiling fans

Location	Quantity	Diameter (mm)
None		

## Roof type

Construction	Added insulation (R-value)	Solar absorptance	Roof Colour
ATTIC-METAL-01: Pitched / Attic Metal Roof (Roofspace) & Flat PB Ceiling	1.80	0.50	Medium

## Thermal bridging schedule for steel frame elements

Building element	Steel section dimensions (height x width, mm)	Frame spacing (mm)	Steel thickness (BMT mm)	Thermal Break (R-value)
None				



## Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

### Cooling system

Type	Location	Fuel Type	Minimum efficiency / performance	Recommended capacity
No Whole of Home Data				

### Heating system

Type	Location	Fuel Type	Minimum efficiency / performance	Recommended capacity
No Whole of Home Data				

### Hot water system

Type	Fuel type	Hot Water CER Zone	Minimum efficiency / STC	Assessed daily load [litres]
No Whole of Home Data				

### Pool / spa equipment

Type	Fuel type	Minimum efficiency / performance	Recommended capacity
No Whole of Home Data			

## Onsite Renewable Energy *schedule*

Type	Orientatation	Generation Capacity [kW]
No Whole of Home Data		

## Battery *schedule*

Type	Storage Capacity [kWh]
No Whole of Home Data	

## Explanatory Notes

### About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value\* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the home's energy value\*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

### Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and

are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

### Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

## Glossary

<b>Annual energy load</b>	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
<b>AFRC</b>	Australian Fenestration Rating Council
<b>Assessed floor area</b>	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
<b>Ceiling penetrations</b>	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
<b>Conditioned</b>	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
<b>COP</b>	Coefficient of performance
<b>Custom windows</b>	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
<b>Default windows</b>	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
<b>EER</b>	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
<b>Energy use</b>	This is your home's rating without solar or batteries.
<b>Energy value</b>	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
<b>Entrance door</b>	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
<b>Exposure</b>	see exposure categories below
<b>Exposure category - exposed</b>	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
<b>Exposure category - open</b>	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
<b>Exposure category - suburban</b>	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
<b>Exposure category - protected</b>	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
<b>Horizontal shading feature</b>	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
<b>National Construction Code (NCC) Class</b>	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at <a href="http://www.abcb.gov.au">www.abcb.gov.au</a> .
<b>Net zero home</b>	a home that achieves a net zero energy value*.
<b>Opening percentage</b>	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
<b>Provisional value</b>	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at <a href="http://www.nathers.gov.au">www.nathers.gov.au</a>
<b>Recommended capacity</b>	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
<b>Reflective wrap (also known as foil)</b>	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
<b>Roof window</b>	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
<b>Shading features</b>	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
<b>Solar heat gain coefficient (SHGC)</b>	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
<b>Skylight (also known as roof lights)</b>	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
<b>STCs</b>	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulatory
<b>Thermal breaks</b>	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick, continuous thermal breaks such as polystyrene insulation sheeting, plastic strips or furring channels.
<b>U-value</b>	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
<b>Unconditioned</b>	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions
<b>Vertical shading features</b>	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
<b>Window shading device</b>	a device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

\* Refer to glossary.