



ACTION PLANS

m: 0426 957 518
e: operations@actionplans.com.au
w: www.actionplans.com.au



**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

39 EILEEN STREET, NORTH BALGOWLAH, NSW, 2093



DEVELOPEMENT APPLICATION

PLANNING CONTROLS LOT 131 DP 11936 SITE AREA : 499.5m ² FRONTAGE : 13.25m				
LEP/DCP	CONTROL	EXISTING	PROPOSED	COMPLIANCE
LAND ZONING	R2			
MAX. BUILDING HEIGHT	8.5m		EXISTING	N/A
LANDSLIP AREA	AREA B (5-25° SLOPE)			
LANDSCAPE OPEN SPACE:	40% (199.80m ²)	41% (206.52m ²)	31% (154.39m ²)	NO
PRIVATE OPEN SPACE:	60m ²	162.92m ²	137.21m ²	YES
FRONT BUILDING SETBACK:	6.5m	8.3m	8.3m	YES
REAR BUILDING SETBACK:	6.0m	10.7m	7.7m	YES
SIDE BUILDING SETBACK:	N: 900mm	953mm	953mm	YES
	S: 900mm	2263mm	2263mm	YES

NCC & AS COMPLIANCES SPECIFICATIONS

- EARTHWORKS: METHOD OF EXCAVATION AND FILL - PART 3.1.1 OF NCC
- SURFACE SUBSOIL-STORMWATER DRAINAGE - PART 3.1.2 OF NCC
- TERMITE-RISK MANAGEMENT - PART 3.1.3 OF NCC
- FOOTINGS & SLAB - PART 3.2 OF NCC INCLUDING AS2870
- MASONRY CONSTRUCTION - PART 3.3 OF NCC INCLUDING AS3700
- SUB FLOOR VENTILATION - PART 3.4.1 OF NCC
- FRAMING - PART 3.4 OF NCC
- ROOF, WALL-CLADDING, GUTTERS & DOWNPIPES - PART 3.5 OF NCC
- GLAZING - PART 3.6 OF NCC INCLUDING AS1288
- FIRE SEPARATION - PART 3.7.1 OF NCC
- SMOKE ALARMS - PART 3.7.2 OF NCC
- HEATING APPLIANCES - PART 3.7.3 OF NCC
- WET AREAS-PROTECTION OF WALLS & FLOORS - PART 3.8.1 OF NCC
- MINIMUM ROOF HEIGHTS - PART 3.8.3 OF NCC
- FACILITIES REQUIRED & SANITARY DOOR CONSTRUCTION - PART 3.8.3 OF NCC
- LIGHT: NATURAL AND ARTIFICIAL - PART 3.8.4 OF NCC
- VENTILATION & LOCATION OF TOILETS - PART 3.8.5 OF NCC
- SOUND INSULATION - PART 3.8.6 OF NCC
- STAIR CONSTRUCTION INCLUDING DIMENSIONS - PART 3.9.1 OF NCC
- BALUSTRADES & OTHER BARRIERS - PART 3.9.2 OF NCC
- FENCING & OTHER PROVISIONS - REGS & AS1926
- DEMOLITION WORKS - AS2601-1991 THE DEMOLITION OF STRUCTURES.
- ALL WATERPROOF MEMBRANES TO COMPLY WITH WITH AS 3740-2004
- ALL PLUMBING & DRAINAGE WORK TO COMPLY WITH AS 3500
- SITE CLASSIFICATION AS TO AS 2870
- ALL PLASTERBOARD WORK TO COMPLY WITH AS 2588-1998
- ALL STRUCTURAL STEEL WORK TO COMPLY WITH AS 4100 & AS 1554
- ALL CONCRETE WORK TO COMPLY WITH AS 3600
- ALL ROOF SHEETING WORK TO COMPLY WITH AS 1562-1992
- ALL SKYLIGHTS TO COMPLY WITH WITH AS 4285-2007
- ALL CERAMIC TILING TO COMPLY WITH AS 3958.1-2007 & 3958.2-1992
- ALL GLAZING ASSEMBLIES TO COMPLY WITH AS2047 & 1288
- ALL TIMBER RETAINING WALLS ARE TO COMPLY WITH AS 1720.1-2010, AS 1720.2-2006, AS 1720.4-2006, AS 1170.1-1989 & AS 1170.4-1993
- ALL RETAINING WALLS ARE TO COMPLY WITH 3700 - 2011 & AS 3600 -2001
- ALL CONSTRUCTION TO COMPLY TO AS3959- 1991

SHEET NUMBER	SHEET NAME	DATE PUBLISHED
DA00	COVER	14/05/2021
DA01	NOTATION	14/05/2021
DA02	SAFETY NOTES	14/05/2021
DA03	SITE ANALYSIS	14/05/2021
DA04	SITE / ROOF / SEDIMENT EROSION / WASTE MANAGEMENT / STORMWATER CONCEPT PLAN	14/05/2021
DA05	EXISTING GARAGE FLOOR PLAN	14/05/2021
DA06	EXISTING GROUND FLOOR PLAN	14/05/2021
DA07	EXISTING FIRST FLOOR PLAN	14/05/2021
DA08	PROPOSED GROUND FLOOR PLAN	14/05/2021
DA09	PROPOSED FIRST FLOOR PLAN	14/05/2021
DA10	NORTH / EAST ELEVATION	14/05/2021
DA11	SOUTH / WEST ELEVATION	14/05/2021
DA12	LONG / CROSS SECTION	14/05/2021
DA13	AREA CALCULATIONS	14/05/2021
DA14	SAMPLE BOARD	14/05/2021
DA15	WINTER SOLSTICE 9 AM	14/05/2021
DA16	WINTER SOLSTICE 12 PM	14/05/2021
DA17	WINTER SOLSTICE 3 PM	14/05/2021
DA18	POOL SECTION	14/05/2021
DA19	POOL PLAN	14/05/2021
DA20	BASIX COMMITMENTS	14/05/2021

SPECIFICATION

- "Approval" - obtained by either an 'Accredited Certifying Authority' or 'Local Council'.
- The Owner will directly pay all fees associated with the following: -
- Building approval from council or accredited certifier, any footpath and kerb deposits with the local council, insurance fees to Building Services Corporation, Long Service Leave levy fees and approval fees by water and sewerage authority. All other fees are to be paid by the builder. The amount of any local authority deposits which are forfeited due to damage or other causes, will be deducted from payments due to the builder.
- The Builder is to provide at his/her own expense adequate Public Risk Insurance and arrange indemnification under the Workers Compensation Act. Works insurance to be as stated in the contract conditions.
- All tenderers are to visit the site to satisfy themselves as to the nature and extent of the Works, facilities available and difficulties entailed in the works as Variations will not be allowed due to work arising owing to neglect of this clause.
- These drawings shall be read in conjunction with all structural and other consultant's drawings and specifications and with any such written instructions as may be issued during the course of the contract.
- Set out dimensions shown on this drawing shall be verified by the builder on site before commencement of any work. Dimensions shall not be obtained by scaling the drawings. Use only figured dimensions. All dimensions are in millimetres.
- The Builder is to ensure all construction, levels and other items comply with the conditions of the Building Approval.
- Any detailing in addition to what is supplied shall be resolved between the Owner and the Builder to the Owner's approval, except for any structural details or design which is to be supplied by the Engineer.
- All work to be carried out in a tradesman like manner and in accordance with the standards, codes and regulations of the Standards Association of Australia, National construction Code of Australia and any statutory authority having jurisdiction over the works.
- All structural work is to be in accordance with the structural details prepared by a suitably qualified structural engineer. Including but not limited to all piers, footings, concrete slabs, retaining walls, steelworks, formwork, underpinning, additional structural loads, timber framing, wind bracing and associated connections. Builder to obtain, prior to finalising the tender unless previously obtained by owners.
- All brickwork is to be selected by owner and is to comply with AS 1640. All masonry is to comply with AS 3700.
- Provide all metalwork and flashings necessary to satisfactorily complete the works.
- All timber construction to be in accordance with AS 1684 - "Timber Framing Code". Level & Grade where necessary under timber floors to provide a minimum clearance of 300mm under bearers or 400mm under joists. Adequate precautions shall be taken to ensure that the surface &/or seepage water does not collect or remain under floor area.
- Sustainable timbers and not rainforest or old growth timber will be used. Recycled timber or second hand timbers are to be sourced and used in preference to plantation timbers, if available and suitable.
- All glazing installed is to comply with AS 1288, 2047 and in accordance with manufacturers recommendations.
- All wall and ceiling linings to be plasterboard and villaboard or equal in wet areas. A breathable wall wrap is to be provided to all external walls. Timber cladding is to be battened out from timber frame to provide an 'air' gap to prevent condensation. Workmanship is to comply with the relevant Australian Standards or installed in accordance with manufacturer's specification. All bathrooms and wet areas to be waterproofed with a flexible membrane to manufacturer's specification and to AS 3740 and Part 3.8.1 of the Building Code of Australia Housing Provisions.
- All Architraves and skirtings to the profile as selected by owner, and painted or stain finish as selected.
- All plumbing and drainage work to be installed and completed by a licensed tradesman and in accordance with the statutory body having authority over the works. Connect all waste to Sydney Water sewer line.
- Connect all stormwater to existing system or street drainage system in accordance with AS 3500 and part 3.1.2 Drainage of the Building Code of Australia Housing Provisions.
- Smoke detector alarms to be installed in accordance with AS3786 and the Building Code of Australia/ NCC clause 3.7.2.2.
- If a member which provides structural support to the work is subject to attack by Termites protection measures are to comply with AS3660 and be installed to manufacturer's specification.
- Stairs and Balustrades to comply with part 3.9.1 & 3.9.2 of the Building Code of Australia Housing Provisions. Provide a handrail along the full length of the flight and a slip resistant finish to the edge of the nosings to comply with 3.9.1 and 3.9.2 of the NCC. No horizontal elements to facilitate climbing between 150mm and 760mm where floor to level below in more than 4m.
- Electrical works to be in accordance with SAA wiring rules and be done by a licenced tradesperson. Obtain electrical layout prior to proceeding. All electrical power (GPO's) and light outlets to be determined by owner.
- Painting: All paints or other coatings shall be of the best quality materials & of approved manufacture. All priming materials shall be of an approved brand acceptable to the manufacturer of the finishing coats to be used. External joinery intended to be painted shall be primed on all faces at the place of assembly. Where new work or alteration work adjoins existing painted surfaces allow for repainting existing surfaces to provide uniform appearance.
- ZERO-VOC or LOW-VOC paints and primers only are to be used.
- Any work indicated on the plans but not specified and any item not shown on the plans which is obviously necessary as part of proper construction and/or finish, is to be considered as shown and specified and is to be undertaken at the Builder's expense.
- Variations will not be permitted without prior written approval by the owners.
- The Builder shall provide sediment and siltation control measures as required by Council and maintain them throughout the duration of the works.
- A legible copy of the plans bearing approval stamps, must be maintained on the job site at all times. Hours of construction shall be restricted to the times as required by the building approval.
- The Builder is to arrange for all inspections required by the relevant authorities and/or lending institutions, to their requirements.
- The Builder is to obtain approval for interruptions to existing services and minimise the duration and number of interruptions. Any interruptions to existing services and equipment is to be undertaken by appropriately qualified tradespersons.
- The Builder shall restore, reinstate or replace any damage to existing structures or landscaping caused by the construction works or workmen.
- Provide protection to existing trees to remain, or as required by the Approval Conditions.

GENERAL NOTATION

- Approved means by the 'relevant local authority' or council
- The owner will directly pay the fees associated with the following: building approval from council, footpath and kerb deposits with the local council, insurance fee to building services corporation, long service leave service levy fee and approval fee by water and sewerage authority. all other fees are to be paid by the builder. the amount of any local authority deposits which are forfeited due to damage or other cause will be deducted from the payments due to the builder.
- The builder is to provide at his/her own expense adequate public risk insurance and arrange indemnification under the workers compensation act. works insurance to be stated in the contract conditions.
- All work to be carried out in a tradesmen like manner and in accordance with the standards codes and regulations of the standards association of Australia, building code of Australia and any statutory authority having jurisdiction over the work.
- All tenderers are to visit the site to satisfy themselves as to the nature and extent of the works, facilities available and difficulties entailed in the works as variations will not be allowed due to work arising owing to neglect of this clause.
- All work and materials to comply with the current Australian standards at the time of commencement were applicable.
- These drawings shall be read in conjunction with all structural and other consultants drawings and specifications and with any such written instructions as may be issued during the course of the contract.
- Set out dimensions shown on this drawing shall be verified by the builder on site before commencement of any work. dimensions should not be obtained by scaling the drawings. use only figured dimensions. all dimensions are in millimetres.
- The builder is to ensure all construction, levels and other items comply with the conditions of the building approval.
- The builder is to comply with all ordinances, local authority regulations and the requirements of all services supply authorities having jurisdiction over the works.
- All plumbing and drainage work to be installed and completed by a licenced tradesman and in accordance with the statutory body having authority over the works. connect all waste to Sydney water sewer line
- All new downpipes are to be connected to the existing storm water system.
- All power and stormwater outlet locations shall be determined onsite by the owner.
- Smoke detector alarm to be installed in accordance with as3786 and the building code of Australia.
- Electrical work to be in accordance with SAA wiring rules and be done by a licenced tradesman
- Any detailing in addition to what is supplied shall be resolved between the owner and the builder to the owner's approval, except for any structural details or design which is supplied by the engineer.
- All timber sizes and concrete details to be confirmed by the builder prior to commencement of any work.
- All structural work is to be in accordance with the structural details prepared by a structural engineer(i.e.) piers, footings, concrete slabs, retaining walls, steelwork, formwork, underpinning, additional structural loads, timber framing, wind bracing and associated connections. builder to obtain prior to finalising tender.
- Any work indicated on the plans but not specified, and any item not shown on the plan which is obviously necessary as a part of construction and/or finish is to be considered as shown and specified, and is to be done as part of the contract. variations will not be permitted without the written consent of the owner.
- The builder shall provide sediment and siltation control measures as required by council and maintain them through the duration of the works.
- A legible copy of the plans bearing approval stamps must be maintained on the job at all times. hours of construction will be restricted to the times as required by the building approval.
- The builder is to arrange for all inspections required by the authorities and lending institutions to their requirements.
- The builder is to obtain approval for interruptions to existing services and minimise the duration and number of interruptions. any interruptions with existing services and equipment to be attended to by the appropriately skilled tradesmen.
- The builder shall restore, reinstate or replace any damage caused to existing structures or landscaping by construction work or workmen. provide protection to existing trees to remain as required by approval conditions.
- All brickwork is to be selected by owner and is to comply with as1640
- All masonry to comply with as3700
- All metalwork and flashing items necessary to satisfactory complete work shall be provided.
- All gutters, downpipes to be colorbond.
- All timber construction to be in accordance with the Australian standard 1684 "timber framing code"
- All glazing installed to comply with as1288, 2047 and in accordance with manufacturers recommendation
- All wall and ceiling linings to be plasterboard or cement render as selected and villa board in wet areas, to comply with the relevant Australian standards or installed in accordance with manufacturers specification.
- All bathrooms and wet areas to be adequately waterproofed to manufacturers speciation and as3740 and part 3.8.1 of the building code of Australia housing provisions
- Stairs and balustrades to comply with part 3.9.1 & 3.9.2 of the building code of Australia housing provision.
- Termite protection measures to comply with as 3660 and be installed to manufacturers specification.
- Any detailing additional to that supplied, shall be resolved between the owner and the builder to the owners approval. except for any structural details or design which is to be supplied by the structural engineer.



**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

SAFETY NOTES

THESE NOTES MUST BE READ AND UNDERSTOOD BY ALL INVOLVED IN THE PROJECT. THIS INCLUDES (but is not limited to): OWNER, BUILDER, SUB-CONTRACTORS, CONSULTANTS, RENOVATORS, OPERATORS, MAINTENORS, DEMOLISHERS.

1. FALLS, SLIPS, TRIPS

a) WORKING AT HEIGHTS

DURING CONSTRUCTION
Wherever possible, components for this building should be prefabricated off-site or at ground level to minimise the risk of workers falling more than two metres. However, construction of this building will require workers to be working at heights where a fall in excess of two metres is possible and injury is likely to result from such a fall. The builder should provide a suitable barrier wherever a person is required to work in a situation where falling more than two metres is a possibility.

DURING OPERATION OR MAINTENANCE
For houses or other low-rise buildings where scaffolding is appropriate: Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, ladders or trestles should be used in accordance with relevant codes of practice, regulations or legislation. For buildings where scaffold, ladders, trestles are not appropriate: Cleaning and maintenance of windows, walls, roof or other components of this building will require persons to be situated where a fall from a height in excess of two metres is possible. Where this type of activity is required, scaffolding, fall barriers or Personal Protective Equipment (PPE) should be used in accordance with relevant codes of practice, regulations or legislation.

b) SLIPPERY OR UNEVEN SURFACES

FLOOR FINISHES Specified
If finishes have been specified by designer, these have been selected to minimise the risk of floors and paved areas becoming slippery when wet or when walked on with wet shoes/ feet. Any changes to the specified finish should be made in consultation with the designer or, if this is not practical, surfaces with an equivalent or better slip resistance should be chosen.

FLOOR FINISHES By Owner
If designer has not been involved in the selection of surface finishes. the owner is responsible for the selection of surface finishes in the pedestrian trafficable areas of this building. Surfaces should be selected in accordance with AS HB 197:1999 and AS/ NZ 4586:2004.

STEPS, LOOSE OBJECTS AND UNEVEN SURFACES
Due to design restrictions for this building, steps and/ or ramps are included in the building which may be a hazard to workers carrying objects or otherwise occupied. Steps should be clearly marked with both visual and tactile warning during construction, maintenance, demolition and at all times when the building operates as a workplace. Building owners and occupiers should monitor the pedestrian access ways and in particular access to areas where maintenance is routinely carried out to ensure that surfaces have not moved or cracked so that they become uneven and present a trip hazard. Spills, loose material, stray objects or any other matter that may cause a slip or trip hazard should be cleaned or removed from access ways. Contractors should be required to maintain a tidy work site during construction, maintenance or demolition to reduce the risk of trips and falls in the workplace. Materials for construction or maintenance should be stored in designated areas away from access ways and work areas.

2. FALLING OBJECTS

LOOSE MATERIALS OR SMALL OBJECTS
Construction, maintenance or demolition work on or around this building is likely to involve persons working above ground level or above floor levels. Where this occurs one or more of the following measures should be taken to avoid objects falling from the area where the work is being carried out onto persons below.
1. Prevent or restrict access to areas below where the work is being carried out.
2. Provide toeboards to scaffolding or work platforms.
3. Provide protective structure below the work area.
4. Ensure that all persons below the work area have Personal Protective Equipment (PPE).

BUILDING COMPONENTS
During construction, renovation or demolition of this building, parts of the structure including fabricated steelwork, heavy panels and many other components will remain standing prior to or after supporting parts are in place. Contractors should ensure that temporary bracing or other required support is in place at all times when collapse which may injure persons in the area is a possibility. Mechanical lifting of materials and components during construction, maintenance or demolition presents a risk of falling objects. Contractors should ensure that appropriate lifting devices are used, that loads are properly secured and that access to areas below the load is prevented or restricted.

3. TRAFFIC MANAGEMENT

For building on a major road, narrow road or steeply sloping road: Parking of vehicles or loading/ unloading of vehicles on this roadway may cause a traffic hazard. During construction, maintenance or demolition of this building designated parking for workers and loading areas should be provided. Trained traffic management personnel should be responsible for the supervision of these areas. For building where on-site loading/ unloading is restricted: Construction of this building will require loading and unloading of materials on the roadway. Deliveries should be well planned to avoid congestion of loading areas and trained traffic management personnel should be used to supervise loading/ unloading areas. For all buildings: Busy construction and demolition sites present a risk of collision where deliveries and other traffic are moving within the site. A traffic management plan supervised by trained traffic management personnel should be adopted for the work site.

4. SERVICES

GENERAL
Rupture of services during excavation or other activity creates a variety of risks including release of hazardous material. Existing services are located on or around this site. Where known, these are identified on the plans but the exact location and extent of services may vary from that indicated. Services should be located using appropriate service (such as Dial Before You Dig), appropriate excavation practice should be used and, where necessary, specialist contractors should be used. Locations with underground power: Underground power lines MAY be located in or around this site. All underground power lines must be disconnected or carefully located and adequate warning signs used prior to any construction, maintenance or demolition commencing. Locations with overhead power lines: Overhead power lines MAY be near or on this site. These pose a risk of electrocution if struck or approached by lifting devices or other plant and persons working above ground level. Where there is a danger of this occurring, power lines should be, where practical, disconnected or relocated. Where this is not practical adequate warning in the form of bright coloured tape or signage should be used or a protective barrier provided.

5. MANUAL TASKS

Components within this design with a mass in excess of 25kg should be lifted by two or more workers or by mechanical lifting device. Where this is not practical, suppliers or fabricators should be required to limit the component mass. All material packaging, building and maintenance components should clearly show the total mass of packages and where practical all items should be stored on site in a way which minimises bending before lifting. Advice should be provided on safe lifting methods in all areas where lifting may occur. Construction, maintenance and demolition of this building will require the use of portable tools and equipment. These should be fully maintained in accordance with manufacturer's specifications and not used where faulty or (in the case of electrical equipment) not carrying a current electrical safety tag. All safety guards or devices should be regularly checked and Personal Protective Equipment should be used in accordance with manufacturer's specification.

6. HAZARDOUS SUBSTANCES

ASBESTOS
For alterations to a building constructed prior to 1990:
If this existing building was constructed prior to:
1990 - it therefore may contain asbestos
1986 - it therefore is likely to contain asbestos
either in cladding material or in fire retardant insulation material. In either case, the builder should check and, if necessary, take appropriate action before demolishing, culling, sanding, drilling or otherwise disturbing the existing structure.

POWDERED MATERIALS
Many materials used in the construction of this building can cause harm if inhaled in powdered form. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation while using powdered material or when sanding, drilling, cutting or otherwise disturbing or creating powdered material.

TREATED TIMBER
The design of this building may include provision for the inclusion of treated timber within the structure. Dust or fumes from this material can be harmful. Persons working on or in the building during construction, operational maintenance or demolition should ensure good ventilation and wear Personal Protective Equipment including protection against inhalation of harmful material when sanding, drilling, cutting or using treated timber in any way that may cause harmful material to be released. Do not burn treated timber.

VOLATILE ORGANIC COMPOUNDS
Many types of glue, solvents, spray packs, paints, varnishes and some cleaning materials and disinfectants have dangerous emissions. Areas where these are used should be kept well ventilated while the material is being used and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

SYNTHETIC MINERAL FIBRE
Fibreglass, rockwool, ceramic and other material used for thermal or sound insulation may contain synthetic mineral fibre which may be harmful if inhaled or if it comes in contact with the skin, eyes or other sensitive parts or the body. Personal Protective Equipment including protection against inhalation of harmful material should be used when installing, removing or working near bulk insulation material.

TIMBER FLOORS
This building may contain timber floors which have an applied finish. Areas where finishes are applied should be kept well ventilated during sanding and application and for a period after installation. Personal Protective Equipment may also be required. The manufacturer's recommendations for use must be carefully considered at all times.

7. CONFINED SPACES

EXCAVATION
Construction of this building and some maintenance on the building will require excavation and installation of items within excavations. Where practical, installation should be carried out using methods which do not require workers to enter the excavation. Where this is not practical, adequate support for the excavated area should be provided to prevent collapse. Warning signs and barriers to prevent accidental or unauthorised access to all excavations should be provided.

ENCLOSED SPACES
For buildings with enclosed spaces where maintenance or other access may be required: Enclosed spaces within this building may present a risk to persons entering for construction, maintenance or any other purpose. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter enclosed spaces, air testing equipment and Personal Protective Equipment should be provided.

SMALL SPACES
For buildings with small spaces where maintenance or other access may be required: Some small spaces within this building will require access by construction or maintenance workers. The design documentation calls for warning signs and barriers to unauthorised access. These should be maintained throughout the life of the building. Where workers are required to enter small spaces they should be scheduled so that access is for short periods. Manual lifting and other manual activity should be restricted in small spaces.

8. PUBLIC ACCESS
Public access to construction and demolition sites and to areas under maintenance causes risk to workers and public. Warning signs and secure barriers to unauthorised access should be provided. Where electrical installations, excavations, plant or loose materials are present they should be secured when not fully supervised.

9. OPERATIONAL USE OF BUILDING RESIDENTIAL BUILDINGS
This building has been designed as a residential building. If it, at a later date, is used or intended to be used as a workplace, the provisions of the Work Health and Safety Act 2011 or subsequent replacement Act should be applied to the new use.


NON-RESIDENTIAL BUILDINGS
For non-residential buildings where the end-use has not been identified: This building has been designed to requirements of the classification identified on the drawings. The specific, use of the building is not known at the time of the design and a further assessment of the workplace health and safety issues should be undertaken at the time of fit-out for the end-user. For non-residential buildings where the end-use is known: This building has been designed for the specific use as identified on the drawings. Where a change of use occurs at a later date a further assessment of the workplace health and safety issues should be undertaken.

10. OTHER HIGH RISK ACTIVITY
All electrical work should be carried out in accordance with Code of Practice: Managing Electrical Risks at the Workplace, AS/ NZ 3012 and all licensing requirements. All work using Plant should be carried out in accordance with Code of Practice: Managing Risks of Plant at the Workplace. All work should be carried out in accordance with Code of Practice: Managing Noise and Preventing Hearing Loss at Work. Due to the history of serious incidents it is recommended that particular care be exercised when undertaking work involving steel construction and concrete placement. All the above applies.





**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

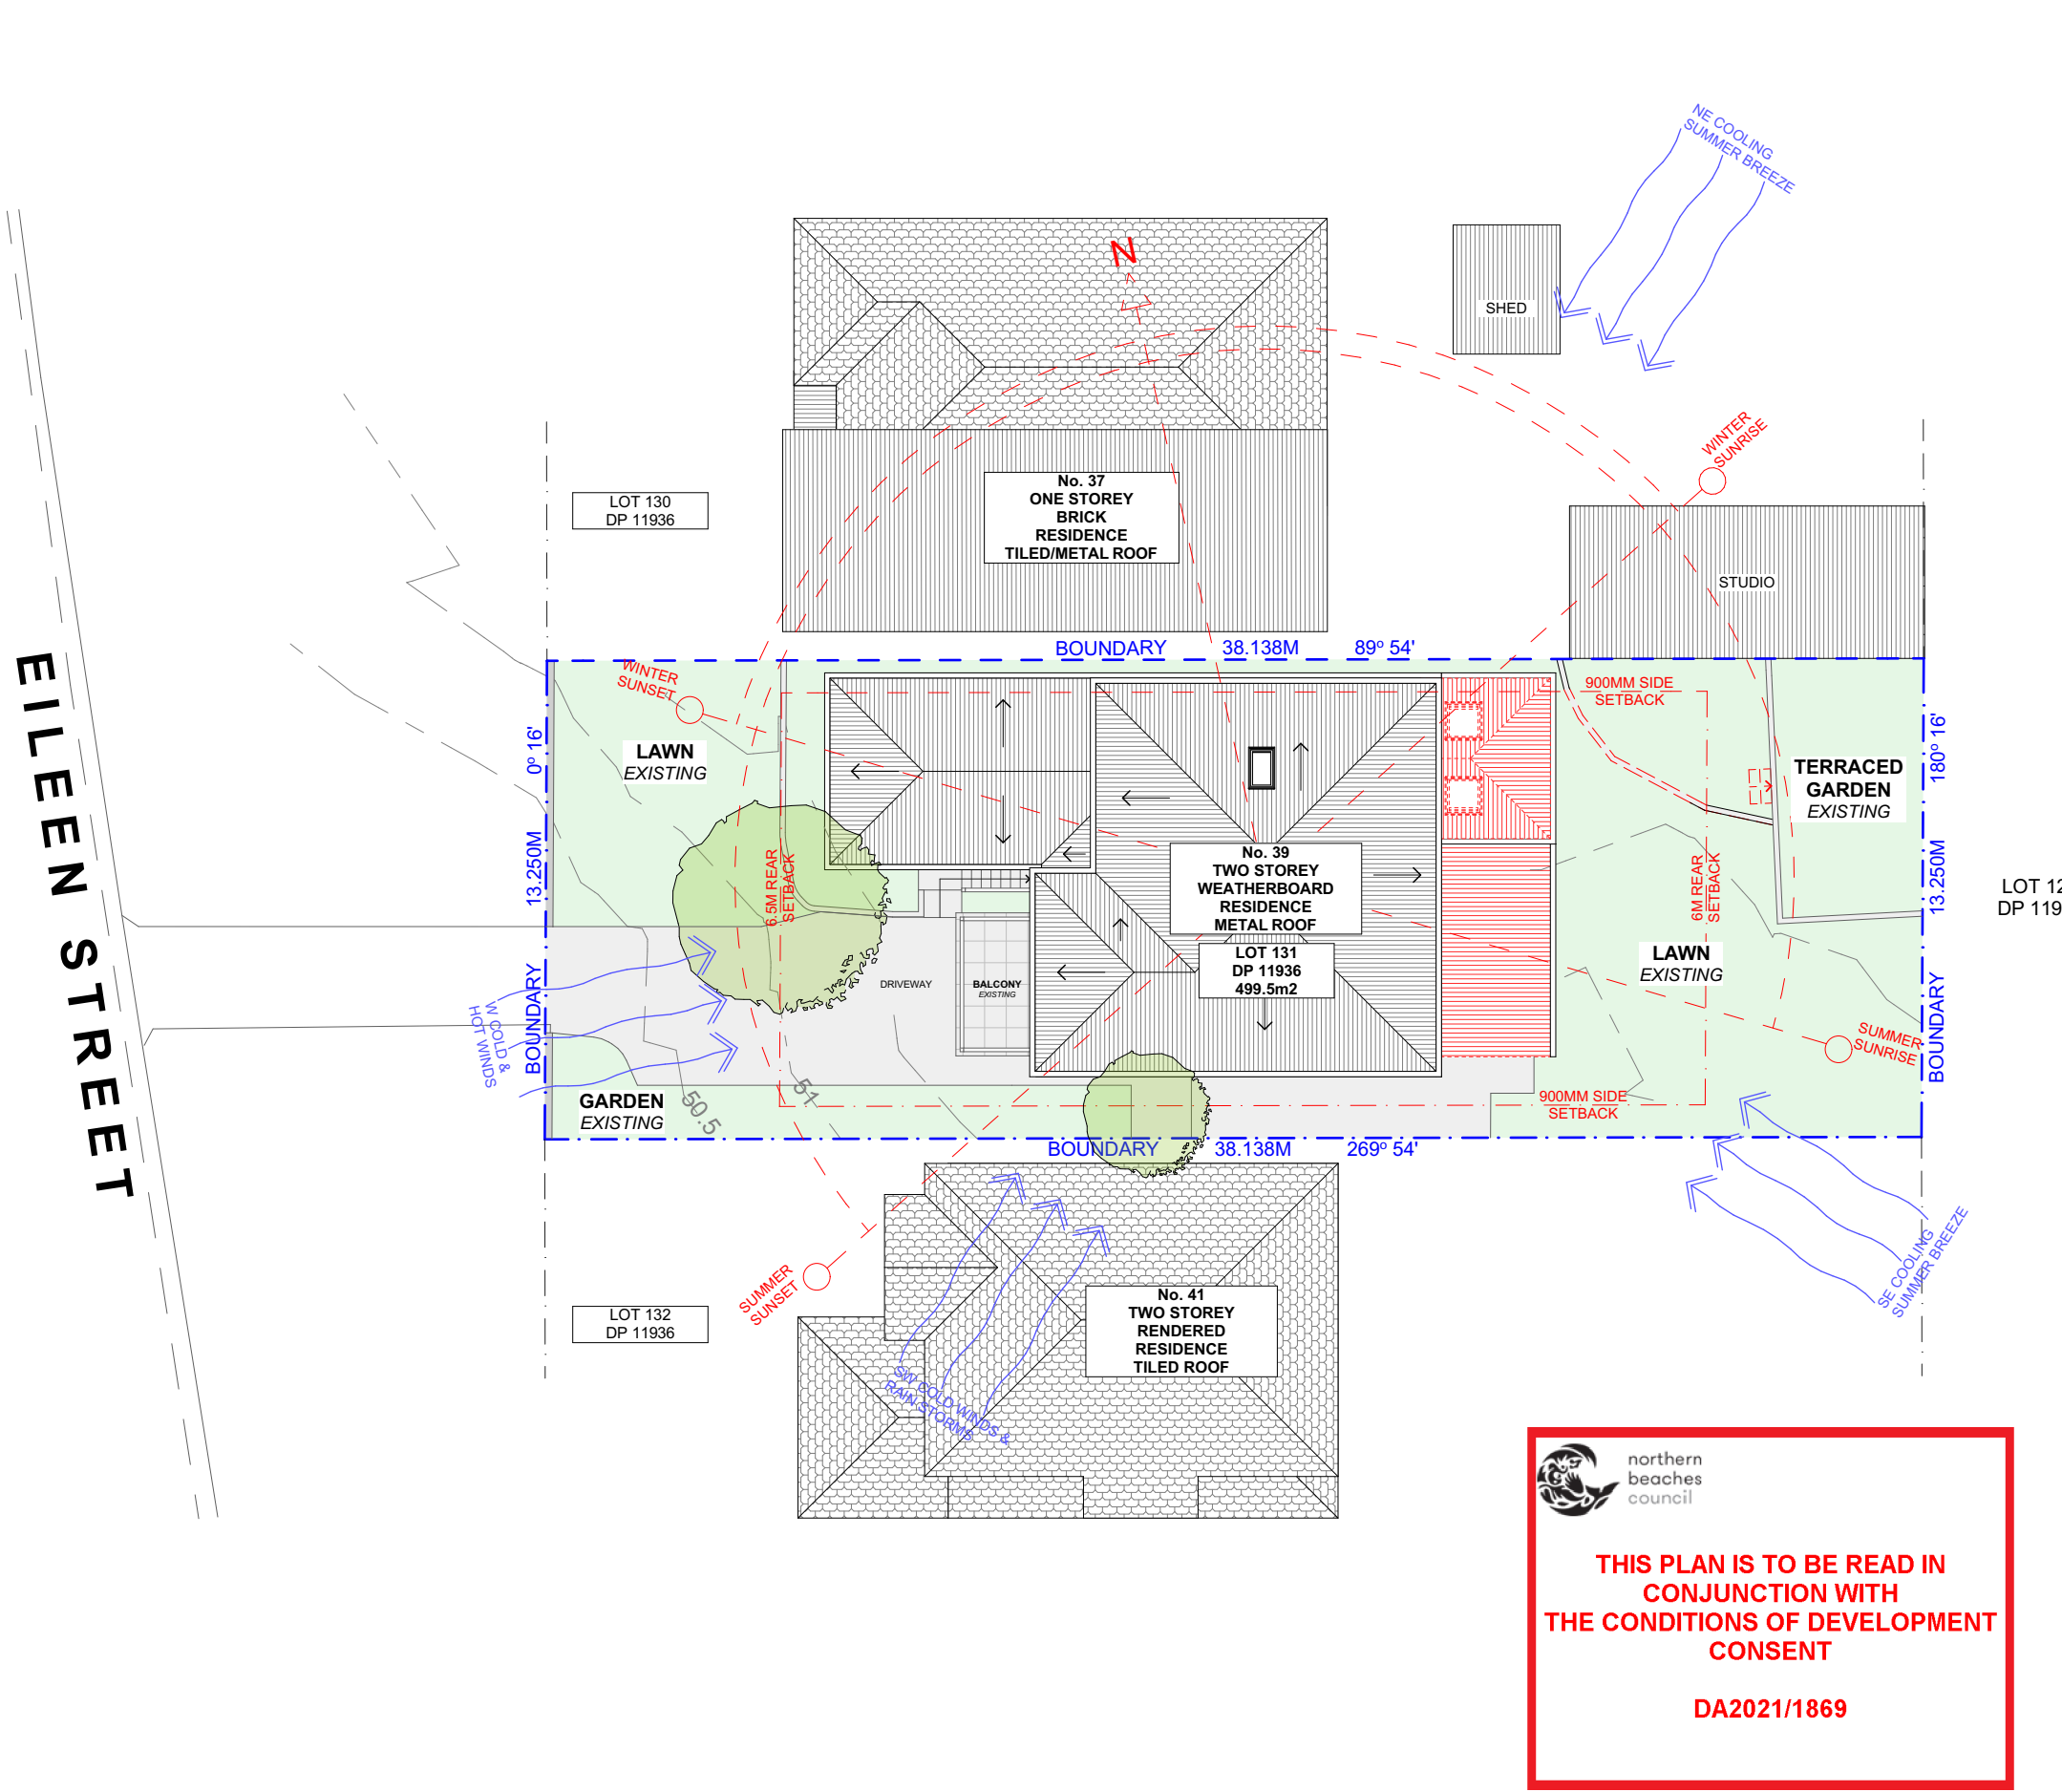

NOTE: ALL DEMOLISHED ELEMENTS TO ENG. SPECIFICATIONS AND AS. 2601 - 2001

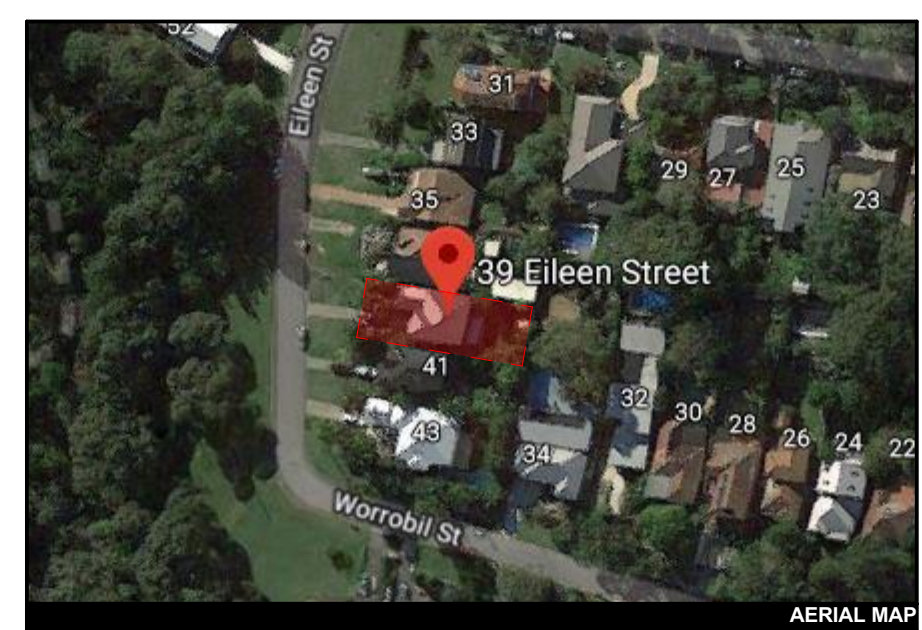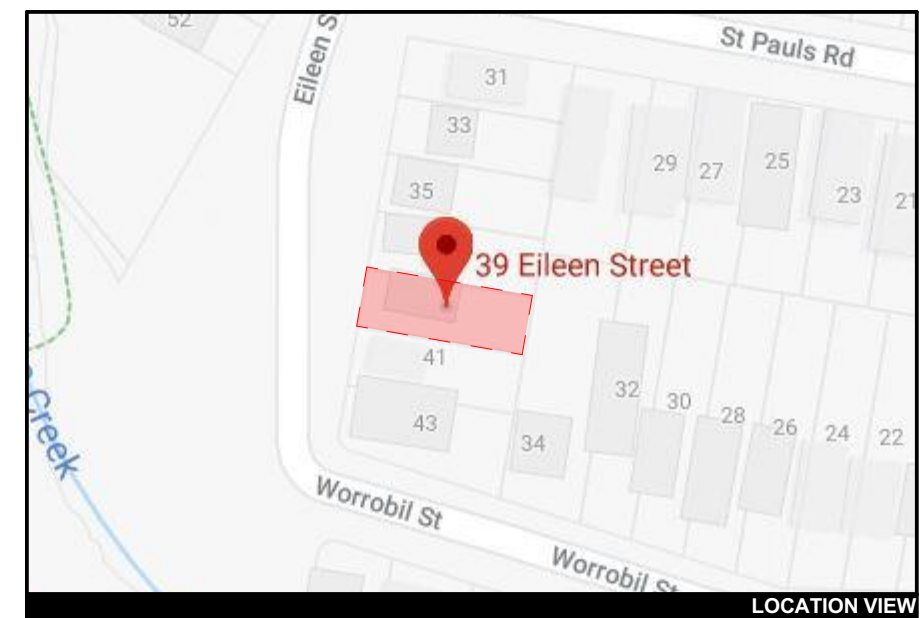



EILEEN STREET



northern
beaches
council

THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

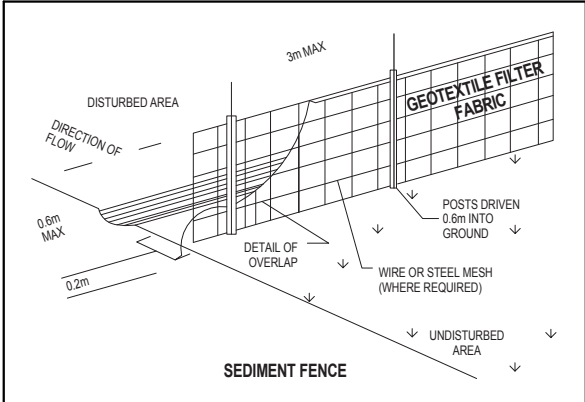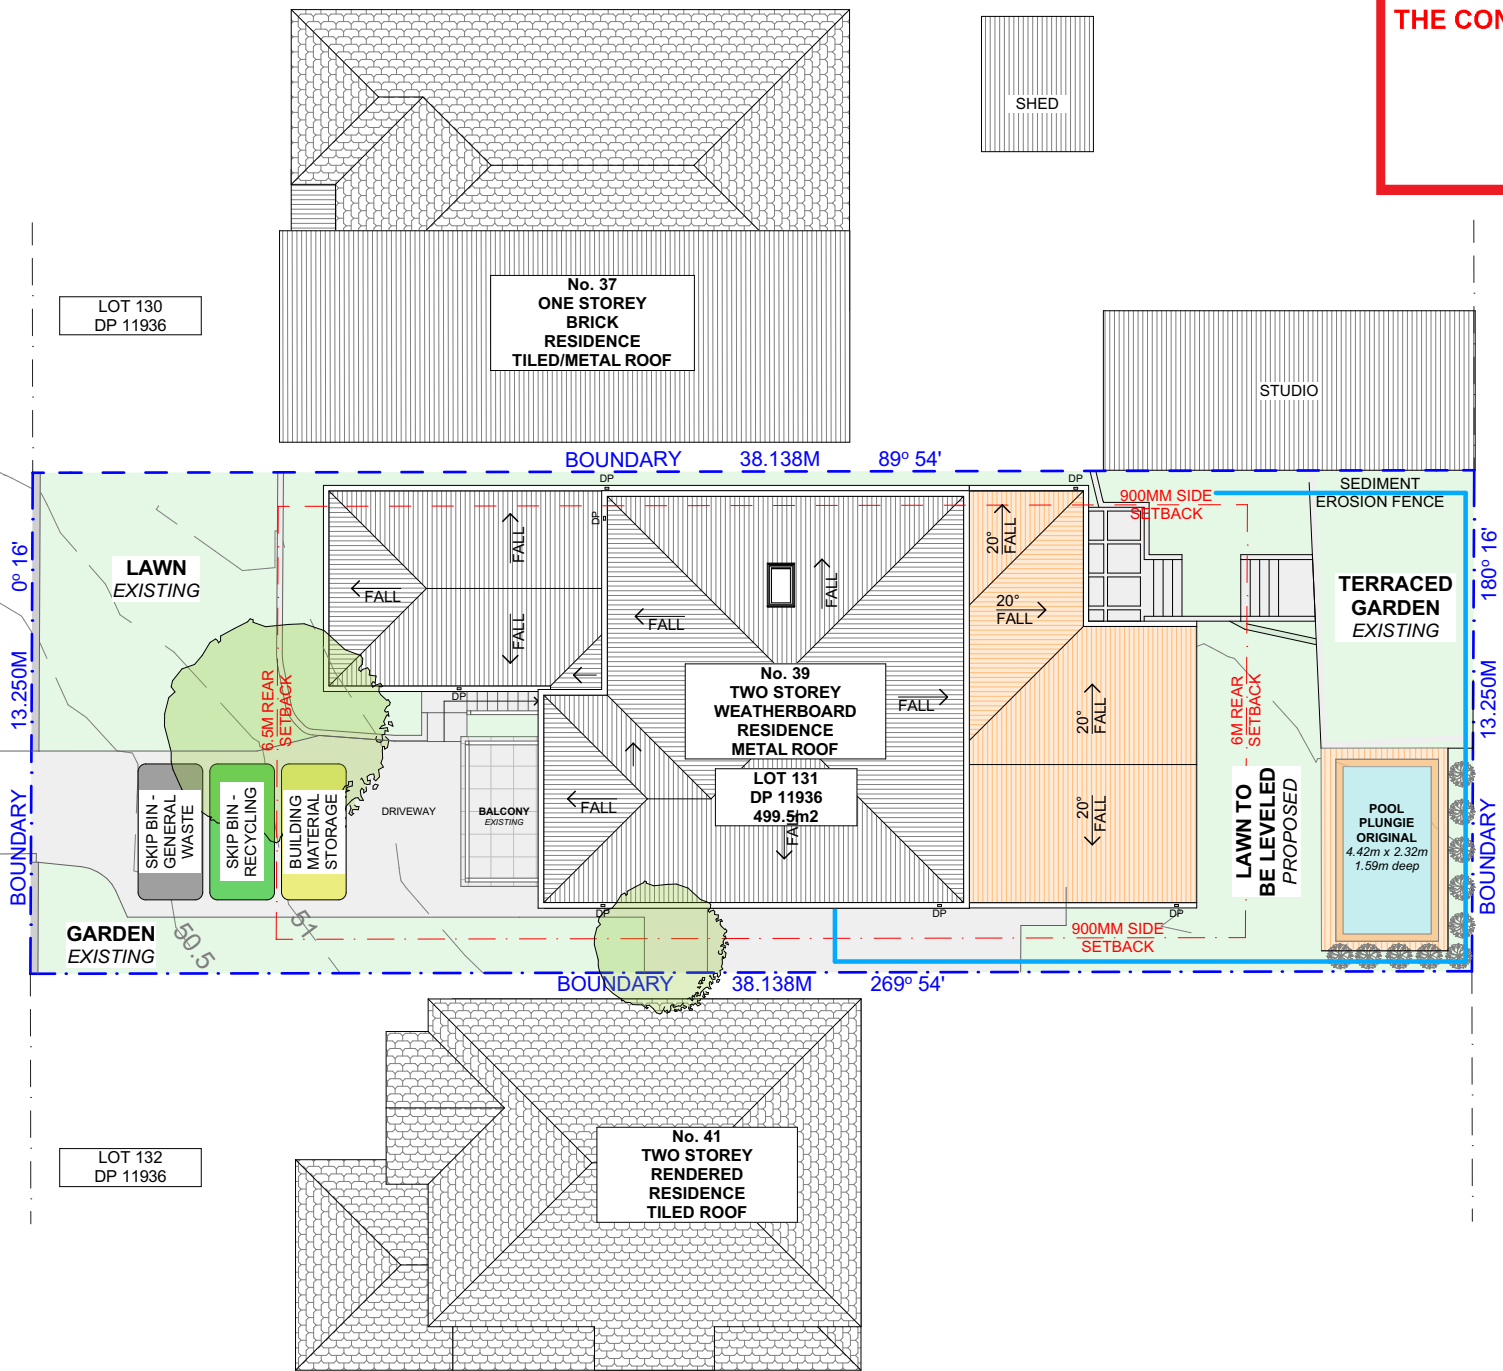

DUST CONTROL :
TO REDUCE DUST GENERATED BY WIND ACTION, THE REMOVAL OF THE TOP SOIL IS TO BE MINIMISED. TO PREVENT DUST GENERATION, WATERING DOWN OF THE SITE, ESPECIALLY DURING THE MOVEMENT OF MACHINERY IS REQUIRED. WHERE EXCAVATING INTO ROCK, KEEP THE SURFACE MOIST TO MINIMISE DUST. CONSTRUCT A GRAVEL ENTRY/EXIT POINT USING BLUE METAL AND RESTRICT ALL VEHICLE MOVEMENTS WITHIN THE SITE TO A MINIMUM. ENSURE WIND BREAKS, SUCH AS EXISTING FENCES ARE MAINTAINED DURING THE CONSTRUCTION PHASE UNTIL NEW LANDSCAPING IS PROVIDED OR REINSTATED. PREVENT DUST BY COVERING STOCKPILES

SEDIMENT NOTE :
1. ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSPECTED AND MAINTAINED DAILY BY THE SITE MANAGER.
2. MINIMISE DISTURBED AREAS, REMOVE EXCESS SOIL FROM EXCAVATED AREA AS SOON AS POSSIBLE.
3. ALL MATERIAL STOCKPILE TO BE CLEAR FROM DRAINS, GUTTERS AND FOOTPATHS, OR WITHIN SEDIMENT FENCE AREA.
4. DRAINAGE TO BE CONNECTED TO STORMWATER AS SOON AS POSSIBLE. IF STORED ON SITE, IT MUST BE FILTERED BEFORE RELEASING INTO STORMWATER SYSTEM OR WATERWAYS.
5. ROADS AND FOOTPATHS TO BE SWEEPED DAILY.

STOCKPILES :
ALL STOCKPILES ARE TO BE KEPT ON-SITE WHERE POSSIBLE. ANY MATERIALS PLACED ON THE FOOTPATHS OR NATURE STRIPS REQUIRE COUNCIL'S PERMISSION.
ALL STOCKPILES ARE TO BE PLACED AWAY FROM THE DRAINAGE LINES AND STREET GUTTERS. IT IS BEST TO LOCATE THESE ON THE HIGHEST PART OF THE SITE IF POSSIBLE. PLACE WATERPROOF COVERING OVER STOCKPILES.
IF REQUIRED PROVIDE DIVERSION DRAIN & BANK AROUND STOCKPILES.

GUTTER PROTECTION :
PROVIDE PROTECTION TO DOWNHILL GRATE IN GUTTER BY MEANS OF SAND BAGS OR BLUE METAL WRAPPED IN GEOTEXTILE FABRIC. WHEN SOIL OR SAND BUILDS UP AROUND THIS SEDIMENT BARRIER, THE MATERIAL SHOULD BE RELOCATED BACK TO THE SITE FOR DISPOSAL.

NOTE: ALL PROPOSED STORMWATER TO CONNECT WITH EXISTING



ACTION PLANS

m: 0426 957 518
e: operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND

- EXISTING STRUCTURE
- NEW STRUCTURE
- DEMOLISHED ITEMS

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA04

DATE


Friday, 14 May 2021

DRAWING NAME

SITE / ROOF / SEDIMENT
EROSION / WASTE
MANAGEMENT / STORMWATER
CONCEPT PLAN

SCALE

1:200 @A3






northern
beaches
council

THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

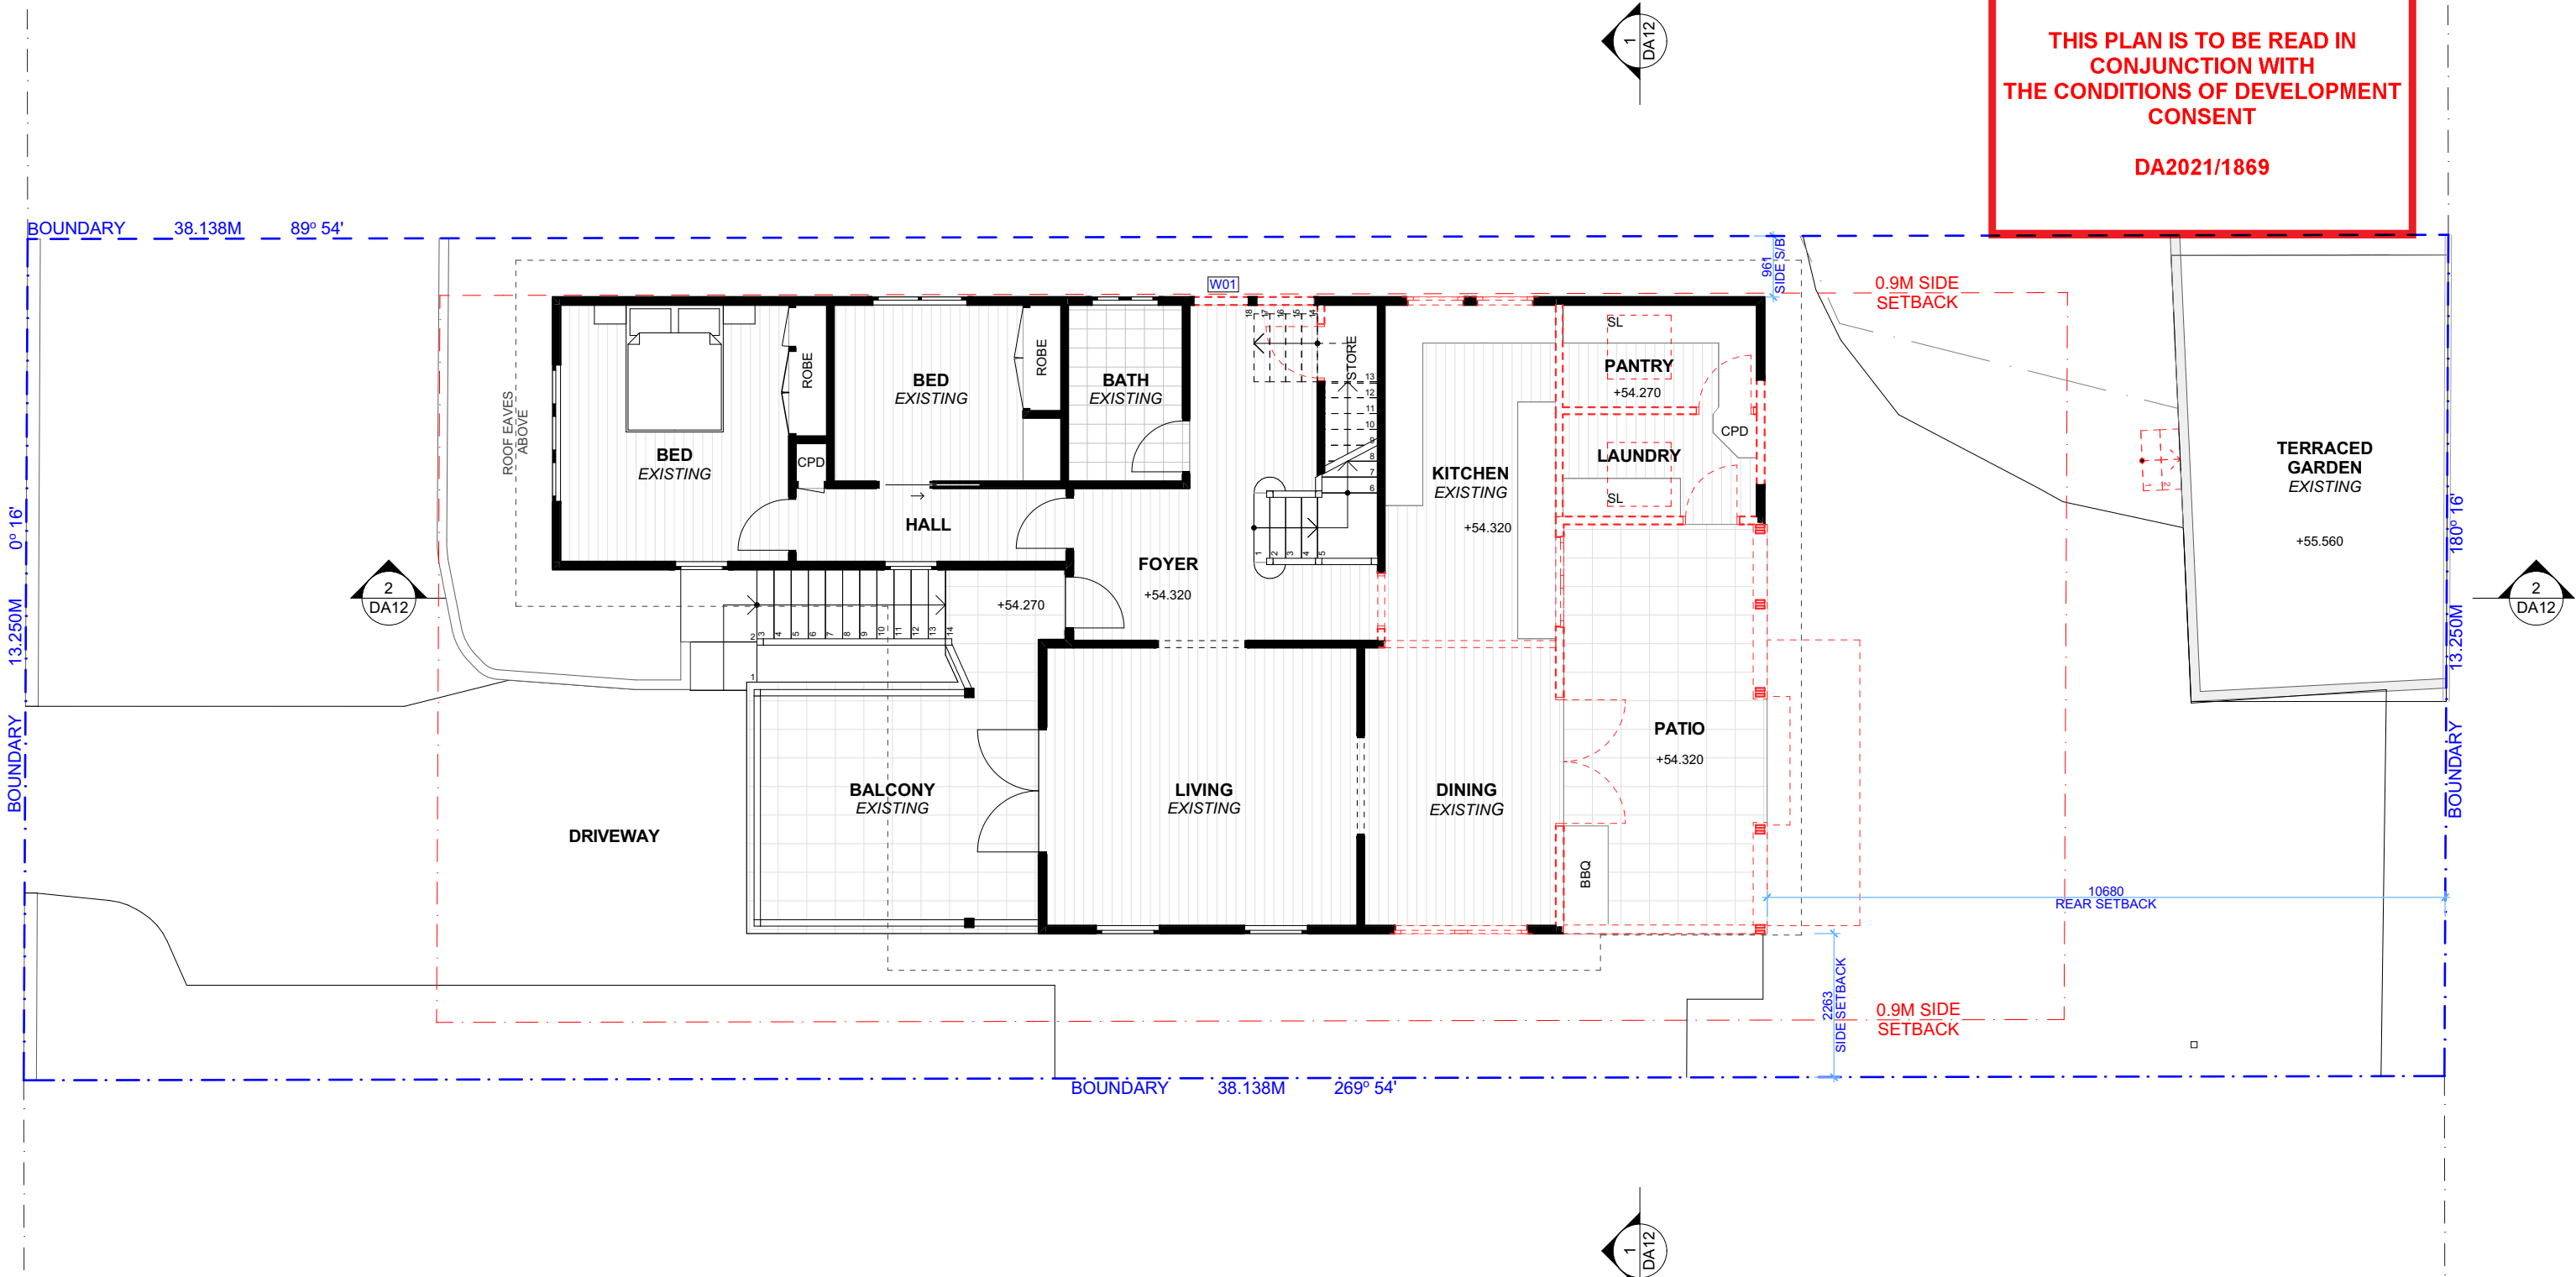


NOTE: ALL DEMOLISHED ELEMENTS TO ENG. SPECIFICATIONS AND AS. 2601 - 2001



northern
beaches
council

THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

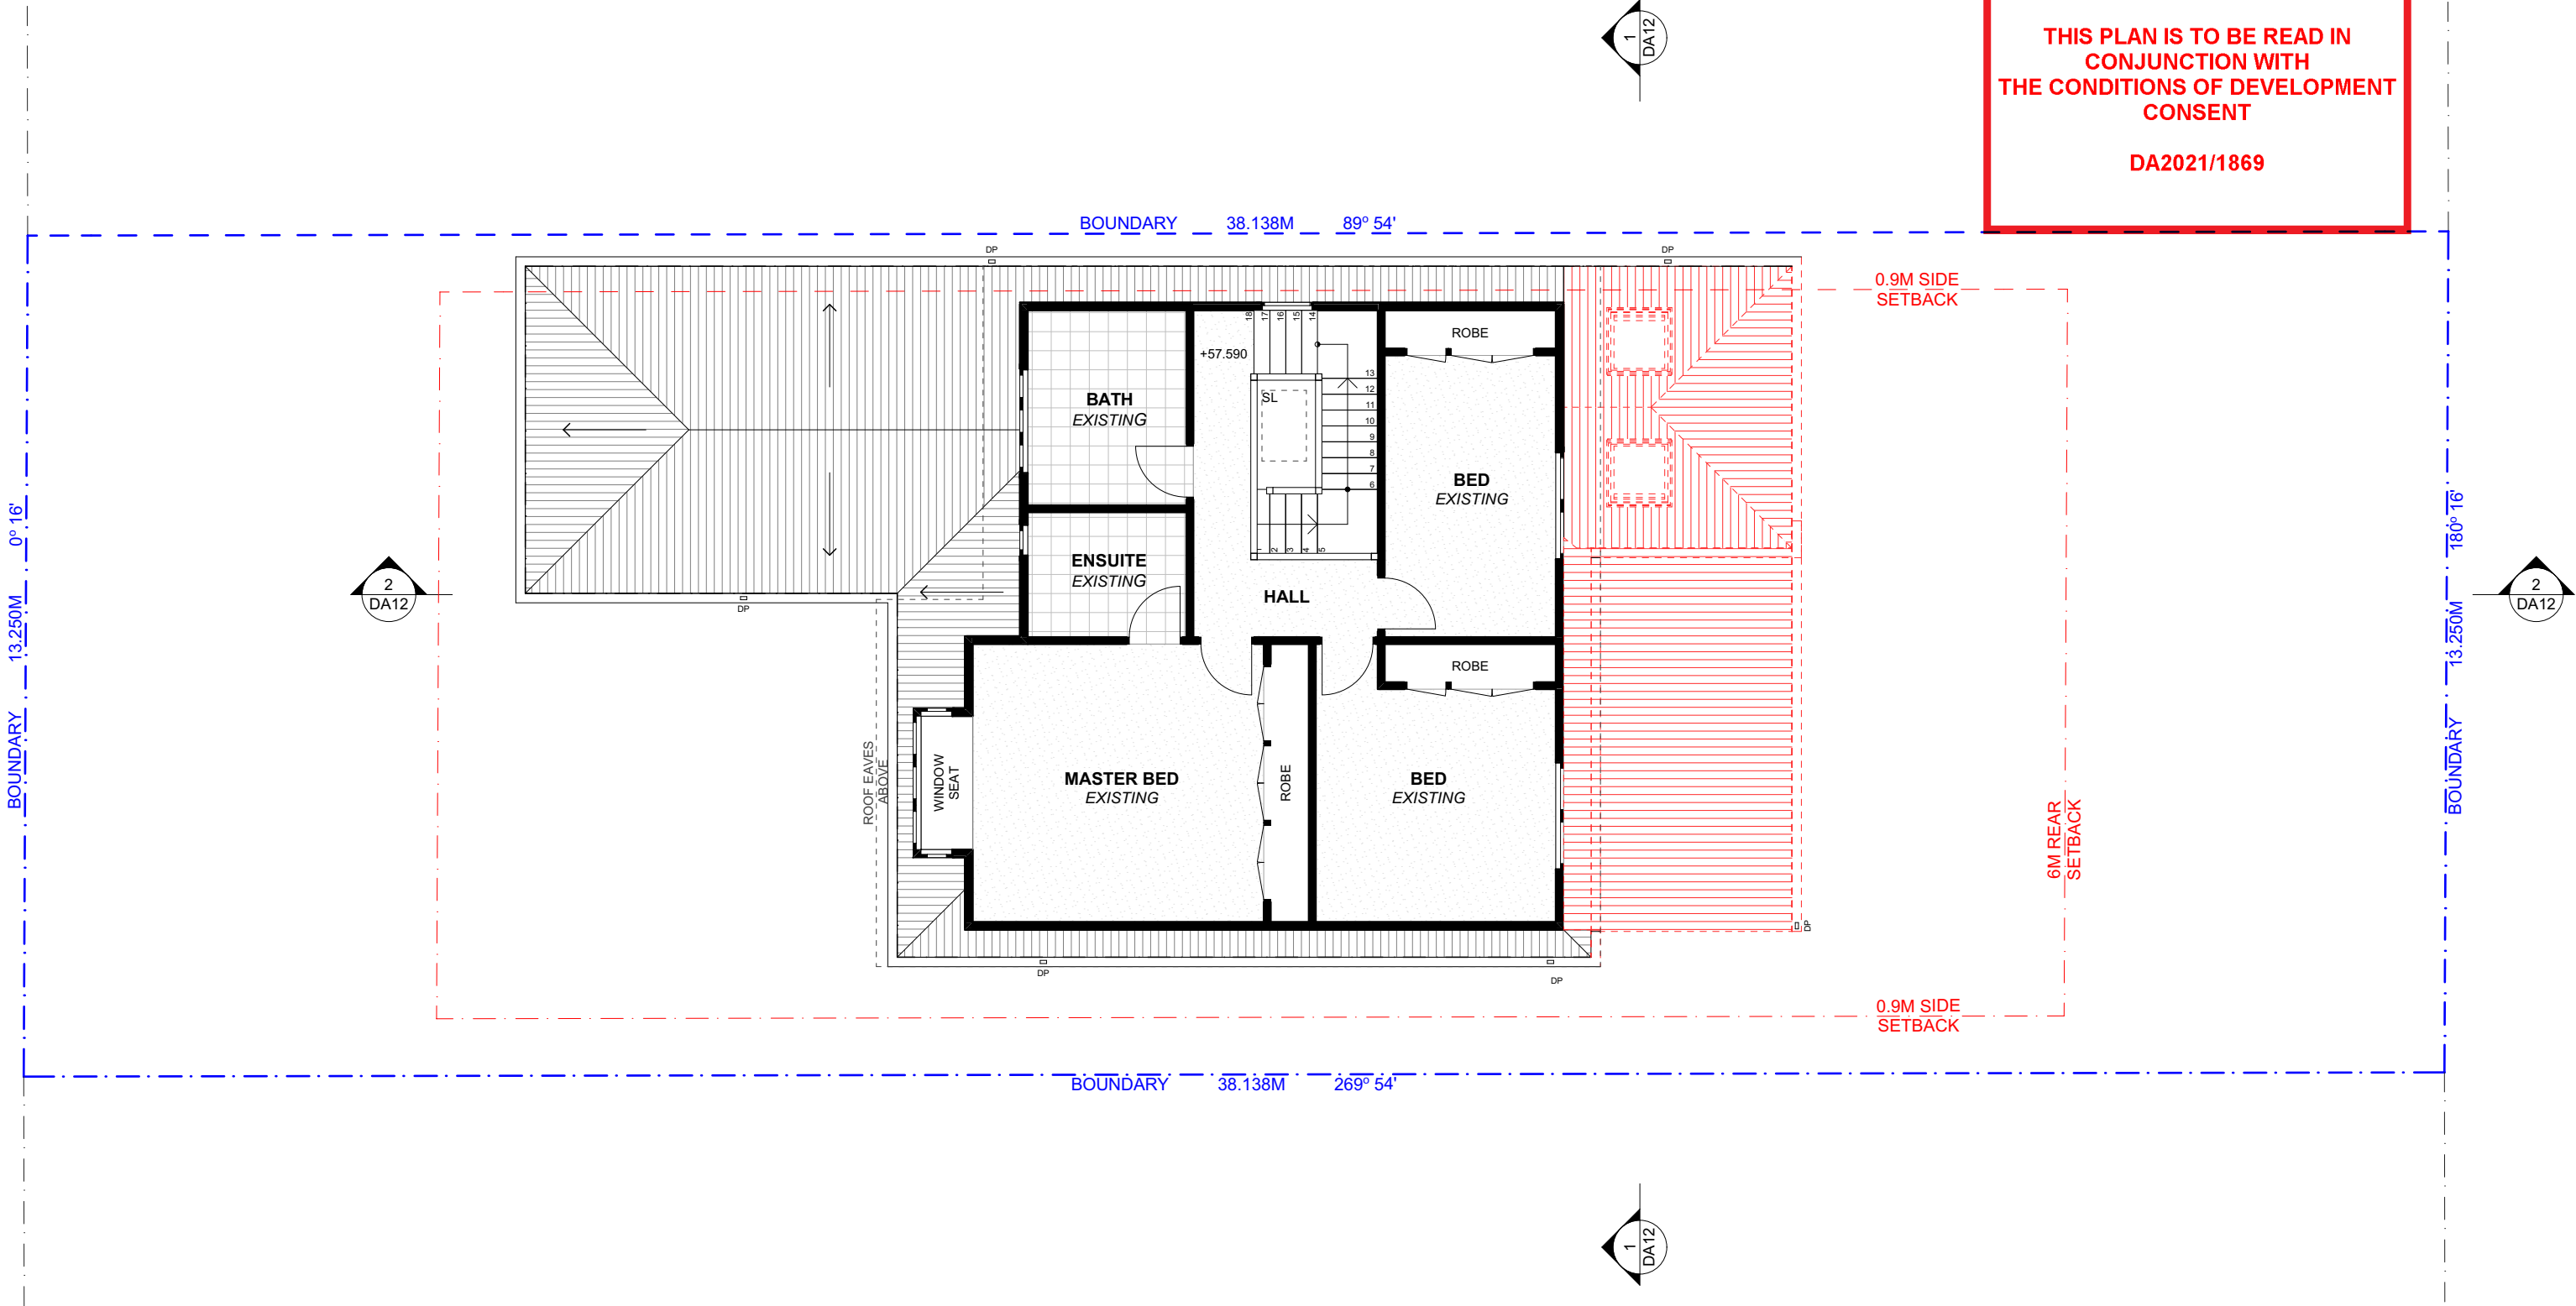

NOTE: ALL DEMOLISHED ELEMENTS TO ENG. SPECIFICATIONS AND AS. 2601 - 2001



ACTION PLANS

m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09/04/2021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND

- EXISTING STRUCTURE
- NEW STRUCTURE
- DEMOLISHED ITEMS

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA07

DATE


Friday, 14 May 2021

DRAWING NAME

EXISTING FIRST FLOOR PLAN


SCALE

1:100 @A3



THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

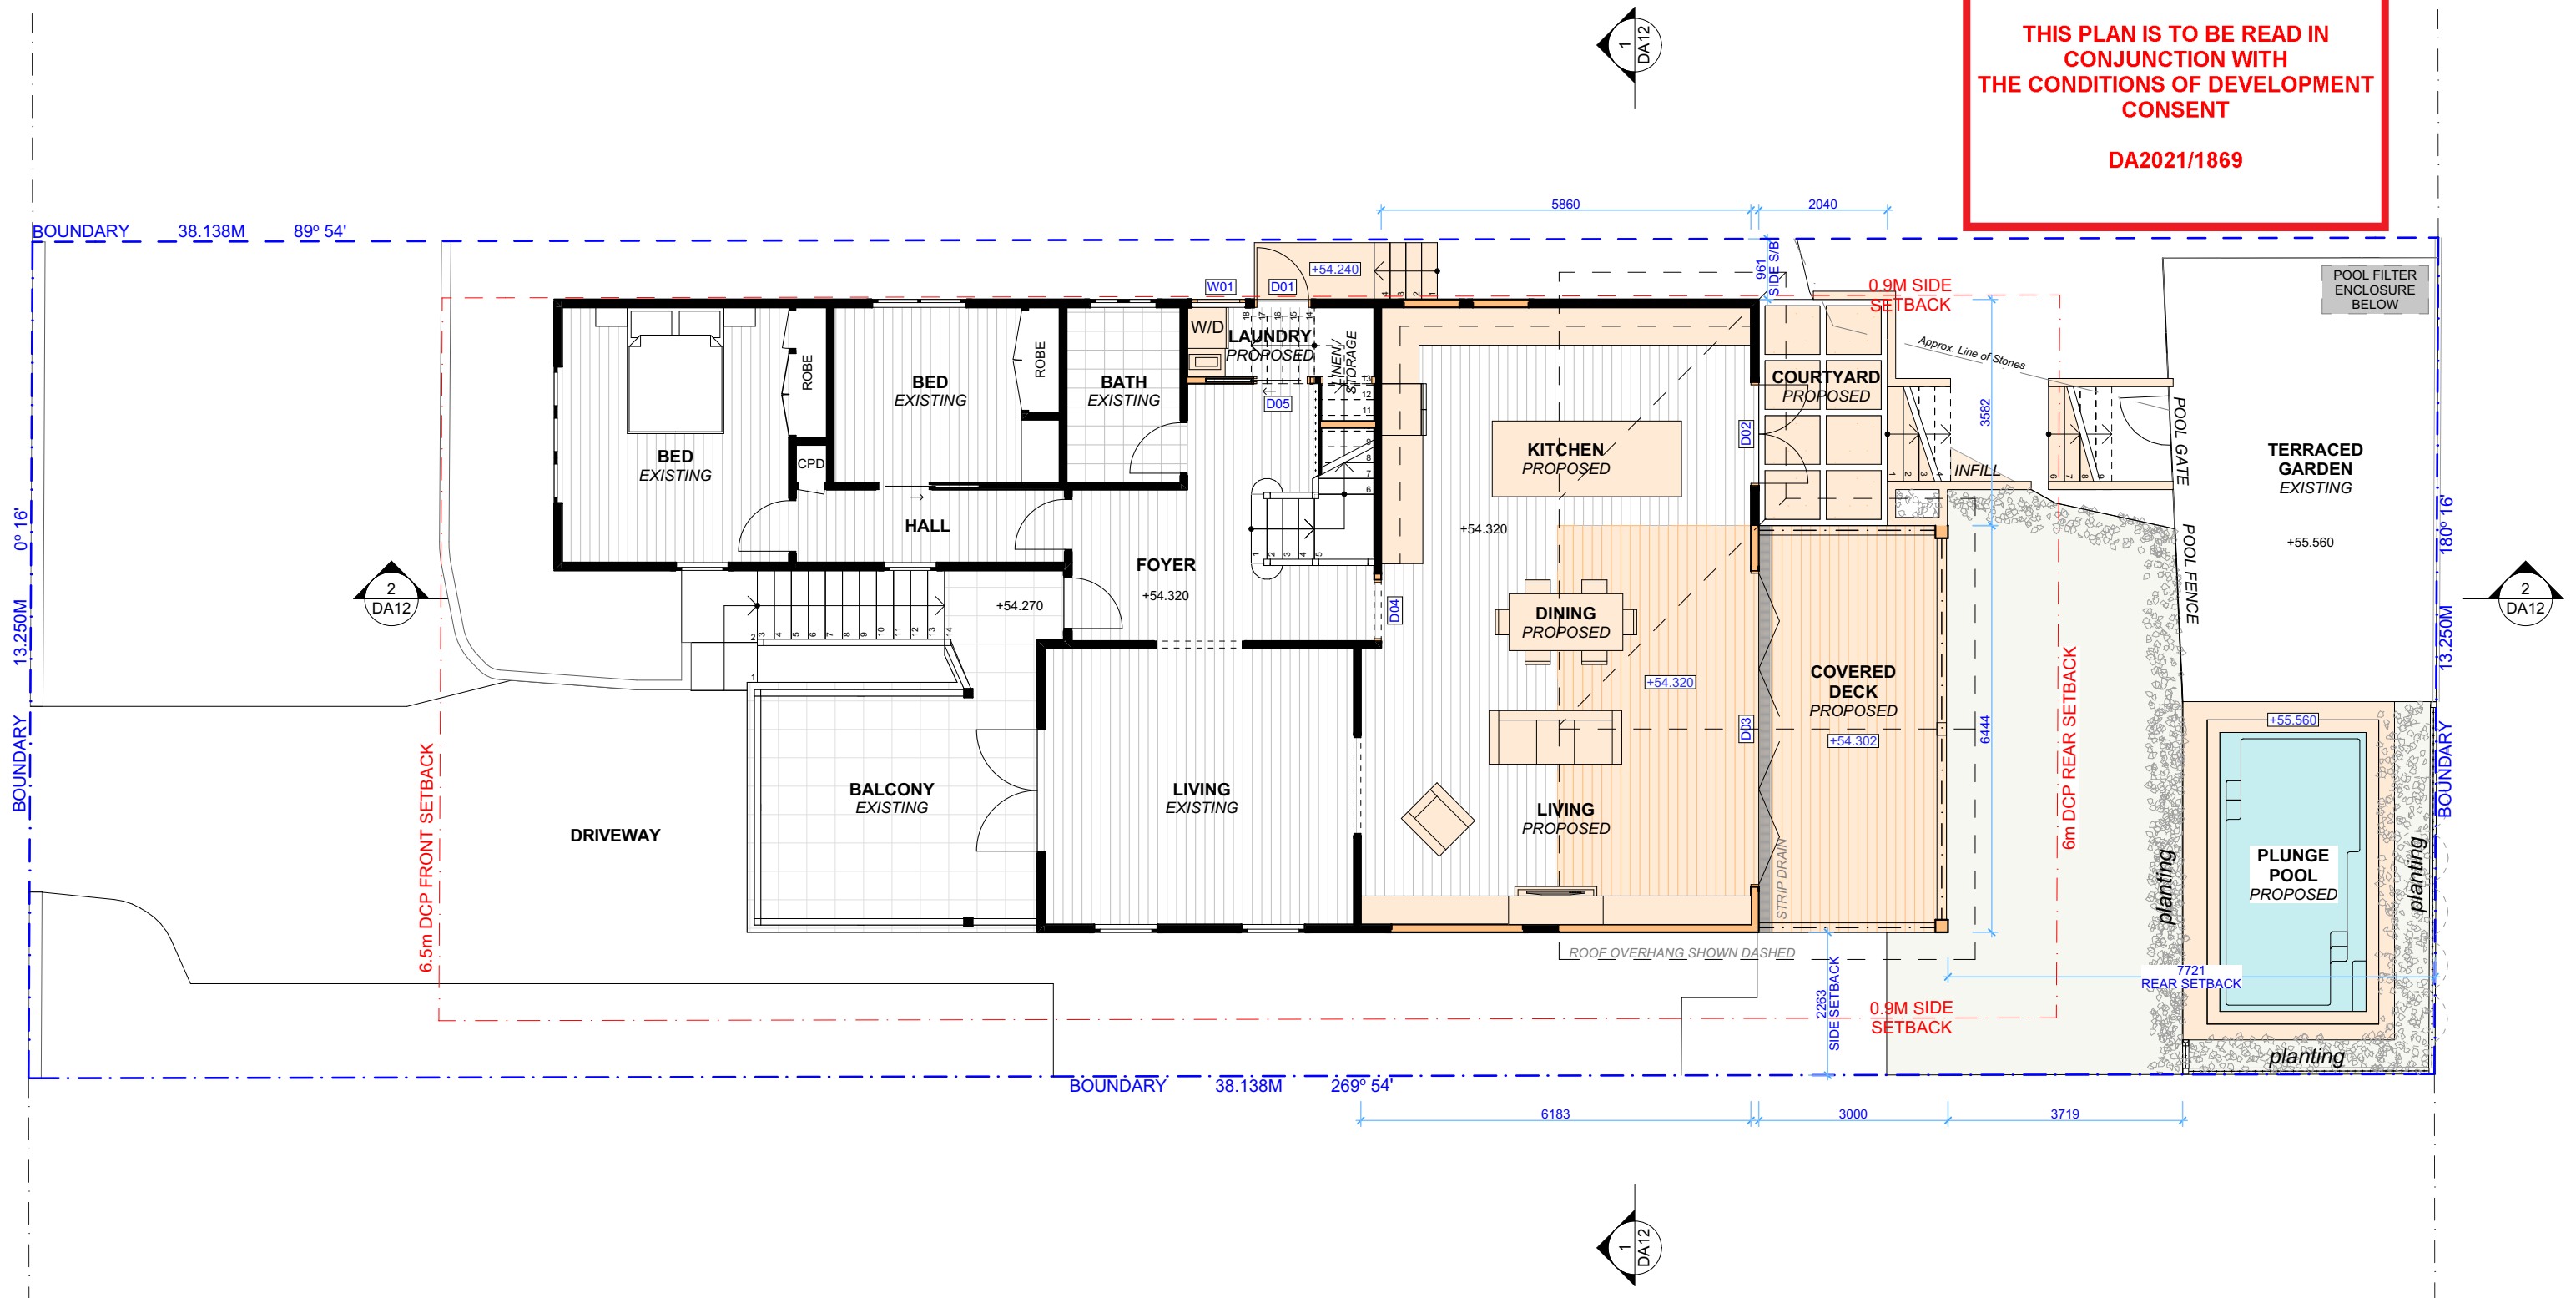

NOTE:
PLANTING WITHIN THE VICINITY OF THE POOL ENCLOSURE
MUST BE OF A SPECIES / STYLE THAT WILL COMPLY WITH (AS 1926.1)
TO ENSURE THAT THERE ARE **NO** CLIMBABLE / FOOTHOLD FEATURES.
BOUNDARY FENCES MUST BE 1.8M HIGH ABOVE FINISHED POOL ENCLOSURE
LEVEL MEASURED 500MM OUTWARDS FROM THE BASE OF THIS FENCE.



ACTION PLANS




m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND

-  EXISTING STRUCTURE
-  NEW STRUCTURE
-  DEMOLISHED ITEMS

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA08

DATE


Friday, 14 May 2021

DRAWING NAME

PROPOSED GROUND FLOOR
PLAN

SCALE


1:100 @A3





THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

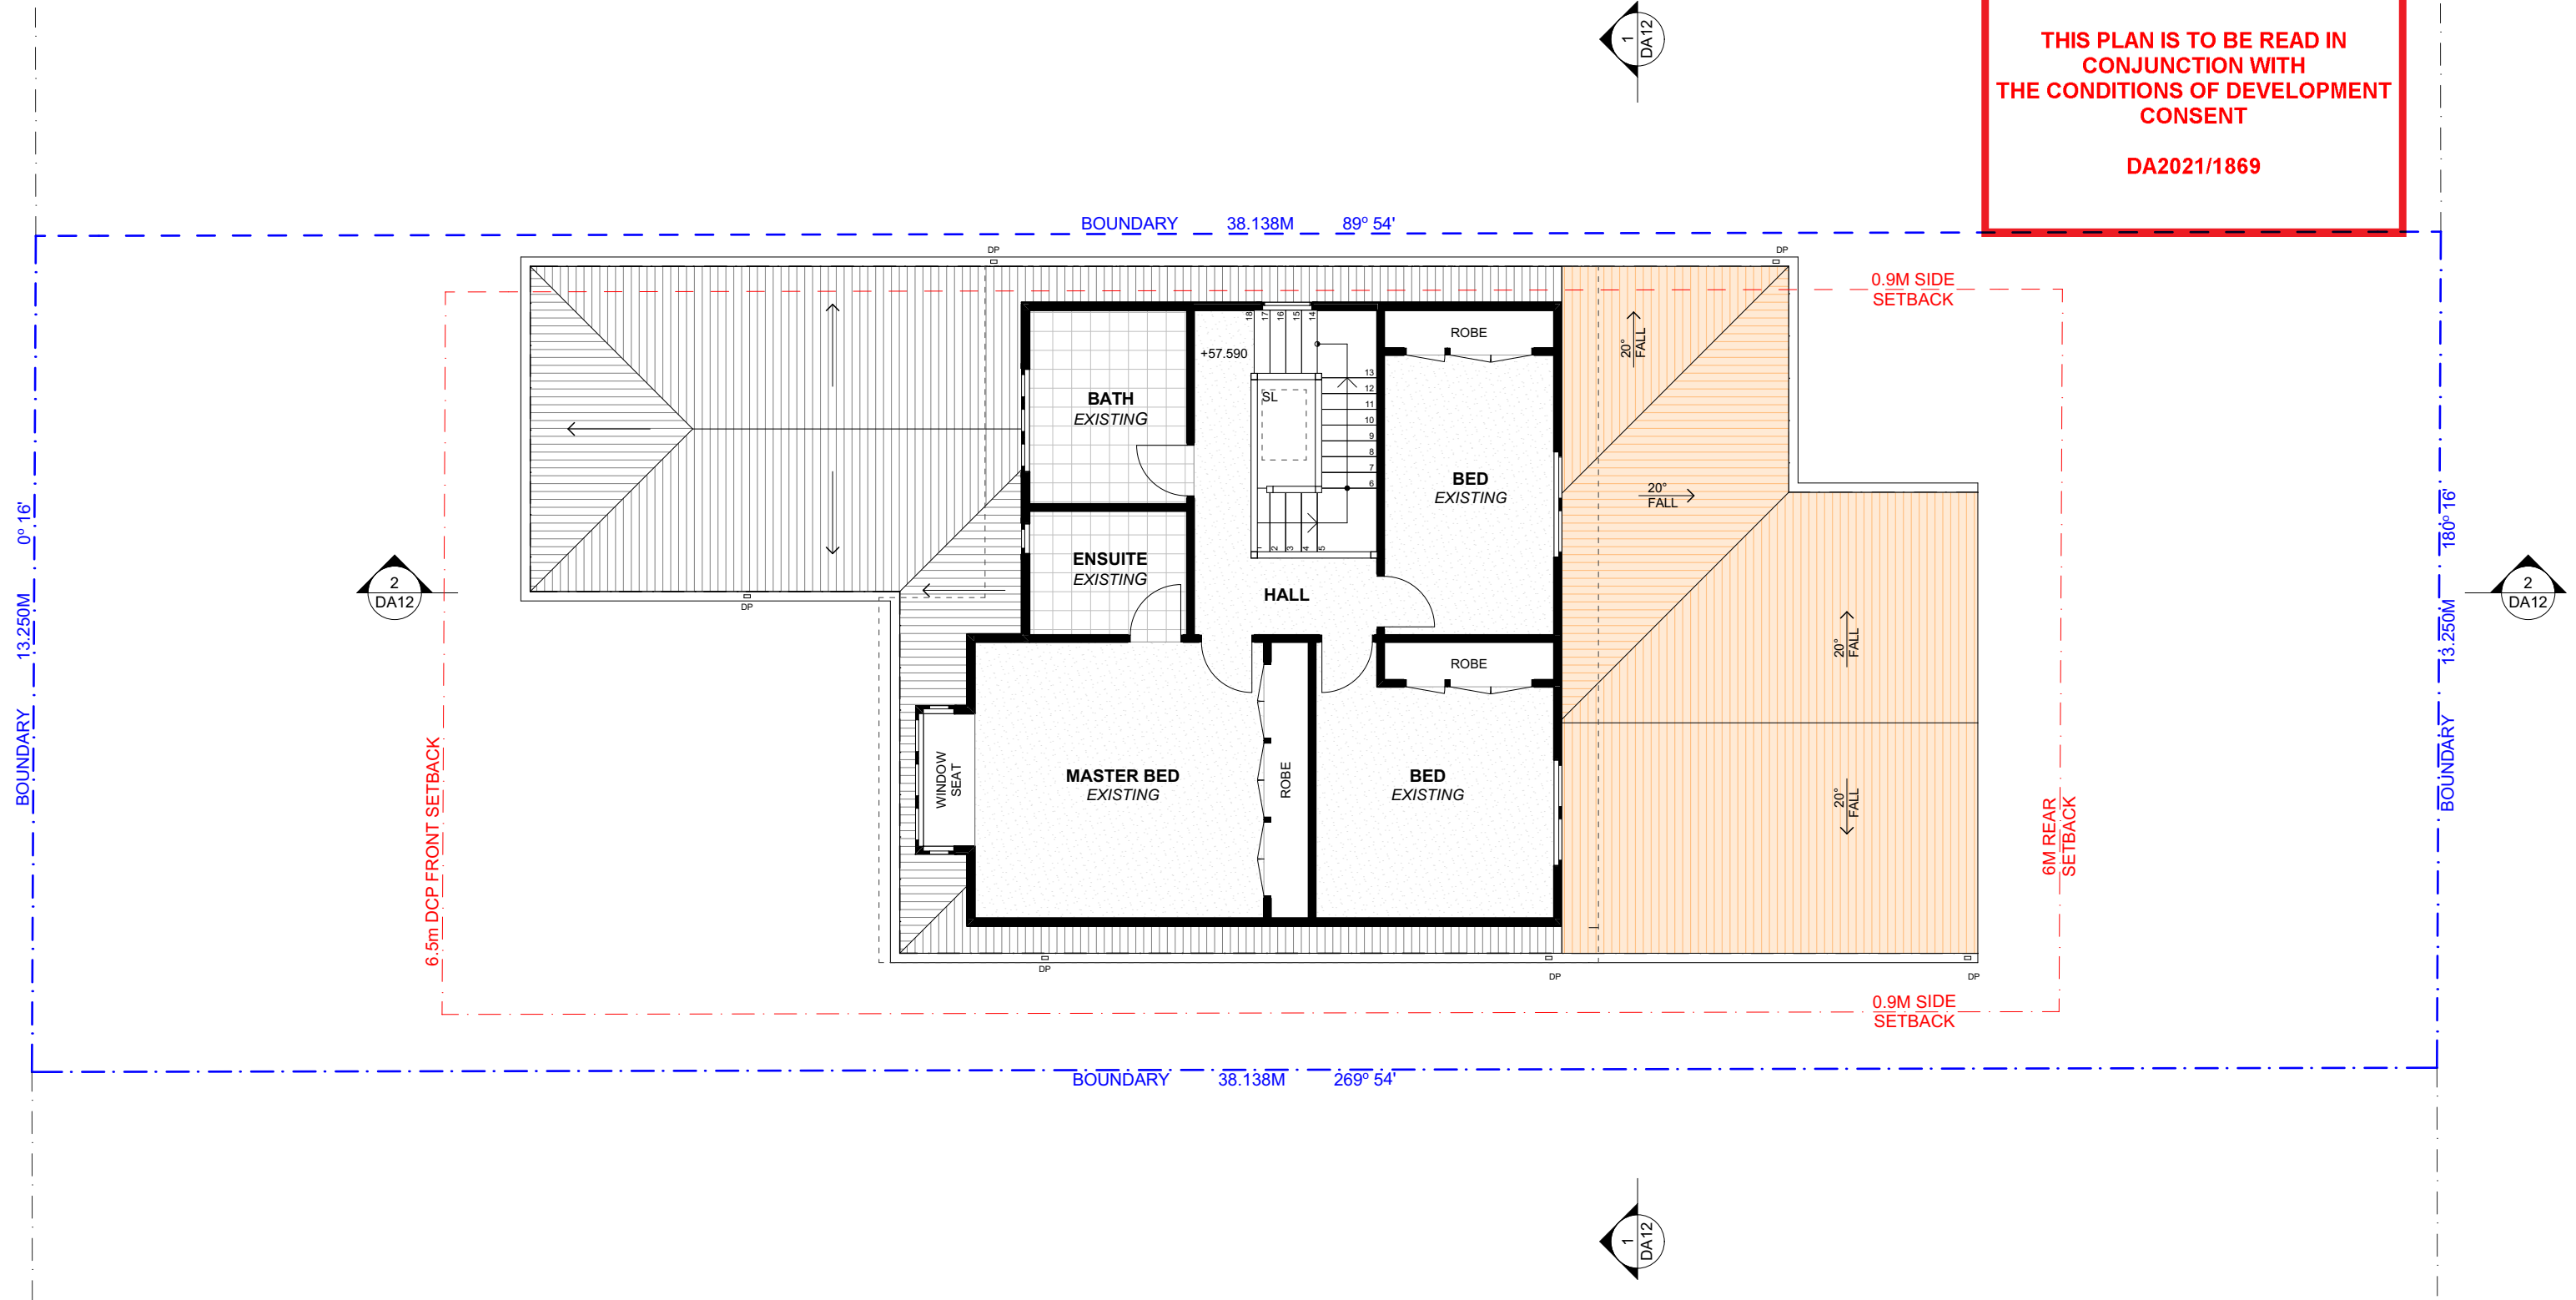

ACTION PLANS

m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09/04/2021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do not scale on drawings. Use figured dimensions.

LEGEND

- EXISTING STRUCTURE
- NEW STRUCTURE
- DEMOLISHED ITEMS

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA09

DATE


Friday, 14 May 2021


DRAWING NAME

PROPOSED FIRST FLOOR
PLAN

SCALE

1:100 @A3




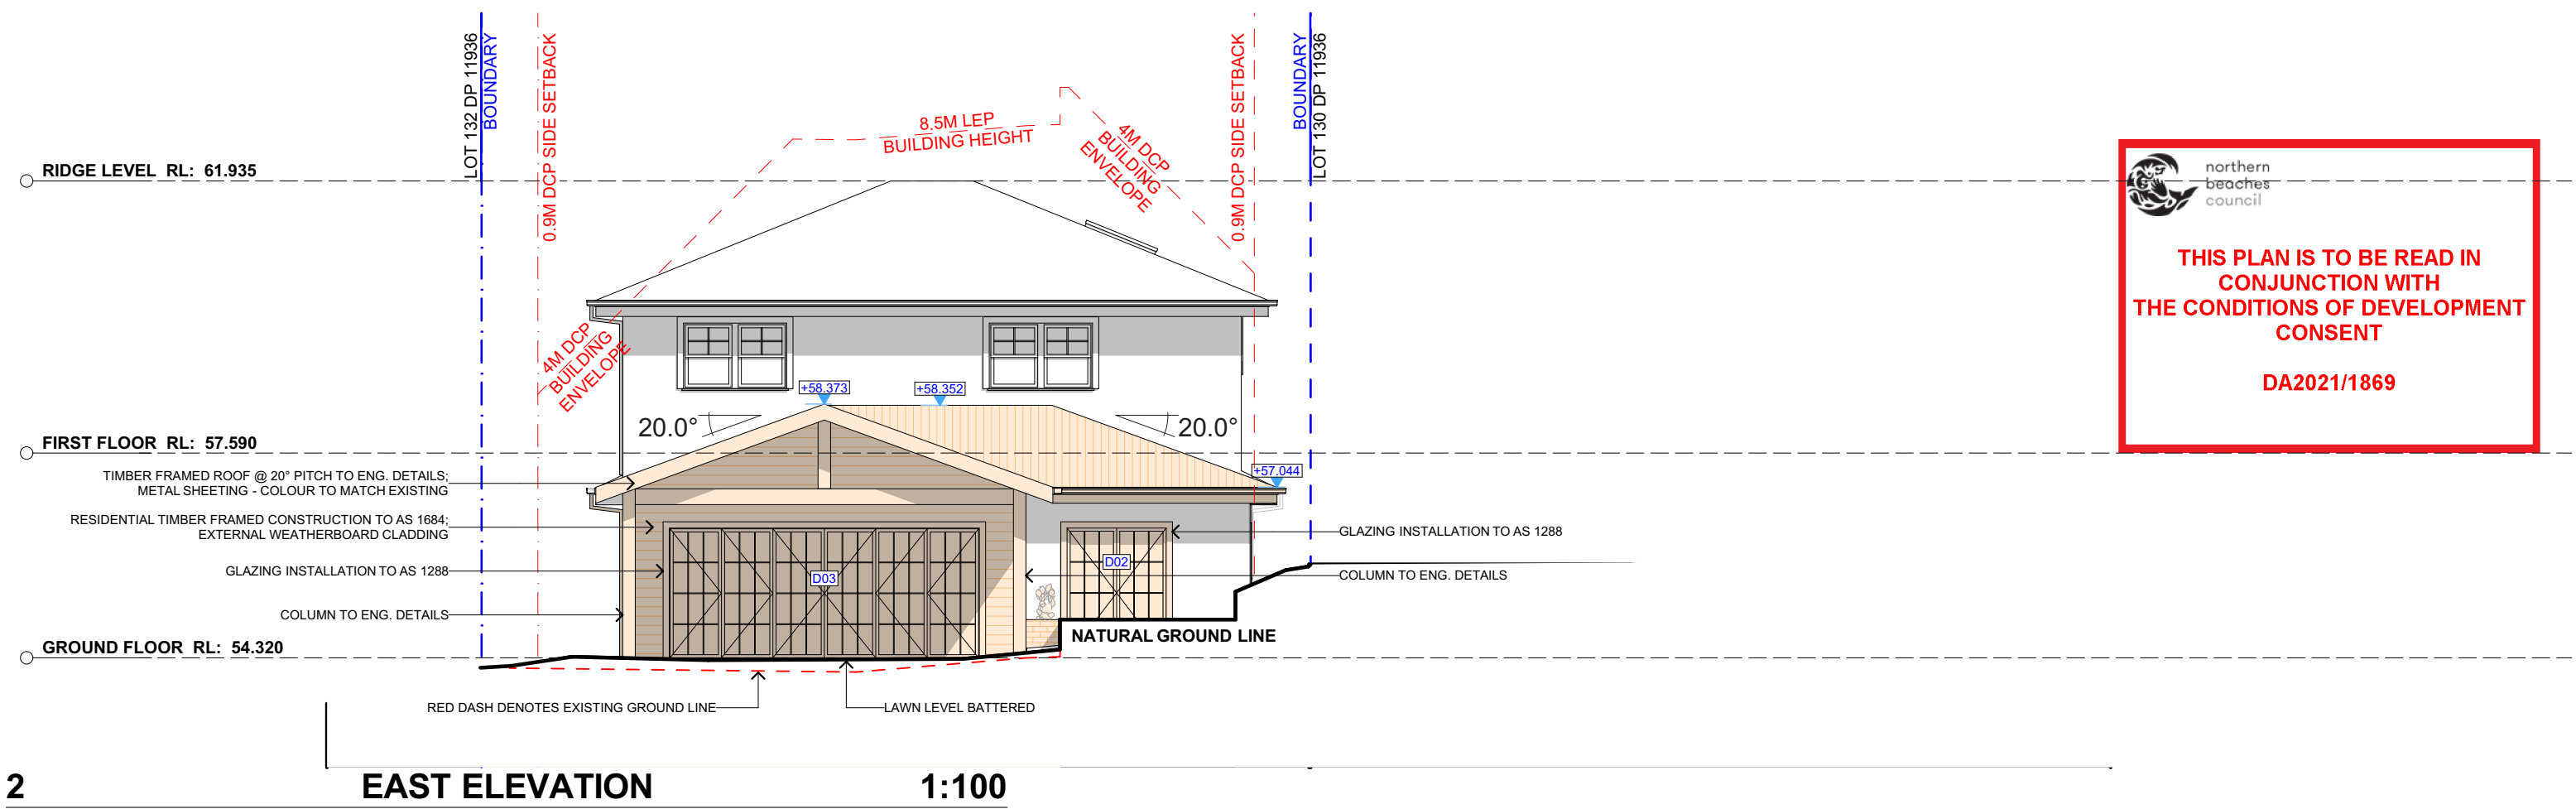


 northern
beaches
council

**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

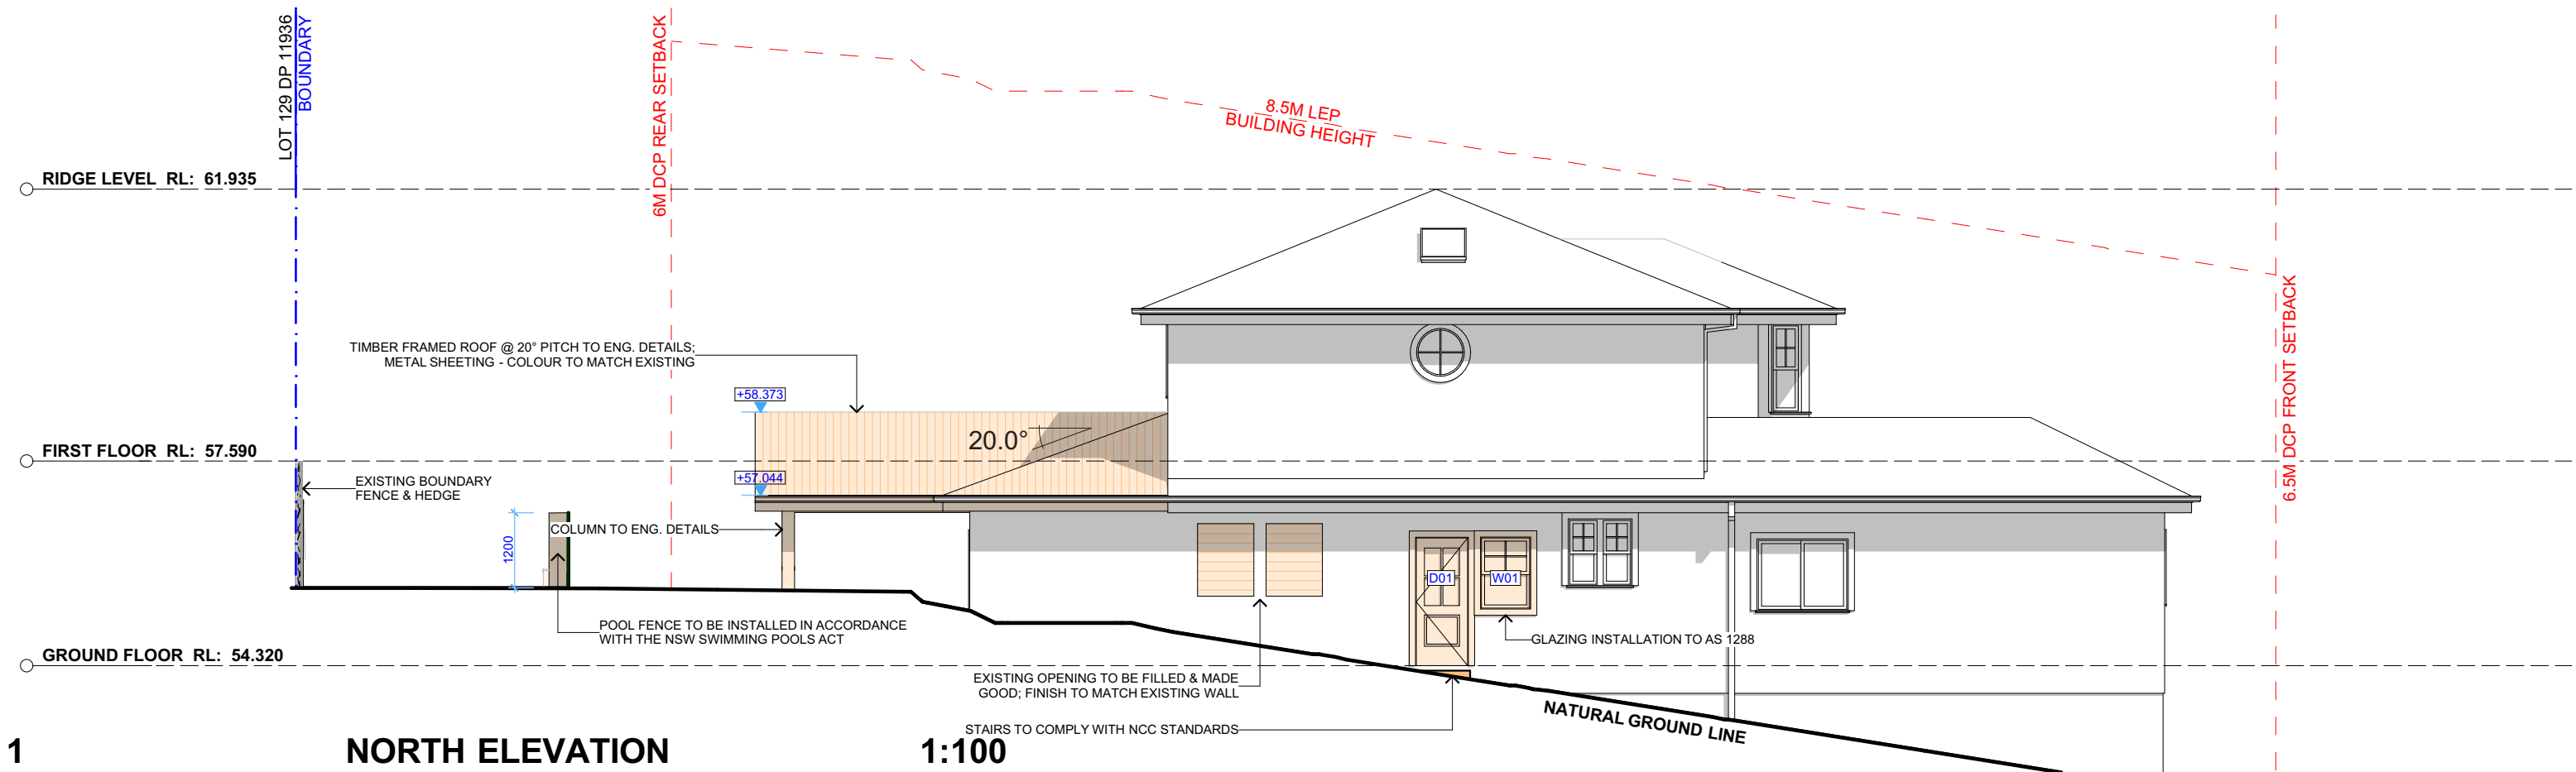



ACTION PLANS

m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND

PROPOSED

EXISTING

DEMOLISHED

CLIENT
VANESSA CHAPMAN &
SCOTT GOODMAN


PROJECT ADDRESS
39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.
DA10


DATE
Friday, 14 May 2021

DRAWING NAME
NORTH / EAST ELEVATION

SCALE
1:100 @A3

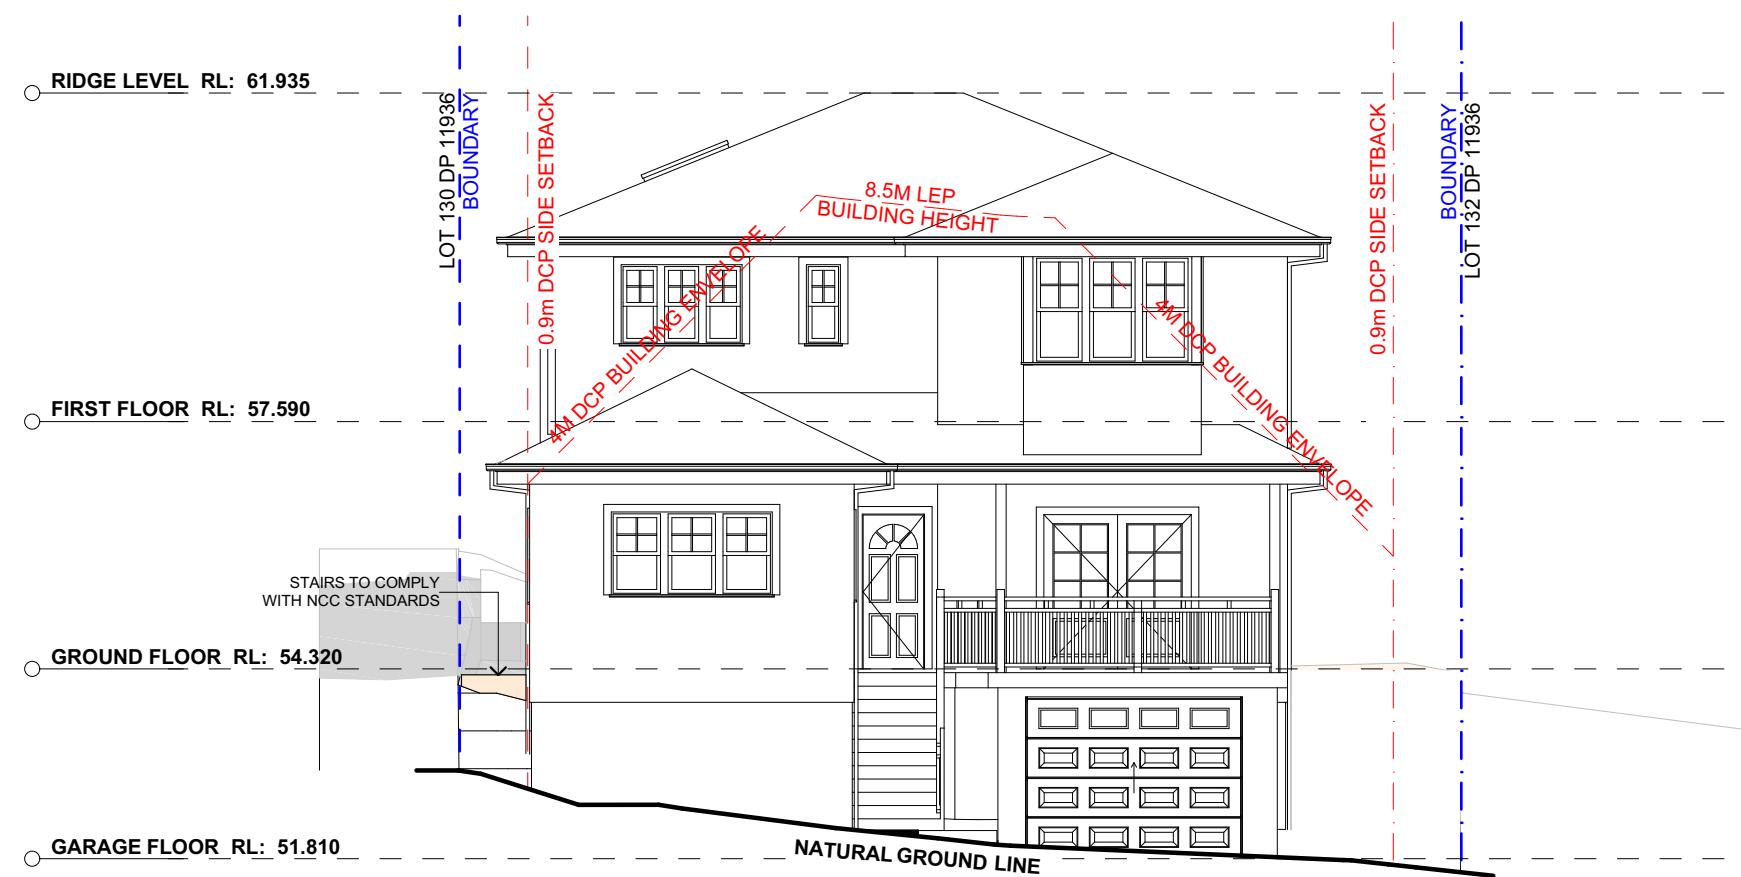

2 WEST ELEVATION 1:100

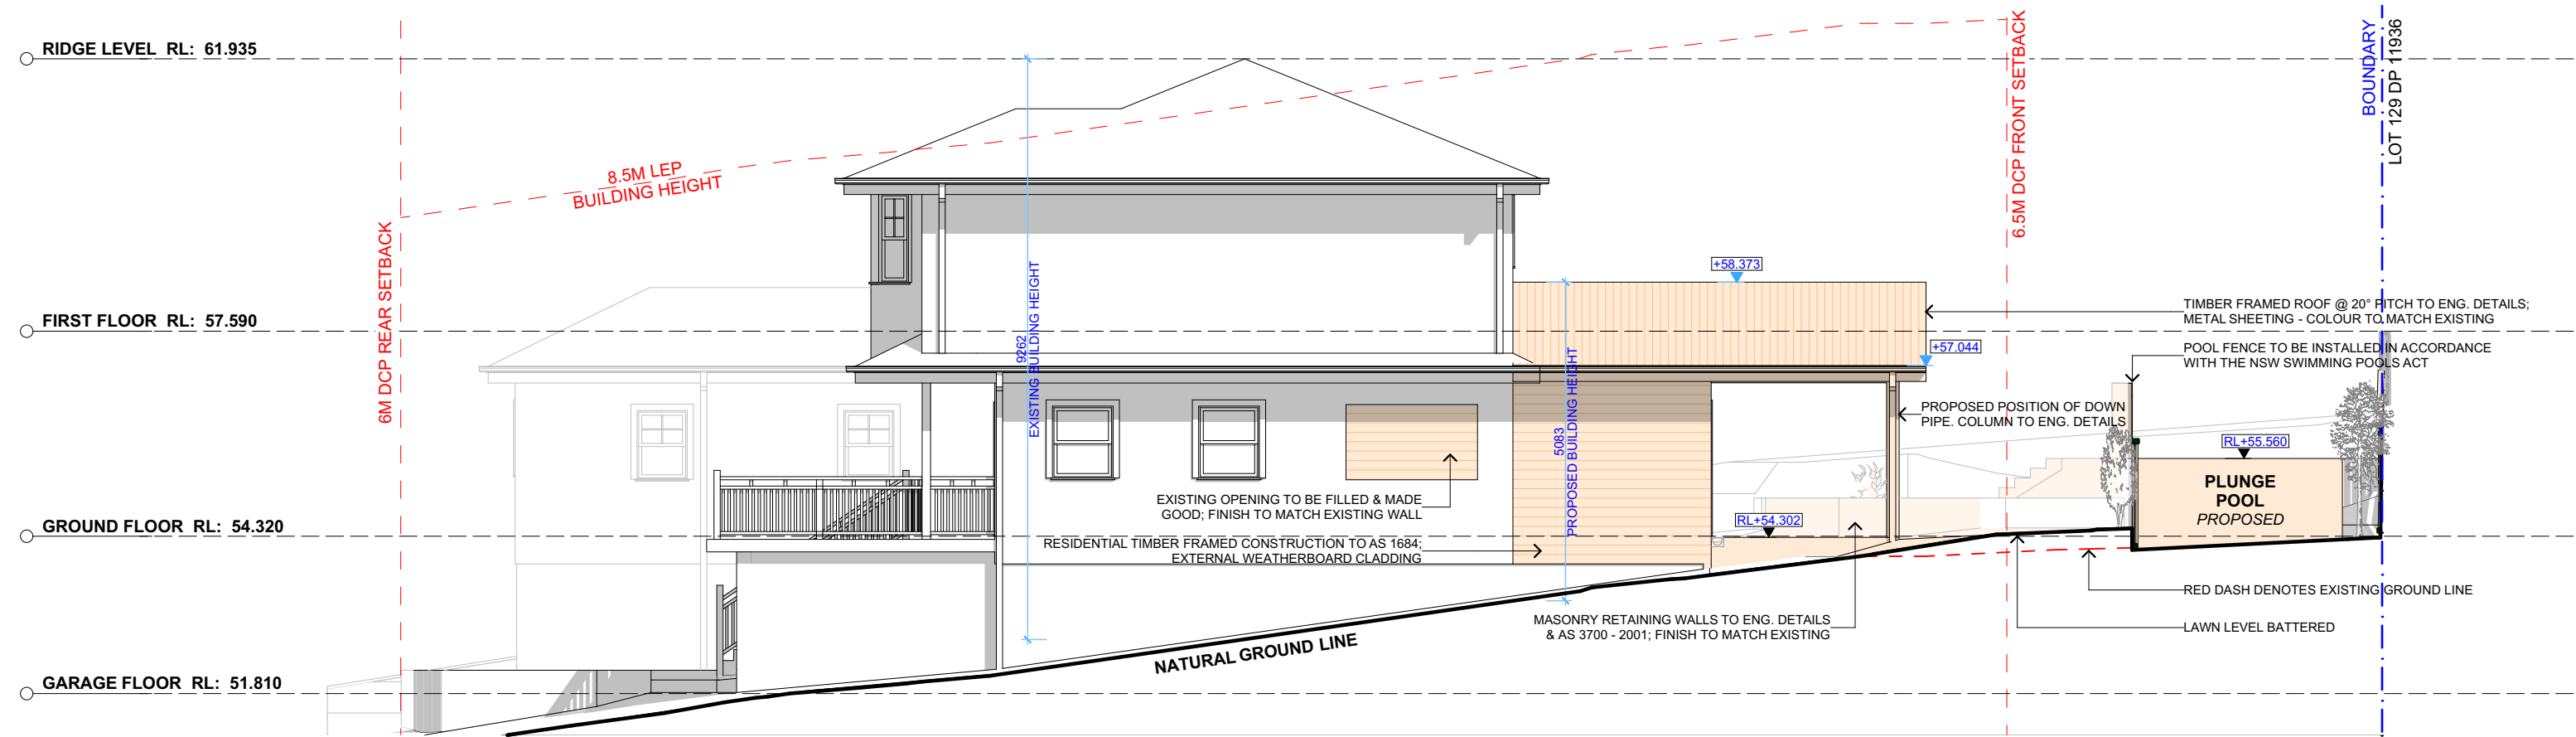


1 SOUTH ELEVATION 1:100

 northern beaches council

THIS PLAN IS TO BE READ IN CONJUNCTION WITH THE CONDITIONS OF DEVELOPMENT CONSENT

DA2021/1869

NOTE:
PLANTING WITHIN THE VICINITY OF THE POOL ENCLOSURE MUST BE OF A SPECIES / STYLE THAT WILL COMPLY WITH (AS 1926.1) TO ENSURE THAT THERE ARE **NO** CLIMBABLE / FOOTHOLD FEATURES. BOUNDARY FENCES MUST BE 1.8M HIGH ABOVE FINISHED POOL ENCLOSURE LEVEL MEASURED 500MM OUTWARDS FROM THE BASE OF THIS FENCE.



ACTION PLANS

m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC


NOTES


This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.


All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.

Do no scale on drawings. Use figured dimensions.

LEGEND

 PROPOSED

 EXISTING

 DEMOLISHED

CLIENT

VANESSA CHAPMAN & SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA11

DATE


Friday, 14 May 2021

DRAWING NAME

SOUTH / WEST ELEVATION

SCALE


1:100 @A3

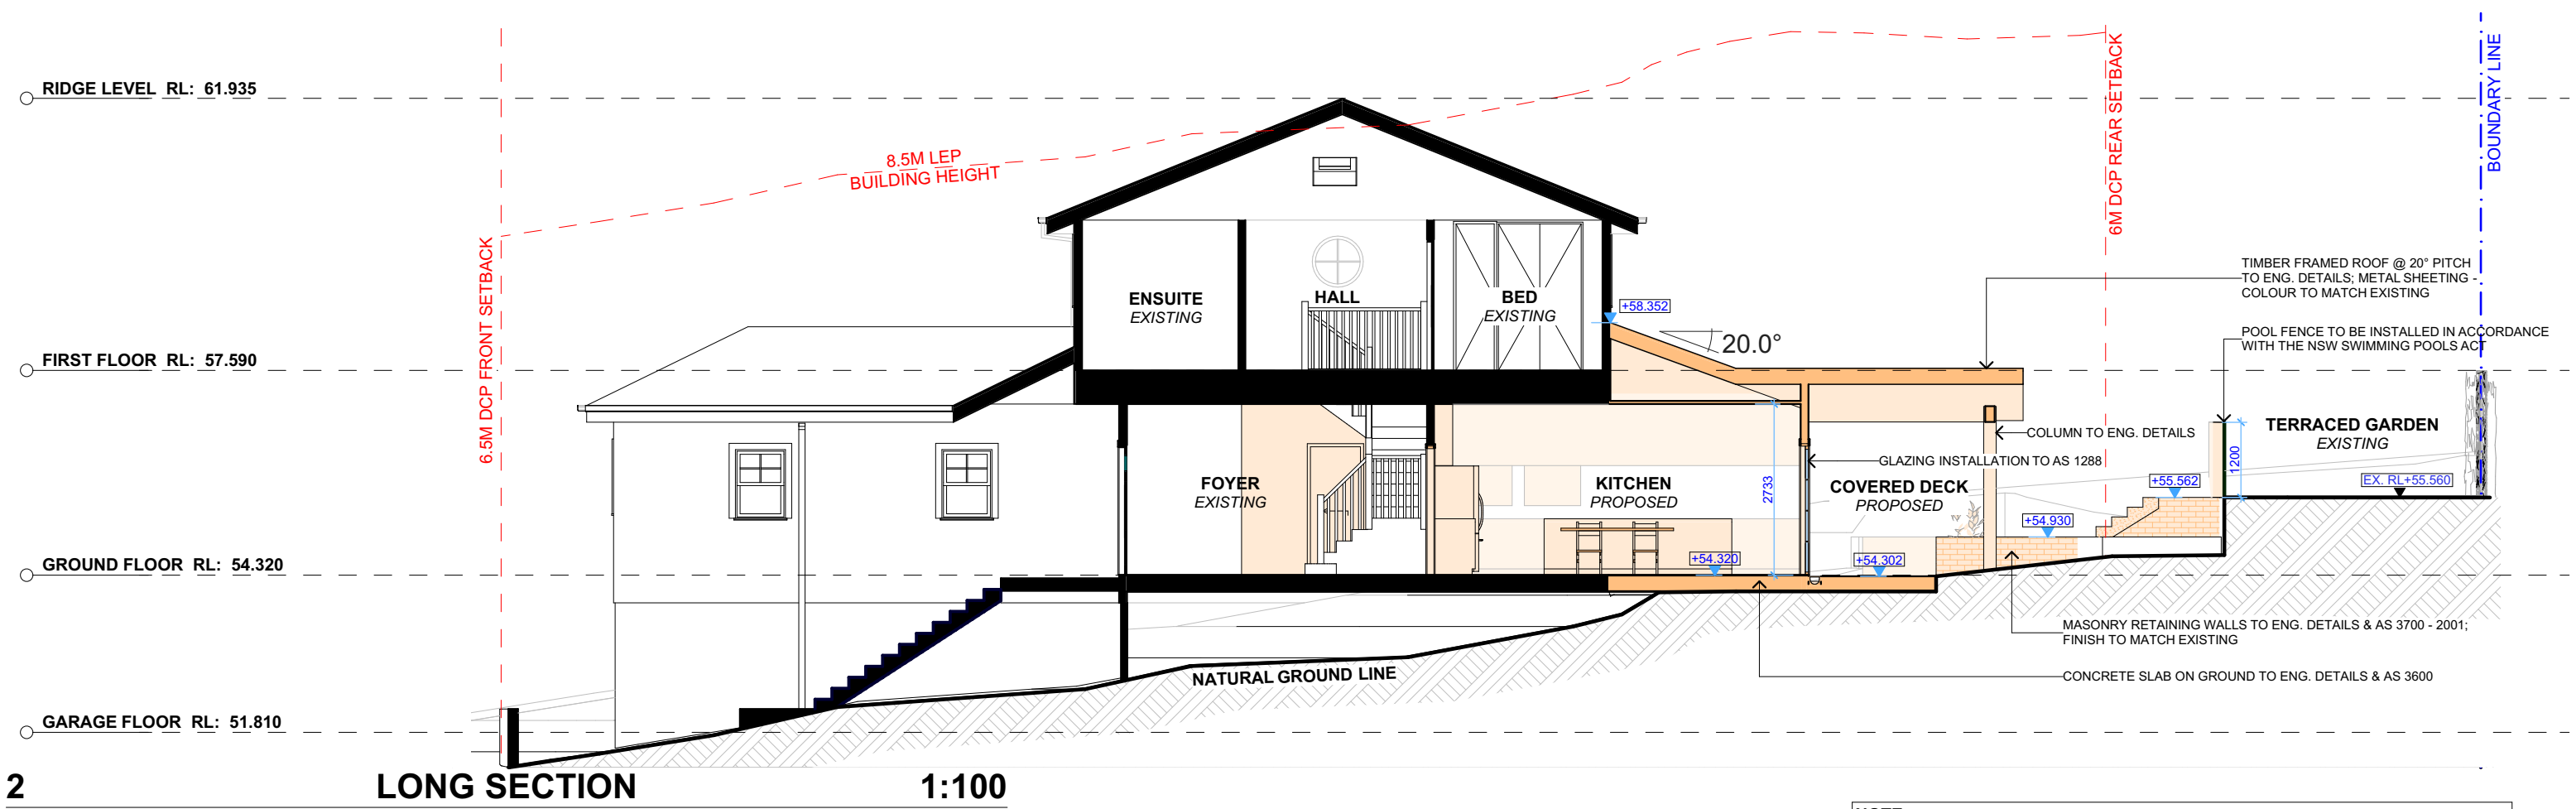

2

LONG SECTION 1:100

NOTE:
PLANTING WITHIN THE VICINITY OF THE POOL ENCLOSURE MUST BE OF A SPECIES / STYLE THAT WILL COMPLY WITH (AS 1926.1) TO ENSURE THAT THERE ARE **NO** CLIMBABLE / FOOTHOLD FEATURES. BOUNDARY FENCES MUST BE 1.8M HIGH ABOVE FINISHED POOL ENCLOSURE LEVEL MEASURED 500MM OUTWARDS FROM THE BASE OF THIS FENCE.

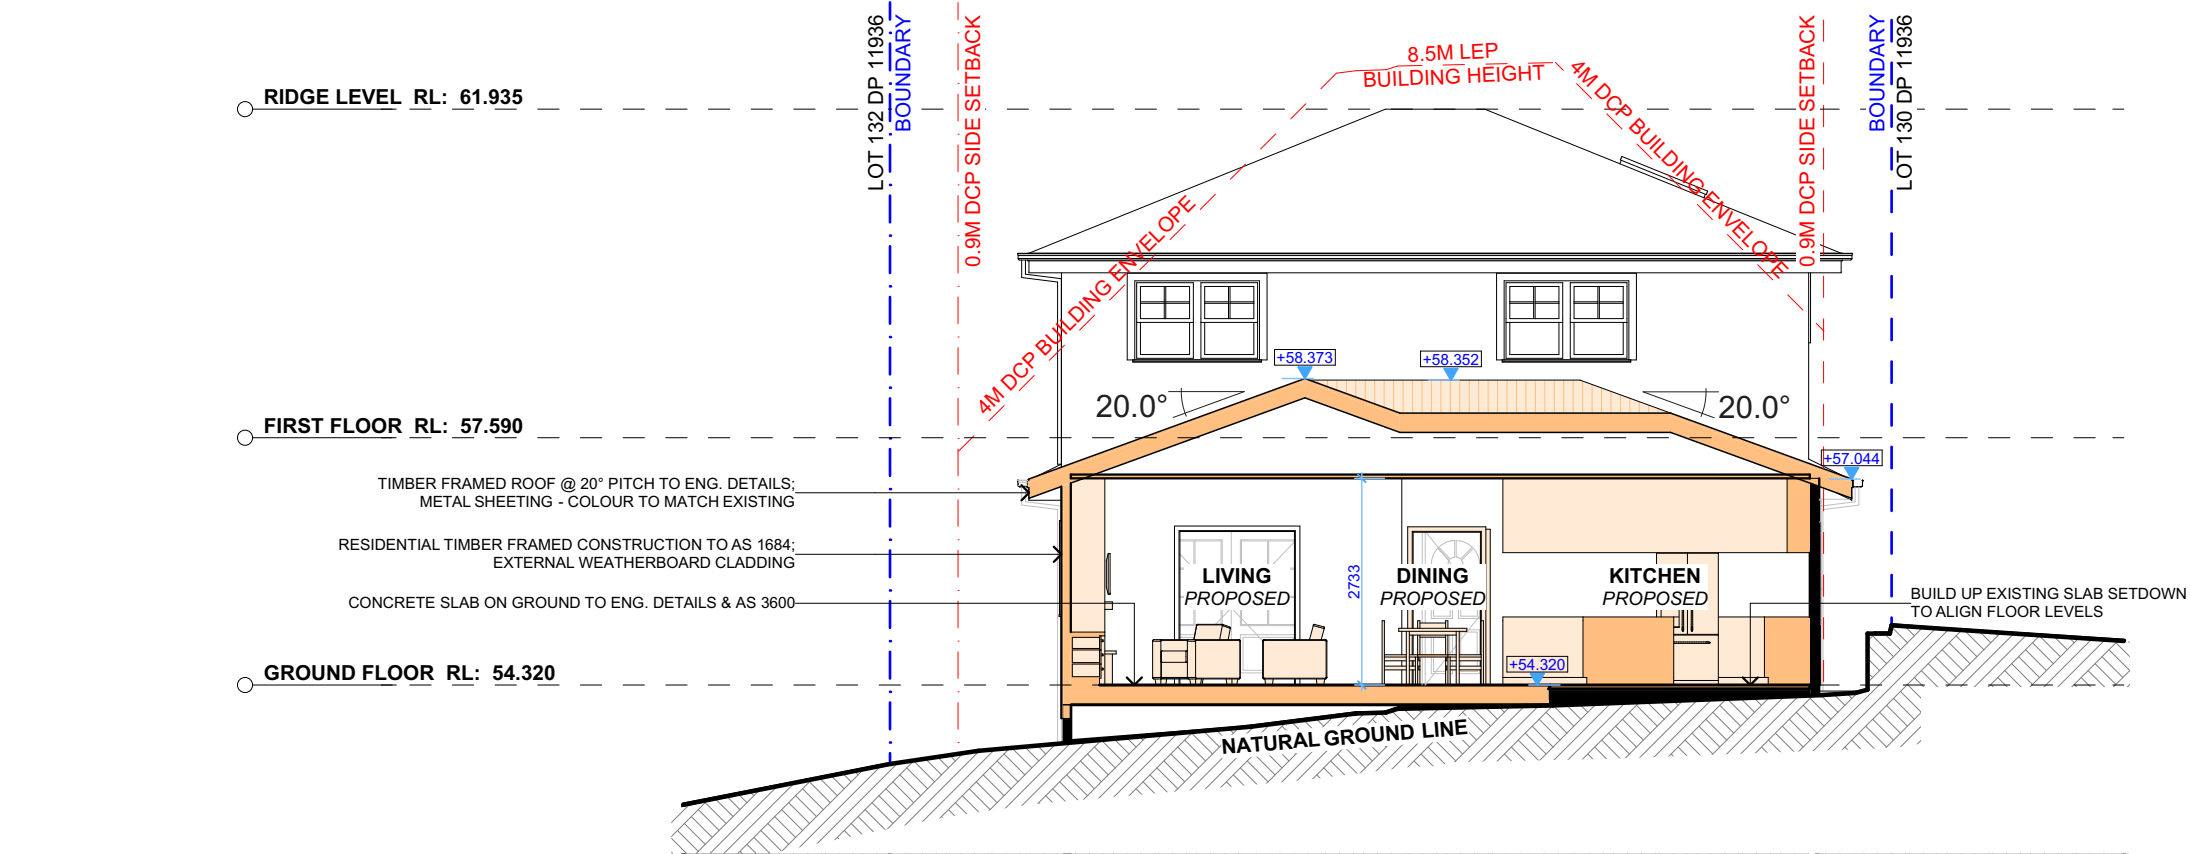

1


CROSS SECTION 1:100



northern
beaches
council

THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869

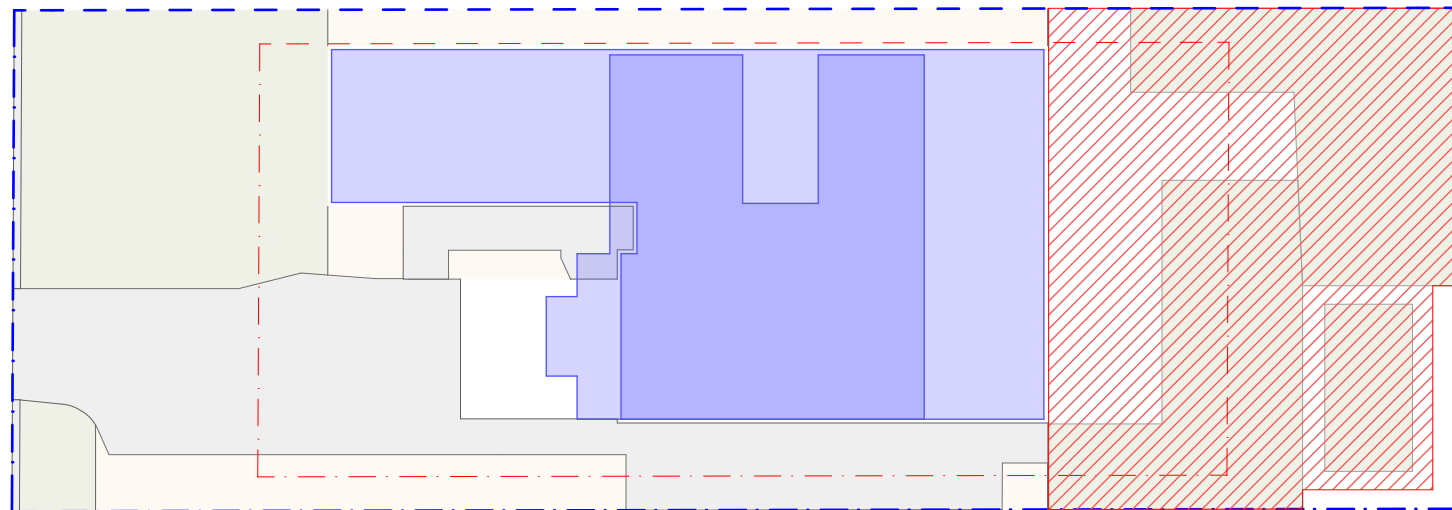


SITE AREA:
499.5m²



FLOOR AREA:
EXISTING: 197.17m²
PROPOSED: 217.57m²



LANDSCAPE OPEN SPACE:
REQUIRED: 40% (199.80m²)
EXISTING: 41% (206.52m²)
PROPOSED: 31% (154.39m²)



PRIVATE OPEN SPACE:
REQUIRED: 60.00m²
EXISTING: 162.92m²
PROPOSED: 137.21m²


2 PROPOSED AREA CALCUATIONS 1:200



northern
beaches
council

**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

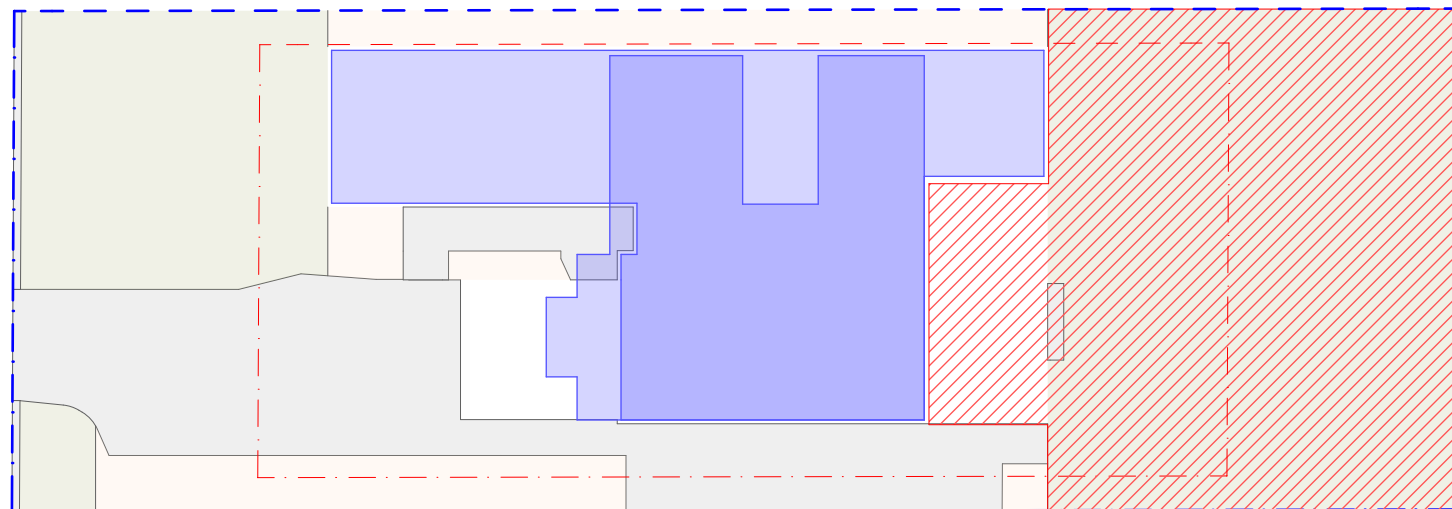

1 EXISTING AREA CALCULATIONS 1:200



ACTION PLANS
m: 0426 957 518
e: operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND

-  **SITE AREA**
-  **LANDSCAPE OPEN SPACE**
-  **FLOOR AREA**
-  **PRIVATE OPEN SPACE**

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA13

DATE


Friday, 14 May 2021

DRAWING NAME

AREA CALCULATIONS

SCALE

1:200 @A3






MT-01
COLOURBOND METAL ROOF SHEETING
POWDERCOAT FINISH 'IRONSTONE' OR SIMILAR
WHERE MARKED ON ELEVATION.



AFD
ALUMINIUM FRENCH DOOR FRAME
POWDERCOAT FINISH 'WHITE' OR SIMILAR
WHERE MARKED ON ELEVATION.

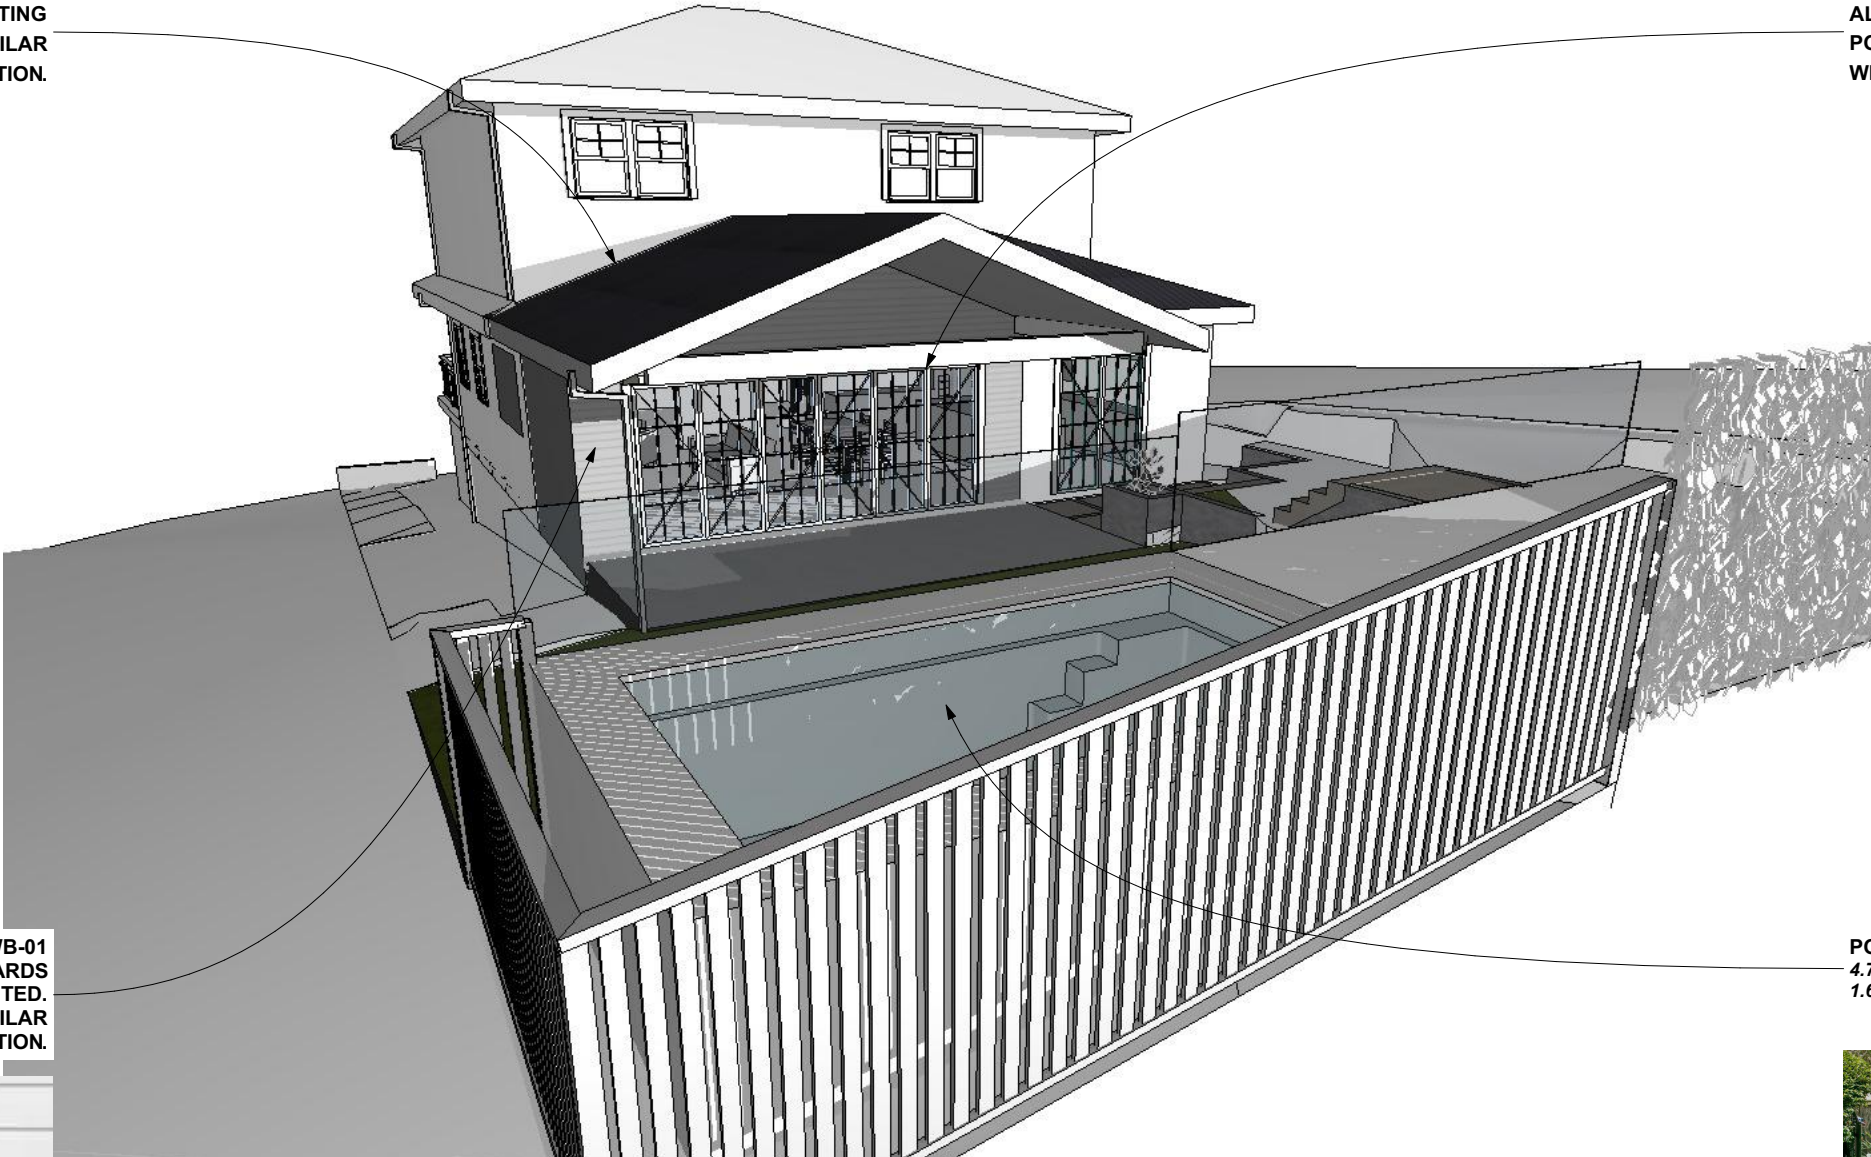

WB-01
PRIMELOK WEATHERBOARDS
PAINTED.
'SURFMIST' OR SIMILAR
WHERE MARKED ON ELEVATION.



POOL NARELLAN EDEN SLIMLINE 5
4.75m x 1.85m
1.65m DEEP





northern
beaches
council

THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT

DA2021/1869



ACTION PLANS

m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09042021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES

This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.

All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.

Do no scale on drawings. Use figured dimensions.

LEGEND

CLIENT

VANESSA CHAPMAN &
SCOTT GOODMAN

PROJECT ADDRESS

39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.

DA14

DATE

Friday, 14 May 2021

DRAWING NAME

SAMPLE BOARD


SCALE

@A3

2

POOL CROSS SECTION

1:50

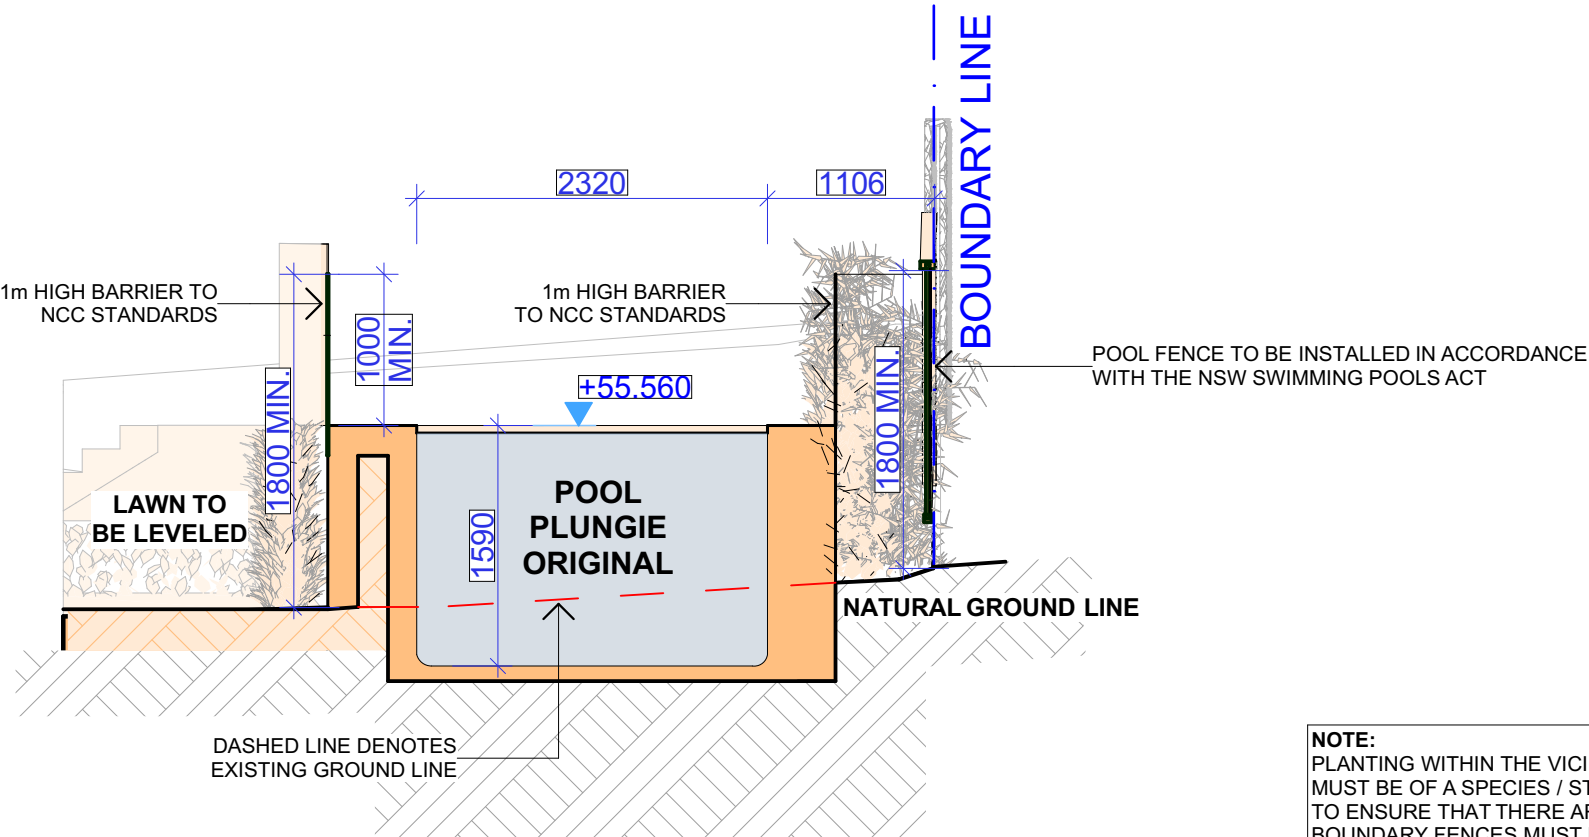



northern
beaches
council

**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**


DA2021/1869

NOTE:
PLANTING WITHIN THE VICINITY OF THE POOL ENCLOSURE
MUST BE OF A SPECIES / STYLE THAT WILL COMPLY WITH (AS 1926.1)
TO ENSURE THAT THERE ARE **NO** CLIMBABLE / FOOTHOLD FEATURES.
BOUNDARY FENCES MUST BE 1.8M HIGH ABOVE FINISHED POOL ENCLOSURE
LEVEL MEASURED 500MM OUTWARDS FROM THE BASE OF THIS FENCE.

1

POOL LONG SECTION

1:50

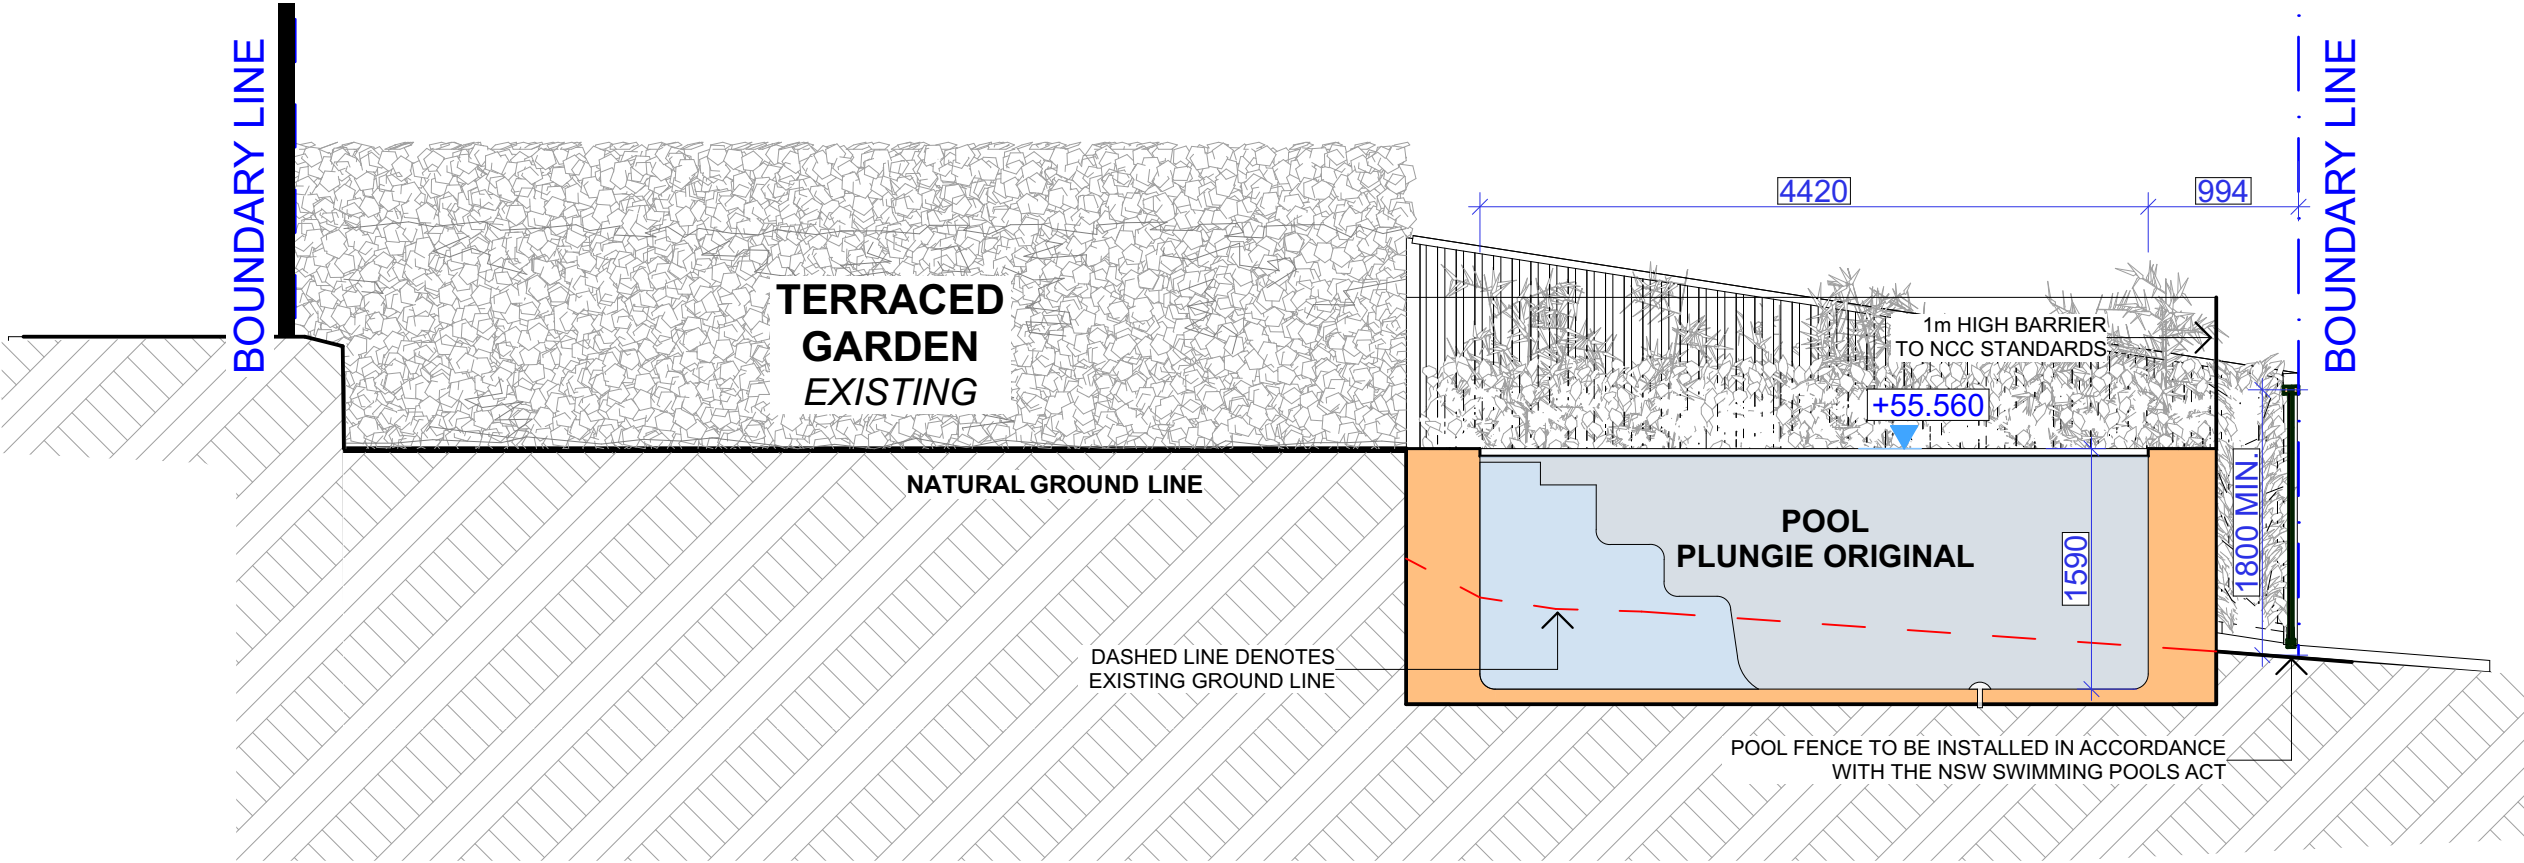

ACTION PLANS
m: 0426 957 518
e:operations@actionplans.com.au
w: www.actionplans.com.au

REV.	DATE	COMMENTS	DRWN
A	09/04/2021	INITIAL DESIGN PLAN	LRP
B	14/05/21	DEVELOPMENT APPLICATION	SC

NOTES
This drawing is the copyright of Action Plans and not be altered, reproduced or transmitted in any form or by any means in part or in whole with the written permission of Action Plans.
All levels and dimensions are to be checked and verified on site prior to commencement of any work, making of shop drawings or fabrication of components.
Do no scale on drawings. Use figured dimensions.

LEGEND
EXISTING STRUCTURE
NEW STRUCTURE
DEMOLISHED ITEMS

CLIENT
VANESSA CHAPMAN &
SCOTT GOODMAN


PROJECT ADDRESS
39 EILEEN STREET,
NORTH BALGOWLAH,
NSW, 2093

DRAWING NO.
DA18

DATE
Friday, 14 May 2021

DRAWING NAME
POOL SECTION

SCALE
1:50 @A3

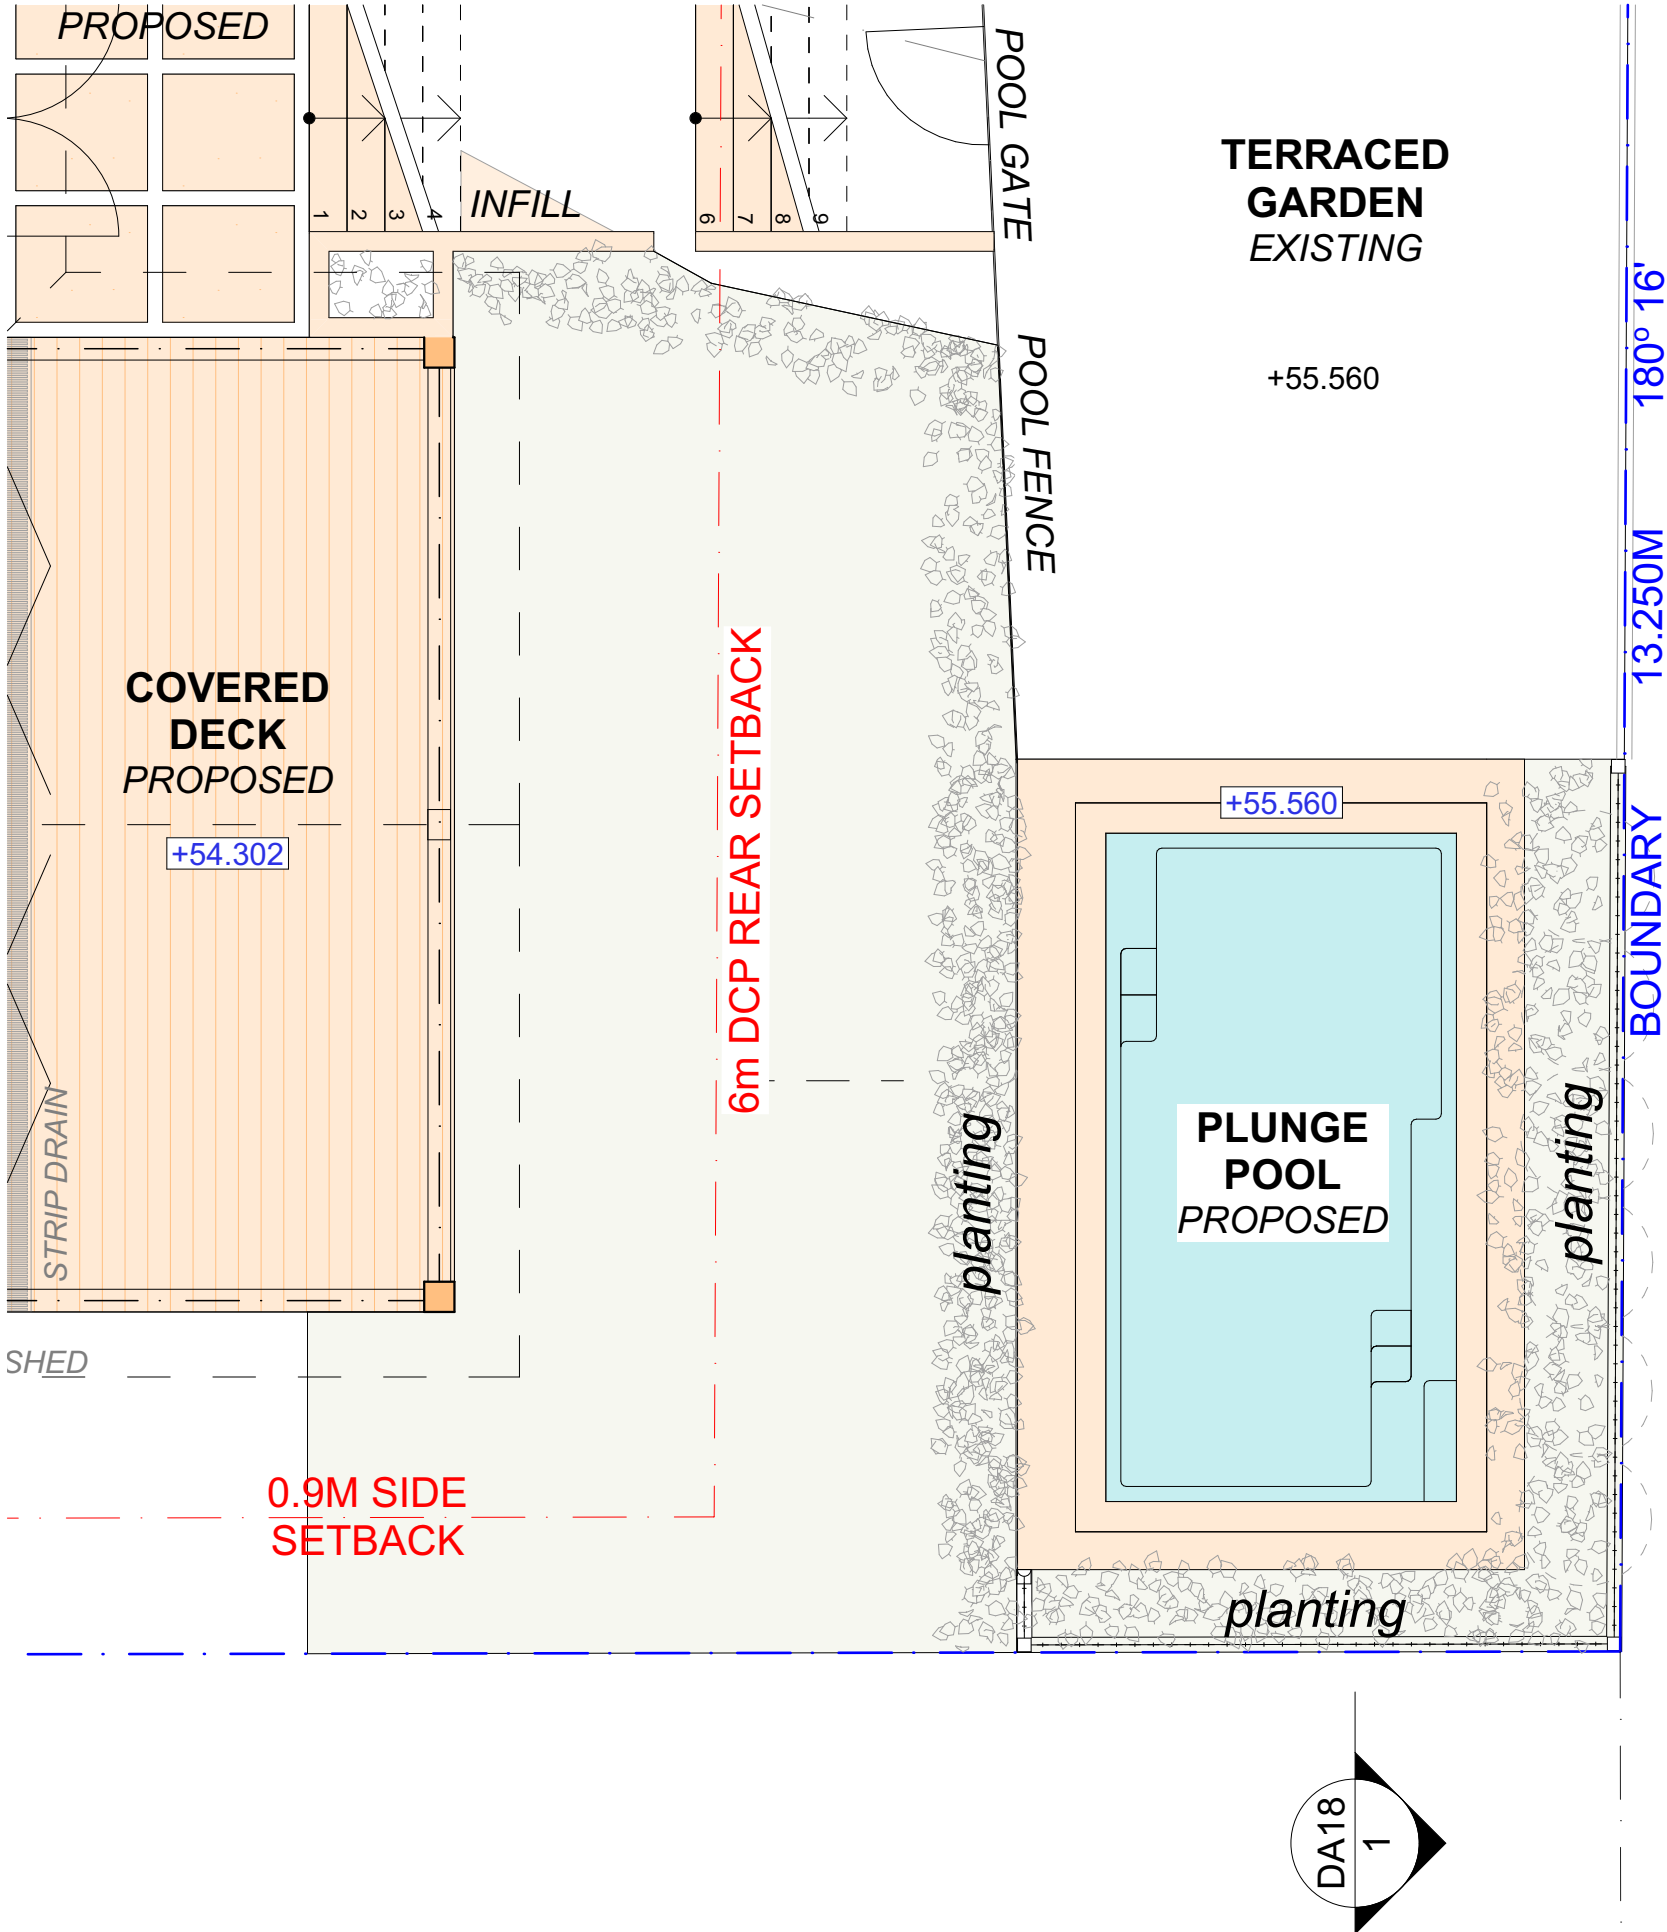



northern
beaches
council

**THIS PLAN IS TO BE READ IN
CONJUNCTION WITH
THE CONDITIONS OF DEVELOPMENT
CONSENT**

DA2021/1869

NOTE:
PLANTING WITHIN THE VICINITY OF THE POOL ENCLOSURE
MUST BE OF A SPECIES / STYLE THAT WILL COMPLY WITH (AS 1926.1)
TO ENSURE THAT THERE ARE **NO** CLIMBABLE / FOOTHOLD FEATURES.
BOUNDARY FENCES MUST BE 1.8M HIGH ABOVE FINISHED POOL ENCLOSURE
LEVEL MEASURED 500MM OUTWARDS FROM THE BASE OF THIS FENCE.

	Design Specification	Building Code of Australia (BCA) requirement (for version of BCA applicable as on the date of submission of CC or CDC)
1.	All glazing including decals shall comply with AS 1288.1-2006, AS 2047-1999 and AS 1170.1-2002	Part 3.6 Glazing, requires all glazing to comply with AS 1288- 2006 and AS 2047-1999. The BCA requires glazing members to comply with Structural Loading Code AS 2280.1- 2002. Glass with a high potential for human impact shall strictly comply with the human impact safety requirements of the BCA
2.	Swimming Pool Safety Fencing	Part 3.9.3, of the BCA specifies all requirements of swimming pool safety fencing. Compliance with As1926.1-2012, including 1800mm high boundary fencing acting as pool fence/barriers. 1200mm high pool fence/barriers shall surround the pool with no doors of building permitted to open onto pool areas. Any windows shall be sufficiently protected in accordance with AS1926.1-2012. NCZ shall be provided to all swimming pool safety fence/barriers in accordance with AS1926.1-2012. AS 1288 2006 specifies glazing requirements when glass is incorporated into a pool fence/barrier. Certification post construction will be required.
3.	Swimming Pool Recirculation Systems	Part 3.9.4. of the BCA specifies all requirements of swimming pool and spa recirculation systems. AS1926.3-2010 shall be complied with and certified post construction