

Nationwide House Energy Rating Scheme

NatHERS Certificate No. 0005738661-01

Generated on 02 Jun 2021 using BERS Pro v4.4.0.3 (3.21)

Property

Address 4 Bubalo Street, Warriewood, NSW, 2102
Lot/DP 22/271139
NCC Class* 1A
Type New Dwelling

Plans

Main Plan CASTRO 20 040
Prepared by SDC

Construction and environment

Assessed floor area (m²)*	Exposure Type
Conditioned* 196.0	Suburban
Unconditioned* 50.0	NatHERS climate zone
Total 246.0	56
Garage 30.0	



Accredited assessor


Name Ian Fry
Business name Frys Energywise
Email comply@frysenergywise.com.au
Phone 02 9899 2825
Accreditation No. DMN/12/1441
Assessor Accrediting Organisation
Design Matters National
Declaration of interest Declaration completed: no conflicts

National Construction Code (NCC) requirements

The NCC's requirements for NatHERS-rated houses are detailed in 3.12.0(a)(i) and 3.12.5 of the NCC Volume Two. For apartments the requirements are detailed in J0.2 and J5 to J8 of the NCC Volume One.

In NCC 2019, these requirements include minimum star ratings and separate heating and cooling load limits that need to be met by buildings and apartments through the NatHERS assessment. Requirements additional to the NatHERS assessment that must also be satisfied include, but are not limited to: insulation installation methods, thermal breaks, building sealing, water heating and pumping, and artificial lighting requirements. The NCC and NatHERS Heating and Cooling Load Limits (Australian Building Codes Board Standard) are available at www.abcb.gov.au.

State and territory variations and additions to the NCC may also apply.

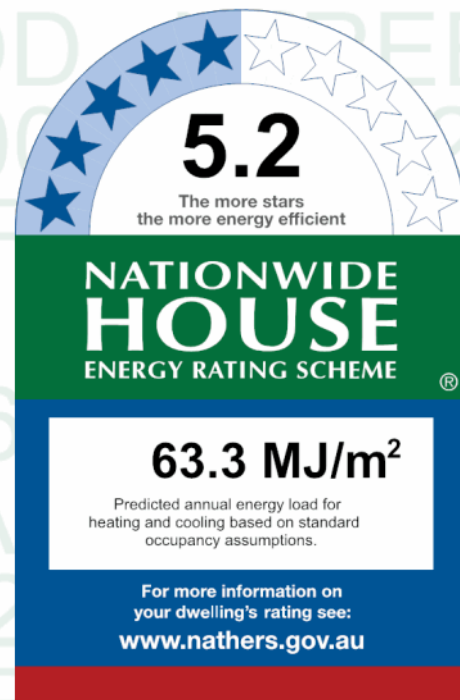

Thermal performance

Heating	Cooling
38.1	25.2
MJ/m²	MJ/m²

About the rating

NatHERS software models the expected thermal energy loads using information about the design and construction, climate and common patterns of household use. The software does not take into account appliances, apart from the airflow impacts from ceiling fans.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=HzLesLYbK. When using either link, ensure you are visiting hstar.com.au



Certificate check

Ensure the dwelling is designed and then built as per the NatHERS Certificate. While you need to check the accuracy of the whole Certificate, the following spot check covers some important items impacting the dwelling's rating.

Genuine certificate

Does this Certificate match the one available at the web address or QR code in the verification box on the front page? Does the set of NatHERS-stamped plans for the dwelling have a Certificate number on the stamp that matches this Certificate?

Ceiling penetrations*

Does the 'number' and 'type' of ceiling penetrations (e.g. downlights, exhaust fans, etc) shown on the stamped plans or installed, match what is shown in this Certificate?

Windows

Does the installed window meet the substitution tolerances (SHGC and U-value) and window type, of the window shown on this Certificate?

Apartment entrance doors

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

Exposure*

Has the appropriate exposure level (terrain) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

Provisional* values

Have provisional values been used in the assessment and, if so, noted in "additional notes" below?

Additional notes

Window and glazed door *type and performance*

Default* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom* windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
TND-024-01 A	TND-024-01 A Trend Al Internal offset glazed window SG 5Clr	6.1	0.75	0.71	0.79
TND-071-01 A	TND-071-01 A Windsor Sliding Door SG 6Clr	6.1	0.65	0.62	0.68
TND-002-01 A	TND-002-01 A Trend Al Awning Window SG 3Clr	6.5	0.66	0.63	0.69
TND-001-08 A	TND-001-08 A Trend Al Sliding Window SG 6.38CP	4.6	0.44	0.42	0.46
TND-071-11 A	TND-071-11 A Windsor Sliding Door SG 638CPClr	4.4	0.54	0.51	0.57
TND-001-01 A	TND-001-01 A Trend Al Sliding Window SG 3Clr	6.4	0.73	0.69	0.77

Window and glazed door *schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Garage	TND-024-01 A	n/a	2400	900	n/a	00	SE	No
Entry/Foyer	TND-071-01 A	n/a	2340	1810	n/a	58	SE	No
Entry/Foyer	TND-002-01 A	n/a	770	2170	n/a	30	SW	No
Entry/Foyer	TND-024-01 A	n/a	860	1810	n/a	00	SW	No
Powder	TND-002-01 A	n/a	1200	1210	n/a	45	SW	No
Kitchen/Living	TND-024-01 A	n/a	700	2650	n/a	00	SW	No
Kitchen/Living	TND-001-08 A	n/a	2060	2650	n/a	33	NW	No
Kitchen/Living	TND-071-11 A	n/a	2400	2410	n/a	45	NE	No
Kitchen/Living	TND-071-11 A	n/a	2400	3490	n/a	30	NW	No
Kitchen/Living	TND-001-01 A	n/a	2060	1210	n/a	30	NE	No
Kitchen/Living	TND-001-01 A	n/a	2060	1210	n/a	30	NE	No
Laundry	TND-071-01 A	n/a	2400	1450	n/a	45	NE	No
Home Theatre	TND-001-01 A	n/a	600	2650	n/a	40	NE	No
Ensuite	TND-002-01 A	n/a	860	1810	n/a	90	SE	No
Upper Lounge	TND-024-01 A	n/a	2140	1810	n/a	00	SW	No
Upper Lounge	TND-001-01 A	n/a	600	2650	n/a	40	NE	No
WC	TND-002-01 A	n/a	1030	850	n/a	90	SW	No
Bath	TND-002-01 A	n/a	1030	2050	n/a	45	SW	No
Bed 2	TND-001-01 A	n/a	1030	1810	n/a	45	NW	No
Bed 3	TND-001-01 A	n/a	1030	1810	n/a	45	NW	No
Bed 4	TND-001-01 A	n/a	1030	1810	n/a	45	NE	No
Master Suite	TND-002-01 A	n/a	860	3600	n/a	60	SE	No

Roof window *type and performance*

Default* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom* roof windows

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window *schedule*

Location	Window ID	Window no.	Opening %	Height (mm)	Width (mm)	Orientation	Outdoor shade	Indoor shade
----------	-----------	------------	-----------	-------------	------------	-------------	---------------	--------------

Location	Window ID	Window no.	Opening %	Height (mm)	Width (mm)	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight type and performance

Skylight ID	Skylight description
No Data Available	

Skylight schedule

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m ²)	Orientation	Outdoor shade	Diffuser	Skylight shaft reflectance
No Data Available								

External door schedule

Location	Height (mm)	Width (mm)	Opening %	Orientation
Garage	2400	3010	90	SE

External wall type

Wall ID	Wall type	Solar absorbance	Wall shade (colour)	Bulk insulation (R-value)	Reflective wall wrap*
EW-1	Brick Veneer	0.50	Medium	No insulation	No
EW-2	Single Skin Brick	0.50	Medium	No insulation	No
EW-3	Brick Veneer	0.50	Medium	Bulk Insulation R2	No
EW-4	Fibro Cavity Panel Direct Fix	0.50	Medium	Bulk Insulation R2	No
EW-5	Brick Veneer	0.50	Medium	Bulk Insulation R2	No

External wall schedule

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Garage	EW-1	2826	800	SW	100	NO
Garage	EW-1	2825	1700	SW	3100	YES
Garage	EW-1	2825	600	NW	100	YES
Garage	EW-1	2825	5500	NE	100	NO
Garage	EW-2	2826	400	SE	500	NO
Garage	EW-2	2825	5100	SE	100	NO
Entry/Foyer	EW-3	2740	2995	SE	1700	YES
Entry/Foyer	EW-3	2740	2500	SW	100	NO
Entry/Foyer	EW-3	3040	3495	SW	100	NO
Powder	EW-3	2740	1690	SW	100	YES

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
WIP	EW-3	3255	600	SE	100	YES
WIP	EW-3	3255	1495	SW	100	NO
Kitchen/Living	EW-3	3255	4995	SW	100	NO
Kitchen/Living	EW-3	3256	3000	SW	600	NO
Kitchen/Living	EW-3	3255	3700	NW	600	NO
Kitchen/Living	EW-3	3255	3200	NE	4400	YES
Kitchen/Living	EW-3	3255	4400	NW	3800	YES
Kitchen/Living	EW-3	3256	400	NW	100	NO
Kitchen/Living	EW-3	3255	5295	NE	100	NO
Laundry	EW-3	2740	1790	NE	100	NO
Home Theatre	EW-3	2740	3890	NE	100	YES
Ensuite	EW-4	2590	2995	SE	700	YES
Ensuite	EW-5	2590	2495	SW	600	NO
Upper Lounge	EW-5	2590	3490	SW	600	NO
Upper Lounge	EW-5	2590	3690	NE	650	NO
WC	EW-5	2590	1090	SW	600	NO
Bath	EW-5	2590	595	SW	1200	YES
Bath	EW-5	2590	600	SE	8400	YES
Bath	EW-5	2590	2495	SW	600	NO
Bed 2	EW-5	2590	3795	SW	600	NO
Bed 2	EW-4	2590	4195	NW	600	NO
Bed 3	EW-4	2590	2995	NW	600	NO
Bed 3	EW-5	2590	1300	NW	600	NO
Bed 3	EW-5	2590	3195	NE	625	NO
Bed 4	EW-5	2590	3190	NE	625	NO
His/Hers	EW-5	2590	895	NE	675	NO
His/Hers	EW-4	2590	995	NE	675	NO
Master Suite	EW-4	2140	3595	NE	675	NO
Master Suite	EW-4	2590	4900	SE	700	NO
Master Suite	EW-4	2590	1600	SW	700	YES

Internal wall type

Wall ID	Wall type	Area (m ²)	Bulk insulation
IW-1 - Cavity wall, direct fix plasterboard, single gap		22.00	Bulk Insulation, No Air Gap R2
IW-2 - Cavity wall, direct fix plasterboard, single gap		212.00	No insulation

Floor type

Location	Construction	Area (m ²)	Sub-floor ventilation	Added insulation (R-value)	Covering
Garage	Waffle pod slab 225 mm 100mm	29.90	None	Waffle Pod 225mm	Bare
Entry/Foyer	Waffle pod slab 300 mm 100mm	25.70	None	Waffle Pod 300mm	Ceramic Tiles 8mm
Powder	Waffle pod slab 300 mm 100mm	3.00	None	Waffle Pod 300mm	Ceramic Tiles 8mm
WIP	Waffle pod slab 300 mm 100mm	3.50	None	Waffle Pod 300mm	Ceramic Tiles 8mm
Kitchen/Living	Waffle pod slab 300 mm 100mm	54.10	None	Waffle Pod 300mm	Ceramic Tiles 8mm
Laundry	Waffle pod slab 300 mm 100mm	6.20	None	Waffle Pod 300mm	Ceramic Tiles 8mm
Home Theatre	Waffle pod slab 300 mm 100mm	13.90	None	Waffle Pod 300mm	Carpet+Rubber Underlay 18mm
WIL	Waffle pod slab 300 mm 100mm	2.10	None	Waffle Pod 300mm	Ceramic Tiles 8mm
Ensuite/Entry/Foyer	Timber Above Plasterboard 19mm	7.30		No Insulation	Ceramic Tiles 8mm
Upper Lounge/Entry/Foyer	Timber Above Plasterboard 19mm	15.20		No Insulation	Carpet+Rubber Underlay 18mm
Upper Lounge/Laundry	Timber Above Plasterboard 19mm	2.50		No Insulation	Carpet+Rubber Underlay 18mm
Upper Lounge/Home Theatre	Timber Above Plasterboard 19mm	10.80		No Insulation	Carpet+Rubber Underlay 18mm
WC/Entry/Foyer	Timber Above Plasterboard 19mm	1.10		No Insulation	Ceramic Tiles 8mm
WC/Powder	Timber Above Plasterboard 19mm	2.20		No Insulation	Ceramic Tiles 8mm
Bath/Powder	Timber Above Plasterboard 19mm	0.70		No Insulation	Ceramic Tiles 8mm
Bath/WIP	Timber Above Plasterboard 19mm	3.60		No Insulation	Ceramic Tiles 8mm
Bath/Kitchen/Living	Timber Above Plasterboard 19mm	2.90		No Insulation	Ceramic Tiles 8mm
Bed 2/Kitchen/Living	Timber Above Plasterboard 19mm	14.50		No Insulation	Carpet+Rubber Underlay 18mm
Bed 3/Kitchen/Living	Timber Above Plasterboard 19mm	12.40		No Insulation	Carpet+Rubber Underlay 18mm
Bed 4/Kitchen/Living	Timber Above Plasterboard 19mm	7.30		No Insulation	Carpet+Rubber Underlay 18mm
Bed 4/Laundry	Timber Above Plasterboard 19mm	3.80		No Insulation	Carpet+Rubber Underlay 18mm
His/Hers/Garage	Timber Above Plasterboard 19mm	3.70		Bulk Insulation R2	Carpet+Rubber Underlay 18mm
His/Hers/Home Theatre	Timber Above Plasterboard 19mm	3.10		No Insulation	Carpet+Rubber Underlay 18mm
Master Suite/Garage	Timber Above Plasterboard 19mm	18.20		Bulk Insulation R2	Carpet+Rubber Underlay 18mm
Passage/Entry/Foyer	Timber Above Plasterboard 19mm	1.80		No Insulation	Carpet+Rubber Underlay 18mm
Passage/Kitchen/Living	Timber Above Plasterboard 19mm	4.00		No Insulation	Carpet+Rubber Underlay 18mm
Passage/WIL	Timber Above Plasterboard 19mm	1.80		No Insulation	Carpet+Rubber Underlay 18mm

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Garage	Plasterboard	No insulation	No
Garage	Timber Above Plasterboard	Bulk Insulation R2	No
Entry/Foyer	Timber Above Plasterboard	No Insulation	No
Powder	Timber Above Plasterboard	No Insulation	No
WIP	Timber Above Plasterboard	No Insulation	No
Kitchen/Living	Plasterboard	Bulk Insulation R5	No

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Kitchen/Living	Timber Above Plasterboard	No Insulation	No
Laundry	Timber Above Plasterboard	No Insulation	No
Home Theatre	Timber Above Plasterboard	No Insulation	No
WIL	Timber Above Plasterboard	No Insulation	No
Ensuite	Plasterboard	Bulk Insulation R5	No
Upper Lounge	Plasterboard	Bulk Insulation R5	No
WC	Plasterboard	Bulk Insulation R5	No
Bath	Plasterboard	Bulk Insulation R5	No
Bed 2	Plasterboard	Bulk Insulation R5	No
Bed 3	Plasterboard	Bulk Insulation R5	No
Bed 4	Plasterboard	Bulk Insulation R5	No
His/Hers	Plasterboard	Bulk Insulation R5	No
Master Suite	Plasterboard	Bulk Insulation R5	No
Passage	Plasterboard	Bulk Insulation R5	No

Ceiling penetrations*

Location	Quantity	Type	Diameter (mm ²)	Sealed/unsealed
Powder	1	Exhaust Fans	0	Sealed
Ensuite	1	Exhaust Fans	300	Sealed
WC	1	Exhaust Fans	300	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling fans

Location	Quantity	Diameter (mm)
Kitchen/Living	1	900

Roof type

Construction	Added insulation (R-value)	Solar absorptance	Roof shade
Corrugated Iron	Foil, Gap Above, Reflective Side Down, Anti-glare Up	0.85	Dark
Roof Tiles	Foil, Gap Above, Reflective Side Down, Anti-glare Up	0.85	Dark
Roof Tiles	Foil, Gap Above, Reflective Side Down, Anti-glare Up	0.85	Dark

Explanatory notes

About this report

A NatHERS rating is a comprehensive, dynamic computer modelling evaluation of a home, using the floorplans, elevations and specifications to estimate an energy load. It addresses the building layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings), but does not cover the water or energy use of appliances or energy production of solar panels.

Ratings are based on a unique climate zone where the home is located and are generated using standard assumptions, including occupancy patterns and thermostat settings. The actual energy consumption of a home may vary significantly from the predicted energy load, as the assumptions used in the rating will not match actual usage patterns. For example, the number of occupants and personal heating or cooling preferences will vary.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparing different dwelling designs and to demonstrate that the design meets the energy efficiency requirements in the National Construction Code. Homes that are energy efficient use less energy, are warmer on cool days, cooler on hot days and cost less to run. The higher the star rating the more thermally efficient the dwelling is.

Accredited assessors

To ensure the NatHERS Certificate is of a high quality, always use an accredited or licenced assessor. NatHERS accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

Australian Capital Territory (ACT) licensed assessors may only produce assessments for regulatory purposes using software for which they have a licence endorsement. Licence endorsements can be confirmed on the ACT licensing register

AAOs have specific quality assurance processes in place, and continuing professional development requirements, to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any ongoing training requirements.

Any questions or concerns about this report should be directed to the assessor in the first instance. If the assessor is unable to address these questions or concerns, the AAO specified on the front of this certificate should be contacted.

Disclaimer

The format of the NatHERS Certificate was developed by the NatHERS Administrator. However the content of each individual certificate is entered and created by the assessor to create a NatHERS Certificate. It is the responsibility of the assessor who prepared this certificate to use NatHERS accredited software correctly and follow the NatHERS Technical Notes to produce a NatHERS Certificate.

The predicted annual energy load in this NatHERS Certificate is an estimate based on an assessment of the building by the assessor. It is not a prediction of actual energy use, but may be used to compare how other buildings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, indoor air temperature and local climate.

Not all assumptions that may have been made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.

Glossary

Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, rangehoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m; farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – suburban	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – protected	terrain with numerous, closely spaced obstructions over 10m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading device	a device fixed to windows that provides shading e.g. window awnings or screens but excludes eaves.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).